




## FineAdjust Applicator Specification Sheet Part No. 63867-1000

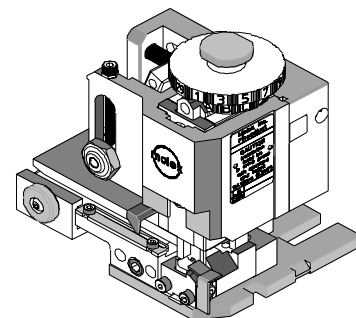


### FEATURES

- Quick punch removal with the push of a button for fast and easy tooling change
- Applicator designed to industry standard mounting and shut height 135.80mm (5.346")
- Quick set-up time; plus the crimp height, track and feed adjustments can be set without removing the applicator from the press
- Fine adjustment allows users to achieve target with little effort by adjusting in increments of 0.15mm (.0006") for conductor crimp height and .063mm (.0025") for insulation height
- Independent adjustment rings allow users to quickly adjust the conductor or insulation crimp height without affecting each other
- Directly adapts to most automatic wire processing machines

### SCOPE

| Terminal<br>Series No. | Wire Size |                 | Insulation Diameter |           | Strip Length |           |
|------------------------|-----------|-----------------|---------------------|-----------|--------------|-----------|
|                        | AWG       | mm <sup>2</sup> | mm                  | In.       | mm           | In.       |
| 94539-1000             | 20-24     | 0.50-0.25       | 2.20 Max.           | .087 Max. | 4.10-4.60    | .161-.181 |

### DEFINITION OF TERMS

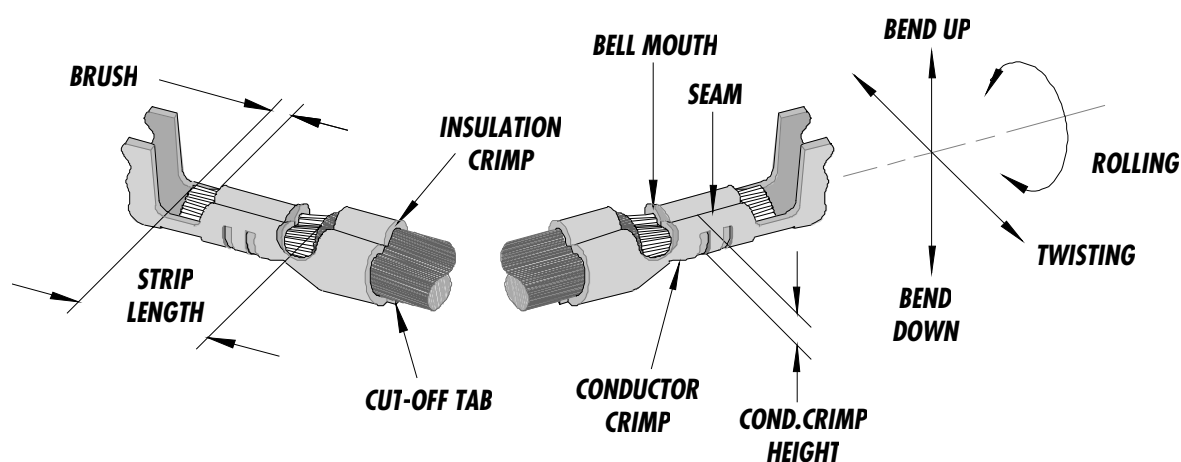

*The above terminal drawing is a generic terminal representation. It is not an image of a terminal listed in the scope.*

**CRIMP SPECIFICATION**

| Terminal<br>Series No. | Bell mouth |             | Cut-off Tab Max. |      | Conductor Brush |             |
|------------------------|------------|-------------|------------------|------|-----------------|-------------|
|                        | mm         | In.         | mm               | In.  | mm              | In.         |
| 94539-1000             | .20 - .30  | .008 - .012 | .30              | .012 | .50 - 1.00      | .020 - .040 |

| Terminal<br>Series No. | Bend up   Bend down |   | Twist   Roll |   | Punch Width mm (Ref) |      |            |      | Seam<br><br>Seam shall not be open<br>and no wire allowed<br>out of the crimping<br>area |
|------------------------|---------------------|---|--------------|---|----------------------|------|------------|------|------------------------------------------------------------------------------------------|
|                        | Degree              |   | Degree       |   | Conductor            |      | Insulation |      |                                                                                          |
|                        |                     |   |              |   | mm                   | In   | mm         | In   |                                                                                          |
| 94539-1000             | 3                   | 3 | 4            | 8 | 1.42                 | .056 | 2.40       | .094 |                                                                                          |

*After crimping, the conductor profile should measure the following.*

| Terminal<br>Series No. | Wire Size |                 | Conductor    |           |                   |           | Insulation   |           |                   |           | Pull Force Min. |       |
|------------------------|-----------|-----------------|--------------|-----------|-------------------|-----------|--------------|-----------|-------------------|-----------|-----------------|-------|
|                        |           |                 | Crimp Height |           | Crimp Width (Ref) |           | Crimp Height |           | Crimp Width (Ref) |           |                 |       |
|                        | AWG       | mm <sup>2</sup> | mm           | In.       | mm                | In.       | mm           | In.       | mm                | In.       | N               | Lb.   |
| 94539-1000             | 20        | 0.50            | 0.91-1.01    | .036-.040 | 1.50 Max.         | .059 Max. | 1.70-1.80    | .067-.071 | 2.45 Max.         | .096 Max. | 58.8            | 13.22 |
| 94539-1000             | 22        | 0.35            | 0.90-0.98    | .035-.039 | 1.50 Max.         | .059 Max. | 1.55-1.65    | .061-.065 | 2.45 Max.         | .096 Max. | 39.2            | 8.81  |
| 94539-1000             | 24        | 0.25            | 0.88-0.96    | .035-.038 | 1.50 Max.         | .059 Max. | 1.50-1.60    | .059-.063 | 2.45 Max.         | .096 Max. | 29.4            | 6.61  |

*Pull Force should be measured with no influence from the insulation crimp.*


*The above specifications are guidelines to an optimum crimp.*

**PARTS LIST**

| <b>Item</b> | <b>Order No</b>   | <b>Engineering No.</b> | <b>Description</b>                    | <b>Quantity</b> |
|-------------|-------------------|------------------------|---------------------------------------|-----------------|
|             | <b>63867-1000</b> | <b>63867-1000</b>      | <b>FineAdjust Applicator (Fig. 1)</b> | <b>REF</b>      |
| <b>1</b>    | <b>63457-0024</b> | <b>63457-0024</b>      | <b>Conductor Punch</b>                | <b>1 Y</b>      |
| <b>2</b>    | <b>63455-0026</b> | <b>63455-0026</b>      | <b>Conductor Anvil</b>                | <b>1 Y</b>      |
| <b>3</b>    | <b>63454-0036</b> | <b>63454-0036</b>      | <b>Insulation Punch</b>               | <b>1 Y</b>      |
| <b>4</b>    | <b>63456-0032</b> | <b>63456-0032</b>      | <b>Insulation Anvil</b>               | <b>1 Y</b>      |
| <b>5</b>    | <b>63443-0002</b> | <b>63443-0002</b>      | <b>Cut-Off Plunger</b>                | <b>1 Y</b>      |
| <b>6</b>    | <b>63443-0012</b> | <b>634430012</b>       | <b>Front Plunger Retainer</b>         | <b>1 Y</b>      |
| <b>7</b>    | <b>11-24-1067</b> | <b>4996-4</b>          | <b>Cut-Off Plunger Spring</b>         | <b>1</b>        |
| <b>8</b>    | <b>11-40-4039</b> | <b>8302-5</b>          | <b>Front Plunger Striker</b>          | <b>1</b>        |
| <b>9</b>    | <b>63443-0021</b> | <b>63443-0021</b>      | <b>Lower Tooling Key</b>              | <b>1</b>        |
| <b>10</b>   | <b>63443-6005</b> | <b>63443-6005</b>      | <b>Rear Cover</b>                     | <b>1</b>        |
| <b>11</b>   | <b>11-18-4083</b> | <b>60707-8</b>         | <b>Front Cover</b>                    | <b>1</b>        |
| <b>12</b>   | <b>63443-2515</b> | <b>63443-2515</b>      | <b>Anvil Mount</b>                    | <b>1</b>        |
| <b>13</b>   | <b>63443-4025</b> | <b>63443-4025</b>      | <b>Wire Stop</b>                      | <b>1</b>        |
| <b>14</b>   | <b>63443-0009</b> | <b>63443-0009</b>      | <b>Scrap Chute</b>                    | <b>1</b>        |
| <b>15</b>   | <b>63800-4900</b> | <b>63800-4900</b>      | <b>FineAdjust Applicator</b>          | <b>1</b>        |
| <b>16</b>   | <b>N/A</b>        | <b>N/A</b>             | <b>M3 by 6Lg. SHCS</b>                | <b>2**</b>      |
| <b>17</b>   | <b>N/A</b>        | <b>N/A</b>             | <b>M4 by 6Lg. SHCS</b>                | <b>1**</b>      |
| <b>18</b>   | <b>N/A</b>        | <b>N/A</b>             | <b>M4 by 12Lg. BHCS</b>               | <b>2**</b>      |
| <b>19</b>   | <b>N/A</b>        | <b>N/A</b>             | <b>M4 by 16Lg. SHCS</b>               | <b>1**</b>      |
| <b>20</b>   | <b>N/A</b>        | <b>N/A</b>             | <b>M4 by 50Lg. SHCS</b>               | <b>2**</b>      |
| <b>21</b>   | <b>N/A</b>        | <b>N/A</b>             | <b>3MM by 6Lg. Roll Pin</b>           | <b>1**</b>      |
| <b>22</b>   | <b>N/A</b>        | <b>N/A</b>             | <b>#10-32 by 1/4"Lg. BHCS</b>         | <b>1**</b>      |
|             | <b>63867-1070</b> | <b>63867-1070</b>      | <b>Tool Kit (All Y Items)</b>         | <b>REF</b>      |

**\*\* The following purchased parts are available from an Industrial supply company such as MSC (1-800-645-7270).**

# Assembly Drawing

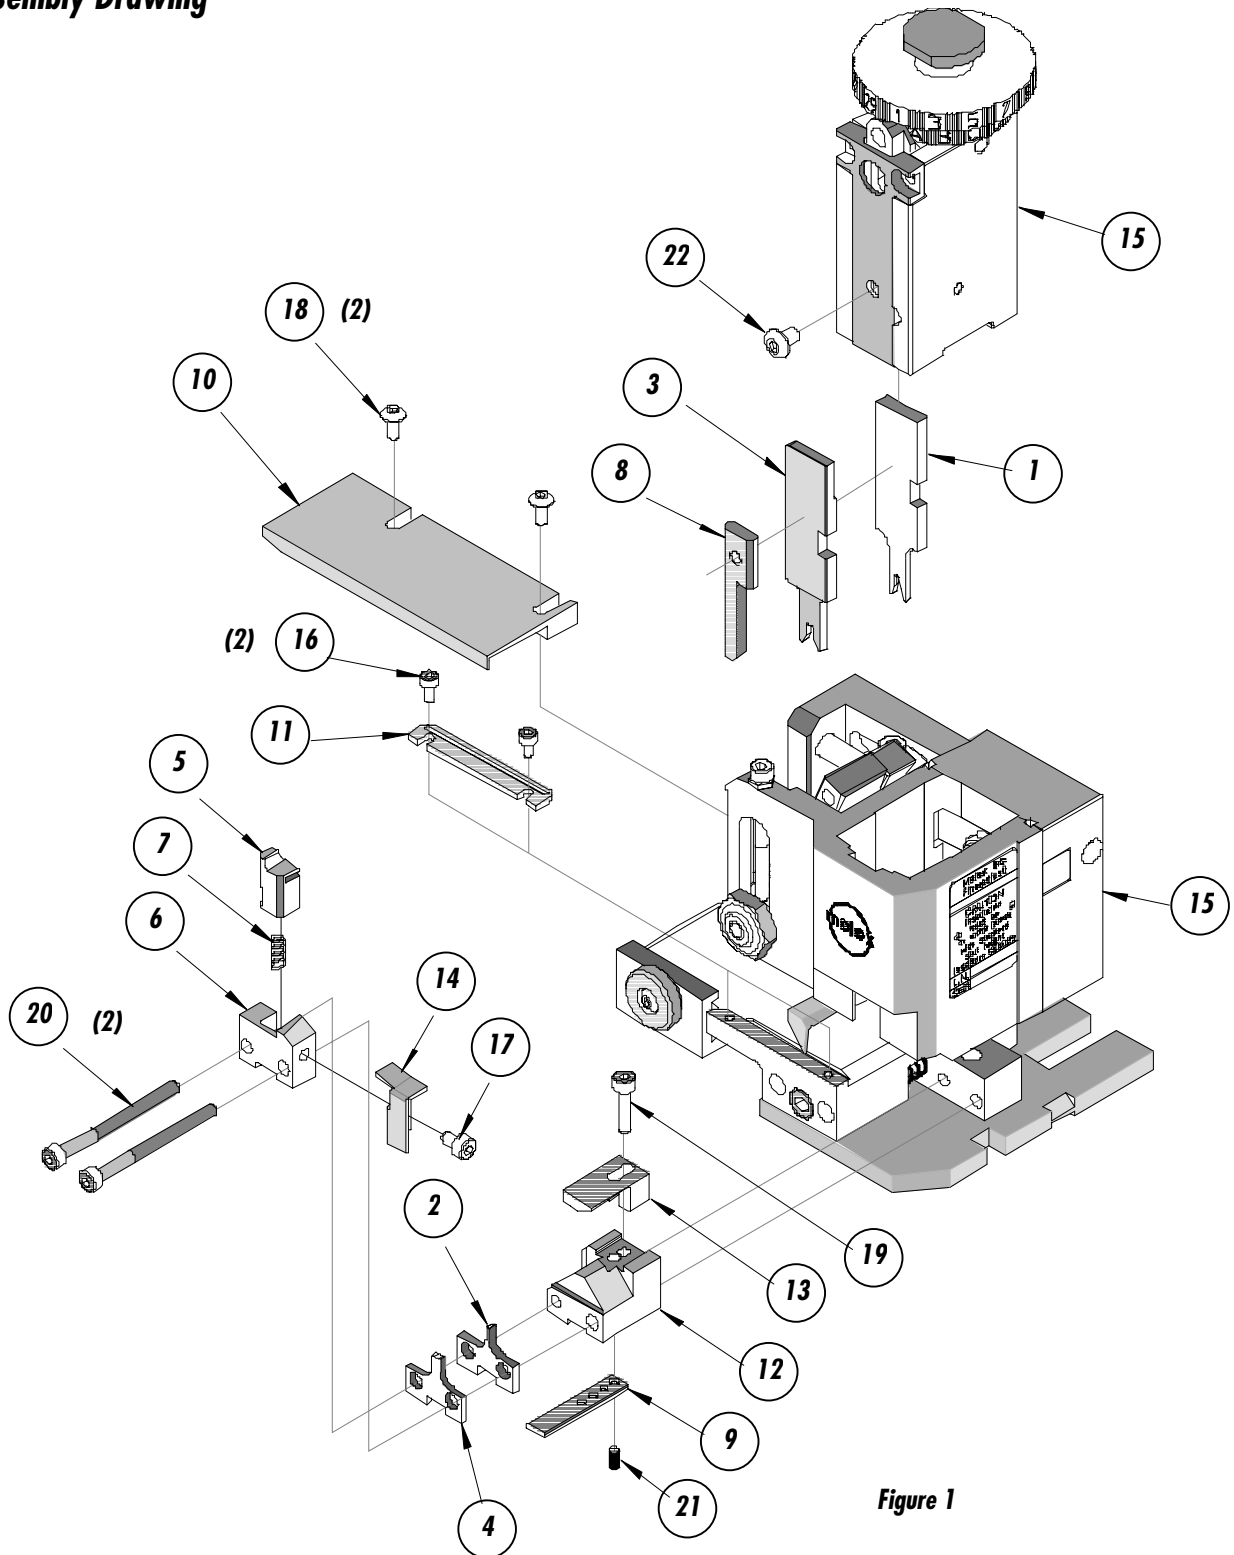

## NOTES

1. Molex recommends an extra perishable tooling kit be maintained at your facility.
2. Verify tooling alignment by manually cycling the press and Applicator before crimping under power. Check that all screws are tight.
3. Slugs, Terminals, Dirt and Oil should be kept clear of work area.
4. Wear safety glasses at all times.
5. For recommended maintenance refer to the FineAdjust Manual.

**CAUTION:** This applicator should only be used in a press with a shut height of 135.8 mm (5.346"). Tooling damage could result at a lower setting.

**CAUTION:** To prevent injury never operate this Applicator without the guards supplied with the press or wire-processing machine in place. Reference the press or wire processing manufacturer's instruction manual.

**CAUTION:** Molex crimp specifications are valid only when used with Molex terminals, applicators and tooling.

**Molex Application Tooling Group**  
1150 E. Diehl Road  
Naperville, IL 60563  
Tel: (630) 969-4550  
Fax: (630) 505-0049

Visit our Web site at <http://www.molex.com>

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9