

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 903A STEP-UP /STEP-DOWN DC-DC CHARGE PUMP CONVERTER

LTC3240-3.3 and LTC3240-2.5

DESCRIPTION

Demonstration circuit 903A is a step-up/step-down charge pump dc-dc converter. It comes with two assembly versions, DC903A-A and DC903A-B featuring the LTC3240-3.3 and LTC3240-2.5 respectively, each in a tiny 2mmx2mm DFN package.

The DC903A-A and DC903A-B generate a fixed regulated output of 3.3V and 2.5V respectively over a wide input voltage range from 1.8V to 5.5V. The output current can reach up to **150mA** when the input voltage is above 2.5V in DC903A-A. The maximum output current of DC903A-B is designed at 60mA over the full input range.

The DC903A optimizes the output efficiency by operating in the LDO step-down mode during most of the battery life time when the input is higher than the output voltage. When the battery voltage gets low enough it auto-

matically switches into charge-pump doubling mode to maximize the battery usage.

Additionally, DC903A features Automatic Burst Mode operation at light load to achieve low supply current (65 μ A, no load). Also, the built-in soft-start limits inrush current at turn-on, and short-circuit current limit/thermal protection help the part survive a continuous short-circuit. All these features make the circuit ideally suited for efficient DC-DC conversion in space-constrained applications such as battery-powered handheld electronics.

Design files for this circuit board are available. Call the LTC factory.

LTC is a trademark of Linear Technology Corporation

Table 1. Performance Summary ($T_A = 25^\circ\text{C}$)

PARAMETER	CONDITION	MINIMUM	TYPICAL	MAXIMUM
Input Voltage Range		1.8V		5.5V
Maximum Output Current	DC903A-A, $V_{IN} \geq 2.5\text{V}$ DC903A-B, $1.8\text{V} < V_{IN} < 5.5\text{V}$		150mA 60mA	
Output Voltage V_{OUT}	DC903A-A, $V_{IN} \geq 2.5\text{V}, I_{OUT} < 150\text{mA}$ $1.8\text{V} < V_{IN} < 2.5\text{V}, I_{OUT} < 40\text{mA}$	3.168V	3.3V	3.432V
	DC903A-B, $V_{IN} > 1.8\text{V}, I_{OUT} < 60\text{mA}$	2.4V	2.5V	2.6V
Output Ripple V_{OUT}	(20MHz BW)	DC903A-A, $I_{OUT} = 150\text{mA}$		32mV _{P-P}
		DC903A-B, $I_{OUT} = 60\text{mA}$		22mV _{P-P}
Load Regulation	DC903A-A		-1.7%	-2.1%
	DC903A-B		-0.6%	-0.68%
Nominal Switching Frequency			1.2MHz	
Efficiency	DC903A-A, $V_{IN} = 3.7\text{V}, I_{OUT} = 150\text{mA}$		85.8%	
	DC903A-B, $V_{IN} = 1.8\text{V}, I_{OUT} = 60\text{mA}$		69.4%	

QUICK START PROCEDURE

1. Demonstration circuit 903A is easy to set up to evaluate the performance of the LTC3240-3.3 and LTC3240-2.5.

Refer to Figure 1 for proper measurement equipment setup and follow the procedure below:

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 903A

STEP-UP /STEP-DOWN DC-DC CHARGE PUMP CONVERTER

NOTE: When measuring the input or output voltage ripple, care must be taken to avoid a long ground lead on the oscilloscope probe. Measure the input or output voltage ripple by touching the probe tip directly across the Vin or Vout and GND terminals. See Figure 2 for proper scope probe technique.

2. Place JP1 jumper in the ON position.
3. With power off, connect a 1.8V-5.5V, 500mA power supply to Vin and GND.
4. Connect a load (preset load current to 0A) to Vout and GND.

5. Turn on the power at the input.

NOTE: Make sure that the input voltage does not exceed 5.5V.

6. Check for the proper output voltages. Vout should measure a typical 3.3V (could vary from 3.168V to 3.432V) for DC903A-A, and a typical 2.5V (could vary from 2.4V to 2.6V) for DC903A-B.
7. Once the proper output voltages are established, adjust the loads within the operating range and observe the output voltage regulation, ripple voltage, efficiency and other parameters.

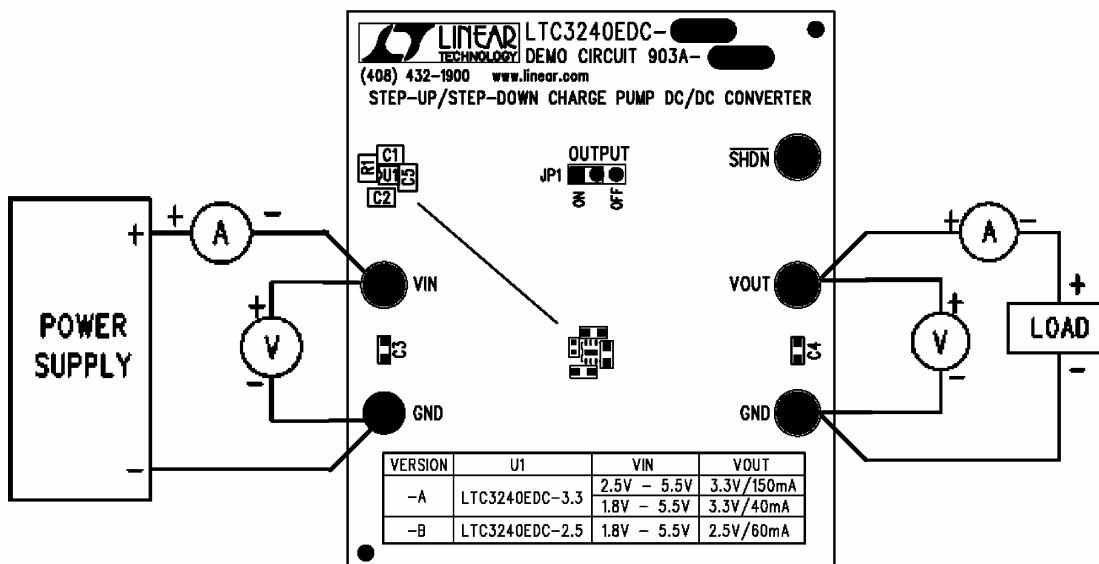


Figure 1. Proper Measurement Equipment Setup




Figure 2. Measuring Input or Output Ripple

OPERATING PRINCIPLES

The LTC3240 is a step-up/step-down charge pump DC/DC converter. For V_{IN} greater than V_{OUT} by about

100mV, the LTC3240 operates as a low dropout regulator. Once V_{IN} drops to within 100mV of regulated V_{OUT} , the

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 903A

STEP-UP /STEP-DOWN DC-DC CHARGE PUMP CONVERTER

part automatically switches into charge pump step-up mode to maintain the regulated output voltage. Regulation is achieved by sensing the output voltage through an internal resistor divider and modulating the charge pump output current based on the feedback error signal.

In the charge pump mode, a 2-phase non-overlapping clock activates the charge pump switches. The flying

capacitor is charged from V_{IN} on the first phase of the clock. On the second phase of the clock it is stacked in series with V_{IN} and connected to V_{OUT} .

Burst Mode operation, soft-start and short-circuit /thermal protection can be found on the LTC3240 data-sheet at www.linear.com.

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 903A

STEP-UP /STEP-DOWN DC-DC CHARGE PUMP CONVERTER

REVISION HISTORY			
ECO	REV	DESCRIPTION	DATE
	1	PROTO	04/06/05
	2	Charge, Test, Current load	09/26/05

This circuit is proprietary to Linear Technology and supplied for use with Linear Technology parts.

Customer Notice: Linear Technology has made a best effort to design a circuit that meets customer-supplied specifications; however, it remains the customer's responsibility to verify proper and reliable operation in the actual application. Component substitution and printed circuit board layout may significantly affect circuit performance or reliability. Contact Linear Applications Engineering for assistance.

* VERSION	U1	VIN	VOUT
-A	LTC3240EDC-3.3	2.5V - 5.5V	3.3V/150mA
-B	LTC3240EDC-2.5	1.8V - 5.5V	3.3V/40mA
		1.8V - 5.5V	2.5V/60mA

* VARIOUS VOLTAGE LEVELS ARE INDICATED BY THE FOLLOWING CONVENTION:
 VIN = Input Voltage
 VOUT = Output Voltage
 C+ = Positive Common Mode Reference
 C- = Negative Common Mode Reference
 GND = Ground Reference

CONTRACT NO.	
APPROVALS	DATE
DRAWN mei	08/06/05
CHECKED	
APPROVED	
ENGINEER	
DESIGNER	

SIZE	CAGE CODE	DWG NO	FILE NAME	REV
		DC903A	903A-2.DSN	1
			SHEET 1 OF 1	

1630 McCarthy Blvd.
Milpitas, CA 95035
Phone: (408)432-1900
Fax: (408)434-0507

LINEAR
TECHNOLOGY

A
TITLE SCH, LTC3240EDC-3.3/2.5, STEP-UP/STEP-DOWN
CHARGE PUMP DC/DC CONVERTER

Данный компонент на территории Российской Федерации**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибуторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ Р В 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru
moschip.ru_4

moschip.ru_6
moschip.ru_9