

2-CHANNEL ELECTRONIC VOLUME WITH INPUT SELECTOR AND TONE CONTROL

■ GENERAL DESCRIPTION

The NJW1194 is a 2-channel electronic volume with 4-in 1-out stereo audio selector and Tone Control. The NJW1194 performs low noise and low distortion characteristics with resistance ladder circuit.

All of functions are controlled via three-wired serial bus. Selectable 4-Chip address is available for using four chips on same serial bus line.

It's suitable for two-channel stereo system and or multi-channel audio system.

■ PACKAGE OUTLINE




NJW1194V

■ FEATURES

- Operating Voltage ±4.5 to ±7.5V
- 3-Wired Serial Control Chip Address Select Function
- Low output noise -117dBVtyp.
- Low THD 0.0015%typ. (Vin=2Vrms, VOL=0dB)
- Input Selector(X4)
- Volume +31.5 to -95.0dB / 0.5dBstep, MUTE
- Tone Control 0to ±10dB/1dBstep
- Channel Separation -120dBtyp.
- Zero Cross Detection
- Bi-CMOS Technology
- Package Outline SSOP32

■ BLOCK DIAGRAM

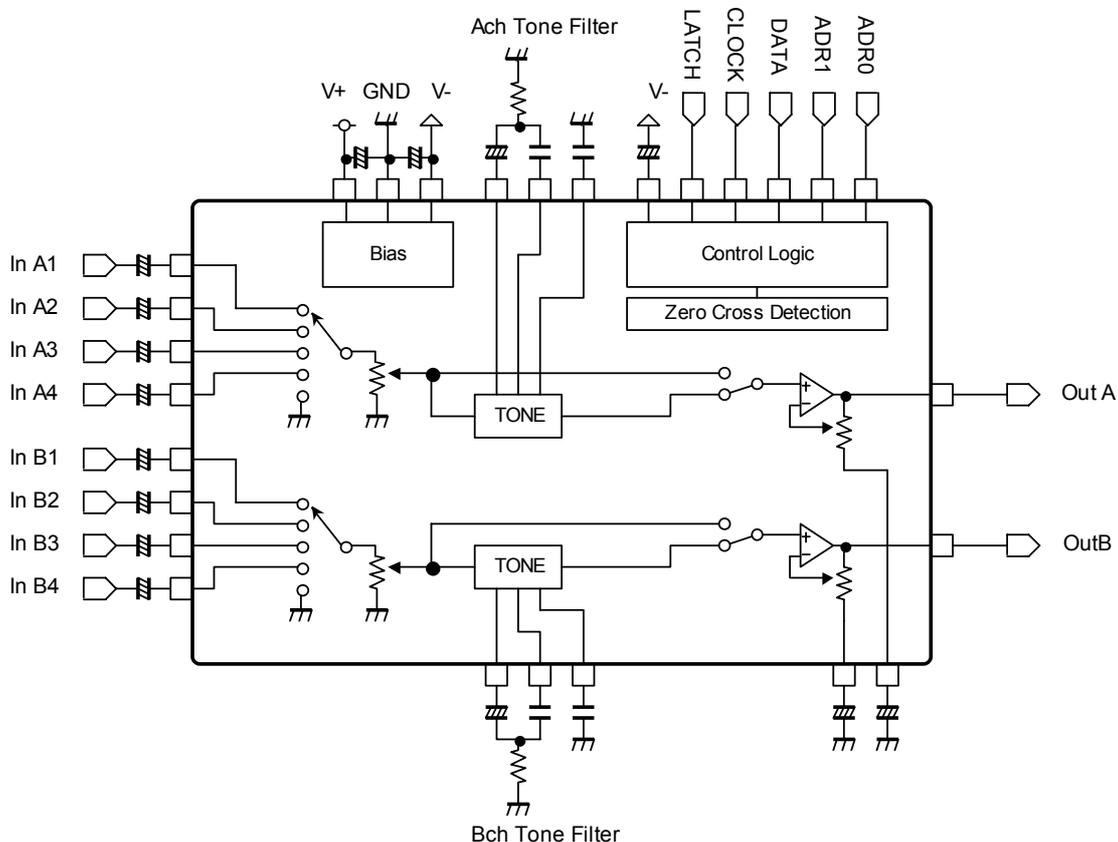

■ ABSOLUTE MAXIMUM RATING (Ta=25°C)

| PARAMETER | SYMBOL | RATING | UNIT |
|-----------------------------|-------------------|---|------|
| Power Supply Voltage | V _{+/V-} | +8/-8 | V |
| Maximum Input Voltage | V _{IM} | V _{+/V-} | V |
| Power Dissipation | P _D | 1000 NOTE: EIA/JEDEC STANDARD Test board (76.2x114.3x1.6mm, 2layer, FR-4) mounting | mW |
| Operating Temperature Range | Topr | -40 ~ +85 | °C |
| Storage Temperature Range | Tstg | -40 ~ +125 | °C |

■ ELECTRICAL CHARACTERISTICS (Ta=25°C, V⁺/V⁻=±7V, RL=47kΩ, Volume=0dB, TONE=OFF, In:input, Out:output)

| PARAMETER | SYMBOL | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|--|-------------------|--|------|------|------|------|
| ◆ Power Supply | | | | | | |
| Operating Voltage | V _{+/V-} | | ±4.5 | ±7.0 | ±7.5 | V |
| Supply Current 1 | I _{CC} | No signal | - | 12 | 17 | mA |
| Supply Current 2 | I _{EE} | No signal | - | 12 | 17 | mA |
| ◆ Input/Output Characteristics (Output) | | | | | | |
| Maximum Output Voltage | V _{OM} | f=1kHz, THD=1% VOL=0dB | 3.6 | 4.2 | - | Vrms |
| Voltage Gain1 | G _{V1} | V _{IN} =2Vrms, f=1kHz VOL=0dB | -0.5 | 0 | 0.5 | dB |
| Voltage Gain2 | G _{V2} | V _{IN} =100mVrms, f=1kHz VOL=+15dB | +14 | +15 | +16 | dB |
| Voltage Gain Error1 | ΔG _{V1} | V _{IN} =2Vrms, f=1kHz VOL=0dB | -0.5 | 0 | 0.5 | dB |
| Voltage Gain Error2 | ΔG _{V2} | f=1kHz, V _{IN} =2Vrms VOL=-60dB | -1.0 | 0 | 1.0 | dB |
| Maximum Attenuation | A _{TT} | f=1kHz, V _{IN} =2Vrms VOL=-95dB, A-weight | - | -95 | - | dB |
| Mute Level | Mute | f=1kHz, V _{IN} =2Vrms VOL=Mute, A-weight | - | -120 | - | dB |
| Cross Talk 1 | CT1 | f=1kHz, V _{IN} =2Vrms, A-weight VOL=0dB, Rg=0Ω | - | -120 | - | dB |
| Cross Talk 2 | CT2 | f=20kHz, V _{IN} =2Vrms VOL=0dB, Rg=0Ω | - | -100 | - | dB |
| Channel Separation 1 | CS1 | f=1kHz, V _{IN} =2Vrms, A-weight VOL=0dB, Rg=0Ω | - | -120 | -90 | dB |
| Channel Separation 2 | CS2 | f=20kHz, V _{IN} =2Vrms VOL=0dB, Rg=0Ω | - | -100 | - | dB |
| Channel Separation 3 | CS3 | f=1kHz, V _{IN} =2Vrms, A-weight VOL=0dB, Rg=0Ω TONE=ON (Bass=Treble=0dB) | - | -110 | -90 | dB |
| Channel Separation 4 | CS4 | f=20kHz, V _{IN} =2Vrms VOL=0dB, Rg=0Ω TONE=ON (Bass=Treble=0dB) | - | -90 | - | dB |
| Input Impedance | R _{IN} | Select Channel Input Terminal | 15 | 20 | - | kΩ |

■ **ELECTRICAL CHARACTERISTICS** (Ta=25°C, V⁺/V⁻=±7V, RL=47kΩ, Volume=0dB, TONE=OFF, In:input,Out:output)

| PARAMETER | SYMBOL | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|--|------------------|---|------|-----------------|---------------|---------------|
| ◆ Input/Output Characteristics (Output) | | | | | | |
| Output Noise1 | V _{NO1} | VOL=0dB, Rg=0Ω, A-weight, TONE=ON (Bass=Treble=0dB) | - | -113 (2.2μ) | -100 (10μ) | dBV (Vrms) |
| Output Noise2 | V _{NO2} | VOL=0dB, Rg=0Ω, A-weight, TONE=OFF | - | -117 (1.41μ) | - | dBV (Vrms) |
| Total Harmonic Distortion 1 | THD1 | f=1kHz, V _{IN} =200mVrms, VOL=0dB, BW=400Hz-30kHz TONE=ON (Bass=Treble=0dB) | - | 0.002 | - | % |
| Total Harmonic Distortion 2 | THD2 | f=10kHz, V _{IN} =200mVrms, VOL=0dB, BW=400Hz-30kHz TONE=ON (Bass=Treble=0dB) | - | 0.002 | - | % |
| Total Harmonic Distortion 3 | THD3 | f=1kHz, V _{IN} =2Vrms, VOL=0dB, BW=400Hz-30kHz TONE=ON (Bass=Treble=0dB) | - | 0.0015 | - | % |
| Total Harmonic Distortion 4 | THD4 | f=10kHz, V _{IN} =2Vrms, VOL=0dB, BW=400Hz-30kHz TONE=ON (Bass=Treble=0dB) | - | 0.005 | - | % |
| Total Harmonic Distortion 5 | THD5 | f=1kHz, V _{IN} =200mVrms, VOL=+15dB, BW=400Hz-30kHz TONE=ON (Bass=Treble=0dB) | - | 0.002 | - | % |
| Total Harmonic Distortion 6 | THD6 | f=10kHz, V _{IN} =200mVrms, VOL=+15dB, BW=400Hz-30kHz TONE=ON (Bass=Treble=0dB) | - | 0.002 | - | % |
| Total Harmonic Distortion 7 | THD7 | f=1kHz, V _{IN} =2Vrms, VOL=-18dB, BW=400Hz-30kHz TONE=ON (Bass=Treble=0dB) | - | 0.002 | 0.02 | % |
| Total Harmonic Distortion 8 | THD8 | f=10kHz, V _{IN} =2Vrms, VOL=-18dB, BW=400Hz-30kHz TONE=ON (Bass=Treble=0dB) | - | 0.002 | - | % |

■ **ELECTRICAL CHARACTERISTICS** ($T_a=25^\circ\text{C}$, $V^+/V^-=\pm 7\text{V}$, $R_L=47\text{k}\Omega$, Volume=0dB, TONE=OFF, In:input, Out:output)

| PARAMETER | SYMBOL | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|---------------------------------------|--------------|--|-------|-------|-------|------|
| ◆Tone Control Characteristics | | | | | | |
| Treble Voltage Gain 1 | G_{VTREB1} | $V_{IN}=100\text{mVrms}$, $f=10\text{kHz}$ VOL=0dB, TONE=ON, Treble=0dB | -2.0 | 0 | 2.0 | dB |
| Treble Voltage Gain 2 | G_{VTREB2} | $V_{IN}=100\text{mVrms}$, $f=10\text{kHz}$ VOL=0dB, TONE=ON, Treble=+10dB | 8.0 | 10.0 | 12.0 | dB |
| Treble Voltage Gain 3 | G_{VTREB3} | $V_{IN}=100\text{mVrms}$, $f=10\text{kHz}$ VOL=0dB, TONE=ON, Treble=-10dB | -12.0 | -10.0 | -8.0 | dB |
| Bass Voltage Gain 1 | G_{VBASS1} | $V_{IN}=100\text{mVrms}$, $f=100\text{Hz}$ VOL=0dB, TONE=ON, Bass=0dB | -2.0 | 0 | 2.0 | dB |
| Bass Voltage Gain 2 | G_{VBASS2} | $V_{IN}=100\text{mVrms}$, $f=100\text{Hz}$ VOL=0dB, TONE=ON, Bass=+10dB | 8.0 | 10.0 | 12.0 | dB |
| Bass Voltage Gain 3 | G_{VBASS3} | $V_{IN}=100\text{mVrms}$, $f=100\text{Hz}$ VOL=0dB, TONE=ON, Bass=-10dB | -12.0 | -10.0 | -8.0 | dB |
| ◆Logic Control Characteristics | | | | | | |
| High Level Input Voltage | V_{IH} | DATA, CLOCK, LATCH, ADR0, ADR1 | 2.5 | - | V^+ | V |
| Low Level Input Voltage | V_{IL} | DATA, CLOCK, LATCH, ADR0, ADR1 | 0 | - | 1.5 | V |

[CAUTION]
The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[NJR:](#)

[NJW1194V-TE1](#) [NJW#1194V-TE1](#)

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9