

EZ-USB HX2LP™ Low-Power USB 2.0 Hub Controller Family


Features

- USB 2.0 hub controller
 - Automotive and Industrial grade option (−40 °C to 85 °C)
 - Compliant with USB 2.0 specification
 - USB-IF certified: TID# 30000009
 - Windows Hardware Quality Lab (WHQL) Compliant
 - Up to four downstream ports supported
 - Supports bus powered and self powered modes
 - Single transaction translator (TT)
 - Bus power configurations
 - Fit, form, and function compatible with CY7C65640 and CY7C65640A (TetraHub™)
 - Space saving 56-pin QFN
 - Single power supply requirement
 - Internal regulator for reduced cost
 - Integrated upstream pull-up resistor
 - Integrated pull-down resistors for all downstream ports
 - Integrated upstream and downstream termination resistors
 - Integrated port status indicator control
- 24 MHz external crystal (integrated phase-locked loop (PLL))
 - In-system EEPROM programming
 - Configurable with external SPI EEPROM:
 - Vendor ID, Product ID, Device ID (VID/PID/DID)
 - Number of active ports
 - Number of removable ports
 - Maximum power setting for high-speed and full-speed
 - Hub controller power setting
 - Power-on timer
 - Overcurrent detection mode
 - Enabled and disabled overcurrent timer
 - Overcurrent pin polarity
 - Indicator pin polarity
 - Compound device
 - Enable full-speed only
 - Disable port indicators
 - Ganged power switching
 - Self and bus powered compatibility
 - Fully configurable string descriptors for multiple language support

Functional Description


For a complete list of related documentation, click [here](#).

Block Diagram – CY7C65630

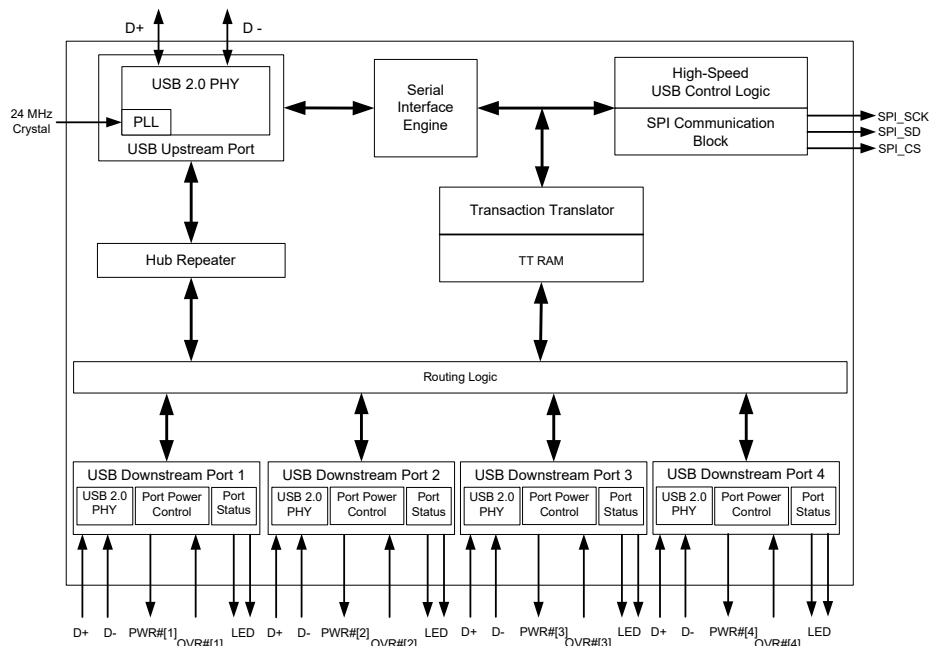

Errata: For information on silicon errata, see [Errata on page 28](#). Details include trigger conditions, devices affected, and proposed workaround.

Block Diagram – CY7C65620

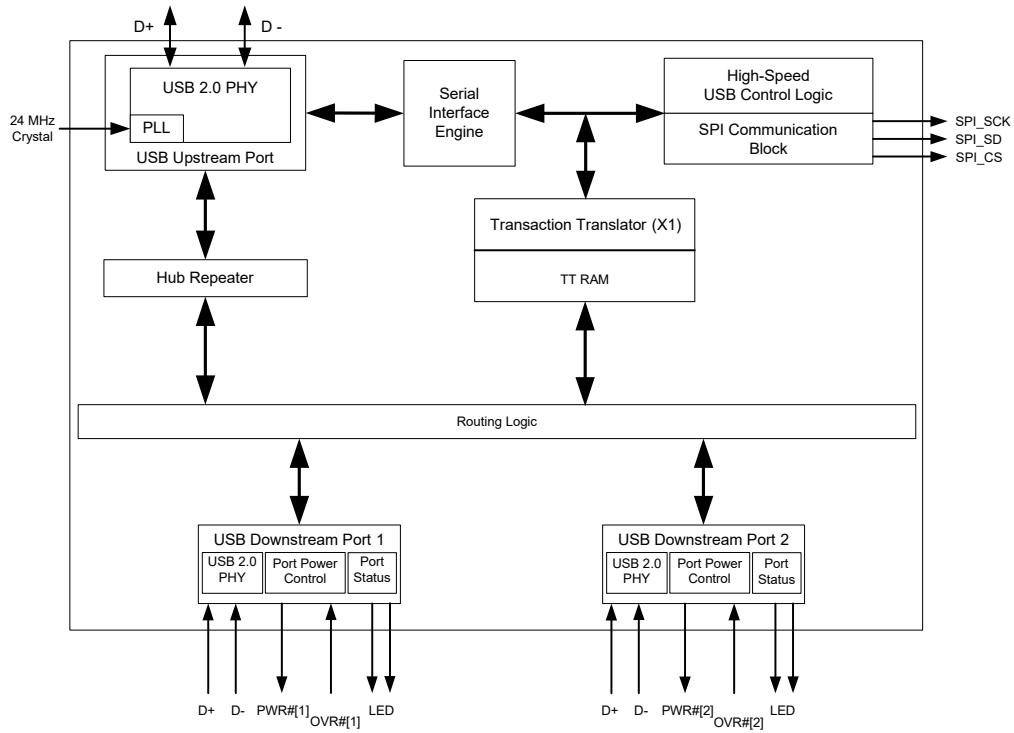

More Information

Cypress provides a wealth of data at www.cypress.com to help you to select the right <product> device for your design, and to help you to quickly and effectively integrate the device into your design. For a comprehensive list of resources, see the knowledge base article <http://www.cypress.com/products/hx2lp>.

- Overview: [USB Portfolio](#), [USB Roadmap](#)
- USB 2.0 Product Selectors: [HX2LP](#), [HX2VL](#)
- Application notes: Cypress offers a large number of USB application notes covering a broad range of topics, from basic to advanced level. Recommended application notes for getting started with HX2LP are:
 - [AN49150 - Schematic and Layout Review Checklist for HX2LP](#)
 - [AN5044 - EZ-USB Hubs\(CY7C656XX\) PCB Design Recommendations](#)
 - [AN15454 - Bus-Powered USB Hub Design Using EZ-USB HX2LP™/HX2VL](#)
 - [AN61904 - How HX2LP™ Addresses Byte and Word-Addressable SPI EEPROMs](#)
 - [AN69235 - Migrating from HX2/HX2LP to HX2VL](#)
- Reference Designs:
 - [CY4605 - High-Speed Low-Power USB 2.0 Compliant 2-Port Hub](#)
 - [CY4606 - EZ-USB HX2LP High-Speed Low-Power USB 2.0 Compliant 4-Port Hub](#)
- Models: [HX2LP](#)

EZ-USB® HX2LP™ Reference Design Kit (RDK)

EZ-USB® HX2LP™ Reference Design Kit (RDK) board is a tool to demonstrate the features of EZ-USB HX2LP devices (CY7C65620/CY7C65630). Both CY7C65620 and CY7C65630 are identical in every aspect except for the number of ports they support. The HX2LP RDK is based on the 56-pin QFN for CY7C65620/CY7C65630. Both are single transaction translator (1TT) hubs. In the initial phase of the design, this board helps developers to understand the chip features and limitations before proceeding with a complete design. The RDK includes support documents related to board hardware, PC application software, and EEPROM configuration data (.iic) files.

Contents

| | | | |
|-------------------------------------|-----------|--|-----------|
| Introduction | 5 | Upstream USB Connection | 21 |
| USB Serial Interface Engine | 5 | Downstream USB Connection | 21 |
| Hub Repeater | 5 | LED Connection | 21 |
| Transaction Translator | 5 | System Block Diagram | 22 |
| Applications | 5 | Absolute Maximum Ratings | 22 |
| Functional Overview | 5 | Operating Conditions | 23 |
| System Initialization | 5 | Electrical Characteristics | 23 |
| Enumeration | 5 | DC Electrical Characteristics | 23 |
| Downstream Ports | 6 | USB Transceiver | 23 |
| Upstream Port | 6 | AC Electrical Characteristics | 24 |
| Power Switching | 6 | Ordering Information | 25 |
| Overcurrent Detection | 6 | Ordering Code Definitions | 25 |
| Port Indicators | 6 | Package Diagrams | 26 |
| Pin Configuration | 8 | Thermal Impedance for the Package | 26 |
| Pin Definitions | 9 | Acronyms | 27 |
| Default Descriptors | 11 | Document Conventions | 27 |
| Device Descriptor | 11 | Units of Measure | 27 |
| Configuration Descriptor | 11 | Numeric Naming | 27 |
| Interface Descriptor | 12 | Errata | 28 |
| Endpoint Descriptor | 12 | Part Numbers Affected | 28 |
| Device Qualifier Descriptor | 12 | HX2LP Qualification Status | 28 |
| Hub Descriptor | 13 | HX2LP Errata Summary | 28 |
| Configuration Options | 14 | Document History Page | 29 |
| 0xD0 Load | 14 | Sales, Solutions, and Legal Information | 34 |
| 0xD2 Load | 14 | Worldwide Sales and Design Support | 34 |
| 0xD4 Load | 15 | Products | 34 |
| Supported USB Requests | 18 | PSoC® Solutions | 34 |
| Device Class Commands | 18 | Cypress Developer Community | 34 |
| Hub Class Commands | 19 | Technical Support | 34 |

Introduction

EZ-USB HX2LP™ is Cypress's next generation family of high-performance, low-power USB 2.0 hub controllers. HX2LP is an ultra low power single chip USB 2.0 hub controller with integrated upstream and downstream transceivers, a USB serial interface engine (SIE), USB hub control and repeater logic, and TT logic. Cypress has also integrated many of the external passive components, such as pull-up and pull-down resistors, reducing the overall bill of materials required to implement a hub design. The HX2LP portfolio consists of:

- **CY7C65630: 4-port/single transaction translator**

This device option is for ultra low-power applications that require four downstream ports. All four ports share a single transaction translator. The CY7C65630 is available in 56 QFN and is also pin-for-pin compatible with the CY7C65640.

- **CY7C65620: 2-port/single transaction translator**

This device option is for a 2-port bus powered application. Both ports share a single transaction translator. The CY7C65620 is available in a 56 QFN.

All device options are supported by Cypress's world class reference design kits, which include board schematics, bill of materials, Gerber files, Orcad files, and thorough design documentation.

USB Serial Interface Engine

The serial interface engine (SIE) allows the CY7C65620/CY7C65630 to communicate with the USB host. The SIE handles the following USB activities independently of the Hub Control Block.

- Bit stuffing and unstuffing
- Checksum generation and checking
- TOKEN type identification
- Address checking.

Hub Repeater

The hub repeater manages the connectivity between upstream and downstream facing ports that are operating at the same speed. It supports full- or low-speed connectivity and high-speed connectivity. According to the USB 2.0 specification, the HUB Repeater provides the following functions:

- Sets up and tears down connectivity on packet boundaries
- Ensures orderly entry into and out of the suspend state, including proper handling of remote wakeups.

Transaction Translator

The TT translates data from one speed to another. A TT takes high speed split transactions and translates them to full- or low-speed transactions when the hub is operating at high-speed (the upstream port is connected to a high-speed host controller) and has full- or low-speed devices attached. The operating speed of a device attached on a downstream facing port determines whether the routing logic connects a port to the TT or hub repeater. If a full- or low-speed device is connected to the hub operating at high-speed, the data transfer route includes the TT. If a high-speed device is connected to this high-speed hub,

the route only includes the repeater and no TT, because the device and the hub are operating at the same speed. When the hub is operating at full-speed (the upstream port is connected to a full-speed host controller), a high-speed peripheral does not operate at its full capability. These devices only work at full-speed. Full- and low-speed devices connected to this hub operate at their normal speed.

Applications

Typical applications for the HX2LP device family are:

- Standalone hubs
- Motherboard hubs
- Monitor hubs
- Advanced port replicators
- Docking stations
- Split-PC designs
- External personal storage drives
- Keyboard hubs

Functional Overview

The Cypress CY7C65620/CY7C65630 USB 2.0 Hubs are high-performance, low system cost solutions for USB. The CY7C65620/CY7C65630 USB 2.0 Hubs integrate 1.5 k Ω upstream pull-up resistors for full-speed operation and all downstream 15 k Ω pull-down resistors and series termination resistors on all upstream and downstream D+ and D- pins. This results in optimization of system costs by providing built-in support for the USB 2.0 specification.

System Initialization

On power-up, the CY7C65620/CY7C65630 reads an external SPI EEPROM for configuration information. At the most basic level, this EEPROM has the vendor ID (VID), product ID (PID), and device ID (DID) for the customer's application. For more specialized applications, other configuration options can be specified. See [Configuration Options on page 14](#) for more details.

After reading the EEPROM, if VBUSPOWER (connected to upstream V_{BUS}) is high, CY7C65620/CY7C65630 enables the pull-up resistor on D+ to indicate its presence to the upstream hub, after which a USB bus reset is expected. During this reset, CY7C65620/CY7C65630 initiates a chirp to indicate that it is a high-speed peripheral. In a USB 2.0 system, the upstream hub responds with a chirp sequence, and CY7C65620/CY7C65630 is in a high-speed mode, with the upstream D+ pull-up resistor turned off. In USB 1.x systems, no such chirp sequence from the upstream hub is seen, and CY7C65620/CY7C65630 operates as a normal 1.x hub (operating at full-speed).

Enumeration

After a USB bus reset, CY7C65620/CY7C65630 is in an unaddressed, unconfigured state (configuration value set to '0'). During the enumeration process, the host sets the hub's address and configuration. After the hub is configured, the full hub functionality is available.

Downstream Ports

The CY7C65620/CY7C65630 supports a maximum of four downstream ports, each of which may be marked as usable or removable in the extended configuration (0xD2 EEPROM load or 0xD4 EEPROM load, see [Configuration Options on page 14](#). Downstream D+ and D- pull-down resistors are incorporated in CY7C65620/CY7C65630 for each port. Before the hubs are configured, the ports are driven SE0 (single ended zero, where both D+ and D- are driven low) and are set to the unpowered state. When the hub is configured, the ports are not driven and the host may power the ports by sending a SetPortPower command for each port. After a port is powered, any connect or disconnect event is detected by the hub. Any change in the port state is reported by the hubs back to the host through the status change endpoint (endpoint 1). On receipt of SetPortReset request for a port with a device connected, the hub does as follows:

- Performs a USB reset on the corresponding port
- Puts the port in an enabled state
- Enables the green port indicator for that port (if not previously overridden by the host)
- Enables babble detection after the port is enabled.

Babble consists of a non-idle condition on the port after EOF2. If babble is detected on an enabled port, that port is disabled. A ClearPortEnable request from the host also disables the specified port.

Downstream ports can be individually suspended by the host with the SetPortSuspend request. If the hub is not suspended, a remote wakeup event on that port is reflected to the host through a port change indication in the hub status change endpoint. If the hub is suspended, a remote wakeup event on this port is forwarded to the host. The host may resume the port by sending a ClearPortSuspend command.

Upstream Port

The upstream port includes the transmitter and the receiver state machine. The transmitter and receiver operate in high-speed and full-speed depending on the current hub configuration.

The transmitter state machine monitors the upstream facing port while the hub repeater has connectivity in the upstream direction. This machine prevents babble and disconnect events on the downstream facing ports of this hub from propagating and causing the hub to be disabled or disconnected by the hub to which it is attached.

Power Switching

The CY7C65620/CY7C65630 includes interface signals for external port power switches. Both ganged and individual (per-port) configurations are supported, with individual switching being the default. Initially all ports are unpowered. After enumerating, the host may power each port by sending a SetPortPower request for that port. The power switching and overcurrent detection of downstream ports is managed by control pins connected to an external power switch device. PWR

[n]# output pins of the CY7C65620/CY7C65630 series are connected to the respective external power switch's port power enable signals. Note that each port power output pin of the external power switch must be bypassed with an electrolytic or tantalum capacitor as required by the USB specification. These capacitors supply the inrush currents, which occur during downstream device hot-attach events. The polarity of this pin is configured through the EEPROM; see [Configuration Options on page 14](#).

Overcurrent Detection

Overcurrent detection includes 8 ms of timed filtering by default. This parameter is configured from the external EEPROM in a range of 0 ms to 15 ms for both enabled ports and disabled ports individually. Detection of overcurrent on downstream ports is managed by control pins connected to an external power switch device.

The OVR[n]# pins of the CY7C65620/CY7C65630 series are connected to the respective external power switch's port overcurrent indication (output) signals. After detecting an overcurrent condition, hub reports overcurrent condition to the host and disables the PWR# output to the external power device. The polarity of the OVR pins can be configured through the EEPROM; see [Configuration Options on page 14](#).

Port Indicators

The USB 2.0 port indicators are also supported directly by CY7C65620/CY7C65630. According to the specification, each downstream port of the hub optionally supports a status indicator. The presence of indicators for downstream facing ports is specified by bit 7 of the wHubCharacteristics field of the hub class descriptor. The default CY7C65620/CY7C65630 descriptor specifies that port indicators are supported (wHubCharacteristics, bit 7 is set). If port indicators are not included in the hub, disable this bit through EEPROM settings.

Each port indicator pin is strategically located directly on the opposite edge of the port with which it is associated. A port indicator provides two colors: green and amber. This is usually implemented as two separate LEDs, one amber and the other green. A combination of hardware and software control is used to inform the user of the current status of the port or the device attached to the port and to guide the user through problem resolution. Colors and blinking provide information to the user. The significance of the color of the LED depends on the operational mode of CY7C65620/CY7C65630. The CY7C65620/CY7C65630 port indicators has two modes of operation: automatic and manual.

On power up the CY7C65620/CY7C65630 defaults to automatic mode, where the color of the Port Indicator (green, amber, off) indicates the functional status of the CY7C65620/CY7C65630 port. In automatic mode, the CY7C65620/CY7C65630 turns on the green LED whenever the port is enabled and the amber LED when an overcurrent condition is detected. The color of the port indicator is set by the port state machine. Blinking of the LEDs is not supported in automatic mode. [Table 1](#) identifies the mapping of color to port state in automatic mode.

Table 1. Automatic Port State to Port Indicator Color Mapping

| Downstream Facing Hub Port State | |
|--|--|
| Color Definition | Port State |
| Off or Amber, if due to an overcurrent condition | Powered Off |
| Off | Disconnected, Disabled, Not Configured, Resetting, Testing |
| Green | Enabled, Transmit, or TransmitR |
| Off | Suspended, Resuming, SendEOR, Restart_E/S |

The LED control lines can also be modulated with a square wave for power conservation. The polarity of these pins is programmable, see [Configuration Options on page 14](#).

In manual mode, the indicators are under the control of the host, which can turn on the LEDs, or leave them off. This is done by a USB Hub class request. Blinking of the LEDs is supported in manual mode. The port indicators enable the user to intervene in any error detection. For example, when babble is detected while plugging in a defective device, or when an overcurrent condition occurs, the port indicators corresponding to the downstream port blink green or only light the amber LED, respectively.

[Table 2](#) displays the color definition of the indicators when CY7C65620/CY7C65630 is in manual mode.^[1]

Table 2. Port Indicator Color Definitions in Manual Mode


| Color Definition | Port State |
|------------------------|--------------------|
| Off | Not operational |
| Amber | Error condition |
| Green | Fully operational |
| Blinking Off / Green | Software attention |
| Blinking Off / Amber | Hardware attention |
| Blinking Green / Amber | Reserved |

Note

1. Information presented in [<ref_note>Table 1](#) and [<ref_note>Table 2](#) is from USB 2.0 specification Tables 11-6 and 11-7, respectively.

Pin Configuration

Figure 1. 56-pin Quad Flat Pack No Leads (8 mm × 8 mm) [2]

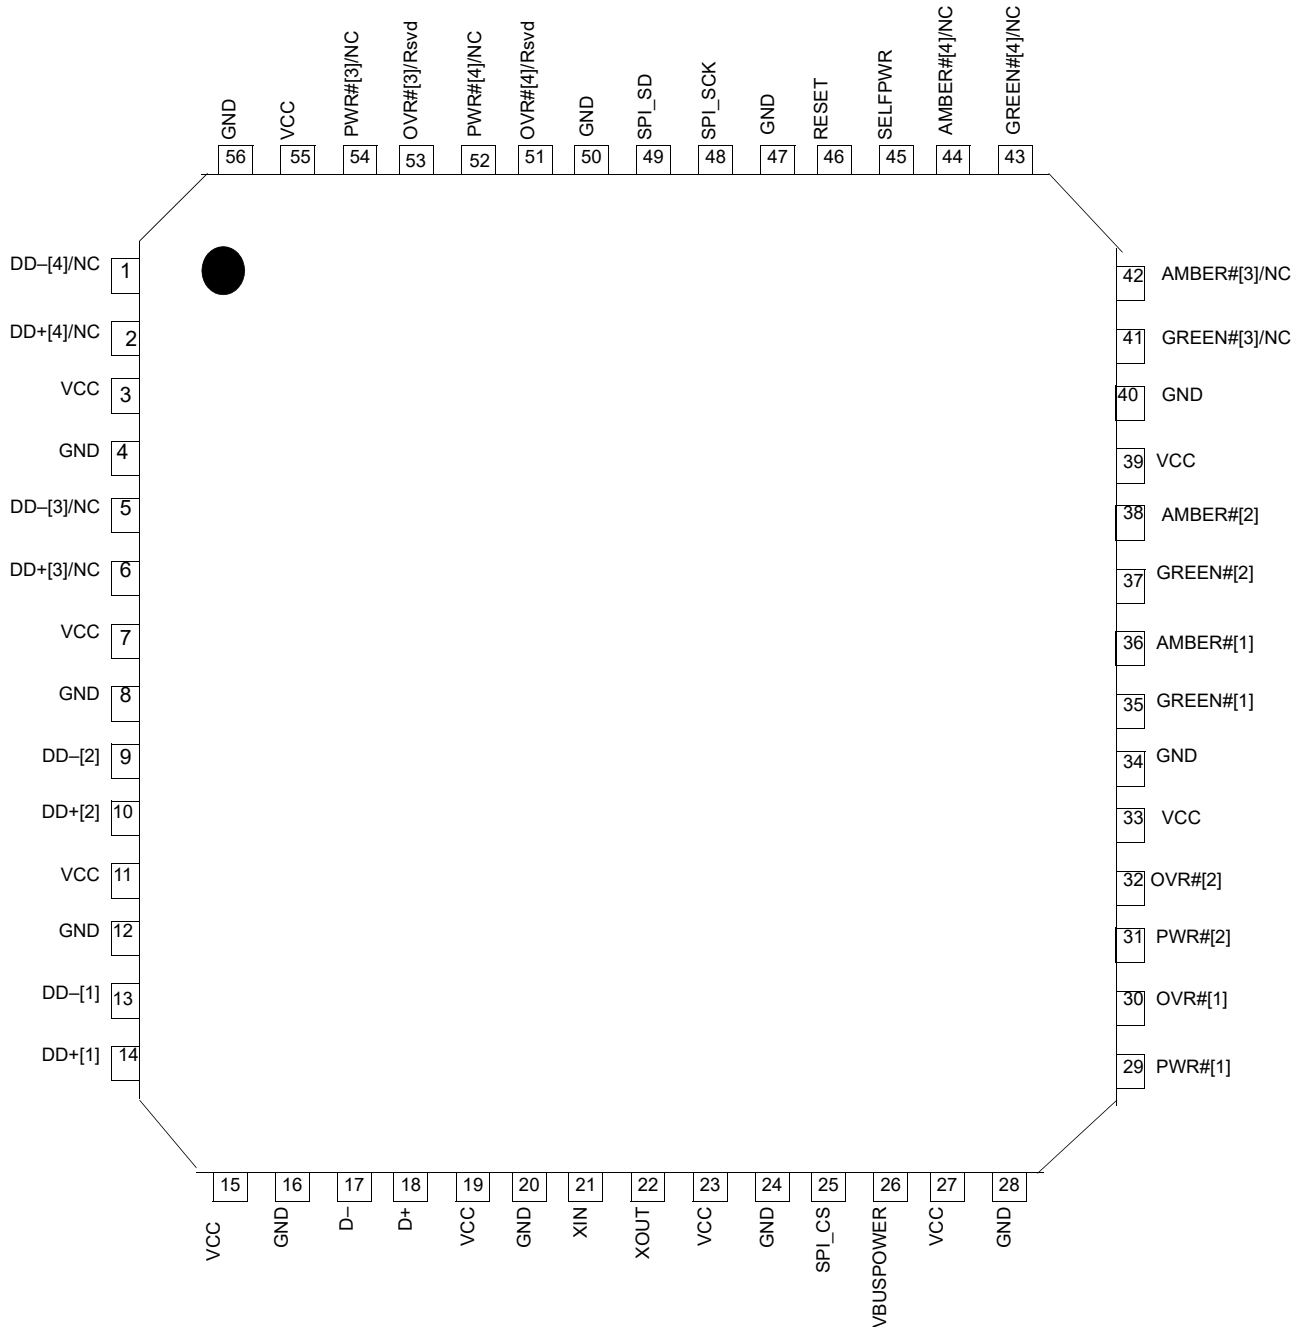

Note

2. NC and Rsvd are for CY7C65620 only.

Pin Definitions

Table 3. Pin Assignments^[3]

| Pin | CY7C65630 Name | CY7C65620 Name | Type | Default | Description |
|----------------------|-----------------|-----------------|--------|---------|--|
| 3 | V _{CC} | V _{CC} | Power | N/A | V _{CC} . This signal provides power to the chip. |
| 7 | V _{CC} | V _{CC} | Power | N/A | V _{CC} . This signal provides power to the chip. |
| 11 | V _{CC} | V _{CC} | Power | N/A | V _{CC} . This signal provides power to the chip. |
| 15 | V _{CC} | V _{CC} | Power | N/A | V _{CC} . This signal provides power to the chip. |
| 19 | V _{CC} | V _{CC} | Power | N/A | V _{CC} . This signal provides power to the chip. |
| 23 | V _{CC} | V _{CC} | Power | N/A | V _{CC} . This signal provides power to the chip. |
| 27 | V _{CC} | V _{CC} | Power | N/A | V _{CC} . This signal provides power to the chip. |
| 33 | V _{CC} | V _{CC} | Power | N/A | V _{CC} . This signal provides power to the chip. |
| 39 | V _{CC} | V _{CC} | Power | N/A | V _{CC} . This signal provides power to the chip. |
| 55 | V _{CC} | V _{CC} | Power | N/A | V _{CC} . This signal provides power to the chip. |
| 4 | GND | GND | Power | N/A | GND. Connect to ground with as short a path as possible. |
| 8 | GND | GND | Power | N/A | GND. Connect to ground with as short a path as possible. |
| 12 | GND | GND | Power | N/A | GND. Connect to ground with as short a path as possible. |
| 16 | GND | GND | Power | N/A | GND. Connect to ground with as short a path as possible. |
| 20 | GND | GND | Power | N/A | GND. Connect to ground with as short a path as possible. |
| 24 | GND | GND | Power | N/A | GND. Connect to ground with as short a path as possible. |
| 28 | GND | GND | Power | N/A | GND. Connect to ground with as short a path as possible. |
| 34 | GND | GND | Power | N/A | GND. Connect to ground with as short a path as possible. |
| 40 | GND | GND | Power | N/A | GND. Connect to ground with as short a path as possible. |
| 47 | GND | GND | Power | N/A | GND. Connect to ground with as short a path as possible. |
| 50 | GND | GND | Power | N/A | GND. Connect to ground with as short a path as possible. |
| 56 | GND | GND | Power | N/A | GND. Connect to ground with as short a path as possible. |
| 21 | XIN | XIN | Input | N/A | 24 MHz crystal IN or external clock input. |
| 22 | XOUT | XOUT | Output | N/A | 24 MHz crystal OUT. (NC if external clock is used) |
| 46 | RESET# | RESET# | Input | N/A | Active LOW reset. This pin resets the entire chip. It is normally tied to V _{CC} through a 100 K resistor, and to GND through a 0.1 μF capacitor. No other special power-up procedure is required. |
| 45 | SELPWR | SELPWR | Input | N/A | Self power. Indicator for bus or self powered. 0 is bus powered, 1 is self powered. |
| 26 | VBUSPOWER | VBUSPOWER | Input | N/A | VBUS. Connect to the VBUS pin of the upstream connector. This signal indicates to the hub that it is in a connected state, and may enable the D+ pull-up resistor to indicate a connection. (The hub does so after the external EEPROM is read). |
| SPI Interface | | | | | |
| 25 | SPI_CS | SPI_CS | Output | O | SPI chip select. Connect to CS pin of the EEPROM. |
| 48 | SPI_SCK | SPI_SCK | Output | O | SPI clock. Connect to EEPROM SCK pin. |
| 49 | SPI_SD | SPI_SD | I/O/Z | Z | SPI dataline connect to GND with 15 kΩ resistor and to the Data I/O pin of the EEPROM. |
| Upstream Port | | | | | |
| 17 | D- | D- | I/O/Z | Z | Upstream D- Signal. |
| 18 | D+ | D+ | I/O/Z | Z | Upstream D+ Signal. |

Note

3. Unused port DD+/DD- lines can be left floating. Leave the port power, amber, and green LED pins unconnected, and deassert the overcurrent pin. Do not leave the overcurrent pin floating; it is an input. SPI data line should be connected to GND with 15 kΩ resistor (Even if no EEPROM is used).

Table 3. Pin Assignments^[3] (continued)

| Pin | CY7C65630 Name | CY7C65620 Name | Type | Default | Description |
|--------------------------|----------------|----------------|--------|---------|--|
| Downstream Port 1 | | | | | |
| 13 | DD-[1] | DD-[1] | I/O/Z | Z | Downstream D- Signal. |
| 14 | DD+[1] | DD+[1] | I/O/Z | Z | Downstream D+ Signal. |
| 36 | AMBER#[1] | AMBER#[1] | Output | 1 | LED. Driver output for Amber LED. Port indicator support. Default is active LOW. Polarity is controlled through EEPROM. |
| 35 | GREEN#[1] | GREEN#[1] | Output | 1 | LED. Driver output for Green LED. Port indicator support. Default is active LOW. Polarity is controlled through EEPROM. |
| 30 | OVR#[1] | OVR#[1] | Input | 1 | Overcurrent condition detection input. Default is active LOW. Polarity is controlled through EEPROM. |
| 29 | PWR#[1] | PWR#[1] | O/Z | Z | Power switch driver output. Default is active LOW. Polarity is controlled through EEPROM. |
| Downstream Port 2 | | | | | |
| 9 | DD-[2] | DD-[2] | I/O/Z | Z | Downstream D- Signal. |
| 10 | DD+[2] | DD+[2] | I/O/Z | Z | Downstream D+ Signal. |
| 38 | AMBER#[2] | AMBER#[2] | Output | 1 | LED. Driver output for amber LED. Port indicator support. Default is active LOW. Polarity is controlled through EEPROM. |
| 37 | GREEN#[2] | GREEN#[2] | Output | 1 | LED. Driver output for green LED. Port indicator support. Default is active LOW. Polarity is controlled through EEPROM. |
| 32 | OVR#[2] | OVR#[2] | Input | 1 | Overcurrent condition detection input. Default is active LOW. Polarity is controlled through EEPROM. |
| 31 | PWR#[2] | PWR#[2] | O/Z | Z | Power switch driver output. Default is active LOW. Polarity is controlled through EEPROM. |
| Downstream Port 3 | | | | | |
| 5 | DD-[3] | NC | I/O/Z | Z | Downstream D- Signal. |
| 6 | DD+[3] | NC | I/O/Z | Z | Downstream D+ Signal. |
| 42 | AMBER#[3] | NC | Output | 1 | LED. Driver output for amber LED. Port indicator support. Default is active LOW. Polarity is controlled through EEPROM. |
| 41 | GREEN#[3] | NC | Output | 1 | LED. Driver output for Green LED. Port indicator support. Default is active LOW. Polarity is controlled through EEPROM. |
| 53 | OVR#[3] | Reserved | Input | 1 | Overcurrent condition detection input. Default is active LOW. Polarity is controlled through EEPROM. Reserved. Pull to deasserted state with external resistor (CY7C65620 only) |
| 54 | PWR#[3] | NC | O/Z | Z | Power switch driver output. Default is active LOW. Polarity is controlled through EEPROM. |
| Downstream Port 4 | | | | | |
| 1 | DD-[4] | NC | I/O/Z | Z | Downstream D- Signal. |
| 2 | DD+[4] | NC | I/O/Z | Z | Downstream D+ Signal. |
| 44 | AMBER#[4] | NC | Output | 1 | LED. Driver output for amber LED. Port indicator support. Default is active LOW. Polarity is controlled through EEPROM. |
| 43 | GREEN#[4] | NC | Output | 1 | LED. Driver output for green LED. Port indicator support. Default is active LOW. Polarity is controlled through EEPROM. |
| 51 | OVR#[4] | Reserved | Input | 1 | Overcurrent condition detection input. Default is active LOW. Polarity is controlled through EEPROM. Reserved. Pull to deasserted state with external resistor (CY7C65620 only) |
| 52 | PWR#[4] | NC | O/Z | Z | Power switch driver output. Default is active LOW. Polarity is controlled through EEPROM. |

Default Descriptors

This section presents the different descriptors that are available. The following tables list the functionality of each descriptor.

Device Descriptor

The standard device descriptor for CY7C65620/CY7C65630 is based on the information found in the SPI EEPROM. The information in the EEPROM overrides the default descriptor values. If no EEPROM is used, the CY7C65620/CY7C65630 enumerates with the default descriptor values as shown in the following table. If a blank EEPROM is connected, the hub enumerates as vendor defined class instead of a hub class. This is for the purpose of programming the EEPROM with the Cypress driver.

| Byte | Full Speed | High Speed | Field Name | Description |
|--------|------------|------------|--------------------|---|
| 0 | 0x12 | 0x12 | bLength | 18 bytes |
| 1 | 0x01 | 0x01 | bDescriptorType | DEVICE_DESCRIPTOR |
| 2,3 | 0x0110 | 0x0200 | bcdUSB | USB specification 2.0 (1.1 if forced FS) |
| 4 | 0x09 | 0x09 | bDeviceClass | HUB |
| 5 | 0x00 | 0x00 | bDeviceSubClass | None |
| 6 | 0x00 | 0x01 | bDeviceProtocol | None |
| 7 | 0x40 | 0x40 | bMaxPacketSize0 | 64 bytes |
| 8,9 | 0x04B4 | 0x04B4 | wIdVendor | VID (overridden by what is defined in EEPROM) |
| 10,11 | 0x6560 | 0x6560 | wIdProduct | PID (overridden by what is defined in EEPROM) |
| 12, 13 | 0x0915 | 0x0915 | wbcdDevice | DID (overridden by what is defined in EEPROM) |
| 14 | 0x00 | 0x00 | iManufacturer | Overridden by EEPROM |
| 15 | 0x00 | 0x00 | iProduct | Overridden by EEPROM |
| 16 | 0x00 | 0x00 | iSerialNumber | Overridden by EEPROM |
| 17 | 0x01 | 0x01 | bNumConfigurations | One configuration supported |

Configuration Descriptor

| Byte | Full Speed | High Speed | Field Name | Description |
|------|--|--|---------------------|---|
| 0 | 0x09 | 0x09 | bLength | 9 bytes |
| 1 | 0x02 ^[4] /0x07 ^[5] | 0x02 ^[4] /0x07 ^[5] | bDescriptorType | CONFIG_DESCRIPTOR |
| 2 | 0x0019 | 0x0019 | wTotalLength | Length of all other descriptors |
| 4 | 0x01 | 0x01 | bNumInterfaces | 1 |
| 5 | 0x01 | 0x01 | bConfigurationValue | The configuration to use |
| 6 | 0x00 | 0x00 | iConfiguration | Index of string descriptor describing this configuration |
| 7 | 0xA0 0xE0 | 0xA0 0xE0 | bmAttributes | Value depends on pin 45 - SELFPWR signal SELPWR = 0 yields 0xA0 and =1 yields 0xE0 |
| 8 | 0x28 | 0x57 ^[4] | bMaxPower | Maximum power consumption of hub from the USB bus |

Notes

4. Configured speed descriptor.
5. Other speed descriptor.

Interface Descriptor

| Byte | Full Speed | High Speed | Field Name | Description |
|------|------------|------------|--------------------|---|
| 0 | 0x09 | 0x09 | bLength | 9 bytes |
| 1 | 0x04 | 0x04 | bDescriptorType | INTERFACE_DESCRIPTOR |
| 2 | 0x00 | 0x00 | bInterfaceNumber | Number of this interface |
| 3 | 0x00 | 0x00 | bAlternateSetting | Value used to select this alternate setting for the interface |
| 4 | 0x01 | 0x01 | bNumEndpoints | Number of endpoints used by this interface (not including endpoint 0) |
| 5 | 0x09 | 0x09 | bInterfaceClass | Hub class code |
| 6 | 0x00 | 0x00 | bInterfaceSubClass | Subclass code (assigned by the USB-IF) |
| 7 | 0x00 | 0x00 | bInterfaceProtocol | Protocol code (assigned by the USB-IF) |
| 8 | 0x00 | 0x00 | iInterface | Index of the string descriptor describing this interface |

Endpoint Descriptor

| Byte | Full-Speed | High-Speed | Field Name | Description |
|------|------------|------------|------------------|---------------------|
| 0 | 0x07 | 0x07 | bLength | 7 bytes |
| 1 | 0x05 | 0x05 | bDescriptorType | ENDPOINT_DESCRIPTOR |
| 2 | 0x81 | 0x81 | bEndpointAddress | IN Endpoint #1 |
| 3 | 0x03 | 0x03 | bmAttributes | Interrupt |
| 4, 5 | 0x0001 | 0x0001 | wMaxPacketSize | Maximum packet size |
| 6 | 0xFF | 0x0C | bInterval | Polling rate |

Device Qualifier Descriptor

| Byte | Full-Speed | High-Speed | Field Name | Description |
|------|------------|------------|--------------------|--|
| 0 | 0x0A | 0x0A | bLength | 10 bytes |
| 1 | 0x06 | 0x06 | bDescriptorType | DEVICE_QUALIFIER |
| 2, 3 | 0x0200 | 0x0200 | bcdUSB | USB Specification Release Number in Binary-Coded Decimal |
| 4 | 0x09 | 0x09 | bDeviceClass | Class code (assigned by the USB-IF) |
| 5 | 0x00 | 0x00 | bDeviceSubClass | Subclass code (assigned by the USB-IF) |
| 6 | 0x01 | 0x00 | bDeviceProtocol | Protocol code (assigned by the USB-IF) |
| 7 | 0x40 | 0x40 | bMaxPacketSize0 | Maximum packet size for other speed |
| 8 | 0x01 | 0x01 | bNumConfigurations | Number of other-speed configurations |
| 9 | 0x00 | 0x00 | bReserved | Reserved for future use, must be zero |

Hub Descriptor

| Byte | All Speed | Field Name | Description |
|------|--|---------------------|---|
| 0 | 0x09 | bLength | 9 bytes |
| 1 | 0x29 | bDescriptorType | HUB descriptor |
| 2 | 0x04 ^[6] 0x02 | bNbrPorts | Number of ports supported, CY7C65630 Number of ports supported, CY7C65620 |
| 3,4 | 0x0089 ^[6] | wHubCharacteristics | b1, b0: Logical power switching mode 00: Ganged power switching (all ports' power at once). 01: Individual port power switching (Default in CY7C65620/CY7C65630). b2: Identifies a compound device 0: Hub is not part of a compound device (Default in CY7C65620/CY7C65630). 1: Hub is part of a compound device. b4, b3: Overcurrent protection mode 00: Global overcurrent protection. The hub reports overcurrent as a summation of all ports' current draw, without a breakdown of individual port overcurrent status. 01: Individual port overcurrent protection. The hub reports overcurrent on a per-port basis. Each port has an overcurrent status (Default in CY7C65620/CY7C65630). 1X: No overcurrent protection. This option is allowed only for bus powered hubs that do not implement overcurrent protection. b6, b5: TT think time 00: TT requires at most eight FS bit times of inter transaction gap on a full/low-speed downstream bus (Default in CY7C65620/CY7C65630). b7: Port indicators supported, 0: Port indicators are not supported on its downstream facing ports and the SetPortIndicator request has no effect. 1: Port indicators are supported on its downstream facing ports and the SetPortIndicator request controls the indicators. See "Functional Overview" on page 5 and "Supported USB Requests" on page 18. (Default in CY7C65620/CY7C65630). b15, b8: Reserved |
| 5 | 0x32 ^[6] | bPwrOn2PwrGood | Time from when the port is powered to when the power is good on that port. |
| 6 | 0x28 ^[6] 0xAE ^[6] | bHubContrCurrent | Maximum current requirement for the hub controller at full-speed. Maximum current requirement for the hub controller at high-speed. |
| 7 | 0x00 ^[6] | bDeviceRemovable | Indicates if the logical port has a removable device attached (0 = removable, 1 = non removable). |
| 8 | 0xFF ^[6] | bPortPwrCtrlMask | Required for compatibility with software written for 1.0 compliant devices. |

Note

6. This value is configured through the external EEPROM.

Configuration Options

Systems using CY7C65620/CY7C65630 have the option of using a fuse ROM, which is preset at the factory to configure the hub. Otherwise, it must have an external EEPROM for the device to have a unique VID, PID, and DID. The CY7C65620/CY7C65630 can communicate with SPI EEPROM that are either double byte addressed or single byte with the ninth bit within the instruction byte, such as the 24LC040 parts use. The 25LC080 EEPROM uses the double byte address format. Therefore, the CY7C65620/CY7C65630 can communicate with these parts. The '010s and '020s use the same command format that is used to interface with the '040 and hence these can also be used to interface with the CY7C65620/CY7C65630.

If the attached EEPROM is blank (0xFF) the hub enumerates as a vendor class device. In this configuration, the hub connects to the Cypress driver to allow programming of the EEPROM. When the EEPROM is programmed, a power cycle configures the chip as a hub class device.

0xD0 Load

With this EEPROM format, only a unique VID, PID, and DID must be present in the external SPI EEPROM. The contents of the EEPROM must contain this information in the following format:

| Byte | Value |
|------|-----------|
| 0 | 0xD0 |
| 1 | VID (LSB) |
| 2 | VID (MSB) |
| 3 | PID (LSB) |
| 4 | PID (MSB) |
| 5 | reserved |
| 6 | DID (MSB) |

0xD2 Load

| Byte | Value (MSB ≥ LSB) |
|------|--|
| 0 | 0xD2 |
| 1 | VID (LSB) |
| 2 | VID (MSB) |
| 3 | PID (LSB) |
| 4 | PID (MSB) |
| 5 | reserved |
| 6 | DID (MSB) |
| 7 | EnabledOverCurrentTimer[3:0], DisableOvercurrentTimer[3:0] |
| 8 | ActivePorts[3:0], RemovablePorts[3:0] |
| 9 | MaxPower |
| 10 | HubControllerPower |
| 11 | PowerOnTimer |
| 12 | IllegalHubDescriptor, CompoundDevice, FullspeedOnly, NoPortIndicators, Reserved, GangPowered, Reserved, Reserved |

Byte 0: 0xD2

Needs to be programmed with 0xD2

Byte 1: VID (LSB)

Least significant byte of vendor ID

Byte 2: VID (MSB)

Most significant byte of vendor ID

Byte 3: PID (LSB)

Least significant byte of product ID

Byte 4: PID (MSB)]

Most significant byte of product ID

Byte 5: Reserved

Reserved

Byte 6: DID (MSB)]

Most significant byte of device ID

Byte 7: EnabledOvercurrentTimer[3:0], DisabledOvercurrentTimer[3:0]

Count time in ms for filtering overcurrent detection. Bits 7–4 are for an enabled port, and bits 3–0 are for a disabled port. Both range from 0 ms to 15 ms. See [Port Indicators on page 6](#). Default: 8 ms = 0x88.

Byte 8: ActivePorts[3:0], RemovablePorts[3:0]

Bits 7–4 are the ActivePorts[3:0] bits that indicates if the corresponding port is usable. For example, a two-port hub that uses ports 1 and 4 would set this field to 0x09. The total number of ports reported in the Hub Descriptor: bNbrPorts field is calculated from this. Bits 3–0 are the RemovablePorts[3:0] bits that indicates whether the corresponding logical port is removable (set to high). Logical port numbers are from 1 to n where n is the total number of active ports. If port 2 is disabled then physical ports 1, 3, and 4 map to logical ports 1, 2, and 3. These bit values are reported appropriately in the HubDescriptor:DeviceRemovable field. Default: 0xFF.

Byte 9: MaximumPower

This value is reported in the ConfigurationDescriptor:bMaxPower field and is the current in 2 mA increments that is required from the upstream hub. Default: 0x28 = 80 mA for full-speed and 0x57 = 174 mA for high-speed.

Byte 10: HubControllerPower

This value is reported in the HubDescriptor:bHubContrCurrent field and is the current in milliamperes required by the hub controller. Default: 0x50 = 80 mA for full-speed and 0xAE = 174 mA for high-speed.

Byte 11: PowerOnTimer

This value is reported in the HubDescriptor:bPwrOn2PwrGood field and is the time in 2 ms intervals from the SetPortPower command until the power on the corresponding downstream port is good. Default: 0x32 = 100 ms.

Byte 12: IllegalHubDescriptor, CompoundDevice, Full Speed Only, NoPortIndicators, Reserved, GangPowered, Reserved, Reserved

Bit 7: IllegalHubDescriptor. For GetHubDescriptor request, some USB hosts use a DescriptorType of 0x00 instead of HUB_DESCRIPTOR, 0x29. According to the USB 2.0 standard, a hub must treat this as a Request Error, and STALL the transaction accordingly (USB 2.0, 11.24.2.5). For systems that do not accept this, the IllegalHubDescriptor configuration bit can be set to allow CY7C65620/CY7C65630 to accept a DescriptorType of 0x00 for this command. Default is 1.

Bit 6: CompoundDevice. Indicates whether the hub is part of a compound device. This is reported in the HubDescriptor, wHub-Characteristics: b2. Default set to '0'.

Bit 5: Fullspeed. Only configures the hub to be a full-speed only device. Default is set to '0'.

Bit 4: NoPortIndicators. Turns off the port indicators and does not report them as present in the HubDescriptor, wHubCharacteristics b7 field. Default is set to '0'.

Bit 3: Reserved. Set this bit to '0'.

Bit 2: GangPowered. Indicates whether the port power switching is ganged (set to 1) or per-port (set to '0'). This is reported in the HubDescriptor, wHubCharacteristics field, b4, b3, b1, and b0. Default is set to '0'.

Bit 1: Reserved. Default is set to '0'.

Bit 0: Reserved. Default is set to '0'.

0xD4 Load

| Byte | Value (MSB ≥ LSB) | Factory Fusable |
|------|--|-----------------|
| 0 | 0xD4 | |
| 1 | VID (LSB) | X |
| 2 | VID (MSB) | X |
| 3 | PID (LSB) | X |
| 4 | PID (MSB) | X |
| 5 | reserved | |
| 6 | DID (MSB) | X |
| 7 | EnabledOverCurrentTimer[3:0], DisableOvercurrentTimer[3:0] | |
| 8 | MaxPower (full-speed) | X |
| 9 | MaxPower (high-speed) | X |
| 10 | Reserved | |
| 11 | Reserved | |
| 12 | HubControllerPower full-speed bus powered | X |
| 13 | HubControllerPower high-speed bus powered | X |
| 14 | HubControllerPower full-speed self powered | |

0xD4 Load (continued)

| Byte | Value (MSB ≥ LSB) | Factory Fusable |
|---------|---|-----------------|
| 15 | HubControllerPower high-speed self powered | |
| 16 | PowerOnTimer | |
| 17 | IllegalHubDescriptor, CompoundDevice, FullspeedOnly, NoPortIndicators, Reserved, GangPowered, Reserved, Reserved | X |
| 18 | AmberPolarity, GreenPolarity, ModulateIndicators, PowerControlPolarity, OverCurrentPolarity, OverCurrentMode1, OverCurrentMode2 | X |
| 19 | Write protect | |
| 20 | NumLangs | |
| 21 | SupportedStrings | |
| 22 | ActivePorts[3:0] | |
| 23 | RemovablePorts[3:0] | X |
| 24 | LangID | |
| a=24+2N | iManufacturer | |
| b=a+2N | iProduct | |
| c=b+2N | iSerialNumber | |
| d=c+2N | iConfiguration(FS) | |
| e=d+2N | iConfiguration(HS) | |
| f=e+2N | iInterface(0) | |
| g=f+2N | reserved | |
| h=g+2N | Strings | |

N: NumLangs

Byte 0: 0xD4

Needs to be programmed with 0xD4

Byte 1: VID (LSB)

Least significant byte of vendor ID

Byte 2: VID (MSB)

Most significant byte of vendor ID

Byte 3: PID (LSB)

Least significant byte of product ID

Byte 4: PID (MSB)

Most significant byte of product ID

Byte 5: Reserved

Reserved

Byte 6: DID (MSB)

Most significant byte of device ID

Byte 7: EnabledOvercurrentTimer[3:0], DisabledOvercurrentTimer[3:0]

Count time in ms for filtering overcurrent detection. Bits 7–4 are for an enabled port, and bits 3–0 are for a disabled port. Both range from 0 ms to 15 ms. See [Port Indicators on page 6](#). Default: 8 ms = 0x88.

Byte 8: MaximumPower (Full-speed)

This value is reported in the ConfigurationDescriptor:bMaxPower field and is the current in 2 mA increments that is required from the upstream hub when connected at full-speed. Default: 0x28 = 80 mA for full-speed.

Byte 9: MaximumPower (High-speed)

This value is reported in the ConfigurationDescriptor:bMaxPower field and is the current in 2 mA increments that is required from the upstream hub when connected at high-speed. Default: 0x57 = 174 mA for high-speed.

Byte 10: Reserved

Write zeros to this location.

Byte 11: Reserved

Write zeros to this location.

Byte 12: HubControllerPower (Full-speed, bus-powered)

This value is reported in the HubDescriptor:bHubContrCurrent field and is the current in milliamperes required by the hub controller when connected on the upstream hub as a full-speed. Default: 0x50 = 80 mA for full-speed.

Byte 13: HubControllerPower (High-speed, bus-powered)

This value is reported in the HubDescriptor:bHubContrCurrent field and is the current in milliamperes required by the hub controller when connected on the upstream hub as a high-speed. Default: 0xAE = 174 mA for high-speed.

Byte 14: HubControllerPower (Full-speed, self-powered)

This value is reported in the HubDescriptor:bHubContrCurrent field and is the current in milliamperes required by the hub controller when connected on the upstream hub as a full-speed. Default: 0x50 = 80 mA for full-speed.

Byte 15: HubControllerPower (High-speed, self-powered)

This value is reported in the HubDescriptor:bHubContrCurrent field and is the current in milliamperes required by the hub controller when connected on the upstream hub as a high-speed. Default: 0x64 = 100 mA for high-speed.

Byte 16: PowerOnTimer

This value is reported in the HubDescriptor:bPwrOn2PwrGood field and is the time in 2 ms increments from the SetPortPower command until the power on the corresponding downstream port is good. Default: 0x32 = 100 ms.

Byte 17: IllegalHubDescriptor, CompoundDevice, Full-Speed Only, NoPortIndicators, Reserved, GangPowered, Reserved, Reserved

Bit 7: IllegalHubDescriptor. For GetHubDescriptor request, some USB hosts use a DescriptorType of 0x00 instead of HUB_DESCRIPTOR, 0x29. According to the USB 2.0 standard, a hub must treat this as a request error, and STALL the transaction accordingly (USB 2.0, 11.24.2.5). For systems that do not accept this, the IllegalHubDescriptor configuration bit may be set to allow CY7C65620/CY7C65630 to accept a DescriptorType of 0x00 for this command. Default set to 1.

Bit 6: CompoundDevice. Indicates whether the hub is part of a compound device. This is reported in the HubDescriptor, wHub-Characteristics: b2. Default is set to '0'.

Bit 5: Fullspeed. Only configures the hub to be a full speed only device. Default is set to '0'.

Bit 4: NoPortIndicators. Turns off the port indicators and does not report them as present in the HubDescriptor, wHubCharacteristics b7 field. Default is set to '0'.

Bit 3: Reserved. Set this bit to '0'.

Bit 2: GangPowered. Indicates whether the port power switching is ganged (set to 1) or per-port (set to '0'). This is reported in the HubDescriptor, wHubCharacteristics field, b4, b3, b1, and b0. Default is set to '0'.

Bit 1: Reserved. Default is set to '0'.

Bit 0: Reserved. Default is set to '0'.

Byte 18: AmberPolarity, GreenPolarity, SelfPowerable, ModulateIndicators, PowerControlPolarity, OverCurrentPolarity, OverCurrentMode1, OverCurrentMode2

Bit 7: AmberPolarity. Indicates the polarity of the amber indicator control. (1 = high, 0 = low)

Bit 6: GreenPolarity. Indicates the polarity of the green indicator control. (1 = high, 0 = low)

Bit 5: SelfPowerable. Indicates whether the hub is capable of operating in self powered mode. If '0', the hub is capable of bus powered operation only.

Bit 4: ModulateIndicators. If this bit is set, the indicator outputs are modulated by a square wave of 120 Hz, for power savings. If '0', the outputs are static.

Bit 3: PowerControlPolarity. If set, the power control outputs are active HIGH. If not set, the power control outputs are active LOW.

Bit 2: OverCurrentPolarity. If set, the overcurrent inputs are active HIGH. If not set, the overcurrent inputs are active LOW.

Bit 1: OverCurrentMode1. Reported as bit 4 of the wHubCharacteristics field of the hub descriptor. If set to '1', this bit disables overcurrent detection.

Bit 0: OverCurrentMode2. Reported as bit 3 of the wHubCharacteristics field of the hub descriptor. If Bit 1 of this byte is set to '0', overcurrent detection is enabled. If this bit (Bit 0) is set to '1', the hub reports overcurrent on a per-port basis. If set to '0', the hub reports overcurrent as the summation of all ports' current draw.

Byte 19: Write Protect

Writing the value 0x42 to this field enables Write Protect and any future writes to the EEPROM fail. Default is set to '0'.

Byte 20: NumLangs

Number of supported string languages. CY7C65620/CY7C65630 supports a maximum of 31 languages; if this field is set to '0' or a number larger than 31, all string support is disabled.

Byte 21: SupportedStrings

This field contains a bitmap of strings supported by the hub. A set bit indicates that the standard string is supported. A bit not set indicates that the string is not supported. The hub controller returns a non zero index for each string that is supported, and returns 0x00 for each string not supported, as indicated by this field. The bits in this field correspond to the following standard strings.

Table 4. Byte 21 Supported Strings

| Bit | Name | Description |
|-----|----------------|---|
| 7 | Reserved | – |
| 6 | Reserved | – |
| 5 | Interface (0) | The Interface string index reported in the first interface descriptor (alternate setting 0) |
| 4 | iConfiguration | (high speed) The iConfiguration string index reported in the configuration descriptor, when operating at high speed |
| 3 | iConfiguration | (full speed) The iConfiguration string index reported in the configuration descriptor, when operating at full speed |
| 2 | iSerial Number | The iSerialNumber string index reported in the device descriptor |
| 1 | iProduct | The iProduct string index reported in the device descriptor |
| 0 | iManufacturer | The iManufacturer string index reported in the device descriptor |

Byte 22: ActivePorts[3:0]

Bits 3–0 are the ActivePorts[3:0] bits that indicates if the corresponding port is usable. For example, a two-port hub that uses ports 1 and 4 sets this field to 0x09. The total number of ports reported in the Hub Descriptor: bNbrPorts field is calculated from this. Default 0x0F.

Byte 23: RemovablePorts[3:0]

Bits 3–0 are the RemovablePorts[3:0] bits that indicates whether the corresponding logical port is removable (set to high). Logical port numbers are from 1 to n where n is the total number of active ports. If port 2 is disabled then physical ports 1, 3, and 4 map to logical ports 1, 2, and 3. These bit values are recorded in the HubDescriptor:DeviceRemovable field. Default 0x0F.

Byte 24: LangID

Array of LangID codes supported by the hub. Each LangID consists of two bytes, stored LSB first. The array has NumLangs entries (2 × NumLangs bytes).

Byte a: iManufacturer

Array of addresses for the iManufacturer strings. Each address is two bytes long, stored LSB first. The array has NumLangs entries (2 × NumLangs bytes). The starting EEPROM address is based upon the number entered for NumLangs. The address $a = 24 + 2 \times \text{NumLangs}$.

Byte b: iProduct

Array of addresses for the iProduct strings. Each address is two bytes long, stored LSB first. The array has NumLangs entries (2 × NumLangs bytes). The address $b = a + 2 \times \text{NumLangs}$.

Byte c: iSerialNumber

Array of addresses for the iSerialNumber strings. Each address is two bytes long, stored LSB first. The array has NumLangs entries (2 × NumLangs bytes). The address $c = b + 2 \times \text{NumLangs}$.

Byte d: iConfiguration(Full Speed)

Array of addresses for the iConfiguration (full speed) strings. Each address is two bytes long, stored LSB first. The array has NumLangs entries (2 × NumLangs bytes). The address $d = c + 2 \times \text{NumLangs}$.

Byte e: iConfiguration(High Speed)

Array of addresses for the iConfiguration (high speed) strings. Each address is two bytes long, stored LSB first. The array has NumLangs entries (2 × NumLangs bytes). The address $e = d + 2 \times \text{NumLangs}$.

Byte f: iInterface(0)

Array of addresses for the iInterface(0) strings. Each address is two bytes long, stored LSB first. The array has NumLangs entries (2 × NumLangs bytes). The address $f = e + 2 \times \text{NumLangs}$.

Byte g: iInterface(1)

Reserved

Byte h: Strings

Strings addressed by the string pointers. Strings must comply with the USB specification. The first byte must be the length of the string in bytes, the second must be 0x03, and the string must be in Unicode.

Supported USB Requests

Device Class Commands

Table 5. Device Class Requests

| Request | bmRequestType | bRequest | wValue | wIndex | wLength | Data |
|---------------------------------------|---------------|----------|---------------------|---------------------|-------------------|-------------------------|
| GetDeviceStatus | 10000000B | 0x00 | 0x0000 | 0x0000 | 0x0002 | 2 Byte device status |
| GetInterfaceStatus | 10000001B | 0x00 | 0x0000 | 0x0000 | 0x0002 | 2 Byte interface status |
| GetEndpointStatus | 10000010B | 0x00 | 0x0000 | 0x0000 | 0x0002 | 2 Byte endpoint status |
| GetDeviceDescriptor | 10000000B | 0x06 | 0x0001 | Zero or language ID | Descriptor length | Descriptor |
| GetConfigDescriptor | 10000000B | 0x06 | 0x0002 | Zero or language ID | Descriptor length | Descriptor |
| GetDeviceQualifierDescriptor | 10000000B | 0x06 | 0x0006 | Zero or language ID | Descriptor length | Descriptor |
| GetOtherSpeedConfiguration Descriptor | 10000000B | 0x06 | 0x0007 | Zero or language ID | Descriptor length | Descriptor |
| GetConfiguration ^[7] | 10000000B | 0x08 | 0x0000 | 0x0000 | 0x0001 | Configuration value |
| SetConfiguration ^[7] | 00000000B | 0x09 | Configuration value | 0x0000 | 0x0000 | None |
| GetInterface | 10000001B | 0xA | 0x0000 | 0x0000 | 0x0001 | Interface number |

| | | | | | | |
|-------------------------|-----------|------|-------------------|------------------|--------|------|
| SetInterface | 00000001B | 0x0B | Alternate setting | Interface number | 0x0000 | None |
| SetAddress | 00000000B | 0x05 | Device address | 0x0000 | 0x0000 | None |
| SetDeviceRemoteWakeup | 00000000B | 0x03 | 0x01 | 0x0000 | 0x0000 | None |
| SetDeviceTest_J | 00000000B | 0x03 | 0x02 | 0x0100 | 0x0000 | None |
| SetDeviceTest_K | 00000000B | 0x03 | 0x02 | 0x0200 | 0x0000 | None |
| SetDeviceTest_SE0_NAK | 00000000B | 0x03 | 0x02 | 0x0300 | 0x0000 | None |
| SetDeviceTest_Packet | 00000000B | 0x03 | 0x02 | 0x0400 | 0x0000 | None |
| SetEndpointHalt | 00000000B | 0x03 | 0x00 | 0x0000 | 0x0000 | None |
| ClearDeviceRemoteWakeup | 00000000B | 0x01 | 0x01 | 0x0000 | 0x0000 | None |
| ClearEndpointHalt | 00000000B | 0x01 | 0x00 | 0x0000 | 0x0000 | None |

Note

7. Only one configuration is supported in CY7C65620/CY7C65630.

Hub Class Commands

Table 6. Hub Class Requests

| Request | bmRequestType | bRequest | wValue | wIndex | wLength | Data |
|------------------|---------------|----------|---|--|---------|---|
| GetHubStatus | 10100000B | 0x00 | 0x0000 | 0x0000 | 0x0004 | Hub status (See Table 11-19 of USB 2.0 Specifications) Change status (See Table 11-20 of USB 2.0 specifications) |
| GetPortStatus | 10100011B | 0x00 | 0x0000 | Byte 0: 0x00 Byte 1: Port | 0x0004 | Port status (See Table 11-21 of USB 2.0 Specifications) Change status (See Table 11-20 of USB 2.0 specifications) |
| ClearHubFeature | 00100000B | 0x01 | Feature selectors ^[8] 0 or 1 | 0x0000 | 0x0000 | None |
| ClearPortFeature | 00100011B | 0x01 | Feature selectors ^[8] 1, 2, 8, 16, 17, 18, 19, or 20 | Byte 0: 0x00 Byte 1: Port | 0x0000 | None |
| ClearPortFeature | 00100011B | 0x01 | Feature selectors ^[8] 22 (PORT_INDICATOR) | Byte 0: - Byte 1: Port | 0x0000 | None |
| SetHubFeature | 00100000B | 0x03 | Feature selector ^[8] 0 or 1 | 0x0000 | 0x0000 | None |
| SetPortFeature | 00100011B | 0x03 | Feature selectors ^[8] 2, 4 or 8 | Port | 0x0000 | None |
| SetPortFeature | 00100011B | 0x03 | Feature selector ^[8] 21 (PORT_TEST) | Byte 0: selectors ^[8] 1, 2, 3, 4 or 5 Byte 1: Port | 0x0000 | None |

| | | | | | | |
|-----------------------|-----------|------|---|--|-----------------------------|------------|
| SetPortFeature | 00100011B | 0x03 | Feature selector ^[8] 22 (PORT_INDICATOR) | Byte 0: selectors ^[9] 0, 1, 2, or 3 Byte 1: Port | 0x0000 | None |
| GetHubDe- scriptor | 10100000B | 0x06 | Descriptor type and descriptor index | Zero/ Language ID | Hub descriptor length | Descriptor |
| ClearTTBuffer | 00100011B | 0x08 | Dev_Addr, EP_Num | TT_Port | 0x0000 | None |
| ResetTT | 00100000B | 0x09 | 0x0000 | Byte 0: 0x00 Byte 1: Port | 0x0000 | None |
| GetTTState | 10100011B | 0x0A | TT_Flags | Byte 0: 0x00 Byte 1: Port | TT state length | TT state |
| StopTT | 00100011B | 0x0B | 0x0000 | Byte 0: 0x00 Byte 1: Port | 0x0000 | None |

Notes

8. Selector values for different features are presented in [Table 7 on page 20](#).
9. Selector values for different features are presented in [Table 9 on page 20](#).

Table 6. Hub Class Requests (continued)

| Request | bmRequestType | bRequest | wValue | wIndex | wLength | Data |
|---|---------------|----------|--------|--------|---------|------|
| Vendor Commands | | | | | | |
| Read EEPROM | 11000000B | 0x02 | 0x00 | 0x00 | Length | Data |
| This request results in reading length bytes of data from the external memory device and returned to the host. Data is read beginning with address 0. This request fails if there is no external memory device present. This request is only valid if the hub is in the configured state; the request fails otherwise. | | | | | | |
| Write EEPROM | 01000000B | 0x01 | 0x00 | 0x00 | Length | Data |
| This request results in writing length bytes of data to the external memory device. Data is written beginning with address 0. This request fails if there is no external memory device present. This request is only valid if the hub is in the configured state or if the external memory device write protect byte is set; the request fails otherwise. | | | | | | |

Table 7. Hub Class Feature Selector

| Feature Selector | Recipient | Value |
|---------------------|-----------|-------|
| C_HUB_LOCAL_POWER | Hub | 0 |
| C_HUB_OVER_CURRENT | Hub | 1 |
| PORT_CONNECTION | Port | 0 |
| PORT_ENABLE | Port | 1 |
| PORT_SUSPEND | Port | 2 |
| PORT_RESET | Port | 4 |
| PORT_POWER | Port | 8 |
| PORT_LOW_SPEED | Port | 9 |
| C_PORT_CONNECTION | Port | 16 |
| C_PORT_ENABLE | Port | 17 |
| C_PORT_SUSPEND | Port | 18 |
| C_PORT_OVER_CURRENT | Port | 19 |
| C_PORT_RESET | Port | 20 |
| PORT_TEST | Port | 21 |
| PORT_INDICATOR | Port | 22 |

Table 8. Test Mode Selector for Feature Selector PORT_TEST (21)^[10]

| PORT_TEST Mode Description | Selector Value |
|----------------------------|----------------|
| Test_J | 1 |
| Test_K | 2 |
| Test_SE0_NAK | 3 |
| Test_Packet | 4 |
| Test_Force_Enable | 5 |

Table 9. Port Indicator Selector for Feature Selector PORT_INDICATOR (22)

| Port Indicator Color | Selector Value | Port Indicator Mode |
|---|----------------|---------------------|
| Color set automatically as shown in Table 1 on page 7 | 0 | Automatic mode |
| Amber | 1 | Manual mode |
| Green | 2 | Manual mode |
| Off | 3 | Manual mode |


Note

 10. Selector values for different features are presented in [Table 8](#).

Upstream USB Connection

The following is a schematic of the USB upstream connector.


Figure 2. USB Upstream Port Connection

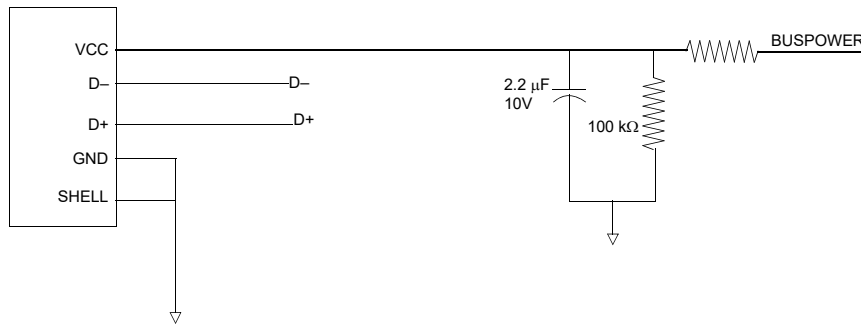

Downstream USB Connection

The following is a schematic of the USB downstream connector.


Figure 3. USB Downstream Port Connection

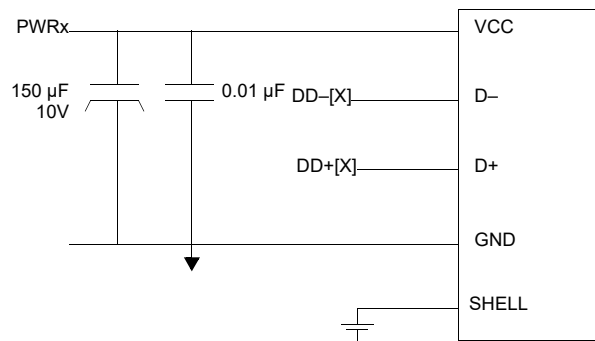

LED Connection


The following is a schematic of the LED circuitry.

Figure 4. USB Downstream Port Connection

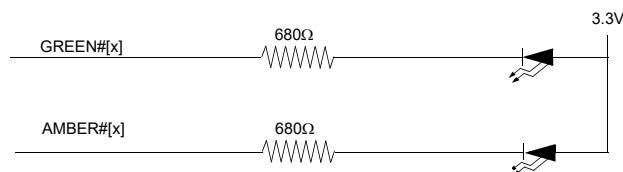

System Block Diagram

Figure 5. Sample Schematic for 4-port Self Powered Configuration

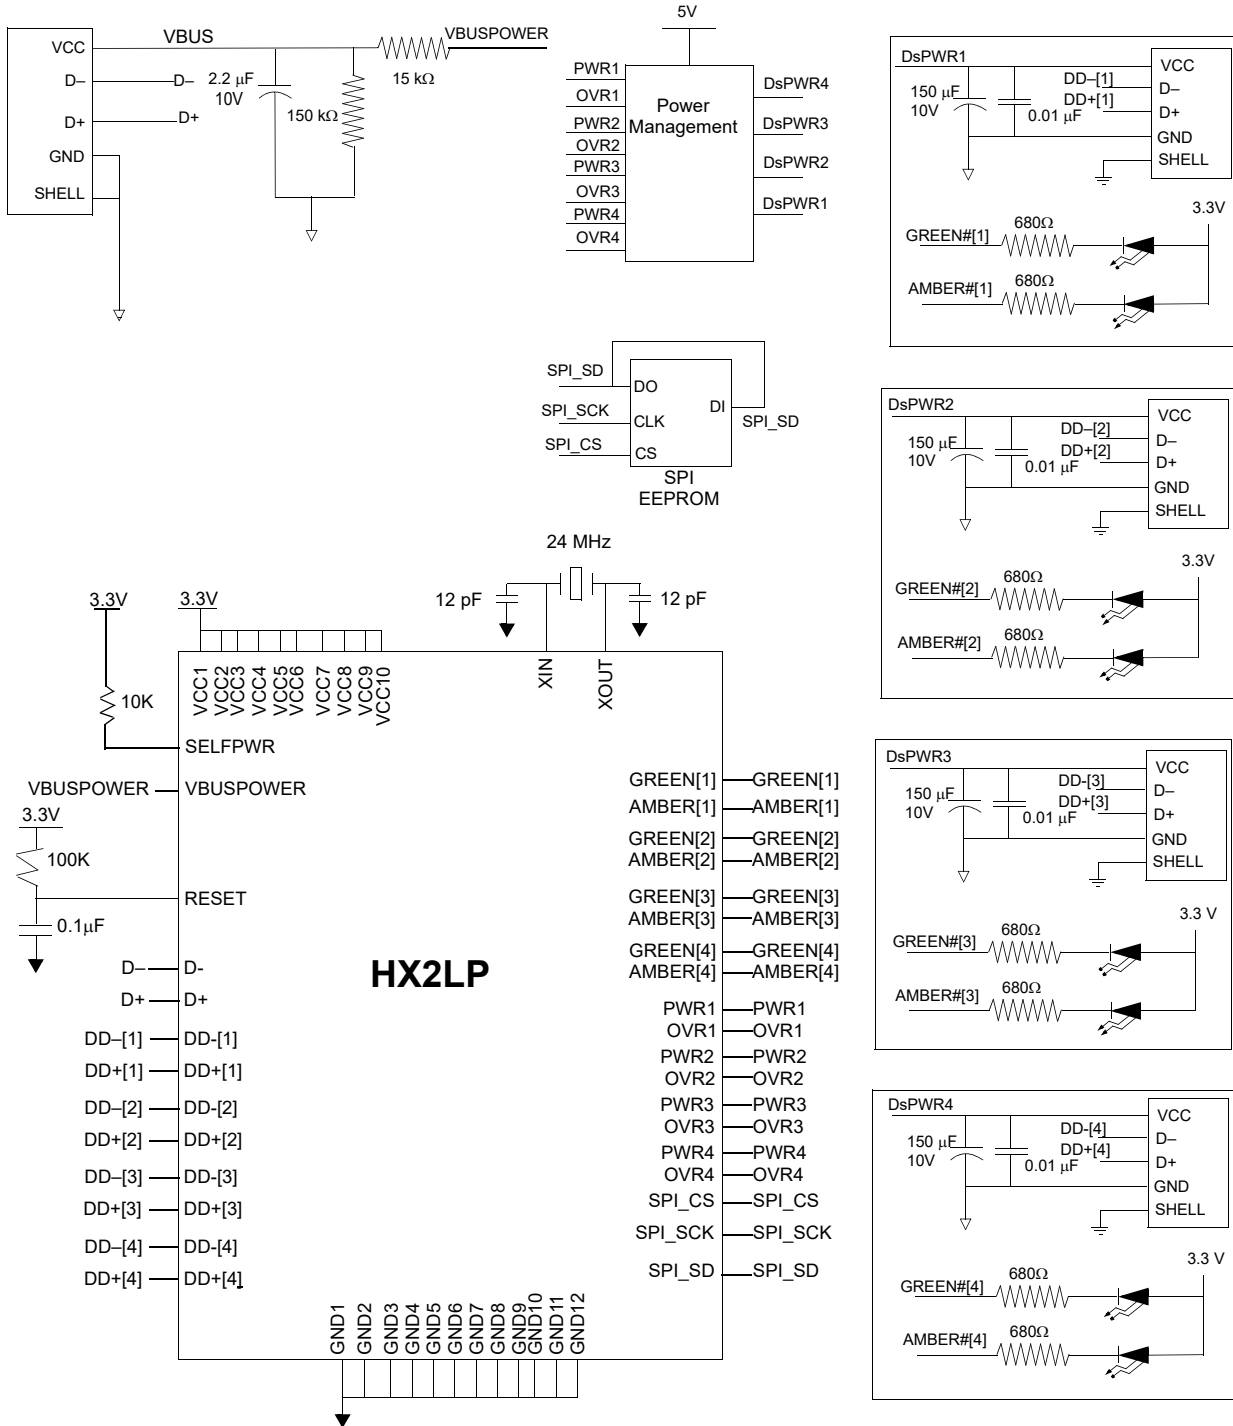

Absolute Maximum Ratings

Exceeding maximum ratings may impair the useful life of the device. These user guidelines are not tested.

| | |
|---|----------------------------|
| Storage temperature | -65 °C to +150 °C |
| Ambient temperature with power applied: | |
| Commercial | 0 °C to +70 °C |
| Automotive | -40 °C to +85 °C |
| Industrial | -40 °C to +85 °C |
| Supply voltage to ground potential | -0.5 V to +4.0 V |
| DC voltage applied to outputs in high Z state | -0.5 V to $V_{CC} + 0.5$ V |
| Power dissipation (4 HS ports) | 0.9 W |
| Static discharge voltage | > 2000 V |
| Maximum output sink current per I/O | 10 mA |

Reset period
(the minimum period between when V_{CC} reaches the minimum operating voltage and de-assertion of the reset line) 1.9 ms

Operating Conditions

| | |
|--|--------------------|
| T_A (ambient temperature under bias) | |
| Commercial | 0 °C to +70 °C |
| Automotive | -40 °C to +85 °C |
| Industrial | -40 °C to +85 °C |
| Supply voltage | +3.15 V to +3.45 V |
| Ground voltage | 0 V |
| FOSC (oscillator or crystal frequency) parallel resonant, 12 pF load capacitance, 0.5 mW | 24 MHz \pm 0.05% |

Electrical Characteristics

DC Electrical Characteristics

| Parameter | Description | Conditions | Min | Typ | Max | Unit |
|-----------------|-----------------------|-------------------------------------|------|-----|----------|---------|
| V_{CC} | Supply voltage | | 3.15 | 3.3 | 3.45 | V |
| V_{CC} RampUp | Ramp rate on V_{CC} | | - | - | 18 | V/ms |
| V_{IH} | Input high voltage | | 2 | - | 5.25 | V |
| V_{IL} | Input low voltage | | -0.5 | - | 0.8 | V |
| I_I | Input leakage current | $0 < V_{IN} < V_{CC}$ | - | - | ± 10 | μ A |
| V_{OH} | Output voltage high | $I_{OUT} = 4$ mA | 2.4 | - | - | V |
| V_{OL} | Output low voltage | $I_{OUT} = -4$ mA | - | - | 0.4 | V |
| I_{OH} | Output current high | | - | - | 4 | mA |
| I_{OL} | Output current low | | - | - | 4 | mA |
| C_{IN} | Input pin capacitance | | - | - | 10 | pF |
| I_{SUSP} | Suspend current | | - | 80 | - | μ A |
| I_{CC} | Supply current | | | | | |
| | 4 active ports | Full speed host, full-speed devices | - | 86 | 110 | mA |
| | | High speed host, high-speed devices | - | 231 | 260 | mA |
| | | High speed host, full-speed devices | - | 154 | 180 | mA |
| | 2 active ports | Full speed host, full-speed devices | - | 77 | 100 | mA |
| | | High speed host, high-speed devices | - | 163 | 190 | mA |
| | | High speed host, full-speed devices | - | 136 | 160 | mA |
| | No active ports | Full speed host | - | 65 | 90 | mA |
| High speed host | | - | 93 | 120 | mA | |

USB Transceiver

USB 2.0 certified in full-, low-, and high-speed modes.

AC Electrical Characteristics

Both the upstream USB transceiver and all four downstream transceivers have passed the USB-IF USB 2.0 Electrical Certification Testing.

Serial Peripheral Interface

Table 10. Serial Peripheral Interface

| Description | Min | Typ | Max | Unit |
|----------------------|-----|-----|-----|------|
| Clock rise/fall time | – | – | 500 | ns |
| Clock frequency | – | – | 250 | kHz |
| Data setup time | 50 | – | – | ns |
| Hold time | 100 | – | – | ns |


Ordering Information

| Ordering Code | Status | Package Type |
|-------------------|--------|--|
| CY7C65620-56LTXC | – | 56-pin QFN 2-Port Sawn Type QFN Bulk |
| CY7C65620-56LTXCT | – | 56-pin QFN 2-Port Sawn Type QFN Tape and Reel |
| CY7C65620-56LTXA | NRND* | 56-pin QFN 2-Port Automotive AEC grade |
| CY7C65620-56LTXAT | NRND* | 56-pin QFN 2-Port Automotive AEC grade Tape and Reel |
| CY7C65630-56LTXC | – | 56-pin QFN 4-Port Sawn Type QFN Bulk |
| CY7C65630-56LTXCT | – | 56-pin QFN 4-Port Sawn Type QFN Tape and Reel |
| CY7C65630-56LTXA | NRND* | 56-pin QFN 4-Port Automotive AEC grade |
| CY7C65630-56LTXAT | NRND* | 56-pin QFN 4-Port Automotive AEC grade Tape and Reel |
| CY4606 | – | CY7C65630 USB 2.0 4-Port Hub Reference Design Kit |
| CY4605 | – | CY7C65620 USB 2.0 2-Port Hub Reference Design Kit |
| CY7C65630-56LTXI | – | 56-pin QFN 4-Port Industrial grade |
| CY7C65630-56LTXIT | – | 56-pin QFN 4-Port Industrial grade Tape and Reel |
| CY7C65620-56LTXI | – | 56-pin QFN 2-Port Industrial grade |
| CY7C65620-56LTXIT | – | 56-pin QFN 2-Port Industrial grade Tape and Reel |

* Not Recommended for New Designs

Ordering Code Definitions

CY 7C656 X0 - 56L X X X X

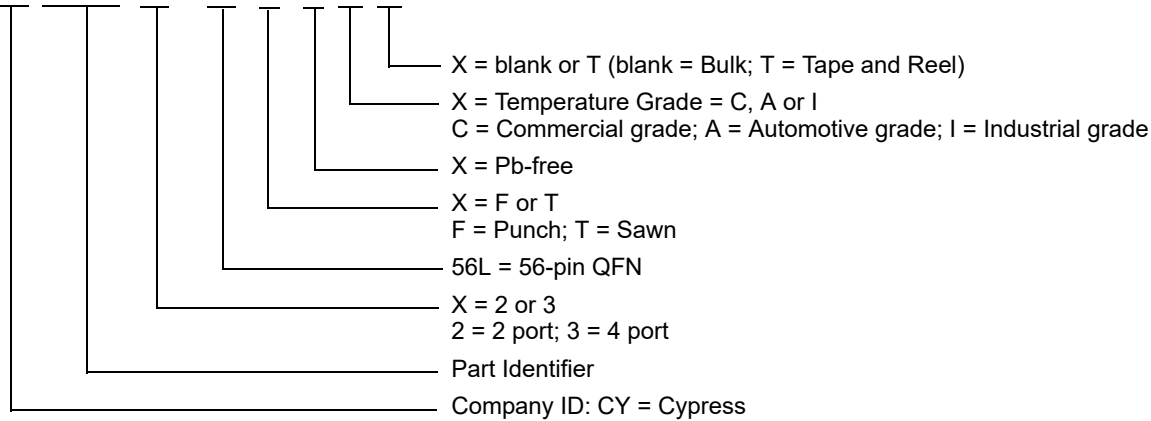

Package Diagrams

The CY7C65620/CY7C65630 is available in a space saving 56-pin QFN (8 × 8 mm).

Figure 6. 56-pin Sawn QFN (8 × 8 × 1.00 mm)


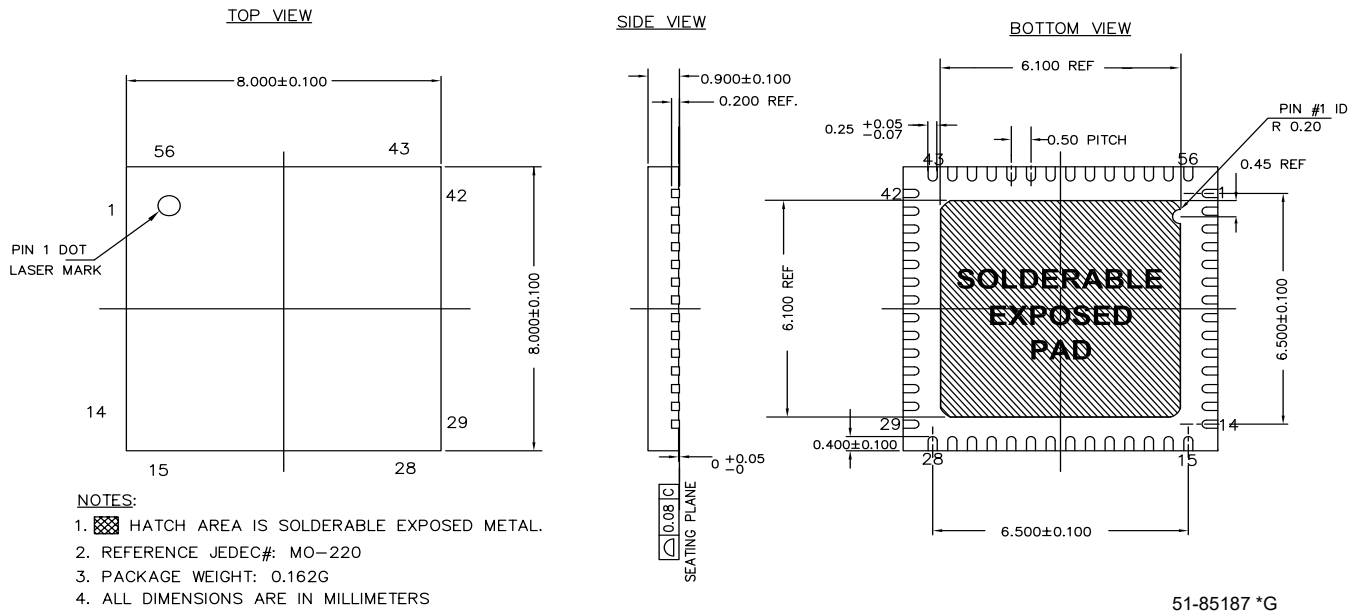


Figure 7. 56-pin QFN 8 × 8 mm LF56A (Subcon Punch Type with 6.1 × 6.1 EPad)

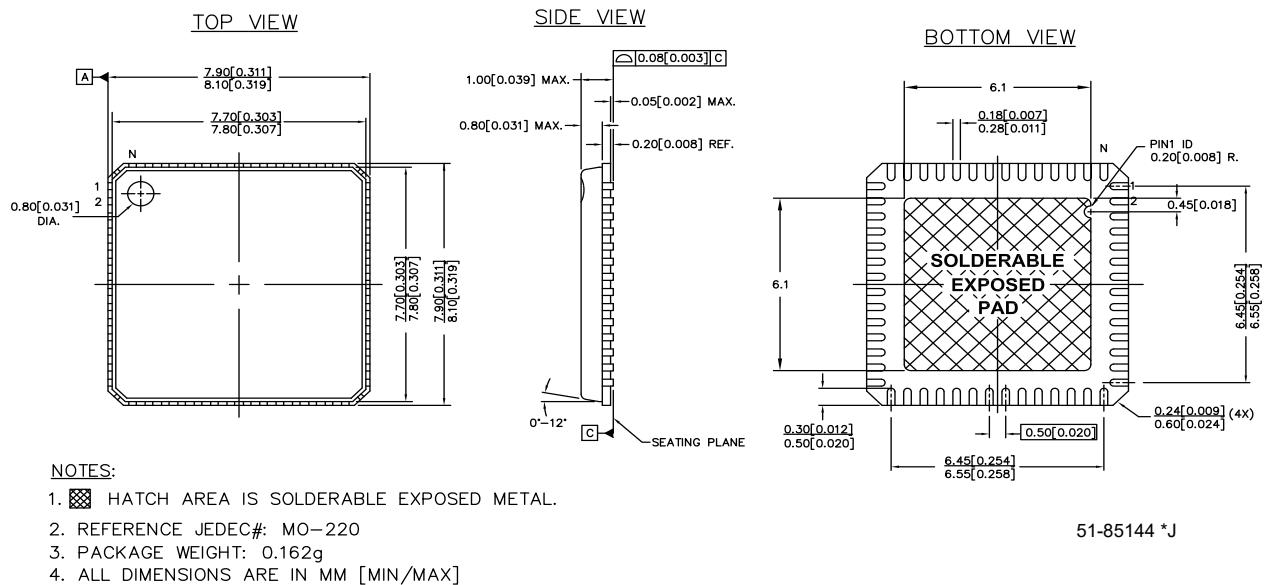

Thermal Impedance for the Package

| Package | Typical θ_{JA} | Typical θ_{JC} |
|------------|-----------------------|-----------------------|
| 56-pin QFN | 18.4 °C/W | 2.1 °C/W |

Acronyms

The following table lists the acronyms that are used in this document.

| Acronym | Description |
|---------|------------------------|
| AC | alternating current |
| AI | analog input |
| AIO | analog input/output |
| DO | digital output |
| GPO | general purpose output |
| LSB | least significant bit |
| MSB | most significant bit |
| P | power pins |
| PCB | printed circuit board |
| PLL | phase-locked loop |
| POR | power-on reset |
| POST | power on self test |
| RF | radio frequency |

Document Conventions

Units of Measure

The following table lists all the abbreviations used to measure the PSoC devices.

| Symbol | Unit of Measure |
|--------|-----------------|
| °C | degree Celsius |
| kΩ | kilohm |
| μA | microampere |
| μs | microsecond |
| mA | milliampere |
| ms | millisecond |
| mV | millivolt |
| nA | nanoampere |
| Ω | ohm |
| pF | picofarad |
| V | volt |

Numeric Naming

Hexadecimal numbers are represented with all letters in uppercase with an appended lowercase 'h' (for example, '14h' or '3Ah'). Hexadecimal numbers may also be represented by a '0x' prefix, the C coding convention. Binary numbers have an appended lowercase 'b' (for example, '01010100b' or '01000011b'). Numbers not indicated by an 'h', 'b', or '0x' are decimal.

Errata

This section describes the errata for the EZ-USB HX2LP™ Low-Power USB 2.0 Hub Controller Family, CY7C65620/30. Details include errata trigger conditions, scope of impact, available workaround, and silicon revision applicability. Contact your local Cypress Sales Representative if you have questions.

Part Numbers Affected

| Part Number | Device Characteristics |
|-------------|------------------------|
| CY7C65620 | All Packages |
| CY7C65630 | All Packages |

HX2LP Qualification Status

Product status: Production

HX2LP Errata Summary

1. Non-periodic and Isochronous OUT transfers in the same microframe

■Description

With the operating in High-Speed mode with a Full-Speed device connected to a downstream port, Sometimes, an Isochronous OUT packet gets corrupted on the downstream port.

■Implication

The main cause of this phenomenon is in the way the hub's Transaction Translator downstream handler state machine schedules transactions if non-periodic (Control or Bulk) transactions are found in the non-periodic buffer while an Isochronous OUT transaction is active on the port. If the downstream handler state machine sees an Isochronous OUT packet in the Transaction translation buffer and if it is scheduled in the same micro-frame by the host then it will skip the Isochronous OUT transaction and resume a non-periodic transaction.

■Workaround

The workaround for this issue is for the host controller to avoid scheduling non-periodic traffic such that it will run while an Isochronous OUT transaction is active. Non-periodic traffic can be scheduled to run in the micro-frame before the Isochronous OUT transaction begins, or after the Isochronous OUT transaction completes.

■Status

No plan to fix currently - recommend using workaround.

2. Last data not received in multi-microframe Isochronous IN transfers

■Description

With the hub operating in High-Speed mode with a Full-Speed device connected to a downstream port, Sometimes a multi-microframe Isochronous IN transaction resulted in the last two Complete Split transactions that should have returned data but instead returned NYET handshakes.

■Implication

The main cause of this phenomenon is in the hub's Transaction Translator logic which tracks data stored in the periodic transaction buffer. If the Full-Speed transaction completes before the Complete-Split token is received from the host, there is a chance that buffer will be over-written if the requested Isochronous IN payload is greater than 440 bytes (USB 2.0 specification on buffer size).

■Workaround

The workaround for this issue is for the host controller to avoid scheduling the Complete Split token for the microframe where the Full-Speed packet ends too late in the frame. The TT is guaranteed to work correctly if the Complete Split is received in the first quarter of the microframe.

■Status

No plan to fix currently - recommend using workaround.

Document History Page

| Document Title: CY7C65620/CY7C65630, EZ-USB HX2LP™ Low-Power USB 2.0 Hub Controller Family | | | | |
|--|--------|-----------------|-----------------|--|
| Document Number: 38-08037 | | | | |
| Revision | ECN | Orig. of Change | Submission Date | Description of Change |
| ** | 131505 | JTC | 02/12/2004 | New data sheet. |
| *A | 231329 | KKU | 06/04/2004 | Removed "Block Diagram – CY7C65644". Removed "Block Diagram – CY7C65641/CY7C65621". Removed "Block Diagram – CY7C65677". Added "Block Diagram – CY7C65650". Added "Block Diagram – CY7C65630". Updated Introduction : Updated description. Added USB Serial Interface Engine . Added Hub Repeater . Added Transaction Translator . Added Functional Overview . Removed "HX2LP Pin Listing". Added Pin Configuration . Added Pin Definitions . Added Default Descriptors . Added Configuration Options . Added Supported USB Requests . Added Upstream USB Connection . Added Downstream USB Connection . Added LED Connection . Updated System Block Diagram : Updated Figure 5 . Added Absolute Maximum Ratings . Added Electrical Characteristics . Added Operating Conditions . Added Ordering Information . Added Package Diagrams . |
| *B | 250869 | ARI | 08/30/2004 | Removed "Block Diagram – CY7C65650". Removed "Block Diagram – CY7C65630". Added "Block Diagram – CY7C65640B". Added "Block Diagram – CY7C65630/CY7C65620". Updated Electrical Characteristics : Updated DC Electrical Characteristics : Replaced "TBD" with values in "Typ" column corresponding to I _{CC} parameter. Updated Ordering Information : Updated part numbers. |
| *C | 330195 | KKU | 03/07/2005 | Updated "Block Diagram – CY7C65640B". Updated "Block Diagram – CY7C65630/CY7C65620". Updated Configuration Options : Added 0xD4 Load . Updated Supported USB Requests : Updated Hub Class Commands : Updated Table 6 : Replaced TBD with respective details under "Vendor Commands". Updated Electrical Characteristics : Updated DC Electrical Characteristics : Added V _{CC} RampUp parameter and its details. Updated AC Electrical Characteristics : Updated Serial Peripheral Interface : Updated Table 10 : Added "Reset Period" parameter and its details. |

Document History Page *(continued)*

| Document Title: CY7C65620/CY7C65630, EZ-USB HX2LP™ Low-Power USB 2.0 Hub Controller Family | | | | |
|--|--------|-----------------|-----------------|---|
| Document Number: 38-08037 | | | | |
| Revision | ECN | Orig. of Change | Submission Date | Description of Change |
| *D | 342997 | KKU | 04/01/2005 | Updated Features : Updated description. Updated Functional Overview : Updated Enumeration : Updated description. Updated Downstream Ports : Updated description. Updated Power Switching : Updated description. Updated Overcurrent Detection : Updated description. Updated Port Indicators : Updated description. Updated Table 1 . Updated Pin Definitions : Replaced SELFPWR# with SELFPWR in "Name" column. Updated details in "Description" column corresponding to pins 26, 36, 35, 30, 29, 38, 37, 32, 31, 42, 41, 53, 54, 44, 43, 51 and 52. Updated Default Descriptors : Updated Device Descriptor : Updated details in "Description" column corresponding to Byte 2, 3. Updated Configuration Descriptor : Updated details in "Description" column corresponding to Byte 7. Updated Configuration Options : Updated description. Updated 0xD2 Load : Removed "NoEOPatEOF1" in "Value (MSB->LSB)" column corresponding to Byte 12. Updated 0xD4 Load : Updated description. |
| *E | 498396 | TEH | 09/01/2006 | Changed status from Preliminary to Final. Removed "HX1TT" and "Multi-TT" related information in all instances across the document. Updated Features : Added "USB-IF Certified: TID# 30000009". Removed "Block Diagram – CY7C65640B". Removed "Block Diagram – CY7C65630/CY7C65620". Added "Block Diagram – CY7C65630". Added "Block Diagram – CY7C65620". Updated Configuration Options : Updated 0xD4 Load : Updated description. Updated Upstream USB Connection : Updated Figure 2 . Updated System Block Diagram : Updated Figure 5 (to reflect latest RDK). Updated Ordering Information : Updated part numbers. Updated to new template. |

Document History Page *(continued)*

| Document Title: CY7C65620/CY7C65630, EZ-USB HX2LP™ Low-Power USB 2.0 Hub Controller Family Document Number: 38-08037 | | | | |
|---|---------|-----------------|-----------------|--|
| Revision | ECN | Orig. of Change | Submission Date | Description of Change |
| *F | 570287 | ARI | 11/27/2006 | Updated Pin Definitions : Fixed typo (Replaced “DD-[3]” with “DD-[4]” corresponding to pin 1 and replaced “DD+[3]” with “DD+[4]” corresponding to pin 2 under “Downstream Port 4”). Updated Package Diagrams : No change in revisions. Added dimensions of E-Pads in 51-85144 Rev. *E. |
| *G | 852600 | KKU | 03/19/2007 | Updated Features : Removed “2-Port”. Added “Bus power configurations”. Updated Default Descriptors : Updated Device Descriptor : Updated description. Updated Configuration Options : Updated description. Updated 0xD4 Load : Added a column “Factory Fusable” in the table and added details in that column. Updated System Block Diagram : Updated Figure 5 . |
| *H | 1019740 | KKU / ARI | 04/26/2007 | Added “Automotive Temperature Range” related information in all instances across the document. Updated Features : Added “Automotive AEC grade option (–40 °C to 85 °C)”. Updated Block Diagram – CY7C65630 . Updated Block Diagram – CY7C65620 . Updated Configuration Options : Updated 0xD2 Load : Updated description. Updated Absolute Maximum Ratings : Replaced “TBD” with “0.9 W” corresponding to “Power Dissipation (4 HS ports)”. Updated Electrical Characteristics : Updated USB Transceiver : Replaced “USB 2.0 Compliant” with “USB 2.0 Certified”. Updated Ordering Information : Updated part numbers. Updated Package Diagrams : No change in revisions. Removed reference of internal part numbers in 51-85144 Rev. *G. |
| *I | 2238608 | KKU | 03/24/2008 | Updated Block Diagram – CY7C65630 : Block diagram was altered in the *H revision, but should not have been altered. Reverted diagram to *G version. Updated Block Diagram – CY7C65620 : Block diagram was altered in the *H revision, but should not have been altered. Reverted diagram to *G version. Updated to new template. |
| *J | 2370406 | PYRS | 04/14/2008 | Changed status from Preliminary to Final. |
| *K | 2657415 | DPT / PYRS | 02/10/2009 | Updated Package Diagrams : Added spec 51-85187 Rev. *C. |
| *L | 2705817 | GOR / PYRS | 05/13/2009 | Updated Ordering Information : Updated part numbers. |

Document History Page *(continued)*

| Document Title: CY7C65620/CY7C65630, EZ-USB HX2LP™ Low-Power USB 2.0 Hub Controller Family Document Number: 38-08037 | | | | |
|---|---------|-----------------|-----------------|--|
| Revision | ECN | Orig. of Change | Submission Date | Description of Change |
| *M | 2719596 | VIVG / AESA | 06/16/2009 | Updated Ordering Information : Updated part numbers. Updated Package Diagrams : spec 51-85187 – Changed revision from *C to *D. |
| *N | 2753668 | VIVG | 08/19/2009 | Updated Ordering Information : Updated part numbers. |
| *O | 2857913 | VIVG | 01/19/2010 | Updated Ordering Information : No change in part numbers. Fixed typo (Replaced “4-Port” with “2-Port” in “Package Type” column corresponding to CY7C65620-56LFXA and CY7C65620-56LFXAT). Updated Package Diagrams : spec 51-85187 – Changed revision from *D to *E. spec 51-85144 – Changed revision from *G to *H. |
| *P | 2896582 | ODC | 03/19/2010 | Updated Ordering Information : Updated part numbers. |
| *Q | 3011613 | ODC | 08/20/2010 | Updated Ordering Information : No change in part numbers. Added Ordering Code Definitions . Updated Package Diagrams : No change in revisions. Added Thermal Impedance for the Package . Added Document Conventions . Minor edits. |
| *R | 3095394 | ODC | 11/25/2010 | Updated Supported USB Requests : Updated Hub Class Commands : Updated Table 8 . Updated Table 9 . |
| *S | 3174789 | ODC | 02/16/2011 | Updated Configuration Options : Updated 0xD2 Load : Updated description. Updated 0xD4 Load : Updated description. Updated Package Diagrams : spec 51-85144 – Changed revision from *H to *I. |
| *T | 3252356 | ODC | 05/09/2011 | Updated Document Title to read as “CY7C65620/CY7C65630, EZ-USB HX2LP™ Low-Power USB 2.0 Hub Controller Family”. |
| *U | 3501907 | PRVE | 02/10/2012 | Updated Ordering Information : Updated part numbers. Updated Package Diagrams : spec 51-85187 – Changed revision from *E to *F. Completing Sunset Review. |
| *V | 3735946 | PRVE | 09/06/2012 | Updated Ordering Information : Updated part numbers. Updated Ordering Code Definitions . |
| *W | 3806343 | PRJI | 11/08/2012 | Updated Pin Definitions : Updated Table 3 : Updated Note 3 . |

Document History Page *(continued)*

| Document Title: CY7C65620/CY7C65630, EZ-USB HX2LP™ Low-Power USB 2.0 Hub Controller Family | | | | |
|--|---------|-----------------|-----------------|--|
| Document Number: 38-08037 | | | | |
| Revision | ECN | Orig. of Change | Submission Date | Description of Change |
| *X | 3830076 | PRJI | 12/04/2012 | Updated Absolute Maximum Ratings : Added Reset period and its details. Updated Electrical Characteristics : Updated AC Electrical Characteristics : Updated Table 10 : Removed Reset period and its details. |
| *Y | 3992033 | PRJI | 05/06/2013 | Added Errata . |
| *Z | 4033909 | PRJI | 06/19/2013 | Added Errata Footnotes in all instances across the document. Updated to new template. |
| AA | 4054137 | PRJI | 07/09/2013 | Updated Ordering Information : Included a column "Status" and updated the status of CY7C65620-56LFXA, CY7C65620-56LFXAT, CY7C65630-56LFXA and CY7C65630-56LFXAT as NRND. |
| AB | 4614914 | PRJI | 01/06/2015 | Updated Functional Description : Added "For a complete list of related documentation, click here ." at the end. Updated Default Descriptors : Updated Configuration Descriptor : Updated details in "Description" column corresponding to Byte 6 and Byte 8. Updated Interface Descriptor : Updated details in "Description" column corresponding to Byte 2 to Byte 8. Updated Device Qualifier Descriptor : Updated details in "Description" column corresponding to Bytes 2 to Byte 8. Updated Supported USB Requests : Updated Hub Class Commands : Updated Table 6 : Updated details in "Data" column corresponding to "SetHubFeature" request. Updated details in "windex" and "Data" columns corresponding to "GetHubDescriptor" request. Updated System Block Diagram : Updated Figure 5 (removed VCC11). Updated Package Diagrams : spec 51-85187 – Changed revision from *F to *G. spec 51-85144 – Changed revision from *I to *J. Updated to new template. Completing Sunset Review. |
| AC | 4724071 | PRJI | 04/14/2015 | Updated More Information : Updated description. |
| AD | 5526024 | PRJI | 11/18/2016 | Updated Ordering Information : Updated part numbers. Updated to new template. |
| AE | 5767382 | AESATMP9 | 06/08/2017 | Updated logo and copyright. |
| AF | 6145085 | HBM | 04/19/2018 | Updated More Information : Updated description. Updated to new template. Completing Sunset Review. |

Sales, Solutions, and Legal Information

Worldwide Sales and Design Support

Cypress maintains a worldwide network of offices, solution centers, manufacturer's representatives, and distributors. To find the office closest to you, visit us at [Cypress Locations](#).

Products

| | |
|-------------------------------|--|
| Arm® Cortex® Microcontrollers | cypress.com/arm |
| Automotive | cypress.com/automotive |
| Clocks & Buffers | cypress.com/clocks |
| Interface | cypress.com/interface |
| Internet of Things | cypress.com/iot |
| Memory | cypress.com/memory |
| Microcontrollers | cypress.com/mcu |
| PSoC | cypress.com/psoc |
| Power Management ICs | cypress.com/pmic |
| Touch Sensing | cypress.com/touch |
| USB Controllers | cypress.com/usb |
| Wireless Connectivity | cypress.com/wireless |

PSoC® Solutions

[PSoC 1](#) | [PSoC 3](#) | [PSoC 4](#) | [PSoC 5LP](#) | [PSoC 6 MCU](#)

Cypress Developer Community

[Community](#) | [Projects](#) | [Video](#) | [Blogs](#) | [Training](#) | [Components](#)

Technical Support

cypress.com/support

© Cypress Semiconductor Corporation, 2004-2018. This document is the property of Cypress Semiconductor Corporation and its subsidiaries, including Spansion LLC ("Cypress"). This document, including any software or firmware included or referenced in this document ("Software"), is owned by Cypress under the intellectual property laws and treaties of the United States and other countries worldwide. Cypress reserves all rights under such laws and treaties and does not, except as specifically stated in this paragraph, grant any license under its patents, copyrights, trademarks, or other intellectual property rights. If the Software is not accompanied by a license agreement and you do not otherwise have a written agreement with Cypress governing the use of the Software, then Cypress hereby grants you a personal, non-exclusive, nontransferable license (without the right to sublicense) (1) under its copyright rights in the Software (a) for Software provided in source code form, to modify and reproduce the Software solely for use with Cypress hardware products, only internally within your organization, and (b) to distribute the Software in binary code form externally to end users (either directly or indirectly through resellers and distributors), solely for use on Cypress hardware product units, and (2) under those claims of Cypress's patents that are infringed by the Software (as provided by Cypress, unmodified) to make, use, distribute, and import the Software solely for use with Cypress hardware products. Any other use, reproduction, modification, translation, or compilation of the Software is prohibited.

TO THE EXTENT PERMITTED BY APPLICABLE LAW, CYPRESS MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS DOCUMENT OR ANY SOFTWARE OR ACCOMPANYING HARDWARE, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. No computing device can be absolutely secure. Therefore, despite security measures implemented in Cypress hardware or software products, Cypress does not assume any liability arising out of any security breach, such as unauthorized access to or use of a Cypress product. In addition, the products described in these materials may contain design defects or errors known as errata which may cause the product to deviate from published specifications. To the extent permitted by applicable law, Cypress reserves the right to make changes to this document without further notice. Cypress does not assume any liability arising out of the application or use of any product or circuit described in this document. Any information provided in this document, including any sample design information or programming code, is provided only for reference purposes. It is the responsibility of the user of this document to properly design, program, and test the functionality and safety of any application made of this information and any resulting product. Cypress products are not designed, intended, or authorized for use as critical components in systems designed or intended for the operation of weapons, weapons systems, nuclear installations, life-support devices or systems, other medical devices or systems (including resuscitation equipment and surgical implants), pollution control or hazardous substances management, or other uses where the failure of the device or system could cause personal injury, death, or property damage ("Unintended Uses"). A critical component is any component of a device or system whose failure to perform can be reasonably expected to cause the failure of the device or system, or to affect its safety or effectiveness. Cypress is not liable, in whole or in part, and you shall and hereby do release Cypress from any claim, damage, or other liability arising from or related to all Unintended Uses of Cypress products. You shall indemnify and hold Cypress harmless from and against all claims, costs, damages, and other liabilities, including claims for personal injury or death, arising from or related to any Unintended Uses of Cypress products.

Cypress, the Cypress logo, Spansion, the Spansion logo, and combinations thereof, WICED, PSoC, CapSense, EZ-USB, F-RAM, and Traveo are trademarks or registered trademarks of Cypress in the United States and other countries. For a more complete list of Cypress trademarks, visit cypress.com. Other names and brands may be claimed as property of their respective owners.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9