Low-Voltage, High-Accuracy, Triple/Quad Voltage µP Supervisory Circuits in SOT Package

General Description

The MAX6700/MAX6710 precision triple/quad voltage microprocessor (μP) supervisory circuits monitor up to four system-supply voltages and assert a single reset if any supply voltage drops below its preset threshold. These devices significantly reduce system size and component count while improving reliability compared to separate ICs or discrete components.

A variety of factory-trimmed threshold voltages are available to accommodate different supply voltages and tolerances with minimal external component requirements. The MAX6710 includes internally fixed options for monitoring 5.0V, 3.3V, 3.0V, 2.5V, and 1.8V supplies with -5% or -10% tolerances. The MAX6710 is also available with one to three adjustable threshold options to monitor voltages down to 0.62V. The MAX6700 monitors three voltages with adjustable thresholds down to 0.62V.

A single active-low output asserts when any monitored input falls below its associated threshold. The open-drain output has a weak internal pullup ($10\mu A$) to IN2. For the MAX6710, reset remains low for the reset timeout period (140ms min) after all voltages rise above the selected threshold. The MAX6700 acts as a voltage detector with a propagation delay of $5\mu s$ after all monitored voltages exceed their thresholds. The output remains valid as long as either IN2 or IN2 input voltage remains above 1V (MAX6710) or V_{CC} is above 2V (MAX6700/MAX6710Q).

The MAX6700/MAX6710 are available in a small 6-pin SOT23 package and operate over the extended (-40°C to +85°C) temperature range.

Applications

- Telecommunications
- High-End Printers
- Desktop and Notebook Computers
- Data Storage Equipment
- Networking Equipment
- Industrial Equipment
- Set-Top Boxes
- Servers/Workstations

Selector Guide with top marks appears at end of data sheet.

Pin Configuration appears at end of data sheet.

Features

- Monitor Up to Four Power-Supply Voltages
- Precision Factory-Set Reset Threshold Options for 5.0V, 3.3V, 3.0V, 2.5V, and 1.8V Supplies
- Adjustable Voltage Threshold Monitors Down to 0.62V with 1.5% Accuracy
- Low 35µA Supply Current
- Open-Drain RESET Output with 10µA Internal Pullup
- 5µs Propagation Delay (MAX6700)
- 140ms (min) Reset Timeout Period (MAX6710)
- RESET Valid to IN1 = 1V or IN2 = 1V
- Immune to Short Monitored Supply Transients
- Guaranteed from -40°C to +85°C
- Small 6-Pin SOT23 Package


Ordering Information

PART	TEMP RANGE	PIN-PACKAGE
MAX6700 UT-T	-40°C to +85°C	6 SOT23-6
MAX6710 _UT-T	-40°C to +85°C	6 SOT23-6
MAX6710FUT-T	-40°C to +105°C	6 SOT23-6
MAX6710KUT-T	-40°C to +105°C	6 SOT23-6

Insert the desired suffix letter from the Selector Guide into the blank to complete the part number. There is a 2500 piece minimum order increment requirement on the SOT package. These devices are available in tape-and-reel only.

Devices are available in both leaded and lead-free packaging. Specify lead-free by replacing "-T" with "+T" when ordering.

Typical Operating Circuit





Low-Voltage, High-Accuracy, Triple/Quad Voltage µP Supervisory Circuits in SOT Package

Absolute Maximum Ratings

V _{CC} , IN_, RESET to GND0.3V to +6V	Operating Temperature Range40°C to +105°C
Continuous RESET Current20mA	Storage Temperature Range65°C to +150°C
Continuous Power Dissipation	Junction Temperature+150°C
6-Pin SOT23 (derate 8.7mW/°C above +70°C)695.7mW	Lead Temperature (soldering, 10s)+300°C

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Electrical Characteristics

 $(V_{IN2} = 1V \text{ to } 5.5V, T_A = -40^{\circ}\text{C to } +105^{\circ}\text{C}, \text{ unless otherwise noted.}$ Typical values are at $V_{IN2} = 3.0V \text{ to } 3.3V, T_A = +25^{\circ}\text{C}.)$ (Note 1)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
	V _{CC}	MAX6700/MAX6710Q		2.0		5.5	
Operating Voltage Range (Note 2)	.,		$T_A = 0^{\circ}C \text{ to } +105^{\circ}C$	1.0		5.5	V
	V _{IN2}	All others (Note 3)	$T_A = -40^{\circ}\text{C to } +105^{\circ}\text{C}$	1.2		5.5	
		IN_ = nominal input voltage (for 1.8V, 2.5V, and 5.0V supplies)			25	45	
	I _{IN} _	IN2 = nominal input voltage (for 3.0V and 3.3V supplies) (Note 4)			55	115	
Input Current		V _{IN1} = 0 to 0.85V (for ac	djustable thresholds)			1	μA
		V_{IN3} , $V_{IN4} = 0$ to 0.85V thresholds)	(for adjustable			0.2	
	I _{CC}	MAX6700/MAX6710Q o	nly, V_{CC} = 5.5V		35	65	
	V _{TH}		5V (-5%)	4.50	4.63	4.75	V
Threshold Voltage		IN_ decreasing	5V (-10%)	4.25	4.38	4.50	
			3.3V (-5%)	3.00	3.08	3.15	
			3.3V (-10%)	2.85	2.93	3.00	
			3.0V (-5%)	2.70	2.78	2.85	
			3.0V (-10%)	2.55	2.63	2.70	
			2.5V (-5%)	2.25	2.32	2.38	
			2.5V (-10%)	2.13	2.19	2.25	
			1.8V (-5%)	1.62	1.67	1.71	
			1.8V (-10%)	1.53	1.58	1.62	
Adjustable Threshold	V _{TH}	IN_ decreasing	•	0.611	0.620	0.629	V
Reset Threshold Hysteresis	V _{HYST}	IN_ increasing relative to IN_ decreasing			0.3		%V _{TH}
Reset Threshold Temperature Coefficient	TCV _{TH}				60		ppm/°C
IN_ to Reset Delay	t _{RD}	V _{IN} falling at 10mV/µs from V _{TH} to (V _{TH} - 50mV)			30		μs
Propagation Delay	t _{PD}	MAX6700 only			5		μs
Reset Timeout Period	t _{RP}	MAX6710 only		140	200	280	ms

Electrical Characteristics (continued)

 $(V_{IN2} = 1V \text{ to } 5.5V, T_A = -40^{\circ}\text{C to } +105^{\circ}\text{C}, \text{ unless otherwise noted.}$ Typical values are at $V_{IN2} = 3.0V \text{ to } 3.3V, T_A = +25^{\circ}\text{C.})$ (Note 1)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
RESET Output Low	V _{OL}	V_{IN2} , V_{CC} = 5V, I_{SINK} = 2mA	0.3			
		V_{IN2} , V_{CC} = 2.5V, I_{SINK} = 1.2mA			0.4	V
		V _{IN2} = 1.0V, I _{SINK} = 50μA, T _A = 0°C to +105°C			0.3]
RESET Output High		V _{CC} ≥ 2.0V, I _{SOURCE} = 6μA, RESET deasserted (MAX6700/MAX6710Q)	0.8 x V _{CC}			- V
	V _{OH}	V _{IN2} ≥ 2.0V, I _{SOURCE} = 6μA, RESET deasserted	0.8 x V _{II}	x V _{IN2}		
RESET Output High Source Current	ГОН	V _{IN2} ≥ 2.0V, RESET deasserted		10		μA

Note 1: 100% production tested at $T_A = +25$ °C. Limits over temperature guaranteed by design.


Note 2: The devices are powered from IN2 or V_{CC} (for MAX6700/MAX6710Q).


Note 3: The RESET output is guaranteed to be in the correct state for IN1 or IN2 down to 1V.


Note 4: Monitored IN2 voltage (3.3V, 3.0V) is also the device power supply. Supply current splits as follows: 25µA for the resistor divider (for the monitored voltage) and 30µA for other circuits.

Typical Operating Characteristics

 $(V_{IN2} = V_{CC} = 3.0V, T_A = +25^{\circ}C)$








Typical Operating Characteristics (continued)

 $(V_{IN2} = V_{CC} = 3.0V, T_A = +25^{\circ}C)$

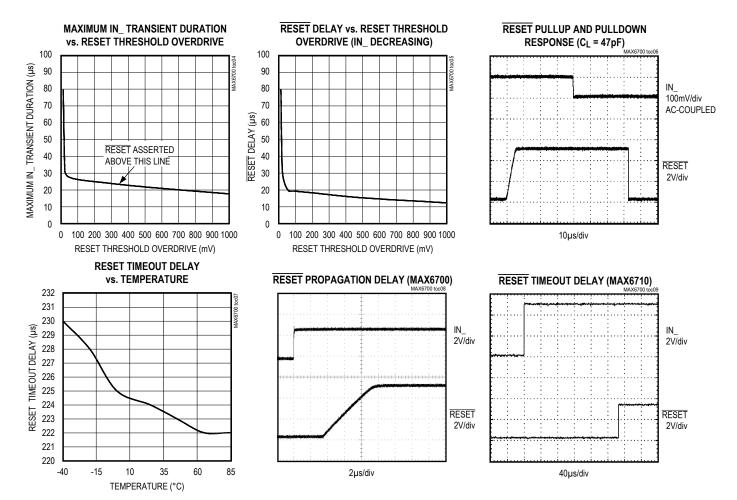

Pin Description

PIN	NAME	FUNCTION
1	IN1	Input Voltage 1. See the Selector Guide for monitored voltages.
2	IN2	Input Voltage 2. See the Selector Guide for monitored voltages. IN2 is the power-supply input for the device.
V _{CC}		For the MAX6700/MAX6710Q, V _{CC} is the power-supply input for the device and is not a monitored voltage.
3	IN3	Input Voltage 3. See the Selector Guide for monitored voltages.
4	IN4	Input Voltage 4. See the Selector Guide for monitored voltages.
5	GND	Ground
6	RESET	Active-Low, Reset Output. RESET goes low when any input goes below its specified threshold. After all inputs rise above their threshold voltage, RESET remains low for 5µs (MAX6700) or for 200ms (MAX6710) before going high. The open-drain RESET output has a weak (10µA) internal pullup to IN2 or V _{CC} .

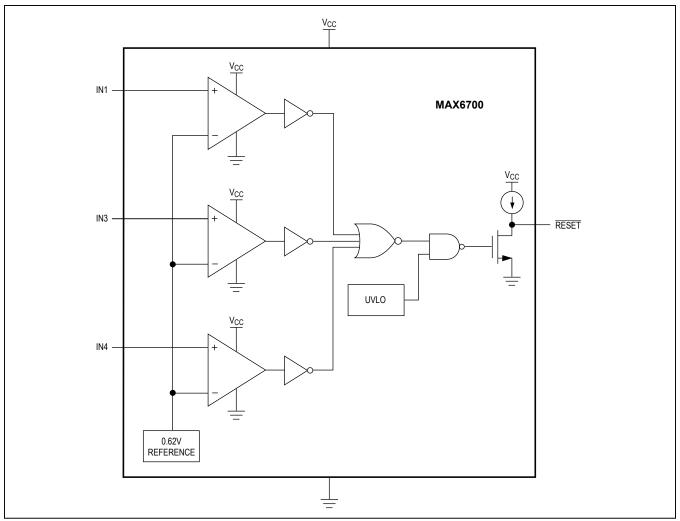


Figure 1. MAX6700 Functional Diagram

Detailed Description

The MAX6700/MAX6710 are very small, low-power, triple/ quad voltage μP supervisory circuits designed to maintain system integrity in multisupply systems (Figure 1 and Figure 2). The MAX6710 offers several internally trimmed undervoltage threshold options for monitoring 5.0V, 3.3V, 3.0V, 2.5V, and 1.8V supplies. The devices offer one-to-three adjustable thresholds for monitoring voltages down to 0.62V.

The triple/quad voltage monitors include an accurate bandgap reference, precision comparators, and a series of internally trimmed resistor-divider networks to set the factory-fixed reset threshold options. The resistor networks scale the specified IN_ reset voltages to match the internal bandgap reference/

comparator voltage. Adjustable threshold options bypass the internal resistor networks and connect directly to one of the comparator inputs (use an external resistor-divider network for threshold matching). The MAX6700/MAX6710Q provide a separate unmonitored power-supply input (V_{CC}) and three adjustable voltage inputs.

Each of the internal comparators has a typical hysteresis of 0.3% with respect to its reset threshold. This built-in hysteresis improves the monitor's immunity to ambient noise without significantly reducing threshold accuracy. The devices are immune to short IN_ transients. See the *Typical Operating Characteristics* for a glitch immunity graph.

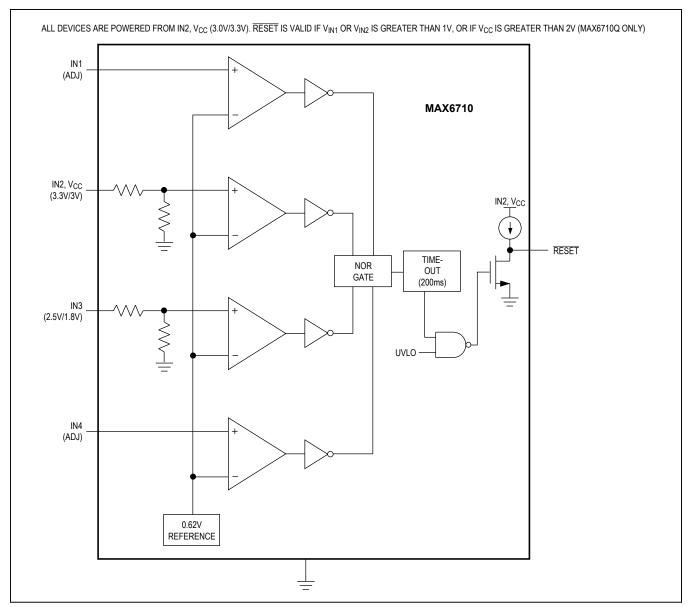


Figure 2. MAX6710 Functional Diagram

Applications Information

Reset Output

The MAX6700 RESET output asserts low when any monitored IN_ voltage drops below its specified reset threshold and remains low for the propagation delay (5µs) after all inputs exceed their thresholds (Figure 3). The MAX6710 provides an extended reset timeout period of 140ms (min).

The output is open drain with a weak internal pullup to the monitored IN2 or V_{CC} supply (10µA typ). For many applications no external pullup resistor is required to interface with other logic devices. An external pullup resistor to any voltage from 0 to 5.5V can overdrive the internal pullup if interfacing to different logic-supply voltages (Figure 4). Internal circuitry prevents reverse current flow from the external pullup voltage to IN2.




Figure 3. RESET Output Timing Diagram




Figure 4. Interfacing to Different Logic-Supply Voltage




Figure 5. Setting the Auxiliary Monitor

V_{CC} powers the MAX6700/MAX6710Q and is not a monitored voltage. IN2 powers all other options for the MAX6710 and is a monitored voltage. When any supply drops below its threshold, the reset output asserts low and remains low while either IN1 or IN2 is above 1.0V.

Adjustable Thresholds

The MAX6700/MAX6710 offer several monitor options with adjustable reset thresholds. The threshold voltage at each adjustable IN_ input is typically 0.62V. To monitor a voltage > 0.62V, connect a resistor-divider network to the circuit as shown in Figure 5.

$$V_{INTH} = 0.62V \times (R1 + R2) / R2$$

or, solved in terms of R1:

$$R1 = R2 ((V_{INTH} / 0.62V) - 1)$$

Because the devices have a guaranteed input current of $\pm 0.2\mu A$ ($\pm 0.4\mu A$ for IN1) on their adjustable inputs, resistor values up to $100k\Omega$ can be used for R2 with < 1% error. The MAX6700/MAX6710Q include an internal voltage clamp (1.5V typ) at each of the adjustable voltage inputs. An input voltage higher than 1.5V induces a higher input current.

Unused Inputs

Connect unused monitor inputs to a supply voltage greater in magnitude than their specified threshold voltages. For unused IN_ adjustable inputs, connect a $1 M\Omega$ series resistor between the unused input and IN2 (or V_{CC}) to limit the bias current. Use IN2 for normal operation (device power-supply pin). Do not connect unused monitor inputs to ground or allow them to float.

Adding Manual Reset Capability (MAX6710)

Figure 6 shows an application circuit adding manual reset to the MAX6710. Depressing the pushbutton switch short-circuits the analog input to ground and initiates a RESET pulse. The switch must be open for at least 140ms in order to deassert the RESET output. No external switch debounce is required. Use a small capacitor to improve noise immunity when using long leads from the pushbutton switch to the adjustable input.

Power-Supply Bypassing and Grounding

The MAX6700/MAX6710 are normally powered from the monitored IN2 or from the V_{CC} supply input. All monitored inputs are immune to short supply transients. For higher immunity in noisy applications, connect a $0.1\mu F$ bypass capacitor from the IN2 input to ground. Add capacitance to IN1, IN3, and IN4 to increase their noise immunity.

Low-Voltage, High-Accuracy, Triple/Quad Voltage µP Supervisory Circuits in SOT Package





Figure 6. Adding Manual Reset Capability

Pin Configuration



Chip Information

TRANSISTOR COUNT: 699
PROCESS: BICMOS

Selector Guide

PART**		Nominal Input Voltage						
(SUFFIX IN BOLD)	TEMPERATURE RANGE	IN1 (V)	IN2 (V)	IN3 (V)	IN4 (V)	Supply Tolerance (%)	Top Mark	
MAX6700UT	-40°C to +85°C	Adj*	V _{CC}	Adj*	Adj*	N/A	ABEK	
MAX6710 A UT	-40°C to +85°C	5	3.3	2.5	Adj*	10	AAZA	
MAX6710 B UT	-40°C to +85°C	5	3.3	2.5	Adj*	5	AAZB	
MAX6710 C UT	-40°C to +85°C	5	3.3	1.8	Adj*	10	AAZC	
MAX6710 D UT	-40°C to +85°C	5	3.3	1.8	Adj*	5	AAZD	
MAX6710 E UT	-40°C to +85°C	Adj*	3.3	2.5	1.8	10	AAZE	
MAX6710 F UT	-40°C to +105°C	Adj*	3.3	2.5	1.8	5	AAZF	
MAX6710 G UT	-40°C to +85°C	5	3.3	Adj*	Adj*	10	AAZG	
MAX6710 H UT	-40°C to +85°C	5	3.3	Adj*	Adj*	5	AAZH	
MAX6710IUT	-40°C to +85°C	Adj*	3.3	2.5	Adj*	10	AAZI	
MAX6710 J UT	-40°C to +85°C	Adj*	3.3	2.5	Adj*	5	AAZJ	
MAX6710 K UT	-40°C to +105°C	Adj*	3.3	1.8	Adj*	10	AAZK	
MAX6710 L UT	-40°C to +85°C	Adj*	3.3	1.8	Adj*	5	AAZL	
MAX6710 M UT	-40°C to +85°C	Adj*	3	2.5	Adj*	10	AAZM	
MAX6710 N UT	-40°C to +85°C	Adj*	3	2.5	Adj*	5	AAZN	
MAX6710 O UT	-40°C to +85°C	Adj*	3	1.8	Adj*	10	AAZO	
MAX6710 P UT	-40°C to +85°C	Adj*	3	1.8	Adj*	5	AAZP	
MAX6710 Q UT	-40°C to +85°C	Adj*	V _{CC}	Adj*	Adj*	N/A	AAZQ	

^{*}Adjustable voltage based on 0.62V internal threshold. External threshold voltage can be set using an external resistor-divider.

Package Information

For the latest package outline information and land patterns (footprints), go to www.maximintegrated.com/packages. Note that a "+", "#", or "-" in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.

PACKAGE	PACKAGE	OUTLINE	LAND
TYPE	CODE	NO.	PATTERN NO.
6 SOT	U6+1	<u>21-0058</u>	<u>90-0175</u>

^{**}The MAX6700 acts as a voltage detector with a 5µs propagation delay. The MAX6710 serves as a microprocessor reset circuit with a 140ms (min) reset timeout.

Low-Voltage, High-Accuracy, Triple/Quad Voltage µP Supervisory Circuits in SOT Package

Revision History

REVISION NUMBER	REVISION DATE	DESCRIPTION	PAGES CHANGED
3	9/14	Added ordering information for F option, added extended temperature range information, updated Selector Guide and Package Information sections	1, 2, 8, 9
4	11/15	Added MAX6710K with new limits	1, 2, 9
5	8/16	Updated MAX6710 upper operating temperature range and EC limits to 105°C	2–3

For pricing, delivery, and ordering information, please contact Maxim Direct at 1-888-629-4642, or visit Maxim Integrated's website at www.maximintegrated.com.

Maxim Integrated cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim Integrated product. No circuit patent licenses are implied. Maxim Integrated reserves the right to change the circuitry and specifications without notice at any time. The parametric values (min and max limits) shown in the Electrical Characteristics table are guaranteed. Other parametric values quoted in this data sheet are provided for guidance.

ПОСТАВКА ЭЛЕКТРОННЫХ КОМПОНЕНТОВ

многоканальный

Общество с ограниченной ответственностью «МосЧип» ИНН 7719860671 / КПП 771901001 Адрес: 105318, г.Москва, ул.Щербаковская д.3, офис 1107

Данный компонент на территории Российской Федерации Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

http://moschip.ru/get-element

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г. Москва, ул. Щербаковская д. 3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru moschip.ru_6 moschip.ru_4 moschip.ru_9