

**Single/Dual Low Bias Current, Low Voltage, Rail-to-Rail
Input/Output CMOS Operational Amplifiers**
AZV831/2
General Description

The AZV831/AZV832 is single/dual channels rail-to-rail input and output amplifier, which provides a wide input common-mode voltage range and output voltage swing capability for maximum signal swings in low supply voltage applications. The device is fully specified to operate from 1.6V to 5.0V single supply, or $\pm 0.8V$ and $\pm 2.5V$ dual supply applications. It features very low supply current dissipation $70\mu A$ per channel, which is well suitable for today's low-voltage and/or portable systems.

The AZV831/AZV832 features optimal performance in very low bias current of $1pA$, which enables the IC to be used for integrators, photodiode amplifiers, and piezoelectric sensors etc. The device has typical $0.5mV$ input offset voltage and provides $1MHz$ bandwidth.

The AZV831/AZV832 adopts the latest packaging technology to meet the most demanding space-constraint applications. The AZV831 is available in standard SOT-23-5 and SC-70-5 packages. The AZV832 is offered in the traditional MSOP-8 and SOIC-8 packages.

Features

- Single Supply Voltage Range: 1.6V to 5.5V
- Ultra-low Input Bias Current: $1pA$ (Typ.)
- Offset Voltage: $0.5mV$ (Typ.), $2.5mV$ (Max.)
- Rail-to-Rail Input
 V_{CM} : $300mV$ beyond Rails @ $V_{CC}=5V$
- Rail-to-Rail Output Swing:
 $10k\Omega$ Load: $4mV$ from Rail
 $1k\Omega$ Load: $25mV$ from Rail
- Supply Current: $70\mu A$ /Amplifier
- Unity Gain Stable
 Gain Bandwidth Product: $1.0MHz$
- Slew Rate: $0.45V/\mu s$ @ $V_{CC}=5.0V$
- Operation Ambient Temperature Range: $-40^{\circ}C$ to $85^{\circ}C$

Applications

- Sensors
- Photodiode Amplification
- Battery-Powered Instrumentation
- Pulse Blood Oximeter, Glucose Meter

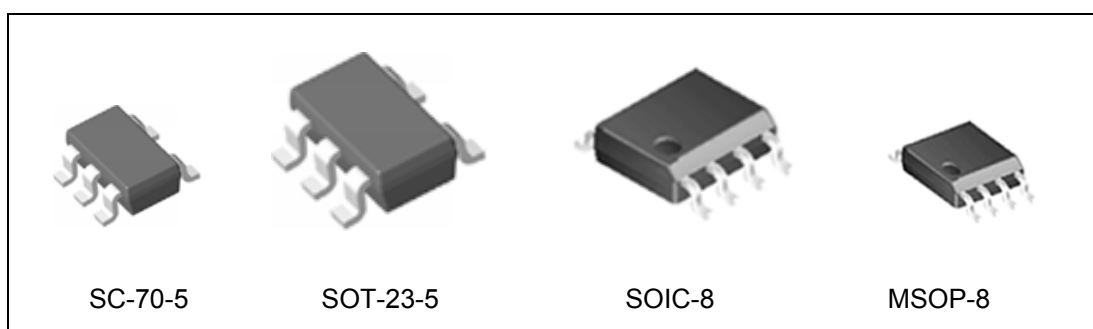
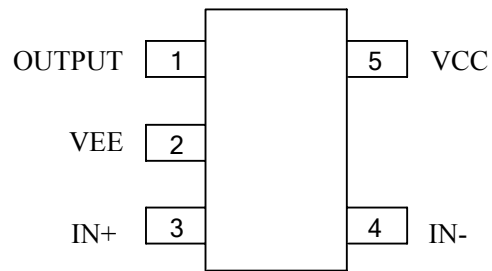
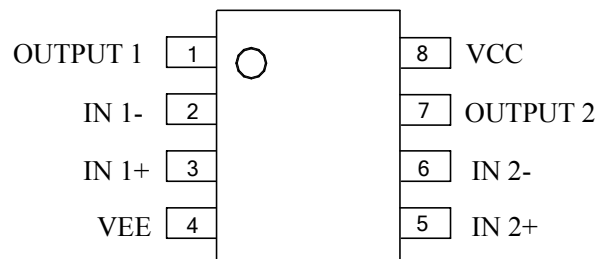


Figure 1. Package Types of AZV831/AZV832

**Single/Dual Low Bias Current, Low Voltage, Rail-to-Rail
Input/Output CMOS Operational Amplifiers****AZV831/2****Pin Configuration**KS/K Package
(SC-70-5/SOT-23-5)

AZV831

M/MM Package
(SOIC-8/MSOP-8)


AZV832

Figure 2. Pin Configuration of AZV831/2 (Top View)


**Single/Dual Low Bias Current, Low Voltage, Rail-to-Rail
Input/Output CMOS Operational Amplifiers**

AZV831/2

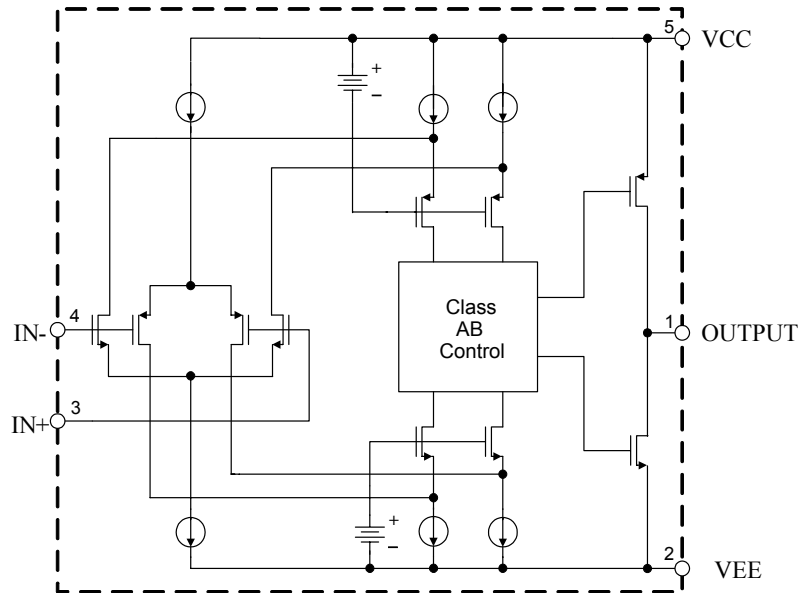Function Block Diagram



For AZV831

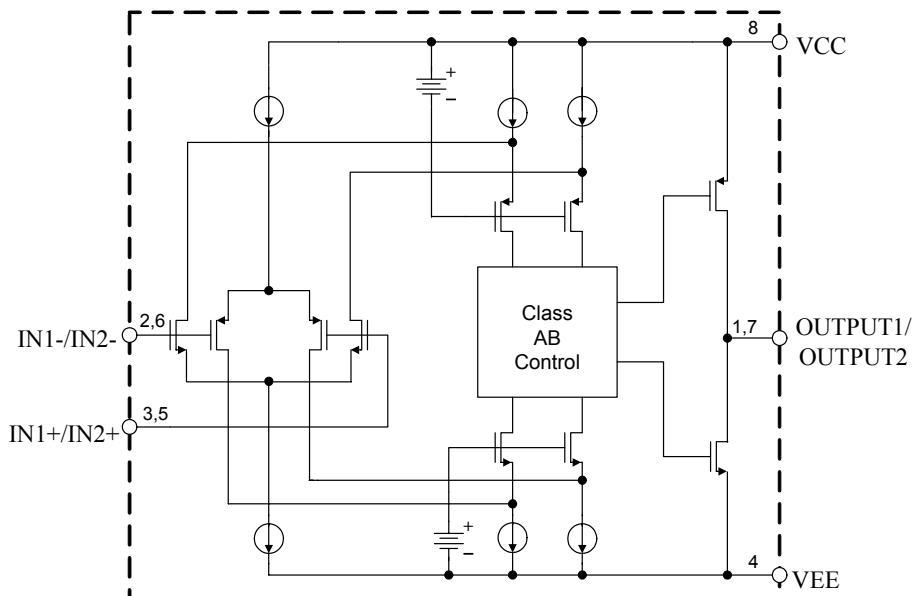

For AZV832/Amplifier


Figure 3. Functional Block Diagram of AZV831/2



**Single/Dual Low Bias Current, Low Voltage, Rail-to-Rail
Input/Output CMOS Operational Amplifiers**

AZV831/2

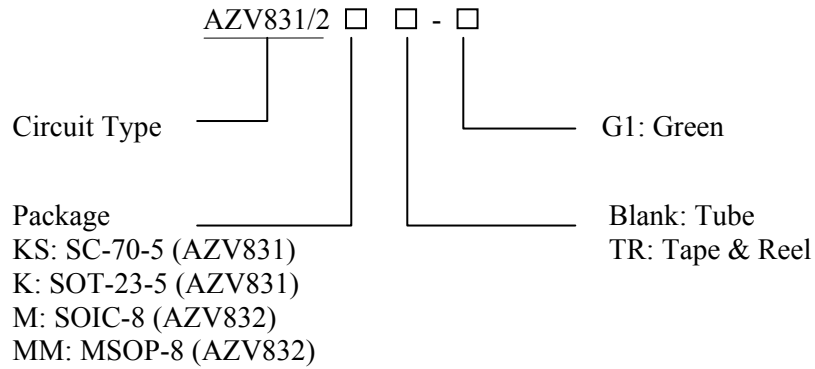Ordering Information



| Package | Temperature Range | Part Number | Marking ID | Packing Type |
|----------|-------------------|---------------|------------|--------------|
| SC-70-5 | -40 to 85°C | AZV831KSTR-G1 | L3 | Tape & Reel |
| SOT-23-5 | -40 to 85°C | AZV831KTR-G1 | G4D | Tape & Reel |
| SOIC-8 | -40 to 85°C | AZV832M-G1 | 832M-G1 | Tube |
| | | AZV832MTR-G1 | 832M-G1 | Tape & Reel |
| MSOP-8 | -40 to 85°C | AZV832MM-G1 | 832MM-G1 | Tube |
| | | AZV832MMTR-G1 | 832MM-G1 | Tape & Reel |

BCD Semiconductor's Pb-free products, as designated with "G1" suffix in the part number, are RoHS compliant and green.

**Single/Dual Low Bias Current, Low Voltage, Rail-to-Rail
Input/Output CMOS Operational Amplifiers****AZV831/2****Absolute Maximum Ratings (Note 1)**

| Parameter | Symbol | Value | Unit | |
|---|---------------|----------------------|------|------|
| Power Supply Voltage | V_{CC} | 6.0 | V | |
| Differential Input Voltage | V_{ID} | 6.0 | V | |
| Input Voltage | V_{IN} | -0.3 to $V_{CC}+0.5$ | V | |
| Operating Junction Temperature | T_J | 150 | °C | |
| Thermal Resistance (Junction to Ambient) | θ_{JA} | SC-70-5 | 270 | °C/W |
| | | SOT-23-5 | 220 | |
| | | SOIC-8 | 150 | |
| | | MSOP-8 | 200 | |
| Storage Temperature Range | T_{STG} | -65 to 150 | °C | |
| Lead Temperature (Soldering,10 Seconds) | T_{LEAD} | 260 | °C | |
| ESD (Human Body Model) | | 4000 | V | |
| ESD (Machine Model) | | 300 | V | |

Note 1: Stresses greater than those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “Recommended Operating Conditions” is not implied. Exposure to “Absolute Maximum Ratings” for extended periods may affect device reliability.

Recommended Operating Conditions

| Parameter | Symbol | Min | Max | Unit |
|-------------------------------------|----------|-----|-----|------|
| Supply Voltage | V_{CC} | 1.6 | 5.5 | V |
| Operation Ambient Temperature Range | T_A | -40 | 85 | °C |



**Single/Dual Low Bias Current, Low Voltage, Rail-to-Rail
Input/Output CMOS Operational Amplifiers**

AZV831/2

1.6V DC Electrical Characteristics

$V_{CC}=1.6V, V_{EE}=0, V_{OUT}=V_{CC}/2, V_{CM}=V_{CC}/2, T_A=25^{\circ}C$, unless otherwise noted.

| Parameter | Symbol | Conditions | Min | Typ | Max | Unit |
|---------------------------------|--------------------------|---|------------------|-----|-----|-------------------|
| Input Offset Voltage | V_{OS} | | | 0.5 | 2.5 | mV |
| Input Bias Current | I_B | | | 1.0 | | pA |
| Input Offset Current | I_{OS} | | | 1.0 | | pA |
| Input Common-mode Voltage Range | V_{CM} | | -0.2 | | 1.8 | V |
| Common-mode Rejection Ratio | CMRR | $V_{CM}=-0.2V$ to $1.8V$ | 55 | 75 | | dB |
| Large Signal Voltage Gain | G_V | $R_L=10k\Omega$ to $V_{CC}/2$, $V_{OUT}=0.2V$ to $1.4V$ | 90 | 110 | | dB |
| Input Offset Voltage Drift | $\Delta V_{OS}/\Delta T$ | | | 2.0 | | $\mu V/^{\circ}C$ |
| Output Voltage Swing from Rail | V_{OL}/V_{OH} | $R_L=1k\Omega$ to $V_{CC}/2$ | | 30 | 50 | mV |
| | | $R_L=10k\Omega$ to $V_{CC}/2$ | | 3 | 15 | |
| Output Current | Sink | I_{SINK} | $V_{OUT}=V_{CC}$ | 8 | 10 | mA |
| | Source | I_{SOURCE} | $V_{OUT}=0V$ | 5 | 8.5 | |
| Closed-loop Output Impedance | Z_{OUT} | $f=10kHz, A_V=1$ | | 9 | | Ω |
| Power Supply Rejection Ratio | PSRR | $V_{CC}=1.6V$ to $5.0V$ | 66 | 80 | | dB |
| Supply Current (Per Amplifier) | I_{CC} | $V_{OUT}=V_{CC}/2, I_{OUT}=0$ | | 70 | 90 | μA |

1.6V AC Electrical Characteristics

$V_{CC}=1.6V, V_{EE}=0, V_{OUT}=V_{CC}/2, V_{CM}=V_{CC}/2, T_A=25^{\circ}C$, unless otherwise noted.

| Parameter | Symbol | Conditions | Min | Typ | Max | Unit |
|---------------------------------|----------|---|-----|------|-----|----------------|
| Gain Bandwidth Product | GBP | $R_L=100k\Omega$ | | 1.0 | | MHz |
| Slew Rate (Note 2) | SR | 1V Step, $C_L=100pF, R_L=10k\Omega$ | | 0.32 | | $V/\mu s$ |
| Phase Margin | ϕ_M | $R_L=100k\Omega$ | | 67 | | Degrees |
| Total Harmonic Distortion+Noise | THD+N | $f=1kHz, A_V=1, V_{IN}=1V_{pp}$ $R_L=10k\Omega, C_L=100pF$ | | -70 | | dB |
| Voltage Noise Density | e_n | $f=1kHz$ | | 27 | | nV/\sqrt{Hz} |

Note 2: Number specified is the positive slew rate.

**Single/Dual Low Bias Current, Low Voltage, Rail-to-Rail
Input/Output CMOS Operational Amplifiers****AZV831/2****1.8V DC Electrical Characteristics** $V_{CC}=1.8V$, $V_{EE}=0$, $V_{OUT}=V_{CC}/2$, $V_{CM}=V_{CC}/2$, $T_A=25^\circ C$, unless otherwise noted.

| Parameter | Symbol | Conditions | Min | Typ | Max | Unit |
|---------------------------------|--------------------------|---|------------------|-----|-----|------------------|
| Input Offset Voltage | V_{OS} | | | 0.5 | 2.5 | mV |
| Input Bias Current | I_B | | | 1.0 | | pA |
| Input Offset Current | I_{OS} | | | 1.0 | | pA |
| Input Common-mode Voltage Range | V_{CM} | | -0.2 | | 2.0 | V |
| Common-mode Rejection Ratio | CMRR | $V_{CM}=-0.2V$ to $2.0V$ | 55 | 75 | | dB |
| Large Signal Voltage Gain | G_V | $R_L=10k\Omega$ to $V_{CC}/2$, $V_{OUT}=0.2V$ to $1.6V$ | 90 | 112 | | dB |
| Input Offset Voltage Drift | $\Delta V_{OS}/\Delta T$ | | | 2.0 | | $\mu V/^\circ C$ |
| Output Voltage Swing from Rail | V_{OL}/V_{OH} | $R_L=1k\Omega$ to $V_{CC}/2$ | | 25 | 50 | mV |
| | | $R_L=10k\Omega$ to $V_{CC}/2$ | | 3 | 15 | |
| Output Current | Sink | I_{SINK} | $V_{OUT}=V_{CC}$ | 12 | 16 | mA |
| | Source | I_{SOURCE} | $V_{OUT}=0V$ | 10 | 14 | |
| Closed-loop Output Impedance | Z_{OUT} | $f=10kHz$ | | 9 | | Ω |
| Power Supply Rejection Ratio | PSRR | $V_{CC}=1.6V$ to $5.0V$ | 66 | 80 | | dB |
| Supply Current (Per Amplifier) | I_{CC} | $V_{OUT}=V_{CC}/2$, $I_{OUT}=0$ | | 70 | 90 | μA |

1.8V AC Electrical Characteristics $V_{CC}=1.8V$, $V_{EE}=0$, $V_{OUT}=V_{CC}/2$, $V_{CM}=V_{CC}/2$, $T_A=25^\circ C$, unless otherwise noted.

| Parameter | Symbol | Conditions | Min | Typ | Max | Unit |
|---------------------------------|----------|--|-----|------|-----|----------------|
| Gain Bandwidth Product | GBP | $R_L=100k\Omega$ | | 1.0 | | MHz |
| Slew Rate (Note 2) | SR | 1V Step, $C_L=100pF$, $R_L=10k\Omega$ | | 0.34 | | $V/\mu s$ |
| Phase Margin | ϕ_M | $R_L=100k\Omega$ | | 67 | | Degrees |
| Total Harmonic Distortion+Noise | THD+N | $f=1kHz$, $A_V=1$, $V_{IN}=1V_{pp}$ $R_L=10k\Omega$, $C_L=100pF$ | | -70 | | dB |
| Voltage Noise Density | e_n | $f=1kHz$ | | 27 | | nV/\sqrt{Hz} |

Note 2: Number specified is the positive slew rate.



**Single/Dual Low Bias Current, Low Voltage, Rail-to-Rail
Input/Output CMOS Operational Amplifiers**

AZV831/2

3.0V DC Electrical Characteristics

$V_{CC}=3.0V, V_{EE}=0, V_{OUT}=V_{CC}/2, V_{CM}=V_{CC}/2, T_A=25^{\circ}C$, unless otherwise noted.

| Parameter | Symbol | Conditions | Min | Typ | Max | Unit |
|---------------------------------|--------------------------|---|------------------|-----|-----|-------------------|
| Input Offset Voltage | V_{OS} | | | 0.5 | 2.5 | mV |
| Input Bias Current | I_B | | | 1.0 | | pA |
| Input Offset Current | I_{OS} | | | 1.0 | | pA |
| Input Common-mode Voltage Range | V_{CM} | | -0.3 | | 3.3 | V |
| Common-mode Rejection Ratio | CMRR | $V_{CM}=-0.3V$ to 1.8V | 62 | 80 | | dB |
| | | $V_{CM}=-0.3V$ to 3.3V | 58 | 75 | | |
| Large Signal Voltage Gain | G_V | $R_L=1k\Omega$ to $V_{CC}/2$, $V_{OUT}=0.2V$ to 2.8V | 90 | 110 | | dB |
| | | $R_L=10k\Omega$ to $V_{CC}/2$, $V_{OUT}=0.1V$ to 2.9V | 95 | 115 | | |
| Input Offset Voltage Drift | $\Delta V_{OS}/\Delta T$ | | | 2.0 | | $\mu V/^{\circ}C$ |
| Output Voltage Swing from Rail | V_{OL}/V_{OH} | $R_L=1k\Omega$ to $V_{CC}/2$ | | 20 | 50 | mV |
| | | $R_L=10k\Omega$ to $V_{CC}/2$ | | 3 | 15 | |
| Output Current | Sink | I_{SINK} | $V_{OUT}=V_{CC}$ | 50 | 60 | mA |
| | Source | I_{SOURCE} | $V_{OUT}=0V$ | 50 | 65 | |
| Closed-loop Output Impedance | Z_{OUT} | $f=10kHz$ | | 9 | | Ω |
| Power Supply Rejection Ratio | PSRR | $V_{CC}=1.6V$ to 5.0V | 66 | 80 | | dB |
| Supply Current (Per Amplifier) | I_{CC} | $V_{OUT}=V_{CC}/2, I_{OUT}=0$ | | 70 | 90 | μA |

3.0V AC Electrical Characteristics

$V_{CC}=3.0V, V_{EE}=0, V_{OUT}=V_{CC}/2, V_{CM}=V_{CC}/2, T_A=25^{\circ}C$, unless otherwise noted.

| Parameter | Symbol | Conditions | Min | Typ | Max | Unit |
|---------------------------------|----------|---|-----|------|-----|----------------|
| Gain Bandwidth Product | GBP | $R_L=100k\Omega$ | | 1.0 | | MHz |
| Slew Rate (Note 2) | SR | $G=1, 2V$ Step, $C_L=100pF, R_L=10k\Omega$ | | 0.40 | | V/ μs |
| Phase Margin | ϕ_M | $R_L=100k\Omega$ | | 67 | | Degrees |
| Total Harmonic Distortion+Noise | THD+N | $f=1kHz, G=1, V_{IN}=1V_{pp}$ $R_L=10k\Omega, C_L=100pF$ | | -70 | | dB |
| Voltage Noise Density | e_n | $f=1kHz$ | | 27 | | nV/\sqrt{Hz} |

Note 2: Number specified is the positive slew rate.



**Single/Dual Low Bias Current, Low Voltage, Rail-to-Rail
Input/Output CMOS Operational Amplifiers**

AZV831/2

5.0V DC Electrical Characteristics

$V_{CC}=5.0V$, $V_{EE}=0$, $V_{OUT}=V_{CC}/2$, $V_{CM}=V_{CC}/2$, $T_A=25^\circ C$, unless otherwise noted.

| Parameter | Symbol | Conditions | Min | Typ | Max | Unit |
|---------------------------------|--------------------------|---|------------------|-----|-----|------------------|
| Input Offset Voltage | V_{OS} | | | 0.5 | 2.5 | mV |
| Input Bias Current | I_B | | | 1.0 | | pA |
| Input Offset Current | I_{OS} | | | 1.0 | | pA |
| Input Common-mode Voltage Range | V_{CM} | | -0.3 | | 5.3 | V |
| Common-mode Rejection Ratio | CMRR | $V_{CM}=-0.3V$ to $3.8V$ | 70 | 85 | | dB |
| | | $V_{CM}=-0.3V$ to $5.3V$ | 65 | 90 | | |
| Large Signal Voltage Gain | G_V | $R_L=1k\Omega$ to $V_{CC}/2$, $V_{OUT}=0.2V$ to $4.8V$ | 80 | 92 | | dB |
| | | $R_L=10k\Omega$ to $V_{CC}/2$, $V_{OUT}=0.05V$ to $4.95V$ | 85 | 98 | | |
| Input Offset Voltage Drift | $\Delta V_{OS}/\Delta T$ | | | 2.0 | | $\mu V/^\circ C$ |
| Output Voltage Swing from Rail | V_{OL}/V_{OH} | $R_L=1k\Omega$ to $V_{CC}/2$ | | 25 | 50 | mV |
| | | $R_L=10k\Omega$ to $V_{CC}/2$ | | 4 | 15 | |
| Output Current | Sink | I_{SINK} | $V_{OUT}=V_{CC}$ | 100 | 150 | mA |
| | Source | I_{SOURCE} | $V_{OUT}=0V$ | 110 | 185 | |
| Closed-loop Output Impedance | | $f=1kHz$, $A_V=1$ | | 9 | | Ω |
| Power Supply Rejection Ratio | PSRR | $V_{CC}=1.6V$ to $5.0V$ | 66 | 80 | | dB |
| Supply Current (Per Amplifier) | I_{CC} | $V_{OUT}=V_{CC}/2$, $I_{OUT}=0$ | | 70 | 90 | μA |

5V AC Electrical Characteristics

$V_{CC}=5.0V$, $V_{EE}=0$, $V_{OUT}=V_{CC}/2$, $V_{CM}=V_{CC}/2$, $T_A=25^\circ C$, unless otherwise noted.

| Parameter | Symbol | Conditions | Min | Typ | Max | Unit |
|------------------------|----------|--|-----|------|-----|----------------|
| Gain Bandwidth Product | GBP | $R_L=100k\Omega$ | | 1.0 | | MHz |
| Slew Rate (Note 2) | SR | 2V Step, $C_L=100pF$, $R_L=10k\Omega$ | | 0.45 | | $V/\mu s$ |
| Phase Margin | ϕ_M | $R_L=100k\Omega$ | | 67 | | Degrees |
| THD+N | THD+N | $f=1kHz$, $A_V=1$, $V_{IN}=1V_{PP}$ $R_L=10k\Omega$, $C_L=100pF$ | | -70 | | dB |
| Voltage Noise Density | e_n | $f=1kHz$ | | 27 | | nV/\sqrt{Hz} |

Note 2: Number specified is the positive slew rate.



**Single/Dual Low Bias Current, Low Voltage, Rail-to-Rail
Input/Output CMOS Operational Amplifiers**

AZV831/2

Typical Performance Characteristics

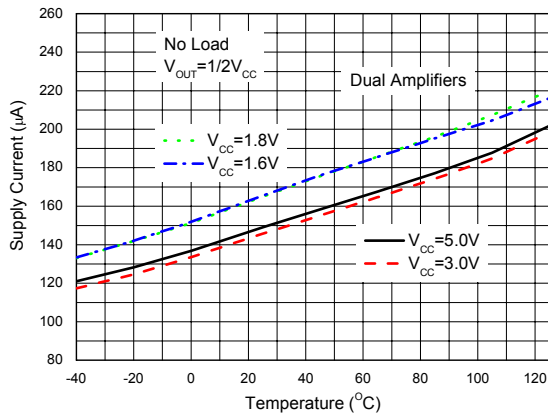


Figure 4. Supply Current vs. Temperature

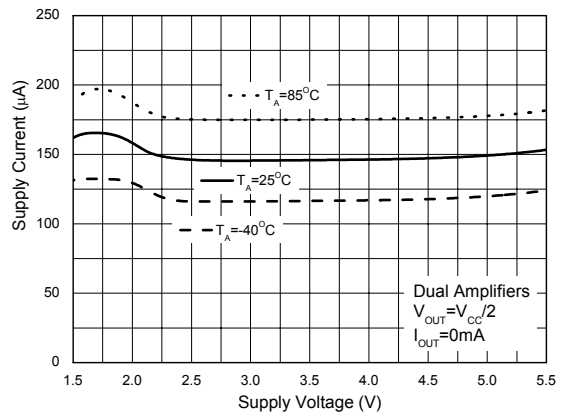


Figure 5. Supply Current vs. Supply Voltage

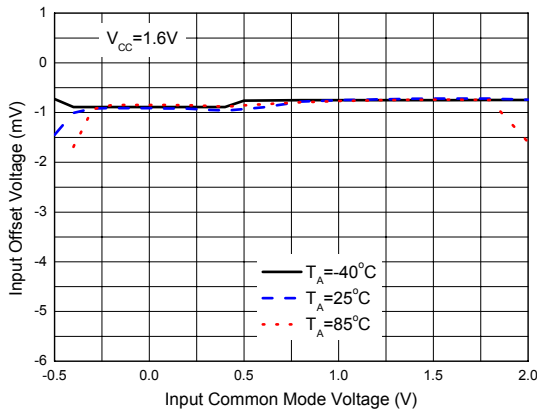


Figure 6. Input Offset Voltage vs. Input Common Mode Voltage

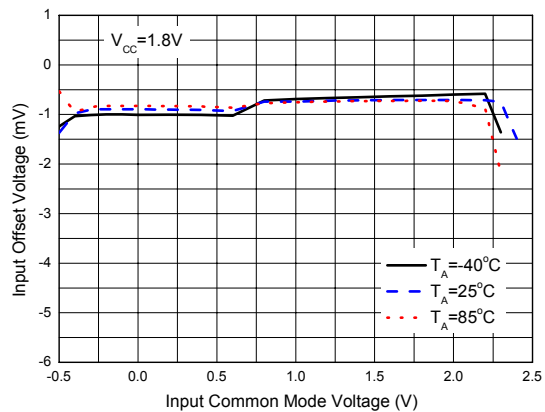


Figure 7. Input Offset Voltage vs. Input Common Mode Voltage

**Single/Dual Low Bias Current, Low Voltage, Rail-to-Rail
Input/Output CMOS Operational Amplifiers**

AZV831/2

Typical Performance Characteristics (Continued)

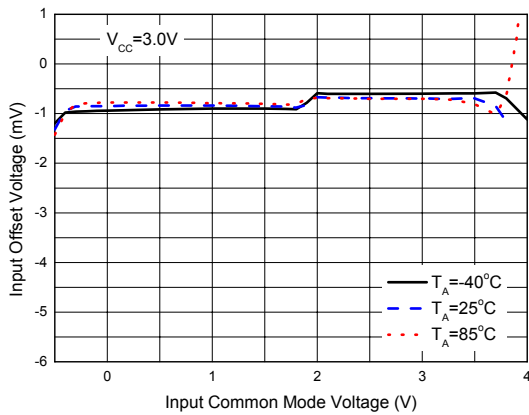


Figure 8. Input Offset Voltage vs. Input Common Mode Voltage

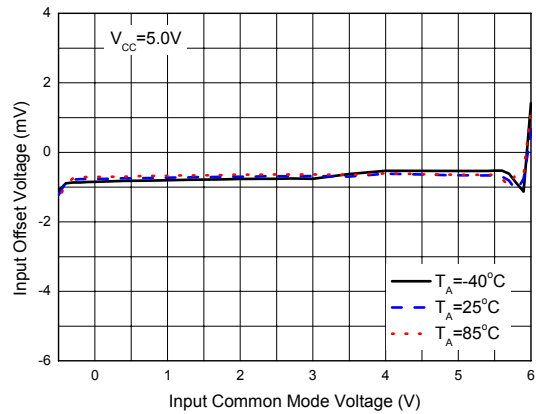


Figure 9. Input Offset Voltage vs. Input Common Mode Voltage

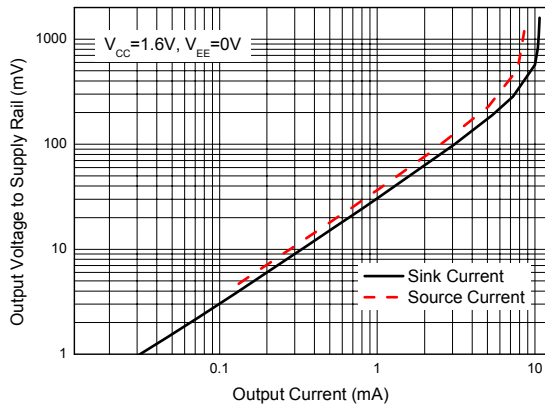


Figure 10. Output Voltage vs. Output Current

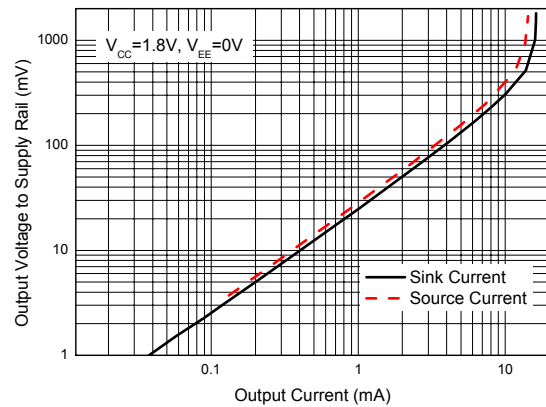


Figure 11. Output Voltage vs. Output Current



**Single/Dual Low Bias Current, Low Voltage, Rail-to-Rail
Input/Output CMOS Operational Amplifiers**

AZV831/2

Typical Performance Characteristics (Continued)

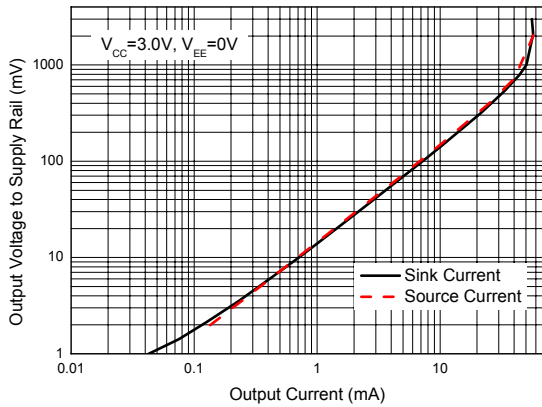


Figure 12. Output Voltage vs. Output Current

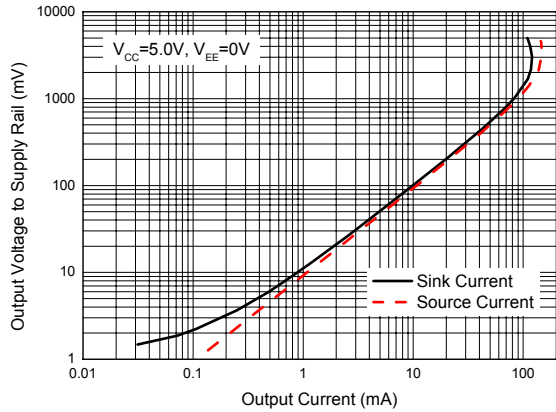


Figure 13. Output Voltage vs. Output Current

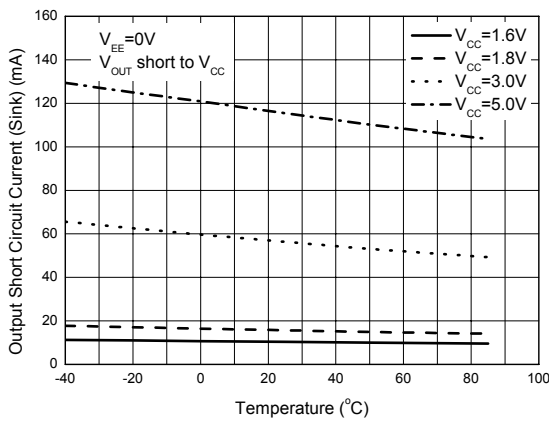


Figure 14. Output Short Circuit Current vs. Temperature

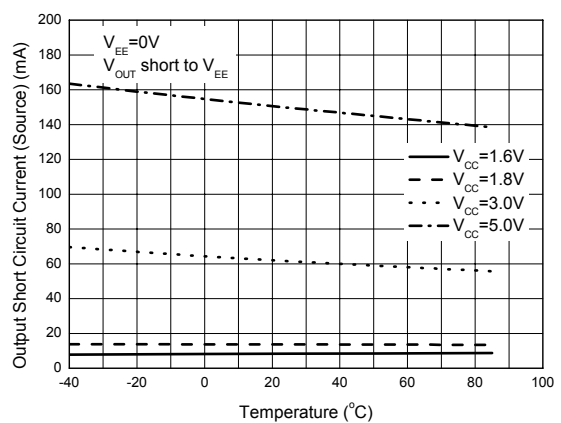


Figure 15. Output Short Circuit Current vs. Temperature

**Single/Dual Low Bias Current, Low Voltage, Rail-to-Rail
Input/Output CMOS Operational Amplifiers**

AZV831/2

Typical Performance Characteristics (Continued)

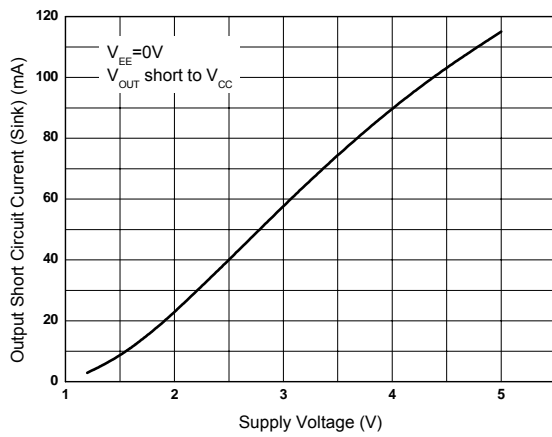


Figure 16. Output Short Circuit Current vs. Supply Voltage

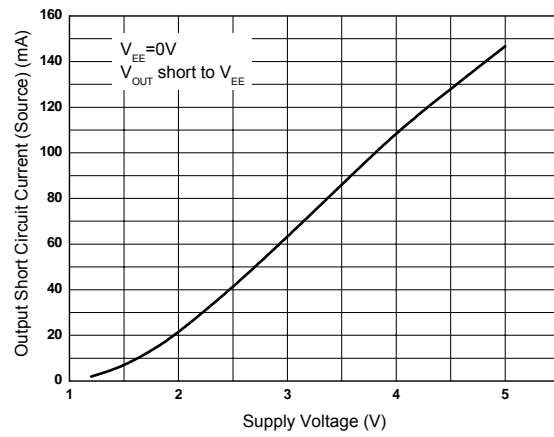


Figure 17. Output Short Circuit Current vs. Supply Voltage

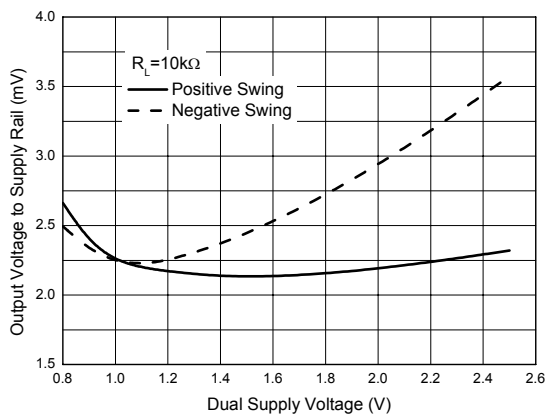


Figure 18. Output Voltage Swing vs. Supply Voltage

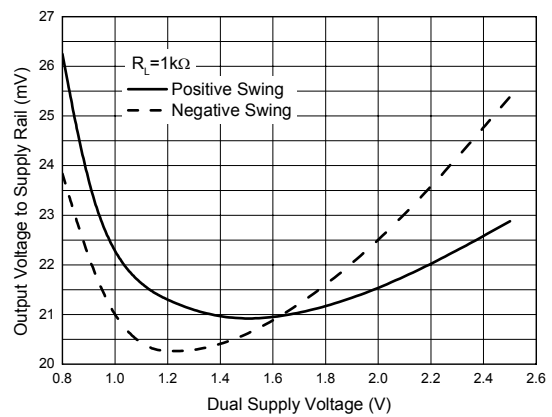


Figure 19. Output Voltage Swing vs. Supply Voltage

**Single/Dual Low Bias Current, Low Voltage, Rail-to-Rail
Input/Output CMOS Operational Amplifiers**

AZV831/2

Typical Performance Characteristics (Continued)

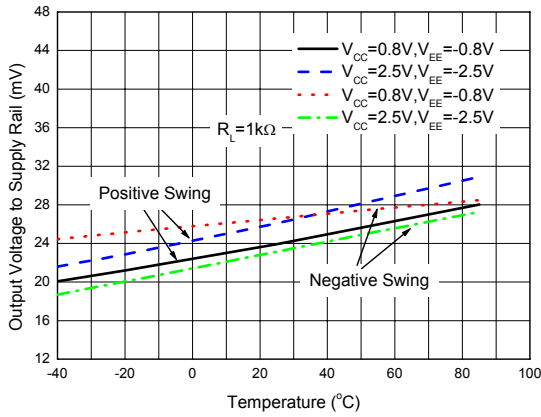


Figure 20. Output Voltage Swing vs. Temperature

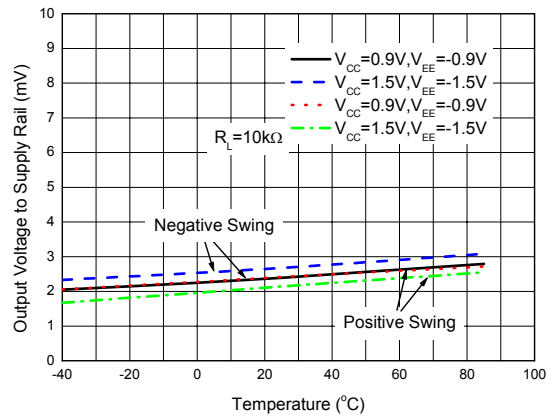


Figure 21. Output Voltage Swing vs. Temperature

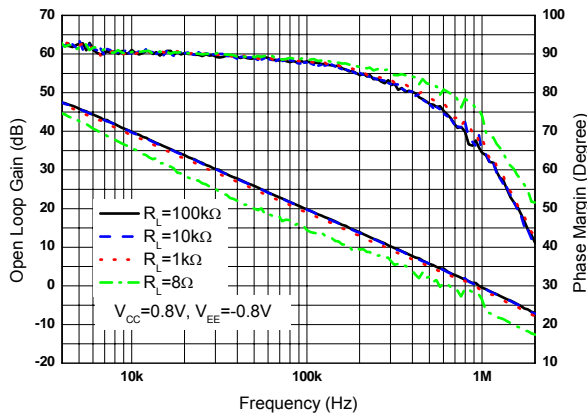


Figure 22. Gain and Phase vs. Frequency with Resistive Load

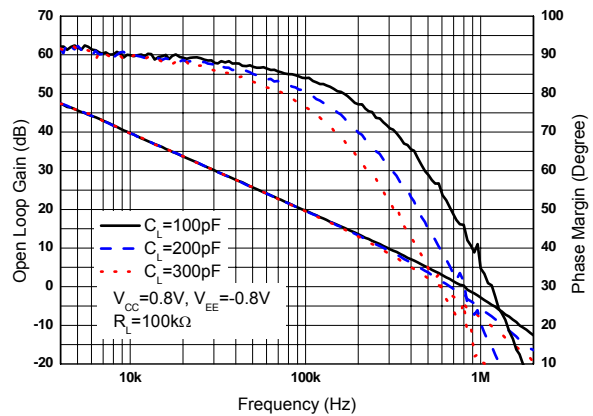


Figure 23. Gain and Phase vs. Frequency with Capacitive Load



Single/Dual Low Bias Current, Low Voltage, Rail-to-Rail
Input/Output CMOS Operational Amplifiers

AZV831/2

Typical Performance Characteristics (Continued)

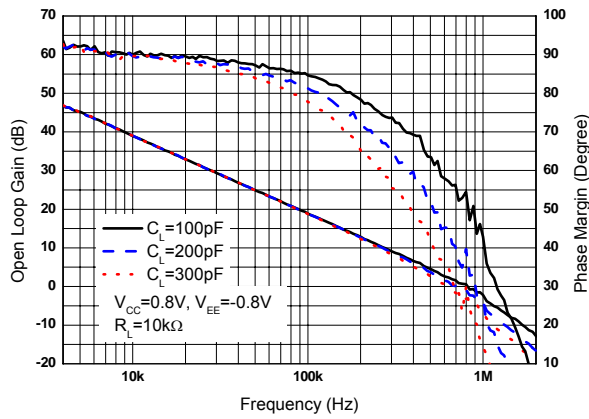


Figure 24. Gain and Phase vs. Frequency with Capacitive Load

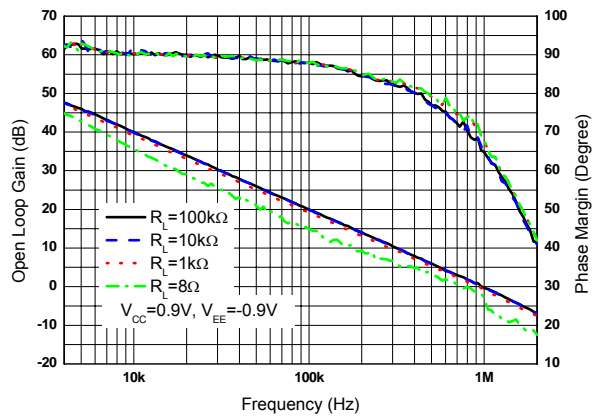


Figure 25. Gain and Phase vs. Frequency with Resistive Load

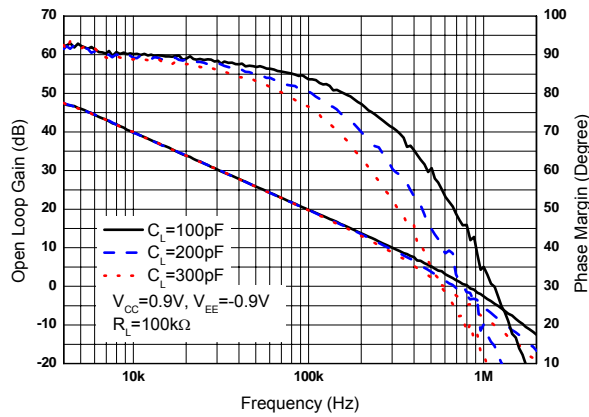


Figure 26. Gain and Phase vs. Frequency with Capacitive Load

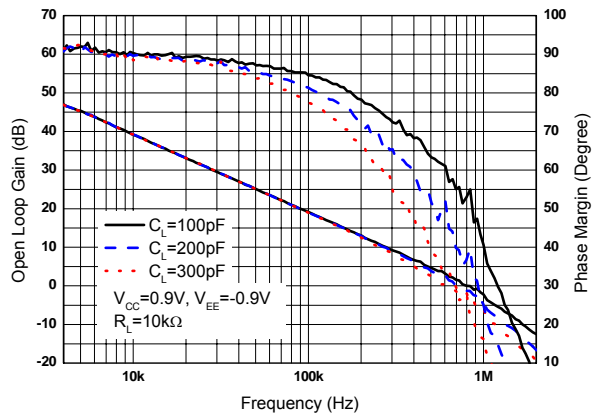


Figure 27. Gain and Phase vs. Frequency with Capacitive Load

**Single/Dual Low Bias Current, Low Voltage, Rail-to-Rail
Input/Output CMOS Operational Amplifiers**

AZV831/2

Typical Performance Characteristics (Continued)

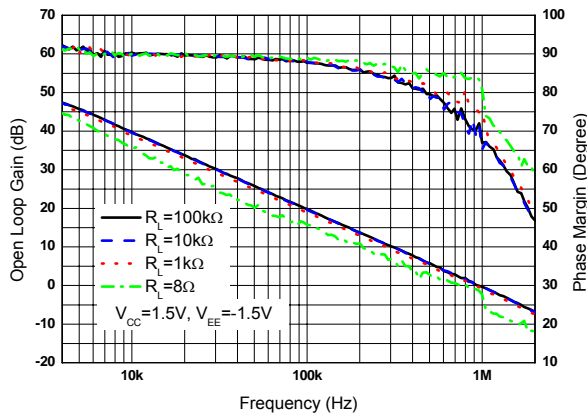


Figure 28. Gain and Phase vs. Frequency with Resistive Load

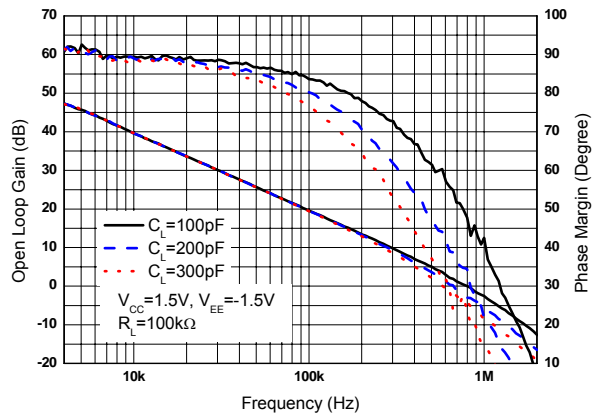


Figure 29. Gain and Phase vs. Frequency with Capacitive Load

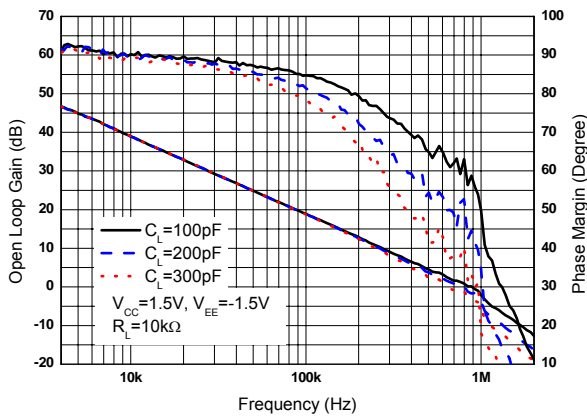


Figure 30. Gain and Phase vs. Frequency with Capacitive Load

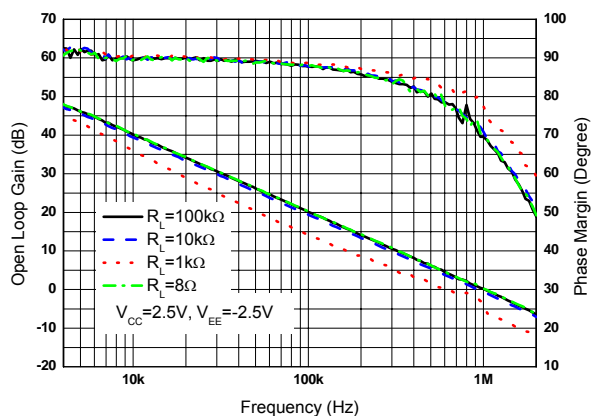


Figure 31. Gain and Phase vs. Frequency with Resistive Load



Single/Dual Low Bias Current, Low Voltage, Rail-to-Rail
Input/Output CMOS Operational Amplifiers

AZV831/2

Typical Performance Characteristics (Continued)

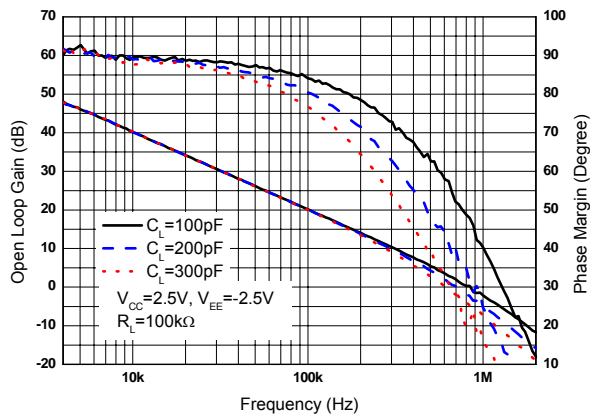


Figure 32. Gain and Phase vs. Frequency with Capacitive Load

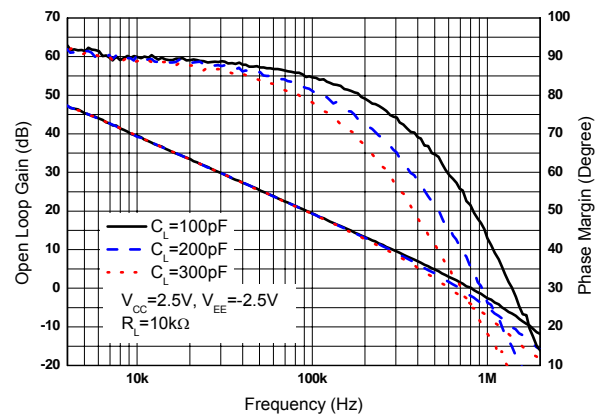


Figure 33. Gain and Phase vs. Frequency with Capacitive Load

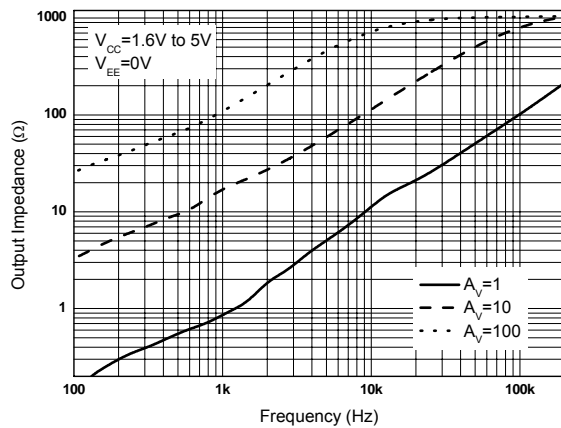


Figure 34. Output Impedance vs. Frequency

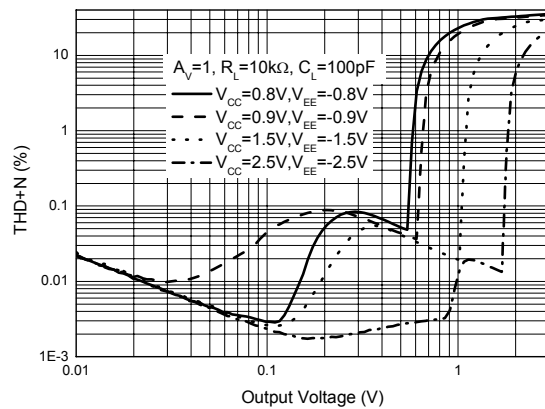


Figure 35. THD+N vs. Output Voltage

**Single/Dual Low Bias Current, Low Voltage, Rail-to-Rail
Input/Output CMOS Operational Amplifiers**

AZV831/2

Typical Performance Characteristics (Continued)

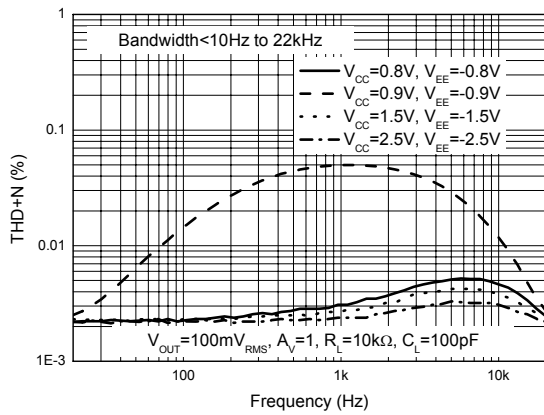


Figure 36. THD+N vs. Frequency



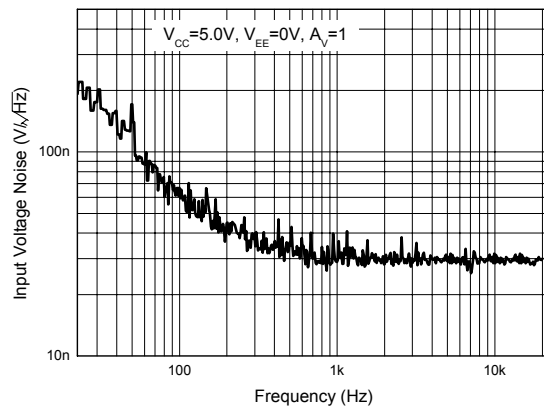


Figure 37. Input Voltage Noise Density

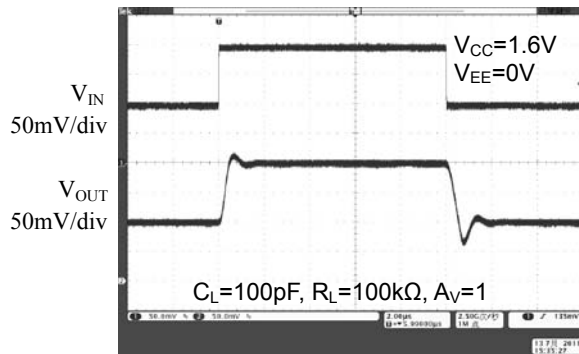

Time (2µs/div)

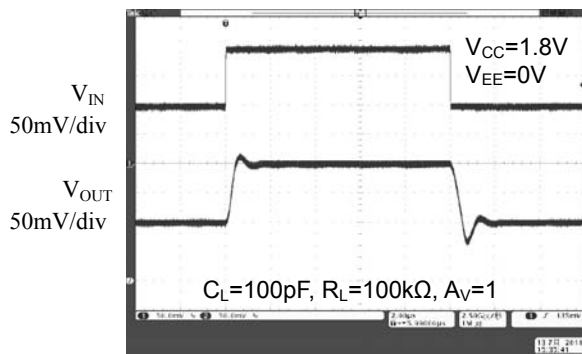Figure 38. Small Signal Pulse Response



Time (2µs/div)

Figure 39. Small Signal Pulse Response


**Single/Dual Low Bias Current, Low Voltage, Rail-to-Rail
Input/Output CMOS Operational Amplifiers**
AZV831/2
Typical Performance Characteristics (Continued)

 Time (2 μ s/div)

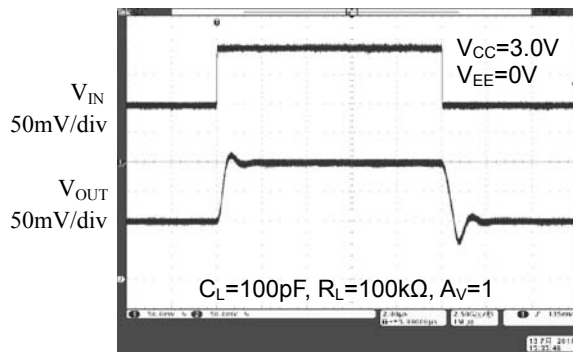Figure 40. Small Signal Pulse Response

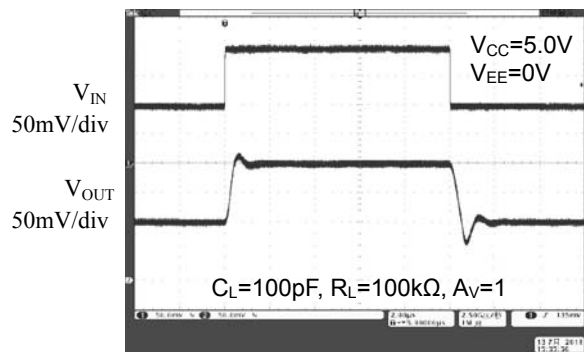

 Time (2 μ s/div)

Figure 41. Small Signal Pulse Response

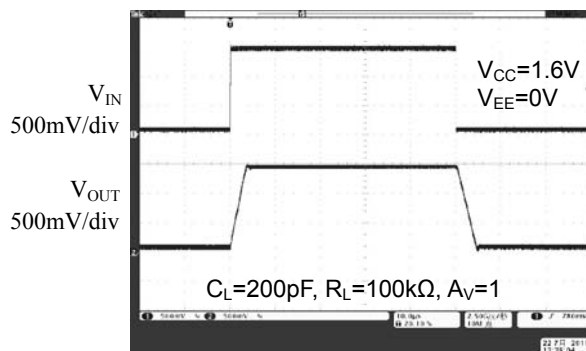

 Time (10 μ s/div)

Figure 42. Large Signal Pulse Response


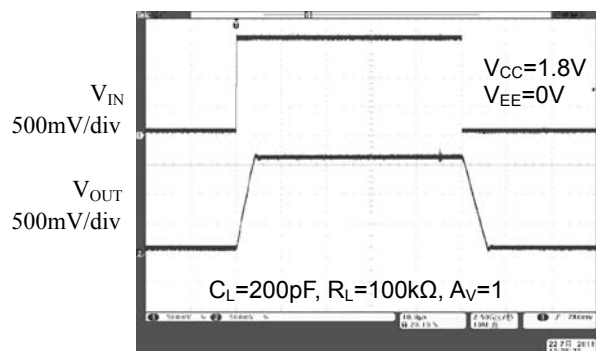

 Time (10 μ s/div)

Figure 43. Large Signal Pulse Response

**Single/Dual Low Bias Current, Low Voltage, Rail-to-Rail
Input/Output CMOS Operational Amplifiers**


AZV831/2

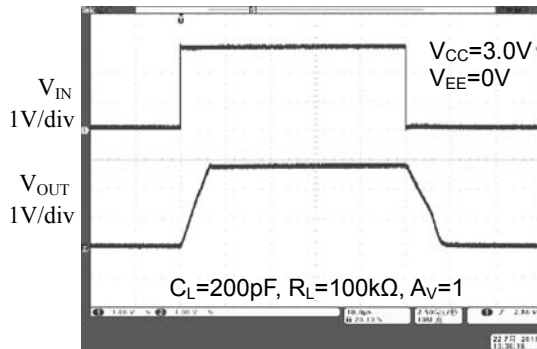Typical Performance Characteristics (Continued)




Time (10μs/div)

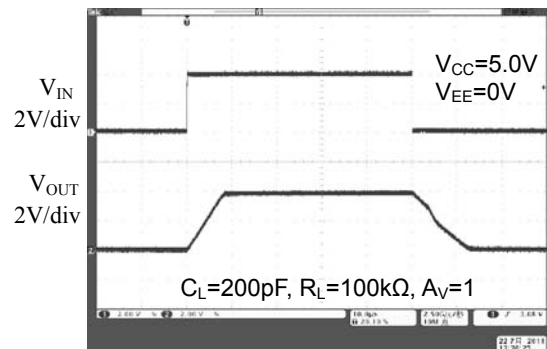Figure 44. Large Signal Pulse Response




Time (10μs/div)

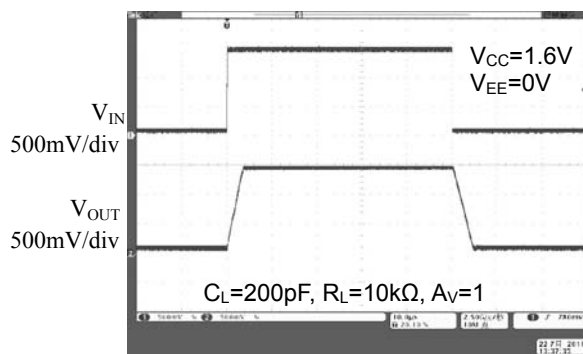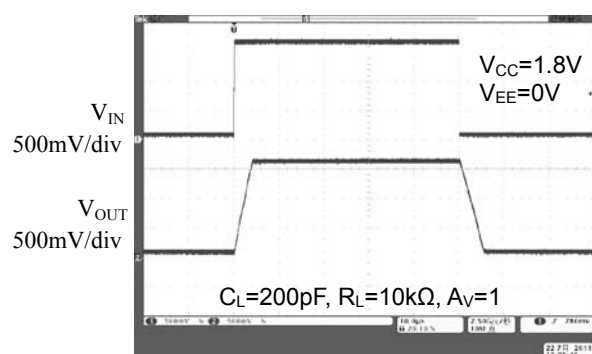Figure 45. Large Signal Pulse Response



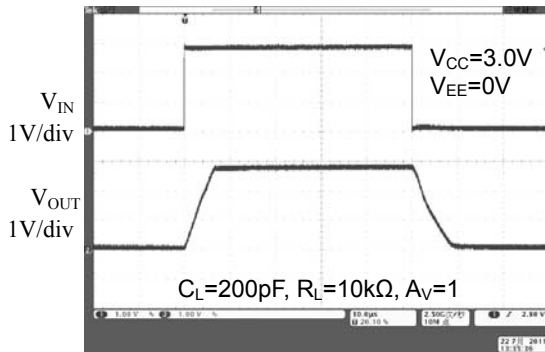
Time (10μs/div)

Figure 46. Large Signal Pulse Response




Time (10μs/div)

Figure 47. Large Signal Pulse Response

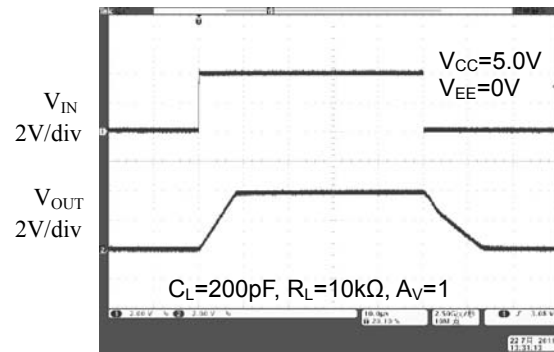**Single/Dual Low Bias Current, Low Voltage, Rail-to-Rail
Input/Output CMOS Operational Amplifiers**
AZV831/2
Typical Performance Characteristics (Continued)


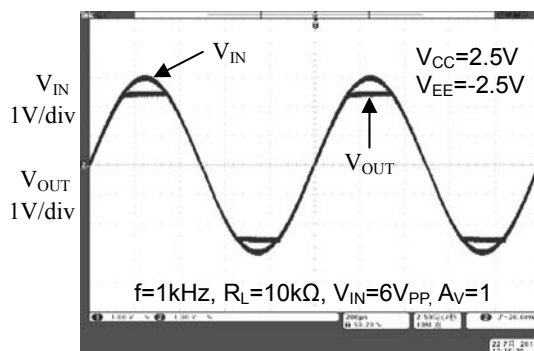
Time (10µs/div)

Figure 48. Large Signal Pulse Response




Time (10µs/div)

Figure 49. Large Signal Pulse Response



Time (200µs/div)

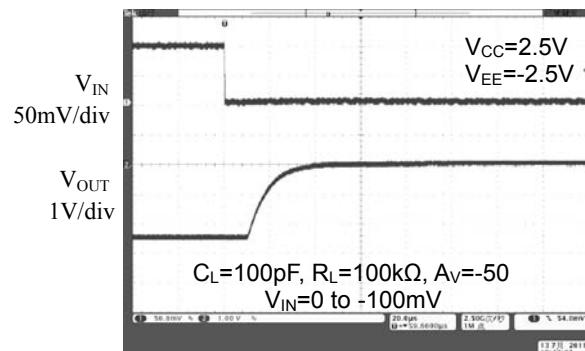Figure 50. No Phase Reversal



Time (20µs/div)

Figure 51. Overload Recovery Time

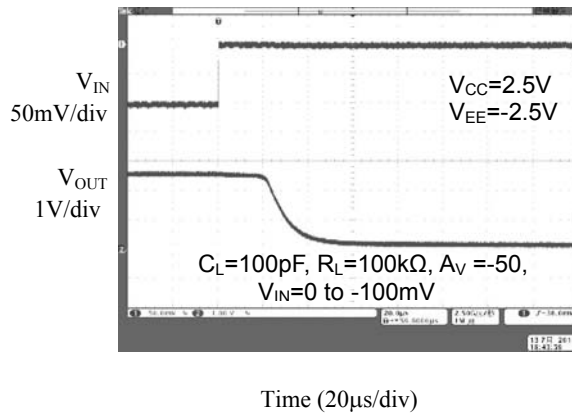
**Single/Dual Low Bias Current, Low Voltage, Rail-to-Rail
Input/Output CMOS Operational Amplifiers****AZV831/2****Typical Performance Characteristics (Continued)**

Figure 52. Overload Recovery Time

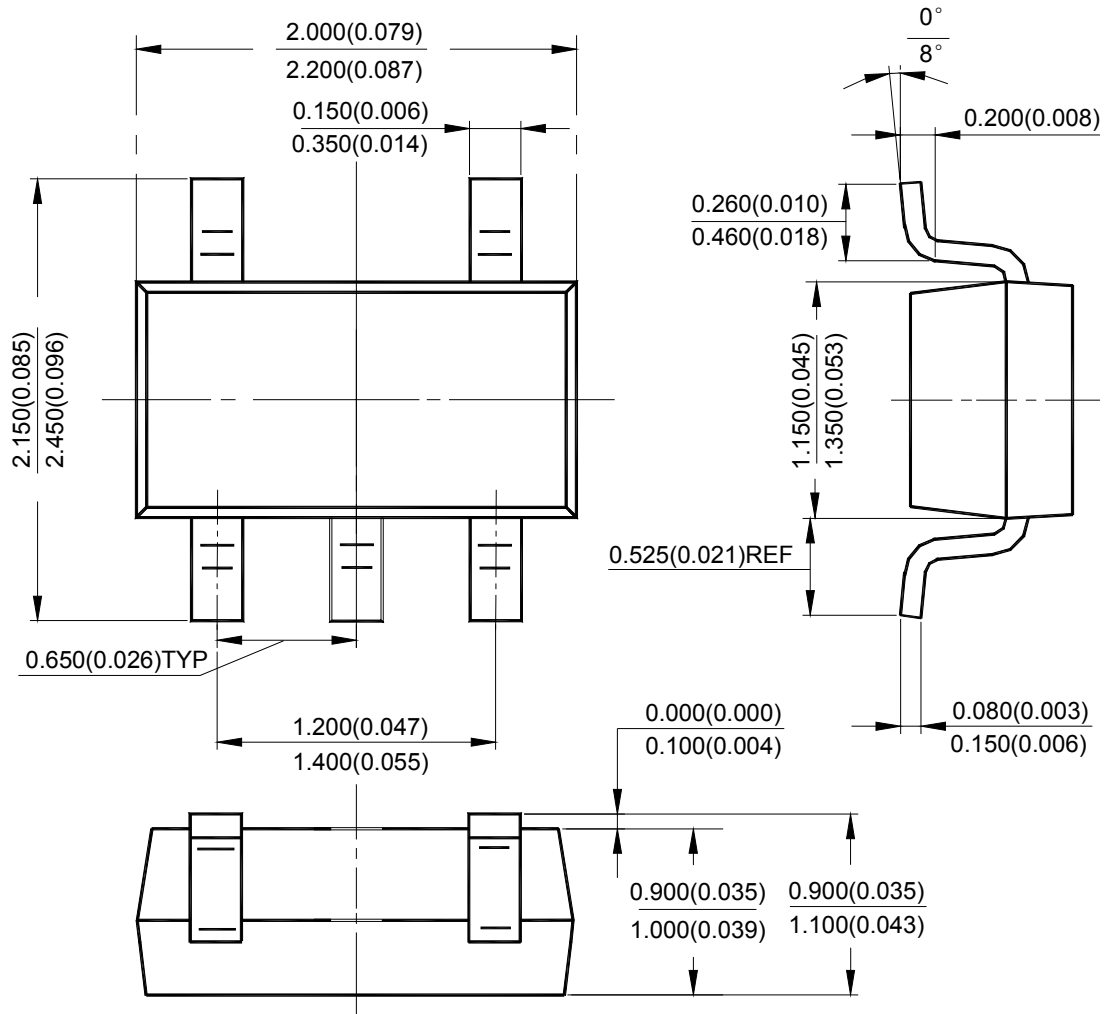
**Single/Dual Low Bias Current, Low Voltage, Rail-to-Rail
Input/Output CMOS Operational Amplifiers**

AZV831/2

Mechanical Dimensions

SC-70-5

Unit: mm(inch)






**Single/Dual Low Bias Current, Low Voltage, Rail-to-Rail
Input/Output CMOS Operational Amplifiers**


AZV831/2

Mechanical Dimensions (Continued)

SOT-23-5

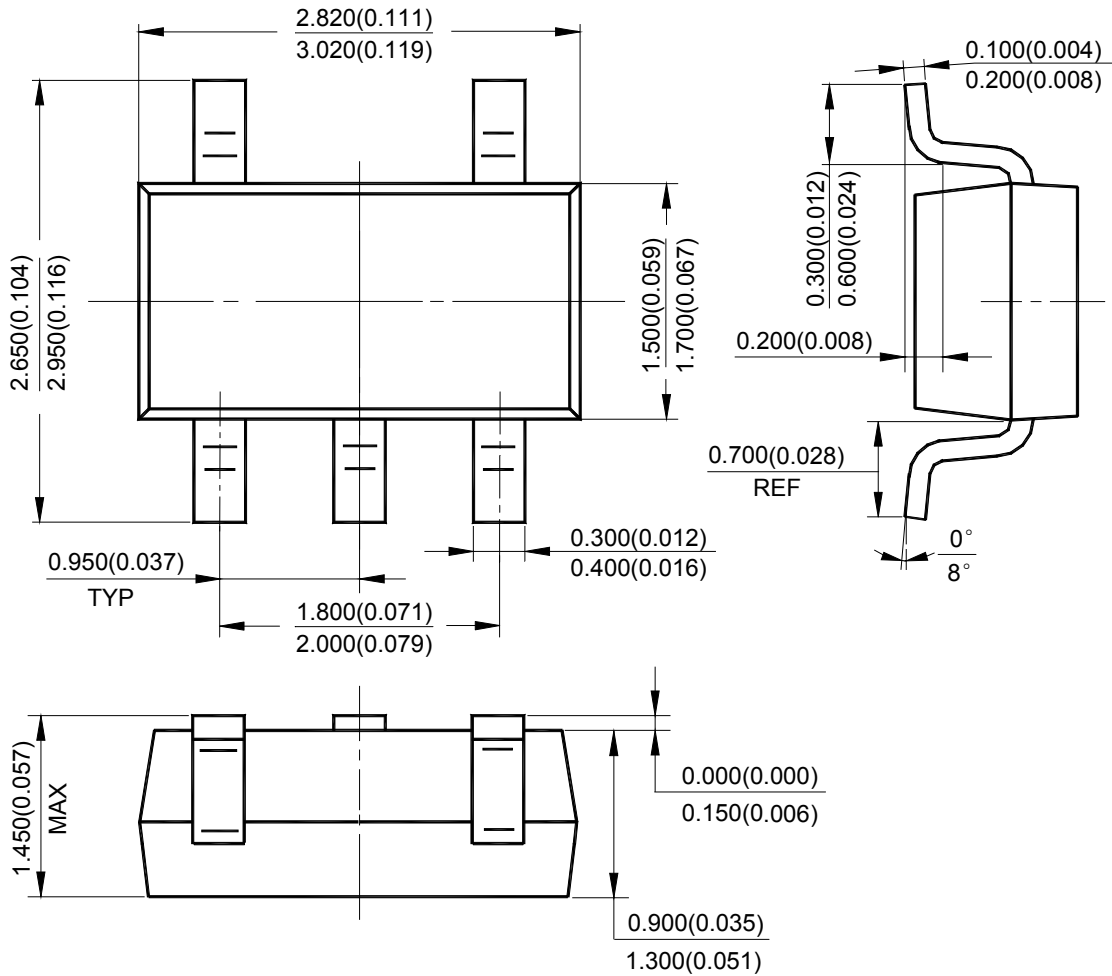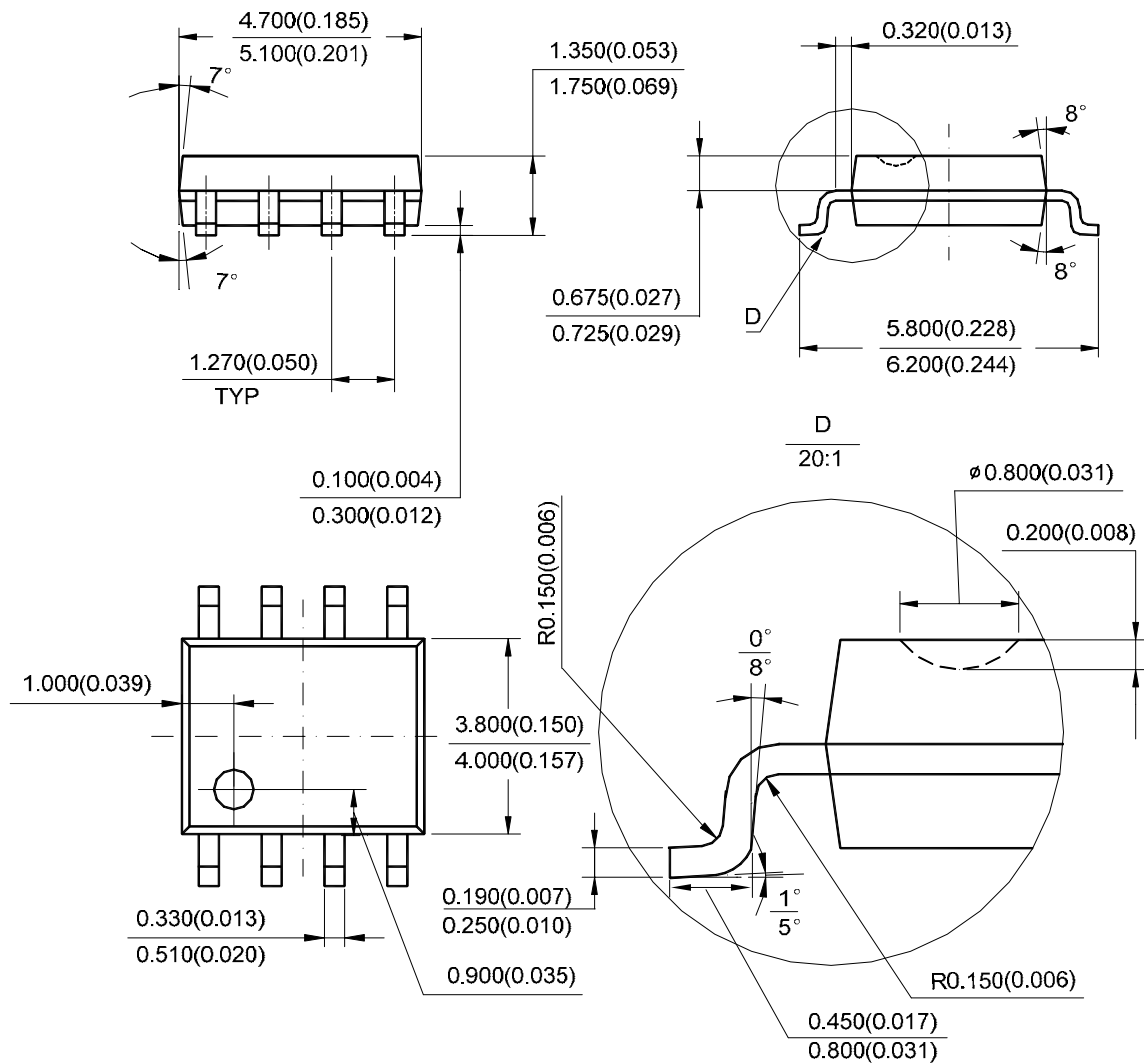Unit: mm(inch)



**Single/Dual Low Bias Current, Low Voltage, Rail-to-Rail
Input/Output CMOS Operational Amplifiers****AZV831/2****Mechanical Dimensions (Continued)****SOIC-8****Unit: mm(inch)**

Note: Eject hole, oriented hole and mold mark is optional.

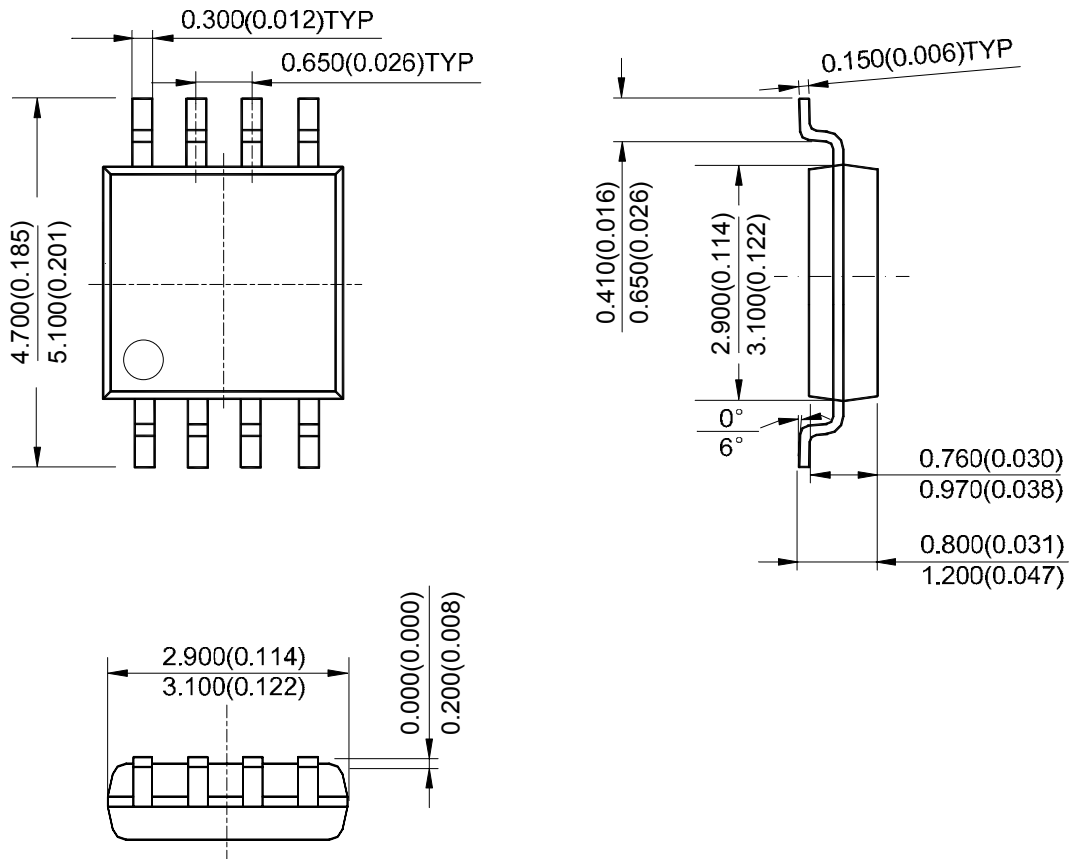
**Single/Dual Low Bias Current, Low Voltage, Rail-to-Rail
Input/Output CMOS Operational Amplifiers**

AZV831/2

Mechanical Dimensions (Continued)

MSOP-8

Unit: mm(inch)



Note: Eject hole, oriented hole and mold mark is optional.



BCD Semiconductor Manufacturing Limited

<http://www.bcdsemi.com>

IMPORTANT NOTICE

BCD Semiconductor Manufacturing Limited reserves the right to make changes without further notice to any products or specifications herein. BCD Semiconductor Manufacturing Limited does not assume any responsibility for use of any its products for any particular purpose, nor does BCD Semiconductor Manufacturing Limited assume any liability arising out of the application or use of any its products or circuits. BCD Semiconductor Manufacturing Limited does not convey any license under its patent rights or other rights nor the rights of others.

MAIN SITE

- Headquarters

BCD Semiconductor Manufacturing Limited

No. 1600, Zi Xing Road, Shanghai Zizhu Science-based Industrial Park, 200241, China
Tel: +86-21-24162266, Fax: +86-21-24162277

- Wafer Fab

Shanghai SIM-BCD Semiconductor Manufacturing Co., Ltd.

800 Yi Shan Road, Shanghai 200233, China
Tel: +86-21-6485 1491, Fax: +86-21-5450 0008

REGIONAL SALES OFFICE

Shenzhen Office

Shanghai SIM-BCD Semiconductor Manufacturing Co., Ltd., Shenzhen Office

Unit A Room 1203, Skyworth Bldg., Gaoxin Ave. 1.S., Nanshan District, Shenzhen, China
Tel: +86-755-8826 7951
Fax: +86-755-8826 7865

Taiwan Office

BCD Semiconductor (Taiwan) Company Limited

4F, 298-1, Rui Guang Road, Nei-Hu District, Taipei, Taiwan
Tel: +886-2-2656 2808
Fax: +886-2-2656 2806

USA Office

BCD Semiconductor Corp.

30920 Huntwood Ave. Hayward, CA 94544, USA
Tel : +1-510-324-2988
Fax: +1-510-324-2788

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9