

## ISL29029

Low Power Ambient Light and Proximity Sensor with Intelligent Interrupt and Sleep Modes

FN7682  
Rev 0.00  
November 23, 2010

The ISL29029 is an integrated ambient and infrared light-to-digital converter with a built-in IR LED driver and I<sup>2</sup>C Interface (SMBus Compatible). This device uses two independent ADCs for concurrently measuring ambient light and proximity in parallel. The flexible interrupt scheme is designed for minimal microcontroller utilization.

For ambient light sensor (ALS) data conversions, an ADC converts photodiode current (with a light sensitivity range up to 2000 Lux) in 100ms per sample. The ADC rejects 50Hz/60Hz flicker noise caused by artificial light sources.

For proximity sensor (PROX) data conversions, the built-in driver turns on an external infrared LED and the proximity sensor ADC converts the reflected IR intensity to digital. This ADC rejects ambient IR noise (such as sunlight) and has a 540μs conversion time.

The ISL29029 provides low power operation of ALS and PROX sensing with a typical 138μA normal operation current (110μA for sensors and internal circuitry, ~28μA for external LED) with 220mA current pulses for a net 100μs, repeating every 800ms (or under).

The ISL29029 uses both a hardware pin and software bits to indicate an interrupt event has occurred. An ALS or PROX interrupt is defined as a measurement which is outside a set window. The user may also require that both ALS/PROX interrupts occur at once, up to 16 times in a row before activating the interrupt pin.

The ISL29029 is designed to operate from 2.25V to 3.63V over the -40°C to +85°C ambient temperature range. It is packaged in a clear, lead-free 8 lead ODFN package.

## Applications

- Display and Keypad Dimming Adjustment and Proximity Sensing for:
  - Mobile Devices: Smart Phone, PDA, GPS
  - Computing Devices: Laptop PC, Netbook
  - Consumer Devices: LCD-TV, Digital Picture Frame, Digital Camera
- Industrial and Medical Light and Proximity Sensing

## Features

- Works Under All Light Sources Including Sunlight
- Dual ADCs Measure ALS/Prox Concurrently
- Intelligent Interrupt Scheme Simplifies μC Code
- 0.5% Typical Nonlinearity

### Ambient Light Sensing

- Simple Output Code Directly Proportional to lux
- 50Hz/60Hz Flicker Noise and IR Rejection
- Light Sensor Close to Human Eye Response
- Selectable 125/2000 Lux Range

### Proximity Sensing

- Proximity Sensor with Broad IR Spectrum
  - Can Use 850nm and 950nm External IR LEDs
- IR LED Driver with I<sup>2</sup>C Programmable Sink Currents
  - Net 100μs Pulse with 110mA or 220mA Amplitudes
  - Periodic Sleep Time up to 800ms Between Pulses
- Ambient IR Noise Cancellation (Including Sunlight)

### Intelligent and Flexible Interrupts

- Independent ALS/PROX Interrupt Thresholds
- Adjustable Interrupt Persistency
  - 1/4/8/16 Consecutive Triggers Required Before Interrupt

### Ultra Low Power

- 138μA DC Typical Supply Current for ALS/Prox Sensing
  - 110μA for Sensors and Internal Circuitry
  - 28μA Typical Current for External IR LED (Assuming 220mA for 100μs Every 800ms)
- <1.0μA Supply Current When Powered Down


### Easy to Use

- Set Registers; Wait for Interrupt
- I<sup>2</sup>C (SMBus Compatible) Output
- Temperature Compensated
- Tiny ODFN8 2.0x2.1x0.7 (mm) Package

### Additional Features


- 1.7V to 3.63V Supply for I<sup>2</sup>C Interface
- 2.25V to 3.63V Sensor Power Supply
- Pb-Free (RoHS compliant)
- I<sup>2</sup>C Address Selection Pin

## Block Diagram

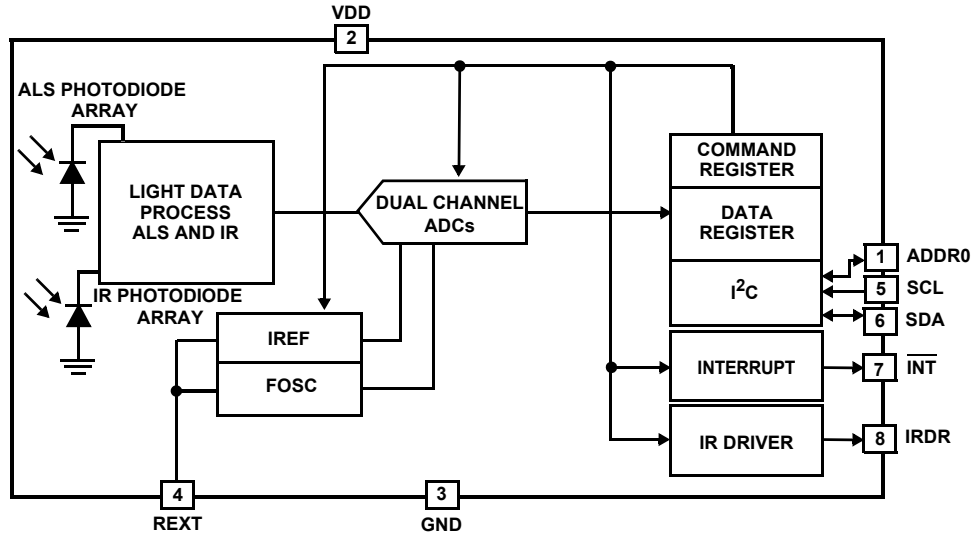

## Pin Configuration

ISL29029  
8 LD ODFN (2.0x2.1x0.7mm)  
TOP VIEW



\*THERMAL PAD CAN BE CONNECTED TO GND OR ELECTRICALLY ISOLATED

## Pin Descriptions

| PIN NUMBER | PIN NAME | DESCRIPTION  |   |
|------------|----------|--|---|
| 0          | T.PAD    | Thermal Pad (connect to GND or float)                            |   |
| 1          | ADDR0    | I <sup>2</sup> C address pin - pull high or low (do not float)   |   |
| 2          | VDD      | Positive supply: 2.25V to 3.63V                                  |   |
| 3          | GND      | Ground   |   |
| 4          | REXT     | External resistor (499kΩ; 1%) connects this pin to ground        |   |
| 5          | SCL      | I <sup>2</sup> C clock line                                      | The I <sup>2</sup> C bus lines can be pulled from 1.7V to above V <sub>DD</sub> , 3.63V max |
| 6          | SDA      | I <sup>2</sup> C data line                                       |   |
| 7          | INT      | Interrupt pin; Logic output (open-drain) for interrupt           |   |
| 8          | IRDR     | IR LED driver pin - current flows into ISL29029 from LED cathode |   |

## Ordering Information

| PART NUMBER<br>(Notes 1, 2, 3) | TEMP. RANGE<br>(°C) | PACKAGE<br>Tape & Reel<br>(Pb-free) | PKG.<br>DWG. # |
|--------------------------------|---------------------|-------------------------------------|----------------|
| ISL29029IROZ-T7                | -40 to +85          | 8 Ld ODFN                           | L8.2.1x2.0     |

NOTES:

1. Please refer to [TB347](#) for details on reel specifications.
2. These Intersil Pb-free plastic packaged products employ special Pb-free material sets; molding compounds/die attach materials and NiPdAu plate - e4 termination finish, which is RoHS compliant and compatible with both SnPb and Pb-free soldering operations. Intersil Pb-free products are MSL classified at Pb-free peak reflow temperatures that meet or exceed the Pb-free requirements of IPC/JEDEC J STD-020.
3. For Moisture Sensitivity Level (MSL), please see device information page for [ISL29029](#). For more information on MSL please see techbrief [TB363](#).

**Absolute Maximum Ratings** ( $T_A = +25^\circ\text{C}$ )

|  |                          |
|--|--------------------------|
| $V_{DD}$ Supply Voltage between $V_{DD}$ and GND | 4.0V                     |
| I <sup>2</sup> C Bus Pin Voltage (SCL, SDA)      | -0.5V to 4.0V            |
| I <sup>2</sup> C Bus Pin Current (SCL, SDA)      | <10mA                    |
| R <sub>EXT</sub> Pin Voltage                     | -0.5V to $V_{DD} + 0.5V$ |
| IRDR Pin Voltage                                 | 5.5V                     |
| ADDR0 Pin Voltage                                | -0.5V to $V_{DD} + 0.5V$ |
| INT Pin Voltage                                  | -0.5V to 4.0V            |
| INT Pin Current                                  | <10mA                    |
| ESD Rating                                       |                          |
| Human Body Model (Note 6)                        | 2kV                      |

**Thermal Information**

|                                |   |   |
|--------------------------------|---|---|
| Thermal Resistance (Typical)   | $\theta_{JA}$ ( $^\circ\text{C}/\text{W}$ )   | $\theta_{JC}$ ( $^\circ\text{C}/\text{W}$ ) |
| 8 Ld ODFN Package (Notes 4, 5) | 88  | 10  |
| Maximum Die Temperature        | +90 $^\circ\text{C}$  |   |
| Storage Temperature            | -40 $^\circ\text{C}$ to +100 $^\circ\text{C}$   |   |
| Operating Temperature          | -40 $^\circ\text{C}$ to +85 $^\circ\text{C}$  |   |
| Pb-Free Reflow Profile         | see link below<br><a href="http://www.intersil.com/pbfree/Pb-FreeReflow.asp">http://www.intersil.com/pbfree/Pb-FreeReflow.asp</a> |   |

**CAUTION:** Do not operate at or near the maximum ratings listed for extended periods of time. Exposure to such conditions may adversely impact product reliability and result in failures not covered by warranty.

**NOTES:**

- $\theta_{JA}$  is measured in free air with the component mounted on a high effective thermal conductivity test board with "direct attach" features. See Tech Brief TB379.
- For  $\theta_{JC}$ , the "case temp" location is the center of the exposed metal pad on the package underside.
- ESD on all pins is 2kV except for IRDR, which is 1.5kV.

**IMPORTANT NOTE:** All parameters having Min/Max specifications are guaranteed. Typical values are for information purposes only. Unless otherwise noted, all tests are at the specified temperature and are pulsed tests, therefore:  $T_J = T_C = T_A$

**Electrical Specifications**  $V_{DD} = 3.0V$ ,  $T_A = +25^\circ\text{C}$ ,  $R_{EXT} = 499k\Omega$  1% tolerance.

| PARAMETER                               | DESCRIPTION   | CONDITION   | MIN  | TYP  | MAX  | UNIT          |
|---|---|---|------|------|------|---------------|
| $V_{DD}$                                | Power Supply Range  |   | 2.25 | 3.0  | 3.63 | V             |
| SR <sub>V<sub>DD</sub></sub>            | Input Power-up Slew Rate  | $V_{DD}$ Rising Edge between 0.4V and 2.25V                       | 0.5  |      |      | V/ms          |
| I <sub>DD_OFF</sub>                     | Supply Current when Powered Down  | ALS_EN = 0; PROX_EN = 0   |      | 0.1  | 0.8  | $\mu\text{A}$ |
| I <sub>DD_NORM</sub>                    | Supply Current for ALS+Prox in Sleep Time   | ALS_EN = 1; PROX_EN = 1   |      | 110  | 125  | $\mu\text{A}$ |
| I <sub>DD_PRX_SLP</sub>                 | Supply Current for Prox in Sleep Time   | ALS_EN = 0; PROX_EN = 1   |      | 80   |      | $\mu\text{A}$ |
| I <sub>DD_ALS</sub>                     | Supply Current for ALS  | ALS_EN = 1; PROX_EN = 0   |      | 96   |      | $\mu\text{A}$ |
| f <sub>OSC</sub>                        | Internal Oscillator Frequency   |   |      | 5.25 |      | MHz           |
| t <sub>INTGR_ALS</sub>                  | 12-bit ALS Integration/Conversion Time  |   | 88   | 100  | 112  | ms            |
| t <sub>INTGR_PROX</sub>                 | 8-bit Prox Integration/Conversion Time  |   |      | 0.54 |      | ms            |
| Linearity ALS_1                         | Nonlinearity  | E <sub>AMBIENT</sub> = 0, 53, 90 Lux; ALS_RANGE = 0 (Notes 7, 11) | -6   | 0.5  | +6   | %             |
| DATA <sub>ALS_0</sub>                   | ALS Result when Dark  | E <sub>AMBIENT</sub> = 0 lux, 2k Range                            |      | 1    | 3    | Counts        |
| DATA <sub>ALS_F</sub>                   | Full Scale ALS ADC Code   | E <sub>AMBIENT</sub> > Selected Range Maximum Lux (Note 11)       |      |      | 4095 | Counts        |
| $\frac{\Delta\text{DATA}}{\text{DATA}}$ | Count Output Variation Over Three Light Sources: Fluorescent, Incandescent and Sunlight | Ambient Light Sensing   |      | ±10  |      | %             |
| DATA <sub>ALS_1</sub>                   | Light Count Output with LSB of 0.0326 Lux/Count   | E = 53 lux, Fluorescent (Note 8), ALS_RANGE = 0                   |      | 1638 |      | Counts        |
| DATA <sub>ALS_2</sub>                   | Light Count Output With LSB of 0.522 Lux/Count  | E = 320 lux, Fluorescent (Notes 8, 11), ALS_RANGE = 1             | 503  | 614  | 725  | Counts        |
| DATA <sub>PROX_0</sub>                  | Prox Measurement w/o Object in Path   |   |      | 1    | 2    | Counts        |
| DATA <sub>PROX_F</sub>                  | Full Scale Prox ADC Code  |   |      |      | 255  | Counts        |
| DATA <sub>PROX_1</sub>                  | Prox Measurement Result   | (Note 9)  | 34   | 46   | 58   | Counts        |
| t <sub>r</sub>                          | Rise Time for IRDR Sink Current   | R <sub>LOAD</sub> = 15 $\Omega$ at IRDR pin, 20% to 80%           |      | 500  |      | ns            |
| t <sub>f</sub>                          | Fall time for IRDR Sink Current   | R <sub>LOAD</sub> = 15 $\Omega$ at IRDR pin, 80% to 20%           |      | 500  |      | ns            |

**Electrical Specifications**  $V_{DD} = 3.0V$ ,  $T_A = +25^\circ C$ ,  $R_{EXT} = 499k\Omega$  1% tolerance. (Continued)

| PARAMETER        | DESCRIPTION   | CONDITION                               | MIN  | TYP   | MAX  | UNIT    |
|------------------|---|---|------|-------|------|---------|
| $I_{IRDR\_0}$    | IRDR Sink Current                                   | PROX_DR = 0; $V_{IRDR} = 0.5V$          | 90   | 110   | 130  | mA      |
| $I_{IRDR\_1}$    | IRDR Sink Current                                   | PROX_DR = 1; $V_{IRDR} = 0.5V$          |      | 220   |      | mA      |
| $I_{IRDR\_LEAK}$ | IRDR Leakage Current                                | PROX_EN = 0; $V_{DD} = 3.63V$ (Note 10) |      | 0.001 | 1    | $\mu A$ |
| $V_{IRDR}$       | Acceptable Voltage Range on IRDR Pin                | Register bit PROX_DR = 0                | 0.5  |       | 4.3  | V       |
| $t_{PULSE}$      | Net $I_{IRDR}$ On Time Per PROX Reading             |   |      | 100   |      | $\mu s$ |
| $V_{REF}$        | Voltage of $R_{EXT}$ Pin                            |   |      | 0.51  |      | V       |
| $F_{I2C}$        | I <sup>2</sup> C Clock Rate Range                   |   |      |       | 400  | kHz     |
| $V_{I2C}$        | Supply Voltage Range for I <sup>2</sup> C Interface |   | 1.7  |       | 3.63 | V       |
| $V_{IL}$         | SCL and SDA Input Low Voltage                       |   |      |       | 0.55 | V       |
| $V_{IH}$         | SCL and SDA Input High Voltage                      |   | 1.25 |       |      | V       |
| $I_{SDA}$        | SDA Current Sinking Capability                      | $V_{OL} = 0.4V$                         | 3    | 5     |      | mA      |
| $I_{INT}$        | $\overline{INT}$ Current Sinking Capability         | $V_{OL} = 0.4V$                         | 3    | 5     |      | mA      |
| $PSRR_{IRDR}$    | $(\Delta I_{IRDR})/(\Delta V_{IRDR})$               | PROX_DR = 0; $V_{IRDR} = 0.5V$ to 4.3V  |      | 4     |      | mA/V    |

## NOTES:

- Nonlinearity is defined as: [(Measured Counts at 53 lux)-(Expected Counts at 53 lux)]/4095. Expected counts are calculated using an endpoint linear-fit trendline from measurements at 0 lux and 90 lux.
- An LED is used in production test. The LED irradiance is calibrated to produce the same DATA count against a fluorescent light source of the same lux level.
- An 850nm infrared LED is used to test PROX/IR sensitivity in an internal test mode.
- Ability to guarantee  $I_{IRDR}$  leakage of  $\sim 1nA$  is limited by test hardware.
- For ALS applications under light-distorting glass, please see the section titled *ALS Range 1 Considerations*.

**I2C Electrical Specifications** For SCL and SDA unless otherwise noted,  $V_{DD} = 3V$ ,  $T_A = +25^\circ C$ ,  $R_{EXT} = 499k\Omega$  1% tolerance (Note 12).

| PARAMETER    | DESCRIPTION   | CONDITION   | MIN           | TYP | MAX  | UNIT    |
|--------------|---|---|---------------|-----|------|---------|
| $V_{I2C}$    | Supply Voltage Range for I <sup>2</sup> C Interface               |   | 1.7           |     | 3.63 | V       |
| $f_{SCL}$    | SCL Clock Frequency   |   |               |     | 400  | kHz     |
| $V_{IL}$     | SCL and SDA Input Low Voltage                                     |   |               |     | 0.55 | V       |
| $V_{IH}$     | SCL and SDA Input High Voltage                                    |   | 1.25          |     |      | V       |
| $V_{hys}$    | Hysteresis of Schmitt Trigger Input                               |   | 0.05 $V_{DD}$ |     |      | V       |
| $V_{OL}$     | Low-level output voltage (open-drain) at 4mA sink current         |   |               |     | 0.4  | V       |
| $I_i$        | Input Leakage for each SDA, SCL pin                               |   | -10           |     | 10   | $\mu A$ |
| $t_{SP}$     | Pulse width of spikes that must be suppressed by the input filter |   |               |     | 50   | ns      |
| $t_{AA}$     | SCL Falling Edge to SDA Output Data Valid                         |   |               |     | 900  | ns      |
| $C_i$        | Capacitance for each SDA and SCL pin                              |   |               |     | 10   | pF      |
| $t_{HD:STA}$ | Hold Time (Repeated) START Condition                              | After this period, the first clock pulse is generated | 600           |     |      | ns      |
| $t_{LOW}$    | LOW Period of the SCL clock                                       | Measured at the 30% of $V_{DD}$ crossing              | 1300          |     |      | ns      |
| $t_{HIGH}$   | HIGH period of the SCL Clock                                      |   | 600           |     |      | ns      |
| $t_{SU:STA}$ | Set-up Time for a Repeated START Condition                        |   | 600           |     |      | ns      |
| $t_{HD:DAT}$ | Data Hold Time  |   | 30            |     |      | ns      |

**I<sup>2</sup>C Electrical Specifications** For SCL and SDA unless otherwise noted, V<sub>DD</sub> = 3V, T<sub>A</sub> = +25°C, R<sub>EXT</sub> = 499kΩ 1% tolerance (Note 12). (Continued)

| PARAMETER            | DESCRIPTION                                      | CONDITION  | MIN                     | TYP | MAX | UNIT |
|----------------------|--|--|-------------------------|-----|-----|------|
| t <sub>SU:DAT</sub>  | Data Set-up Time                                 |  | 100                     |     |     | ns   |
| t <sub>R</sub>       | Rise Time of both SDA and SCL Signals            | (Note 13)  | 20 + 0.1xC <sub>b</sub> |     |     | ns   |
| t <sub>F</sub>       | Fall Time of both SDA and SCL Signals            | (Note 13)  | 20 + 0.1xC <sub>b</sub> |     |     | ns   |
| t <sub>SU:STO</sub>  | Set-up Time for STOP Condition                   |  | 600                     |     |     | ns   |
| t <sub>BUF</sub>     | Bus Free Time Between a STOP and START Condition |  | 1300                    |     |     | ns   |
| C <sub>b</sub>       | Capacitive Load for Each Bus Line                |  |                         |     | 400 | pF   |
| R <sub>PULL-UP</sub> | SDA and SCL system bus pull-up resistor          | Maximum is determined by t <sub>R</sub> and t <sub>F</sub> | 1                       |     |     | kΩ   |
| t <sub>VD:DAT</sub>  | Data Valid Time                                  |  |                         |     | 0.9 | μs   |
| t <sub>VD:ACK</sub>  | Data Valid Acknowledge Time                      |  |                         |     | 0.9 | μs   |
| V <sub>nL</sub>      | Noise Margin at the LOW Level                    |  | 0.1V <sub>DD</sub>      |     |     | V    |
| V <sub>nH</sub>      | Noise Margin at the HIGH Level                   |  | 0.2V <sub>DD</sub>      |     |     | V    |

NOTES:

- 12. All parameters in I<sup>2</sup>C Electrical Specifications table are guaranteed by design and simulation.
- 13. C<sub>b</sub> is the capacitance of the bus in pF.

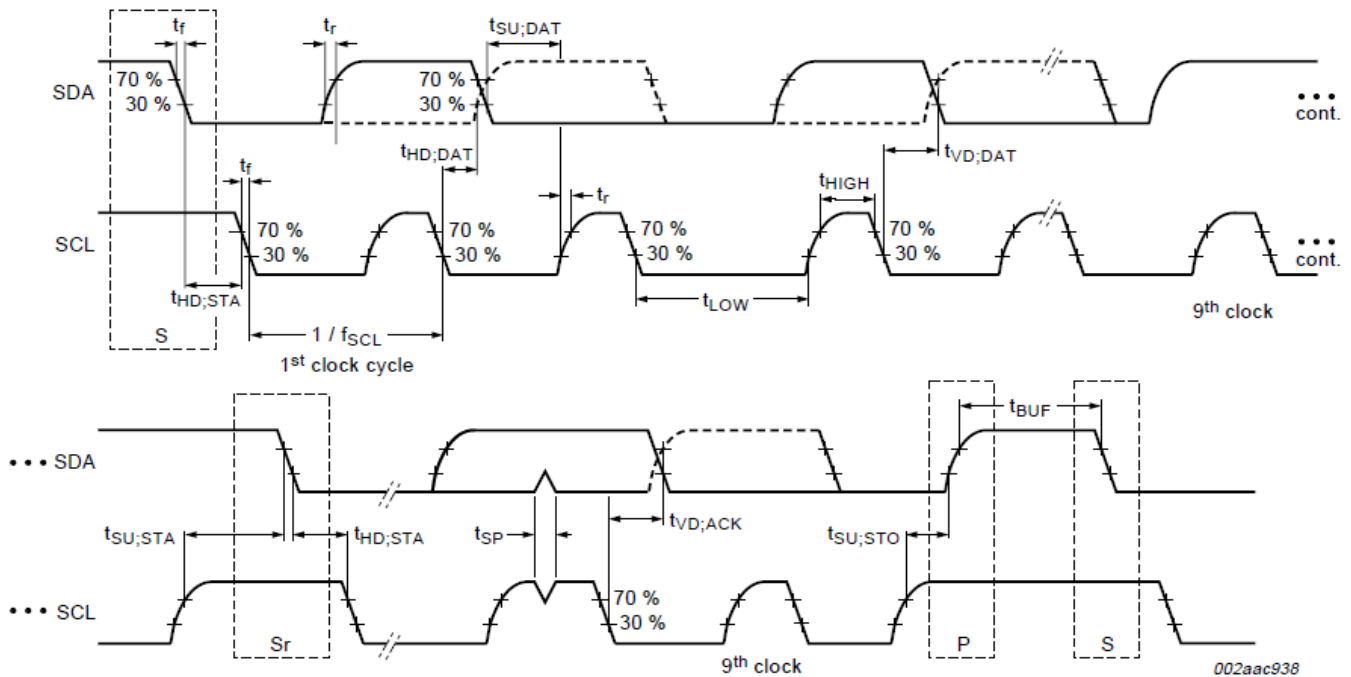


FIGURE 1. I<sup>2</sup>C TIMING DIAGRAM

## Register Map

There are ten 8-bit registers accessible via I<sup>2</sup>C. Registers 0x1 and 0x2 define the operation mode of the device. Registers 0x3 through 0x7 store the various ALS/IR/Prox thresholds which trigger interrupt events. Registers 0x8 through 0xA store the results of ALS/IR/Prox ADC conversions.

**TABLE 1. ISL29029 REGISTERS AND REGISTER BITS**

| ADDR | REG NAME  | BIT                    |                |   |                  |                  |               |           |            | DEFAULT |
|------|-----------|------------------------|----------------|---|------------------|------------------|---------------|-----------|------------|---------|
|      |           | 7                      | 6              | 5 | 4                | 3                | 2             | 1         | 0          |         |
| 0x00 | (n/a)     | <i>(Reserved)</i>      |                |   |                  |                  |               |           |            | (n/a)   |
| 0x01 | CONFIGURE | PROX_EN                | PROX_SLP[2:0]  |   |                  | PROX_DR          | ALS_EN        | ALS_RANGE | ALSIR_MODE | 0x00    |
| 0x02 | INTERRUPT | PROX_FLAG              | PROX_PRST[1:0] |   | <i>(Write 0)</i> | ALS_FLAG         | ALS_PRST[1:0] |           | INT_CTRL   | 0x00    |
| 0x03 | PROX_LT   | PROX_LT[7:0]           |                |   |                  |                  |               |           |            | 0x00    |
| 0x04 | PROX_HT   | PROX_HT[7:0]           |                |   |                  |                  |               |           |            | 0xFF    |
| 0x05 | ALSIR_TH1 | ALSIR_LT[7:0]          |                |   |                  |                  |               |           |            | 0x00    |
| 0x06 | ALSIR_TH2 | ALSIR_HT[3:0]          |                |   |                  | ALSIR_LT[11:8]   |               |           |            | 0xF0    |
| 0x07 | ALSIR_TH3 | ALSIR_HT[11:4]         |                |   |                  |                  |               |           |            | 0xFF    |
| 0x08 | PROX_DATA | PROX_DATA[7:0]         |                |   |                  |                  |               |           |            | 0x00    |
| 0x09 | ALSIR_DT1 | ALSIR_DATA[7:0]        |                |   |                  |                  |               |           |            | 0x00    |
| 0x0A | ALSIR_DT2 | <i>(Unused)</i>        |                |   |                  | ALSIR_DATA[11:8] |               |           |            | 0x00    |
| 0x0E | TEST1     | <i>(Write as 0x00)</i> |                |   |                  |                  |               |           |            | 0x00    |
| 0x0F | TEST2     | <i>(Write as 0x00)</i> |                |   |                  |                  |               |           |            | 0x00    |

## Register Descriptions

**TABLE 2. REGISTER 0x00 (RESERVED)**

| BIT # | ACCESS | DEFAULT | NAME  | FUNCTION/OPERATION                  |
|-------|--------|---------|-------|-------------------------------------|
| 7:0   | RO     | (n/a)   | (n/a) | Reserved - no need to read or write |

**TABLE 3. REGISTER 0x01 (CONFIGURE) - PROX/ALS CONFIGURATION**

| BIT # | ACCESS | DEFAULT | NAME                       | FUNCTION/OPERATION   |
|-------|--------|---------|----------------------------|--|
| 7     | RW     | 0x00    | PROX_EN<br>(Prox Enable)   | When = 0, proximity sensing is disabled<br>When = 1, continuous proximity sensing is enabled. Prox data will be ready 0.54ms after this bit is set high  |
| 6:4   | RW     | 0x00    | PROX_SLP<br>(Prox Sleep)   | For bits 6:4 = (see the following)<br>111; sleep time between prox IR LED pulses is 0.0ms (run continuously)<br>110; sleep time between prox IR LED pulses is 12.5ms<br>101; sleep time between prox IR LED pulses is 50ms<br>100; sleep time between prox IR LED pulses is 75ms<br>011; sleep time between prox IR LED pulses is 100ms<br>010; sleep time between prox IR LED pulses is 200ms<br>001; sleep time between prox IR LED pulses is 400ms<br>000; sleep time between prox IR LED pulses is 800ms |
| 3     | RW     | 0x00    | PROX_DR<br>(Prox Drive)    | When = 0, IRDR behaves as a pulsed 110mA current sink<br>When = 1, IRDR behaves as a pulsed 220mA current sink   |
| 2     | RW     | 0x00    | ALS_EN<br>(ALS Enable)     | When = 0, ALS/IR sensing is disabled<br>When = 1, continuous ALS/IR sensing is enabled with new data ready every 100ms   |
| 1     | RW     | 0x00    | ALS_RANGE<br>(ALS Range)   | When = 0, ALS is in low-lux range<br>When = 1, ALS is in high-lux range  |
| 0     | RW     | 0x00    | ALSIR_MODE<br>(ALSIR Mode) | When = 0, ALS/IR data register contains visible ALS sensing data<br>When = 1, ALS/IR data register contains IR spectrum sensing data   |

**TABLE 4. REGISTER 0x02 (INTERRUPT) - PROX/ALS INTERRUPT CONTROL**

| BIT # | ACCESS | DEFAULT | BIT NAME                        | FUNCTION/OPERATION  |
|-------|--------|---------|---------------------------------|---|
| 7     | FLAG   | 0x00    | PROX_FLAG<br>(Prox Flag)        | When = 0, no Prox interrupt event has occurred since power-on or last "clear"<br>When = 1, a Prox interrupt event occurred. Clearable by writing "0"<br>Writing "1" leaves previous state unchanged   |
| 6:5   | RW     | 0x00    | PROX_PRST<br>(Prox Persist)     | For bits 6:5 = (see the following)<br>00; set PROX_FLAG if 1 conversion result trips the threshold value<br>01; set PROX_FLAG if 4 conversion results trip the threshold value<br>10; set PROX_FLAG if 8 conversion results trip the threshold value<br>11; set PROX_FLAG if 16 conversion results trip the threshold value |
| 4     | RW     | 0x00    | Unused<br>(Write 0)             | Unused register bit - write 0   |
| 3     | FLAG   | 0x00    | ALS_FLAG<br>(ALS FLAG)          | When = 0, no ALS interrupt event has occurred since power-on or last "clear"<br>When = 1, an ALS interrupt event occurred. Clearable by writing "0"<br>Writing "1" leaves previous state unchanged  |
| 2:1   | RW     | 0x00    | ALS_PRST<br>(ALS Persist)       | For bits 2:1 = (see the following)<br>00; set ALS_FLAG if 1 conversion is outside the set window<br>01; set ALS_FLAG if 4 conversions are outside the set window<br>10; set ALS_FLAG if 8 conversions are outside the set window<br>11; set ALS_FLAG if 16 conversions are outside the set window                           |
| 0     | RW     | 0x00    | INT_CTRL<br>(Interrupt Control) | When = 0, set $\overline{\text{INT}}$ pin low if PROX_FLAG or ALS_FLAG high (logical OR)<br>When = 1, set $\overline{\text{INT}}$ pin low if PROX_FLAG and ALS_FLAG high (logical AND)  |

**TABLE 5. REGISTER 0x03 (PROX\_LT) - INTERRUPT LOW THRESHOLD FOR PROXIMITY SENSOR**

| BIT # | ACCESS | DEFAULT | BIT NAME                    | FUNCTION/OPERATION                                  |
|-------|--------|---------|-----------------------------|---|
| 7:0   | RW     | 0x00    | PROX_LT<br>(Prox Threshold) | 8-bit interrupt low threshold for proximity sensing |

**TABLE 6. REGISTER 0x04 (PROX\_HT) - INTERRUPT HIGH THRESHOLD FOR PROXIMITY SENSOR**

| BIT # | ACCESS | DEFAULT | BIT NAME                    | FUNCTION/OPERATION                                   |
|-------|--------|---------|-----------------------------|--|
| 7:0   | RW     | 0xFF    | PROX_HT<br>(Prox Threshold) | 8-bit interrupt high threshold for proximity sensing |

**TABLE 7. REGISTER 0x05 (ALSIR\_TH1) - INTERRUPT LOW THRESHOLD FOR ALS/IR**

| BIT # | ACCESS | DEFAULT | BIT NAME                           | FUNCTION/OPERATION   |
|-------|--------|---------|------------------------------------|--|
| 7:0   | RW     | 0x00    | ALSIR_LT[7:0]<br>(ALS/IR Low Thr.) | Lower 8 bits (of 12 bits) for ALS/IR low interrupt threshold |

**TABLE 8. REGISTER 0x06 (ALSIR\_TH2) - INTERRUPT LOW/HIGH THRESHOLDS FOR ALS/IR**

| BIT # | ACCESS | DEFAULT | BIT NAME                            | FUNCTION/OPERATION  |
|-------|--------|---------|-------------------------------------|---|
| 7:4   | RW     | 0x0F    | ALSIR_HT[3:0]<br>(ALS/IR High Thr.) | Lower 4 bits (of 12 bits) for ALS/IR high interrupt threshold |
| 3:0   | RW     | 0x00    | ALSIR_LT[11:8]<br>(ALS/IR Low Thr.) | Upper 4 bits (of 12 bits) for ALS/IR low interrupt threshold  |

**TABLE 9. REGISTER 0x07 (ALSIR\_TH3) - INTERRUPT HIGH THRESHOLD FOR ALS/IR**

| BIT # | ACCESS | DEFAULT | BIT NAME                             | FUNCTION/OPERATION  |
|-------|--------|---------|--------------------------------------|---|
| 7:0   | RW     | 0xFF    | ALSIR_HT[11:4]<br>(ALS/IR High Thr.) | Upper 8 bits (of 12 bits) for ALS/IR high interrupt threshold |

**TABLE 10. REGISTER 0x08 (PROX\_DATA) - PROXIMITY SENSOR DATA**

| BIT # | ACCESS | DEFAULT | BIT NAME                      | FUNCTION/OPERATION                               |
|-------|--------|---------|-------------------------------|--|
| 7:0   | RO     | 0x00    | PROX_DATA<br>(Proximity Data) | Results of 8-bit proximity sensor ADC conversion |

**TABLE 11. REGISTER 0x09 (ALSIR\_DT1) - ALS/IR SENSOR DATA (LOWER 8 BITS)**

| BIT # | ACCESS | DEFAULT | BIT NAME                    | FUNCTION/OPERATION  |
|-------|--------|---------|-----------------------------|---|
| 7:0   | RO     | 0x00    | ALSIR_DATA<br>(ALS/IR Data) | Lower 8 bits (of 12 bits) from result of ALS/IR sensor conversion |

**TABLE 12. REGISTER 0x0A (ALSIR\_DT2) - ALS/IR SENSOR DATA (UPPER 4 BITS)**


| BIT # | ACCESS | DEFAULT | BIT NAME                    | FUNCTION/OPERATION  |
|-------|--------|---------|-----------------------------|---|
| 7:4   | RO     | 0x00    | (Unused)                    | Unused bits   |
| 3:0   | RO     | 0x00    | ALSIR_DATA<br>(ALS/IR Data) | Upper 4 bits (of 12 bits) from result of ALS/IR sensor conversion |

**TABLE 13. REGISTER 0x0E (TEST1) - TEST MODE**

| BIT # | ACCESS | DEFAULT | BIT NAME        | FUNCTION/OPERATION                                 |
|-------|--------|---------|-----------------|--|
| 7:0   | RW     | 0x00    | (Write as 0x00) | Test mode register. When 0x00, in normal operation |

**TABLE 14. REGISTER 0x0F (TEST2) - TEST MODE 2**

| BIT # | ACCESS | DEFAULT | BIT NAME        | FUNCTION/OPERATION                                 |
|-------|--------|---------|-----------------|--|
| 7:0   | RW     | 0x00    | (Write as 0x00) | Test mode register. When 0x00, in normal operation |

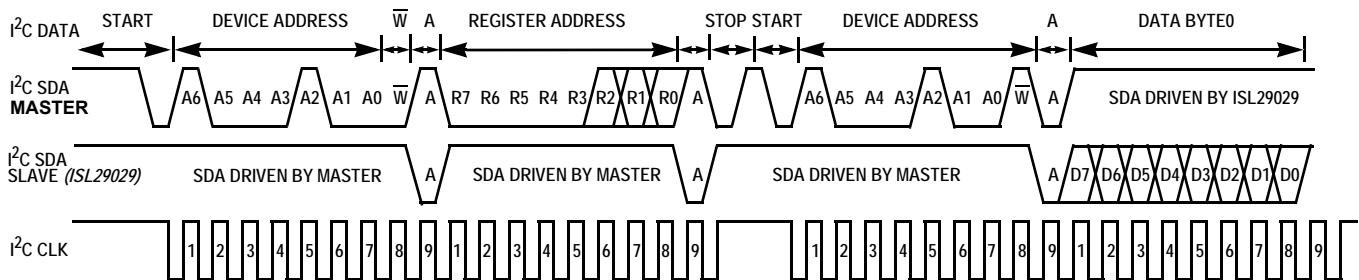

**FIGURE 2. I<sup>2</sup>C DRIVER TIMING DIAGRAM FOR MASTER AND SLAVE CONNECTED TO COMMON BUS**

## Principles of Operation

### I<sup>2</sup>C Interface

The ISL29029's I<sup>2</sup>C interface slave address is internally hardwired as 0b100010<x>, where "0b" signifies binary notation and x represents the logic level on pin ADDR0.

Figure 2 shows a sample one-byte read. The I<sup>2</sup>C bus master always drives the SCL (clock) line, while either the master or the slave can drive the SDA (data) line. Every I<sup>2</sup>C transaction begins with the master asserting a start condition (SDA falling while SCL remains high). The first transmitted byte is initiated by the master and includes 7 address bits and a R/ $\bar{W}$  bit. The slave is responsible for pulling SDA low during the ACK bit after every transmitted byte.

Each I<sup>2</sup>C transaction ends with the master asserting a stop condition (SDA rising while SCL remains high).

For more information about the I<sup>2</sup>C standard, please consult the Philips™ I<sup>2</sup>C specification documents.

### Photodiodes and ADCs

The ISL29029 contains two photodiode arrays which convert photons (light) into current. The ALS photodiodes are constructed to mimic the human eye's wavelength response curve to visible light (see Figure 6). The ALS photodiodes' current output is digitized by a 12-bit ADC in 100ms. These 12 bits can be accessed by reading from I<sup>2</sup>C registers 0x9 and 0xA when the ADC conversion is completed.

The ALS converter is a charge-balancing integrating 12-bit ADC. Charge-balancing is best for converting small current signals in the presence of periodic AC noise. Integrating over 100ms highly rejects both 50Hz and 60Hz light flicker by picking the lowest integer number of cycles for both 50Hz/60Hz frequencies.



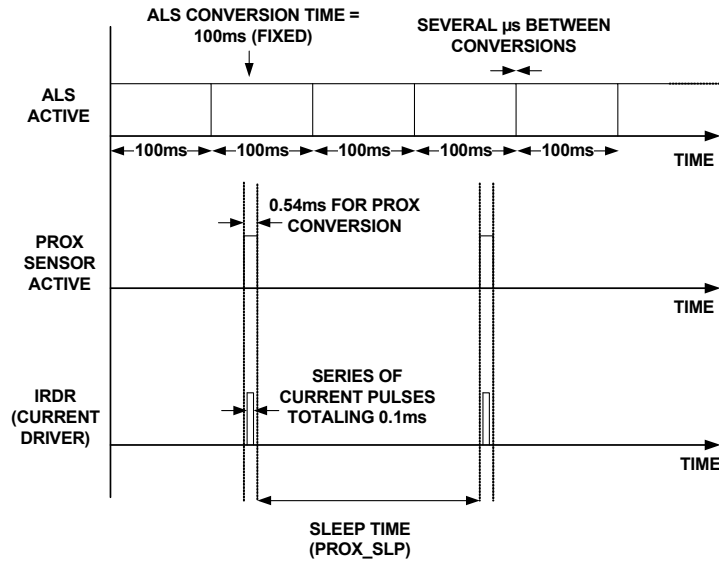


FIGURE 3. TIMING DIAGRAM FOR PROX/ALS EVENTS - NOT TO SCALE

The proximity sensor is an 8-bit ADC which operates in a similar fashion. When proximity sensing is enabled, the IRDR pin will drive a user-supplied infrared LED, the emitted IR reflects off an object (i.e., a human head) back into the ISL29029, and a sensor converts the reflected IR wave to a current signal in 0.54ms. The ADC subtracts the IR reading before and after the LED is driven (to remove ambient IR such as sunlight), and converts this value to a digital count stored in Register 0x8.

The ISL29029 is designed to run two conversions concurrently: a proximity conversion and an ALS (or IR) conversion. Please note that because of the conversion times, the user must let the ADCs perform one full conversion first before reading from I<sup>2</sup>C Registers PROX\_DATA (wait 0.54ms) or ALSIR\_DT1/2 (wait 100ms). The timing between ALS and Prox conversions is arbitrary (as shown in Figure 3). The ALS runs continuously with new data available every 100ms. The proximity sensor runs continuously with a time between conversions decided by PROX\_SLP (Register 1 Bits [6:4]).

### Changes from ISL29028

The ISL29029 is identical to the ISL29028 with a few small changes: the x29 photodiode structure has been improved for better ALS linearity in high-IR conditions, and the x29's PROX interrupt scheme behaves as an out-of-window comparator (compared to the x28's PROX level-comparator with hysteresis). If the internal registers are of concern to the customer, please contact Intersil for a list of changes (internal register changes are independent of part performance).

### Ambient Light and IR Sensing

The ISL29029 is set for ambient light sensing when Register bit ALSIR\_MODE = 0 and ALR\_EN = 1. The light-wavelength response of the ALS appears as shown in Figure 6. ALS measuring mode (as opposed to IR measuring mode) is set by default.

When the part is programmed for infrared (IR) sensing (ALSIR\_MODE = 1; ALS\_EN = 1), infrared light is converted into a current and digitized by the same ALS ADC. The result of an IR conversion is *strongly related* to the amount of IR energy incident on our sensor, but is unitless and is referred to in digital counts.

### Proximity Sensing

When proximity sensing is enabled (PROX\_EN = 1), the external IR LED is driven for 0.1ms by the built-in IR LED driver through the IRDR pin. The amplitude of the IR LED current depends on Register 1 bit 3: PROX\_DR. If this bit is low, the load will see a fixed 110mA current pulse. If this bit is high, the load on IRDR will see a fixed 220mA current pulse as seen in Figure 4.

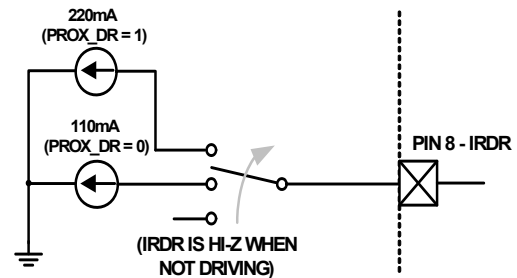


FIGURE 4. CURRENT DRIVE MODE OPTIONS

When the IR from the LED reaches an object and gets reflected back into the ISL29029, the reflected IR light is converted into current as per the IR spectral response shown in Figure 7. One entire proximity measurement takes 0.54ms for one conversion (which includes 0.1ms spent driving the LED), and the period *between* proximity measurements is decided by PROX\_SLP (sleep time) in Register 1 Bits 6:4.

Average LED driving current consumption is given by Equation 1.

$$I_{\text{IRDR,AVE}} = \frac{I_{\text{IRDR,PEAK}} \times 100\mu\text{s}}{T_{\text{SLEEP}}} \quad (\text{EQ. 1})$$

A typical IRDR scheme is 220mA amplitude pulses every 800ms, which yields 28μA DC.

### Total Current Consumption

Total current consumption is the sum of I<sub>DD</sub> and I<sub>IRDR</sub>. The IRDR pin sinks current (as shown in Figure 4) and the average IRDR

current can be calculated using Equation 1.  $I_{DD}$  depends on voltage and the mode-of-operation as seen in Figure 11.

## Interrupt Function

The ISL29029 has an intelligent interrupt scheme designed to shift some logic processing away from intensive microcontroller I<sup>2</sup>C polling routines (which consume power) and towards a more independent light sensor which can instruct a system to “wake up” or “go to sleep”.

An ALS interrupt event (ALS\_FLAG) is governed by Registers 5 through 7 (ALSTH1, ALSTH2, ALSTH3). The user writes high and low threshold values to these registers and the ISL29029 will issue an ALS interrupt flag if the measured ALS data from registers 0x9 and 0xA are *outside* the user’s programmed threshold window X-times-in-a-row (X is set by user; see “persistence” option below). The user must write 0 to clear the ALS\_FLAG.

A PROX interrupt event (PROX\_FLAG) is governed by the high and low thresholds in registers 3 and 4 (PROX\_LT and PROX\_HT). The user writes high and low threshold values to these registers and the ISL29029 will issue a PROX interrupt flag if the measured PROX data from register 0x8 is *outside* the user’s programmed threshold window X-times-in-a-row (X is set by user; see “persistence” option below). The user must write 0 to clear the PROX\_FLAG.

Writing “1” to either ALS\_FLAG or PROX\_FLAG bits does not change the previous logic state of the bit.

Interrupt persistency is another useful option available for both ALS and proximity measurements. Persistency requires X-in-a-row interrupt flags before the INT pin is driven low. Both ALS and Prox have their own independent interrupt persistency options. See ALS\_PRST and PROX\_PRST bits in Register 2.

The final interrupt option is the ability to AND or OR the two interrupt flags using Register 2 Bit 0 (INT\_CTRL). If the user wants both ALS/Prox interrupts to happen at the same time before changing the state of the interrupt pin, set this bit high. If the user wants the interrupt pin to change state when *either* the ALS or the Proximity interrupt flag goes high, leave this bit to its default of 0.

## ALS Range 1 Considerations

When measuring ALS counts higher than 1800 on range 1 (ALSIR\_MODE=0, ALS\_RANGE=0, ALS\_DATA > 1800), switch to range 2 (change the ALS\_RANGE bit from “0” to “1”) and remeasure ALS counts. This recommendation pertains only to applications where the light incident upon the sensor is IR-heavy and is distorted by tinted glass that *increases* the ratio of infrared to visible light. For more information, see the separate *ALS Range 1 Considerations* document.

## V<sub>DD</sub> Power-up and Power Supply Considerations

Upon power-up, please ensure a V<sub>DD</sub> slew rate of 0.5V/ms or greater. After power-up, or if the user’s power supply temporarily deviates from our specification (2.25V to 3.63V), Intersil recommends the user write the following: write 0x00 to register 0x01, write 0x29 to register 0x0F, write 0x00 to register 0x0E, and write 0x00 to register 0x0F. The user should then wait ~1ms or more and then rewrite all registers to the desired values. If the user prefers a hardware reset

method instead of writing to test registers: set V<sub>DD</sub> = 0V for 1 second or more, power back up at the required slew rate, and write registers to the desired values.

## Power-Down

To put the ISL29029 into a power-down state, the user can set both PROX\_EN and ALS\_EN bits to 0 in Register 1. Or more simply, set all of Register 1 to 0x00.

## Calculating Lux

The ISL29029’s ADC output codes are directly proportional to lux when in ALS mode (see ALSIR\_MODE bit).

$$E_{\text{calc}} = \alpha_{\text{RANGE}} \times \text{OUT}_{\text{ADC}} \quad (\text{EQ. 2})$$

In Equation 2,  $E_{\text{calc}}$  is the calculated lux reading and OUT represents the ADC code. The constant  $\alpha$  to plug in is determined by the range bit ALS\_RANGE (register 0x1 bit 1) and is independent of the light source type.

TABLE 15. ALS SENSITIVITY AT DIFFERENT RANGES

| ALS_RANGE | $\alpha_{\text{RANGE}}$<br>(Lux/Count) |
|-----------|--|
| 0         | 0.0326                                 |
| 1         | 0.522                                  |

Table 15 shows two different scale factors: one for the low range (ALS\_RANGE = 0) and the other for the high range (ALS\_RANGE = 1).

## Noise Rejection

Charge balancing ADC’s have excellent noise-rejection characteristics for periodic noise sources whose frequency is an integer multiple of the conversion rate. For instance, a 60Hz AC unwanted signal’s sum from 0ms to  $k \cdot 16.66\text{ms}$  ( $k = 1, 2, \dots, k_i$ ) is zero. Similarly, setting the device’s integration time to be an integer multiple of the periodic noise signal greatly improves the light sensor output signal in the presence of noise. Since wall sockets may output at 60Hz or 50Hz, our integration time is 100ms: the lowest common integer number of cycles for both frequencies.

## Proximity Detection of Various Objects

Proximity sensing relies on the amount of IR reflected back from objects. A perfectly black object would absorb all light and reflect no photons. The ISL29029 is sensitive enough to detect black ESD foam which reflects only 1% of IR. For biological objects, blonde hair reflects more than brown hair and customers may notice that skin tissue is much more reflective than hair. IR penetrates into the skin and is reflected or scattered back from within. As a result, the proximity count peaks at contact and monotonically decreases as skin moves away. The reflective characteristics of skin are very different from that of paper.

## Typical Circuit

A typical application for the ISL29029 is shown in Figure 5. The ISL29029’s I<sup>2</sup>C address is internally hardwired as 0b100010<x>, with x representing the logic state of input I<sup>2</sup>C address pin ADDR0. The device can be tied onto a system’s I<sup>2</sup>C bus together with other I<sup>2</sup>C compliant devices.

### Soldering Considerations

Convection heating is recommended for reflow soldering; direct-infrared heating is not recommended. The plastic ODFN package does not require a custom reflow soldering profile, and is qualified to +260 °C. A standard reflow soldering profile with a +260 °C maximum is recommended.

### Suggested PCB Footprint

It is important that users check the “Surface Mount Assembly Guidelines for Optical Dual FlatPack No Lead (ODFN) Package” before starting ODFN product board mounting.

<http://www.intersil.com/data/tb/TB477.pdf>

### Layout Considerations

The ISL29029 is relatively insensitive to layout. Like other I<sup>2</sup>C devices, it is intended to provide excellent performance even in significantly noisy environments. There are only a few considerations that will ensure best performance.

Route the supply and I<sup>2</sup>C traces as far as possible from all sources of noise. A 0.1µF and 1µF power supply decoupling capacitors need to be placed close to the device.

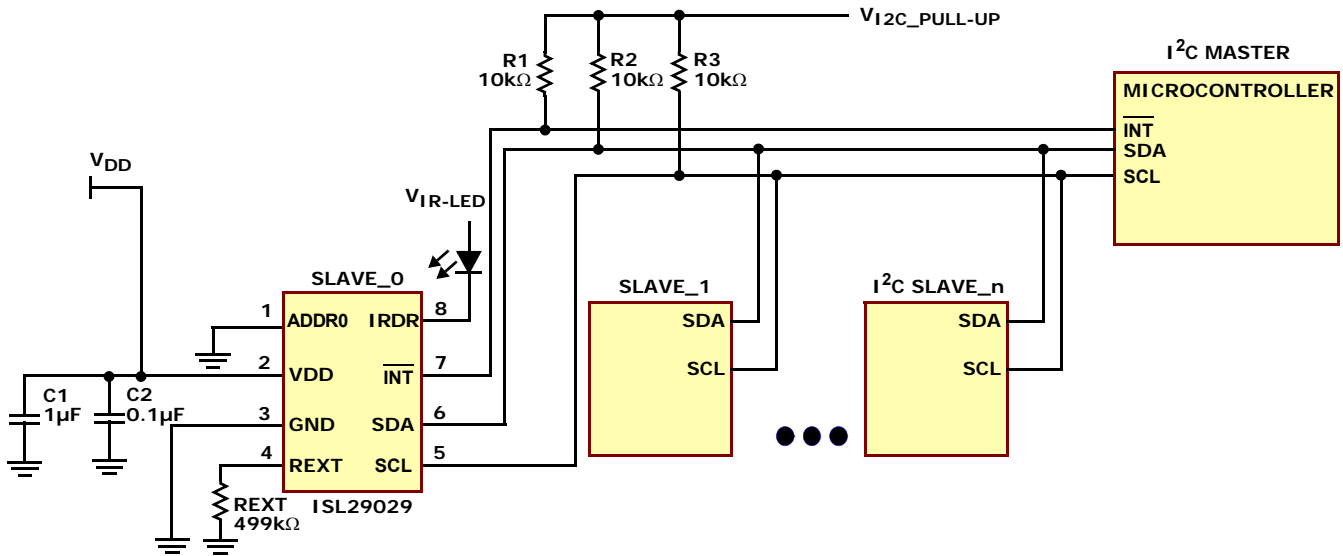


FIGURE 5. ISL29029 TYPICAL CIRCUIT

**Typical Performance Curves**  $V_{DD} = 3.0V$ ,  $R_{EXT} = 499k\Omega$

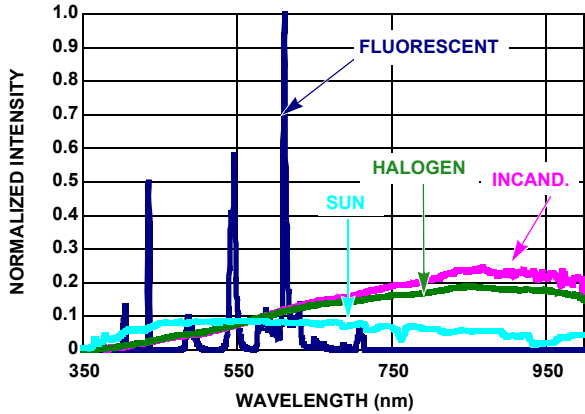


FIGURE 6. SPECTRUM OF FOUR LIGHT SOURCES NORMALIZED BY LUMINOUS INTENSITY (LUX)

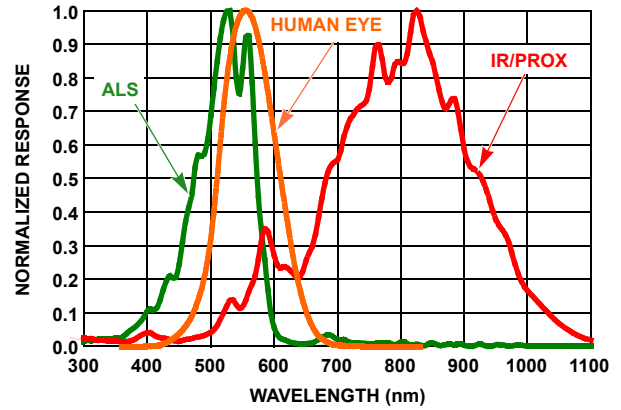


FIGURE 7. ISL29029 SENSITIVITY TO DIFFERENT WAVELENGTHS

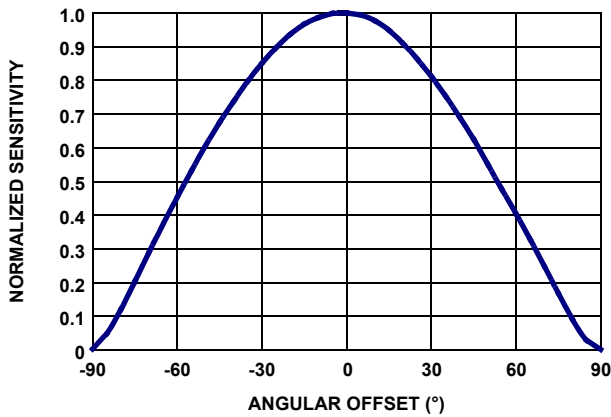


FIGURE 8. ANGULAR SENSITIVITY

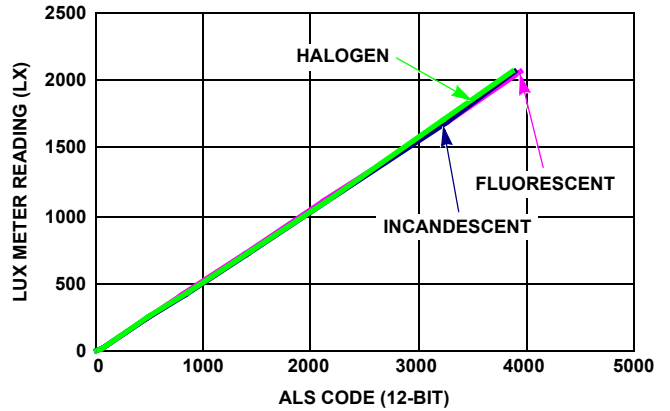


FIGURE 9. ALS LINEARITY OVER 3 LIGHT SOURCES (2000 LUX RANGE)

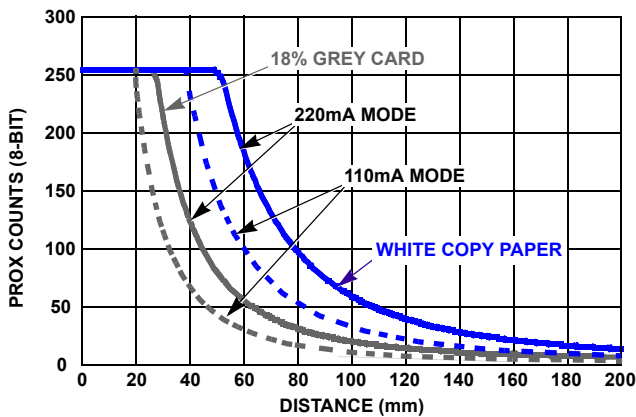


FIGURE 10. PROX COUNTS vs DISTANCE WITH 10CM x 10CM REFLECTOR (USING ISL29028 EVALUATION BOARD)

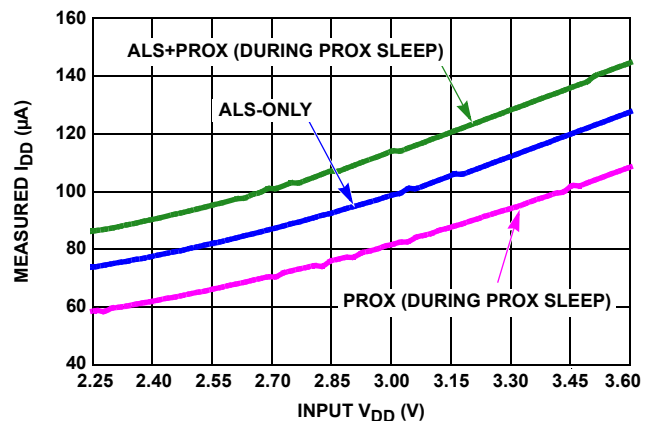


FIGURE 11.  $V_{DD}$  vs  $I_{DD}$  FOR VARIOUS MODES OF OPERATION

**Typical Performance Curves**  $V_{DD} = 3.0V$ ,  $R_{EXT} = 499k\Omega$  (Continued)

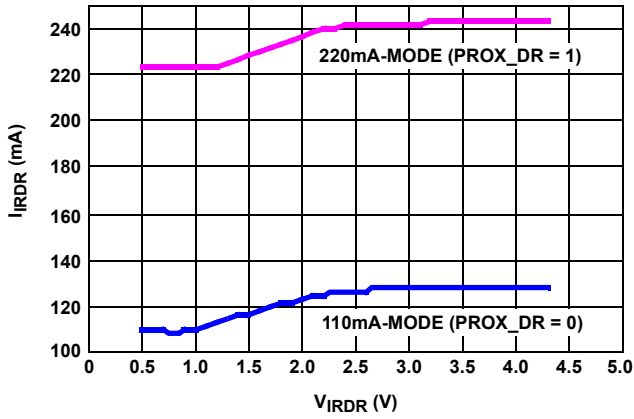


FIGURE 12. IRDR PULSE AMPLITUDE vs V\_IRDR

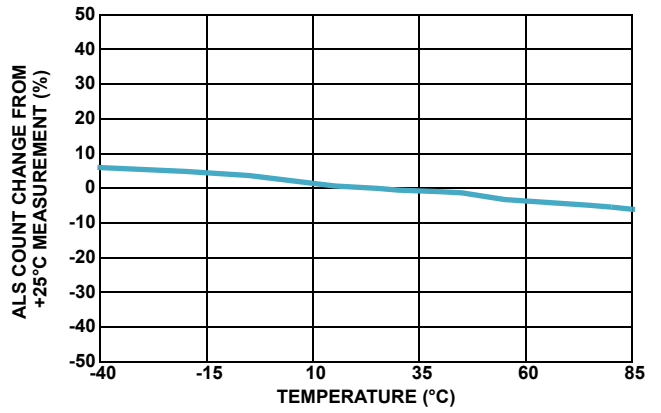


FIGURE 13. STABILITY OF ALS COUNT OVER TEMP (AT 300 LUX)

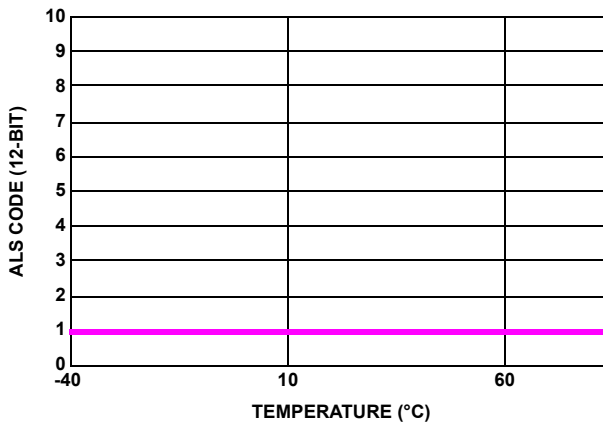


FIGURE 14. STABILITY OF ALS COUNT OVER-TEMPERATURE (AT 0.00 LUX)

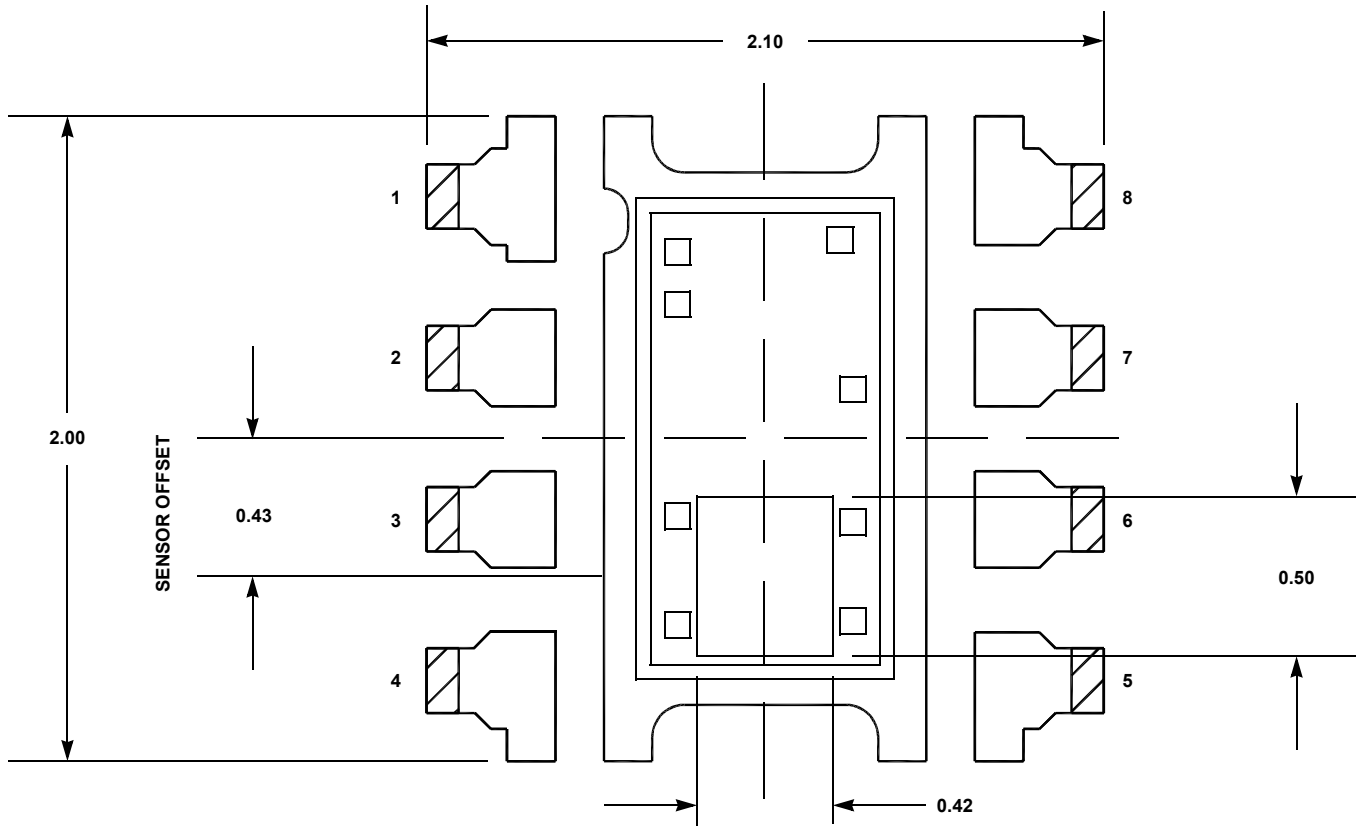


FIGURE 15. 8 LD ODFN SENSOR LOCATION OUTLINE - DIMENSIONS IN mm

## Revision History

The revision history provided is for informational purposes only and is believed to be accurate, but not warranted. Please go to web to make sure you have the latest Rev.

| DATE     | REVISION | CHANGE           |
|----------|----------|------------------|
| 11/23/10 | FN7682.0 | Initial Release. |

## About Intersil

Intersil Corporation is a leader in the design and manufacture of high-performance analog, mixed-signal and power management semiconductors. The company's products address some of the largest markets within the industrial and infrastructure, personal computing and high-end consumer markets. For more information about Intersil, visit our website at [www.intersil.com](http://www.intersil.com).

For the most updated datasheet, application notes, related documentation and related parts, please see the respective product information page found at [www.intersil.com](http://www.intersil.com). You may report errors or suggestions for improving this datasheet by visiting [www.intersil.com/en/support/ask-an-expert.html](http://www.intersil.com/en/support/ask-an-expert.html). Reliability reports are also available from our website at <http://www.intersil.com/en/support/qualandreliability.html#reliability>

© Copyright Intersil Americas LLC 2010. All Rights Reserved.

All trademarks and registered trademarks are the property of their respective owners.

For additional products, see [www.intersil.com/en/products.html](http://www.intersil.com/en/products.html)

Intersil products are manufactured, assembled and tested utilizing ISO9001 quality systems as noted in the quality certifications found at [www.intersil.com/en/support/qualandreliability.html](http://www.intersil.com/en/support/qualandreliability.html)

*Intersil products are sold by description only. Intersil may modify the circuit design and/or specifications of products at any time without notice, provided that such modification does not, in Intersil's sole judgment, affect the form, fit or function of the product. Accordingly, the reader is cautioned to verify that datasheets are current before placing orders. Information furnished by Intersil is believed to be accurate and reliable. However, no responsibility is assumed by Intersil or its subsidiaries for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Intersil or its subsidiaries.*






For information regarding Intersil Corporation and its products, see [www.intersil.com](http://www.intersil.com)

# Package Outline Drawing

## L8.2.1x2.0

8 LEAD OPTICAL DUAL FLAT NO-LEAD PLASTIC PACKAGE (ODFN)

Rev 1, 12/09

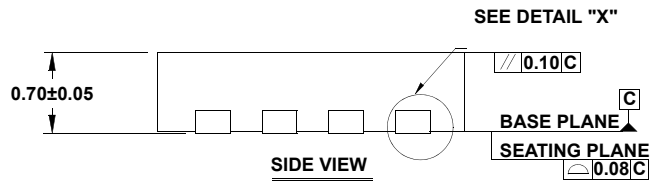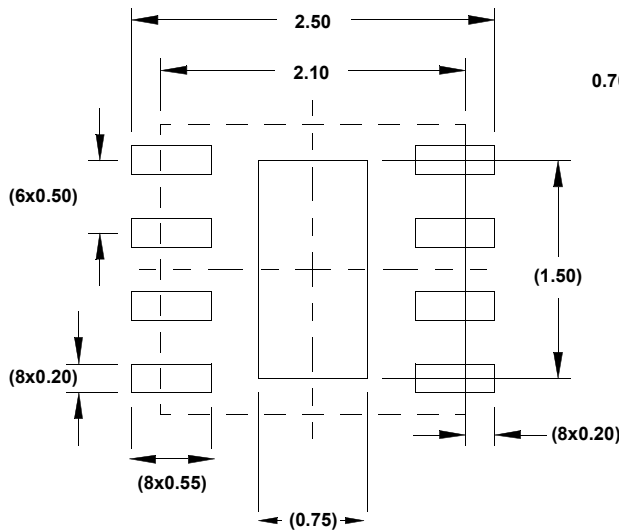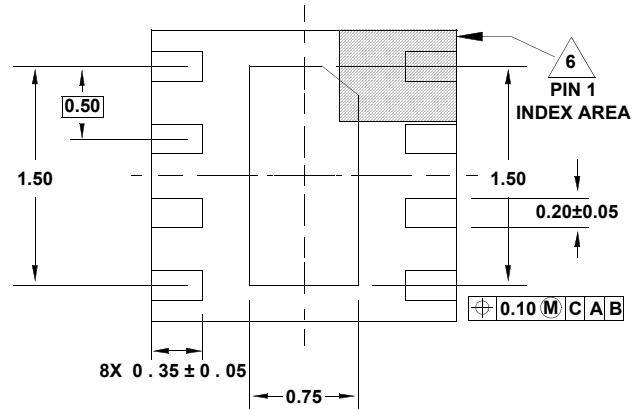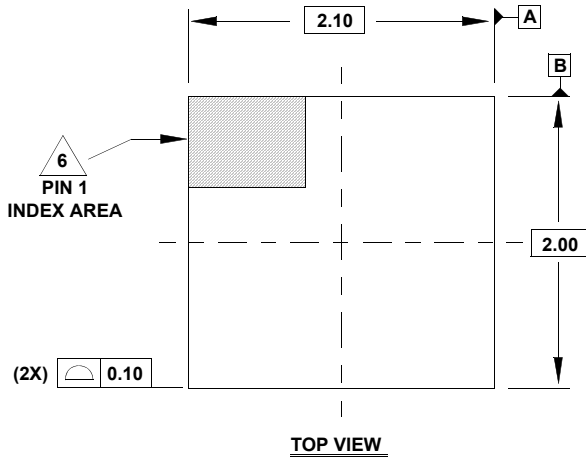

**NOTES:**

1. Dimensions are in millimeters.  
Dimensions in ( ) for Reference Only.
2. Dimensioning and tolerancing conform to ASME Y14.5m-1994.
3. Unless otherwise specified, tolerance : Decimal ± 0.05
4. Dimension b applies to the metallized terminal and is measured between 0.25mm and 0.35mm from the terminal tip.
5. Tiebar shown (if present) is a non-functional feature.
6. The configuration of the pin #1 identifier is optional, but must be located within the zone indicated. The pin #1 identifier may be either a mold or mark feature.



## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9