

## NCV97310 Evaluation Board User's Manual



**ON Semiconductor®**

<http://onsemi.com>

### EVAL BOARD USER'S MANUAL

#### Description

The NCV97310 is 3-output regulator consisting of a low-I<sub>q</sub> battery-connected 3 A 2 MHz non-synchronous switcher and two low-voltage 1.5 A 2 MHz synchronous switchers; all using integrated power transistors.

The high-voltage switcher is capable of converting a 4.1 V to 18 V battery input to a 5 V or 3.3 V output at a constant 2 MHz switching frequency, delivering up to 3 A. In overvoltage conditions up to 36 V, the switching frequency folds back to 1 MHz; in load dump conditions up to 45 V the regulator shuts down.

The output of the battery-connected buck regulator serves as the low voltage input for the 2 synchronous switchers. Each downstream output is adjustable from 1.2 V to 3.3 V, with a 1.5 A current limit and a constant 2 MHz switching frequency. Each switcher has independent enable and reset pins, giving extra power management flexibility.

For low-I<sub>q</sub> operating mode the low-voltage switchers are disabled, and the standby rail is supplied by a low-I<sub>q</sub> LDO (up to 150 mA) with a typical I<sub>q</sub> of 30  $\mu$ A. The LDO regulator is in parallel to the high-voltage switcher, and is activated when the switcher is forced in standby mode.

All 3 SMPS outputs use peak current mode control with internal slope compensation, internally-set soft-start, battery undervoltage lockout, battery overvoltage protection, cycle-by-cycle current limiting, hiccup mode short-circuit protection and thermal shutdown. An error flag is available for diagnostics.

#### Key Features

- Low Quiescent Current in Standby Mode
- 2 Microcontroller Enabled Low Voltage Synchronous Buck Converters
- Large Conversion Ratio of 18 V to 3.3 V Battery Connected Switcher
- Wide Input of 4.1 to 45 V with Undervoltage Lockout (UVLO)
- Fixed Frequency Operation Adjustable from 2.0 to 2.6 MHz
- Internal 1.5 ms Soft-starts
- Cycle-by-Cycle Current Limit Protections
- Hiccup Overcurrent Protections (OCP)
- Individual Reset Pins with Adjustable Delays
- These Devices are Pb-Free, Halogen Free/BFR Free and are RoHS Compliant

#### Typical Applications

- Infotainment, Body Electronics, Telematics, ECU

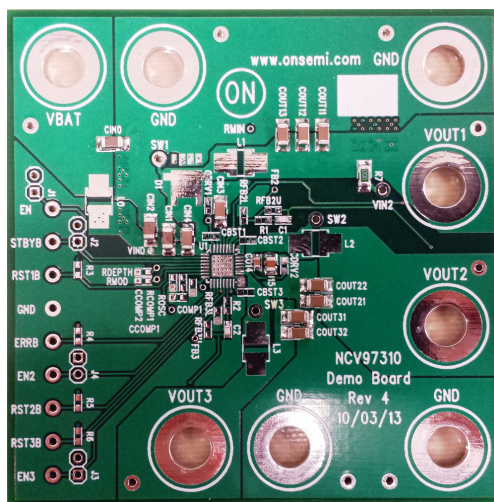


Figure 1. Evaluation Board Photo

# NCV97310MW33GEVB

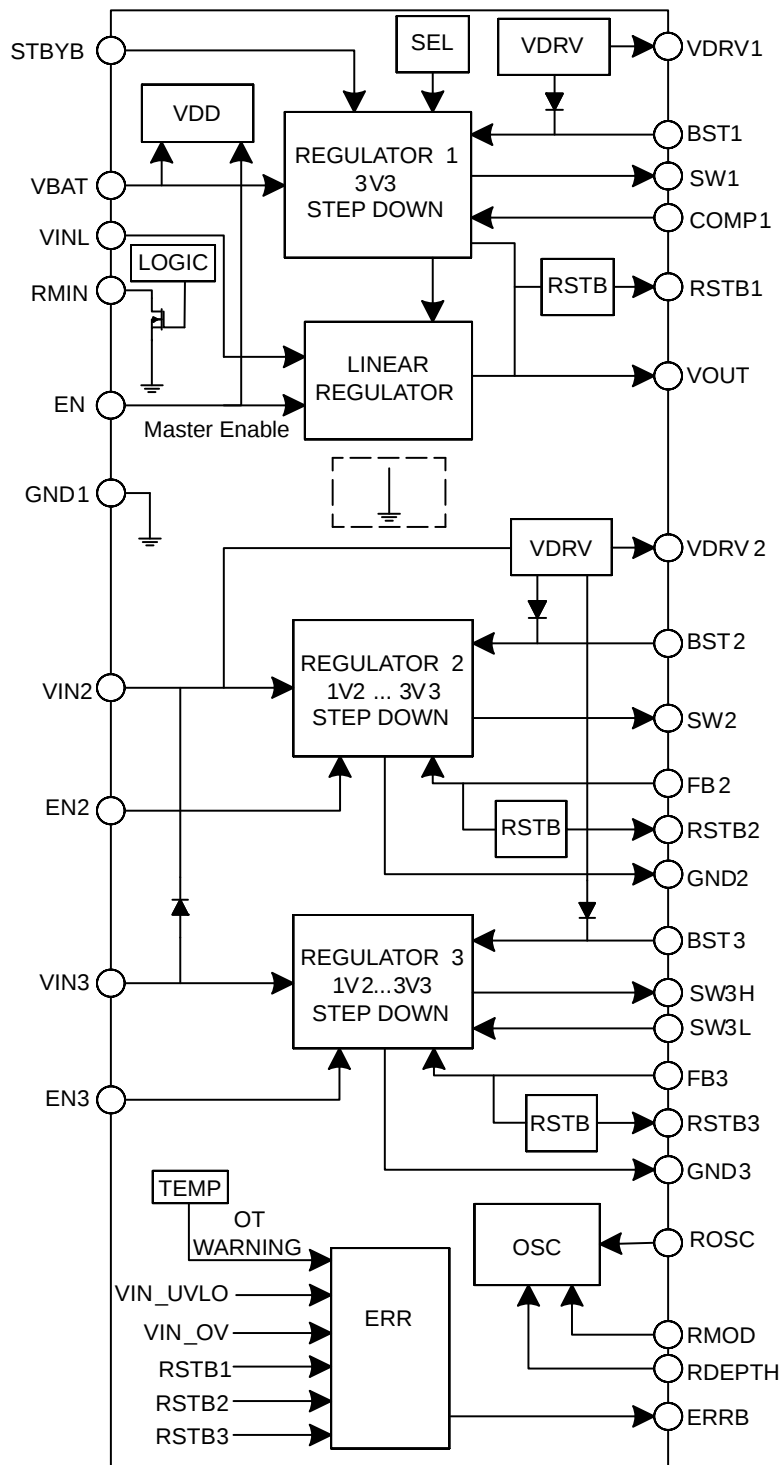


Figure 2. NCV97310 Block Diagram

# NCV97310MW33GEVB

## TYPICAL APPLICATION

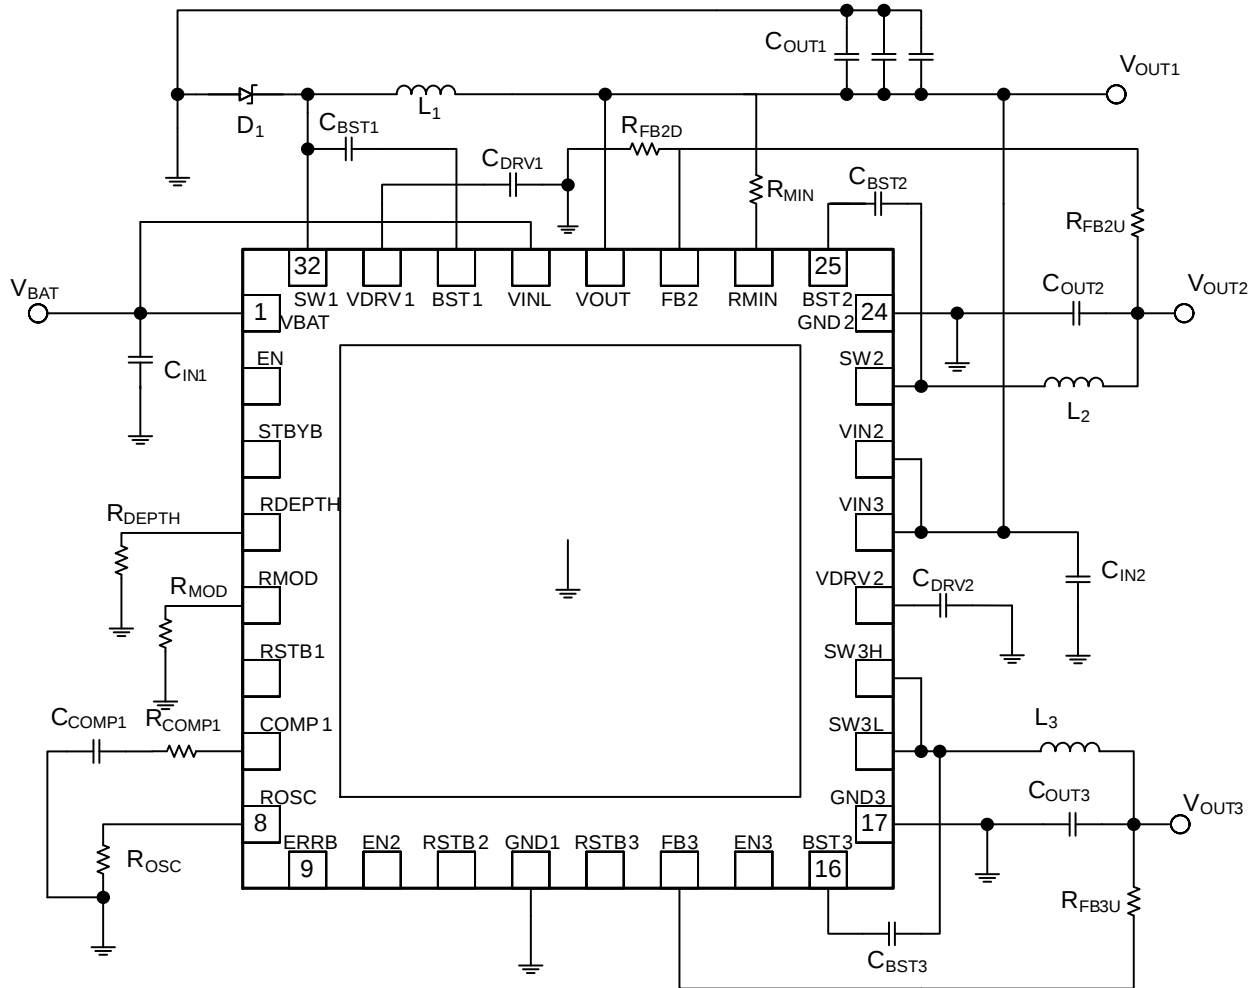


Figure 3. Typical Application

Table 1. EVALUATION BOARD TERMINALS

| Pin Name | Function                                                                   |
|----------|----------------------------------------------------------------------------|
| VBAT     | Positive dc input voltage                                                  |
| GND      | Common dc return                                                           |
| VOUT1    | Positive 3.3 V dc output voltage (LDO/Switcher 1)                          |
| VOUT2    | Positive DC output voltage (Switcher 2)                                    |
| VOUT3    | Positive DC output voltage (Switcher 3)                                    |
| EN       | Master enable input. Includes jumper J3 to connect to VBAT.                |
| STBYB    | Standby enable input. Includes jumper J4 to connect to VBAT.               |
| EN2      | Switcher 2 enable input. Includes jumper J6 to connect to VOUT1.           |
| EN3      | Switcher 3 enable input. Includes jumper J5 to connect to VOUT1.           |
| ERRB     | Error flag combining temperature and input and output voltage sensing.     |
| RST1B    | Reset with adjustable delay. Goes low when the VOUT1 is out of regulation. |
| RST2B    | Reset with adjustable delay. Goes low when the VOUT2 is out of regulation. |
| RST3B    | Reset with adjustable delay. Goes low when the VOUT3 is out of regulation. |

# NCV97310MW33GEVB

**Table 2. ABSOLUTE MAXIMUM RATINGS** (Voltages are with respect to GND)

| Rating                                                 | Value      | Unit |
|--------------------------------------------------------|------------|------|
| Dc Supply Voltage (VBAT, EN, STBYB)                    | -0.3 to 36 | V    |
| Dc Supply Voltage (VIN2, VIN3)                         | -0.3 to 12 | V    |
| Dc Supply Voltage (RSTB1, RSTB2, RSTB3, ERB, EN2, EN3) | -0.3 to 6  | V    |
| Storage Temperature Range                              | -55 to 150 | °C   |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

**Table 3. ELECTRICAL CHARACTERISTICS** (TA = 25°C, 4.5 ≤ VIN ≤ 18 V, IOUT ≤ 2 A, unless otherwise specified)

| Characteristic | Conditions | Typical Value | Unit |
|----------------|------------|---------------|------|
|----------------|------------|---------------|------|

## REGULATION

|                         |                           |       |   |
|-------------------------|---------------------------|-------|---|
| Output Voltage (VOUT1)  |                           | 3.3   | V |
| Output Voltage (VOUT2)  |                           | 1.8   | V |
| Output Voltage (VOUT3)  |                           | 1.2   | V |
| Line Regulation (VOUT1) | I <sub>OUT1</sub> = 1.0 A | 0.03  | % |
| Line Regulation (VOUT2) | I <sub>OUT2</sub> = 1.0 A | 0.01  | % |
| Line Regulation (VOUT3) | I <sub>OUT3</sub> = 1.0 A | 0.001 | % |
| Load Regulation (VOUT1) | V <sub>BAT</sub> = 13.2 V | 0.3   | % |
| Load Regulation (VOUT2) | V <sub>BAT</sub> = 13.2 V | 0.02  | % |
| Load Regulation (VOUT3) | V <sub>BAT</sub> = 13.2 V | 0.03  | % |

## SWITCHING

|                                  |                                  |            |     |
|----------------------------------|----------------------------------|------------|-----|
| Switching Frequency              |                                  | 2.0        | MHz |
| Soft-start Time                  |                                  | 1.4        | ms  |
| R <sub>OSC</sub> Frequency Range | 50 kΩ ≥ R <sub>OSC</sub> ≥ 10 kΩ | 2.0 to 2.6 | MHz |

## CURRENT LIMIT


|                            |             |     |   |
|----------------------------|-------------|-----|---|
| Peak Current Limit (VOUT1) | STBYB = 0 V | 0.2 | A |
| Peak Current Limit (VOUT1) | STBYB = 5 V | 4.4 | A |
| Peak Current Limit (VOUT2) |             | 2.9 | A |
| Peak Current Limit (VOUT3) |             | 2.9 | A |

## PROTECTION

|                                   |                             |     |    |
|-----------------------------------|-----------------------------|-----|----|
| Input Undervoltage Lockout (UVLO) | V <sub>BAT</sub> Decreasing | 3.9 | V  |
| Input Overvoltage Protection      | V <sub>BAT</sub> Increasing | 36  | V  |
| Thermal Warning                   | T <sub>J</sub> Rising       | 150 | °C |
| Thermal Shutdown                  | T <sub>J</sub> Rising       | 170 | °C |

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

**NCV97310MW33GEVB**

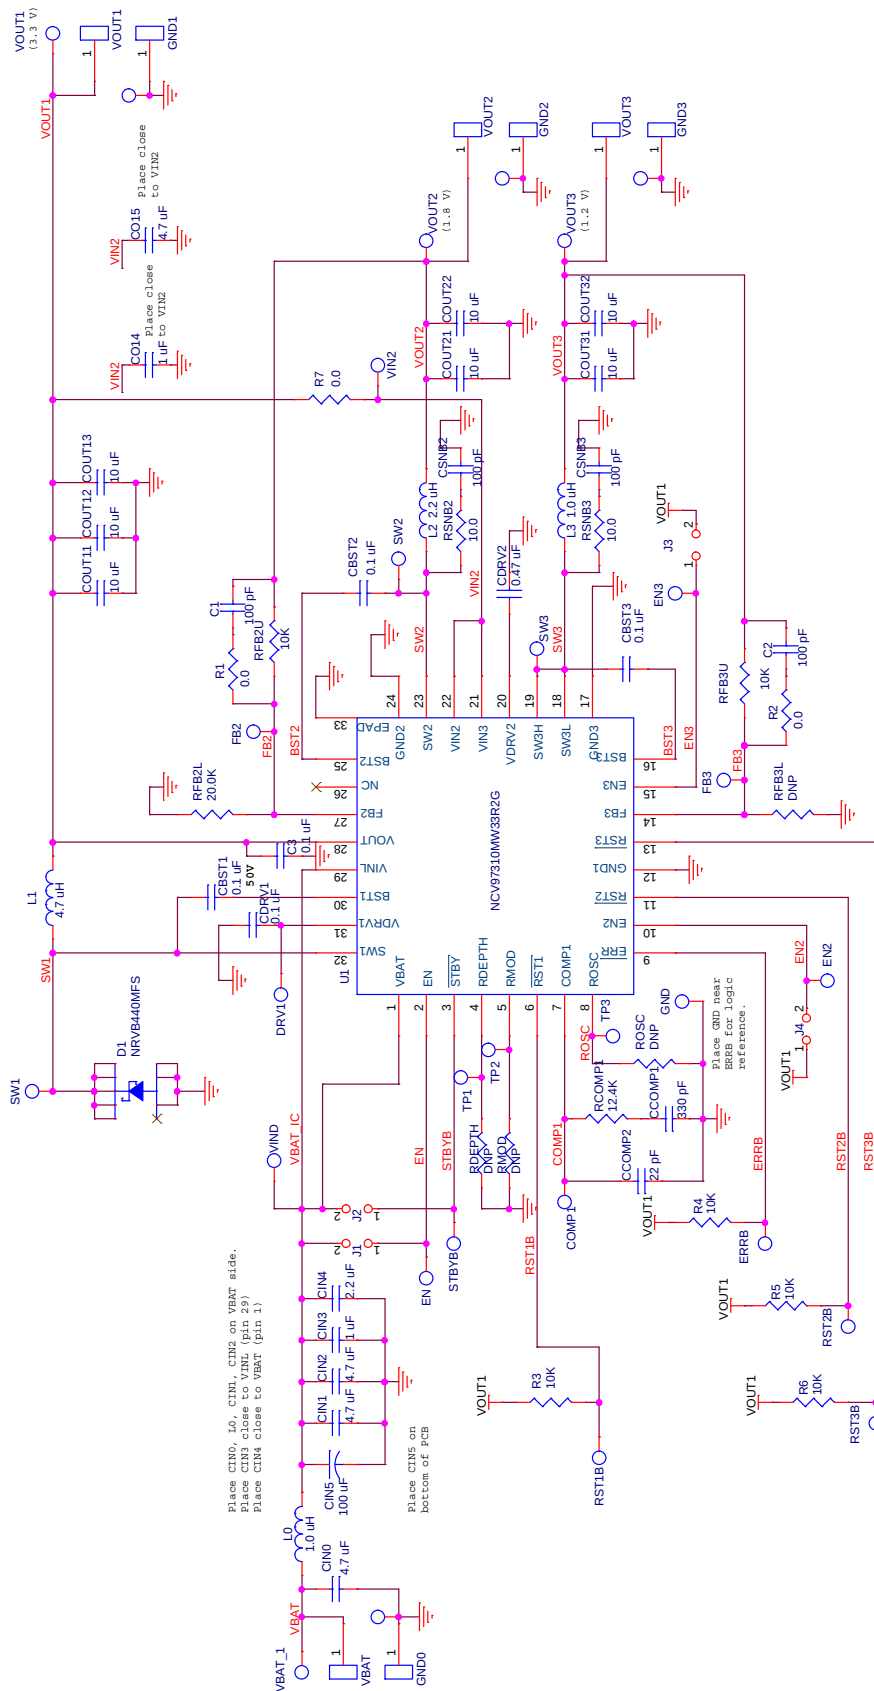

**Figure 4. NCV97310GEVB 3.3 V Board Schematic**

## Operational Guidelines

1. Connect a dc input voltage, within the 6.0 V to 36 V range, between VBAT and GND.
2. Connect a load (< 150 mA) between VOUT1 and GND
3. Connect a dc enable voltage, within the 2.0 V to 36 V range, between EN and GND. This will enable the internal LDO for low Iq mode. You may use jumper J1 to connect EN directly to VBAT.
  - a. The VOUT1 signal should be 3.3 V.
  - b. The VOUT2 signal should be disabled (regardless of EN2 state) and read 0 V.
  - c. The VOUT3 signal should be disabled (regardless of EN3 state) and read 0 V.
4. Connect a dc enable voltage, within the 2.0 V to 36 V range, between STBYB and GND. This will exit low Iq mode and power up switcher 1. You may use jumper J2 to connect STBYB directly to VBAT.

The VOUT1 signal should still be 3.3 V. You may now add a higher load to VOUT1.

5. Connect a dc enable voltage, within the 2.0 V to 6 V range, between EN2 and GND. This will power up switcher 2. You may use jumper J4 to connect EN2 directly to VOUT1.

The VOUT2 signal should be 1.8 V.

6. Connect a dc enable voltage, within the 2.0 V to 6 V range, between EN3 and GND. This will power up switcher 3. You may use jumper J3 to connect EN3 directly to VOUT1.

The VOUT3 signal should be 1.2 V.


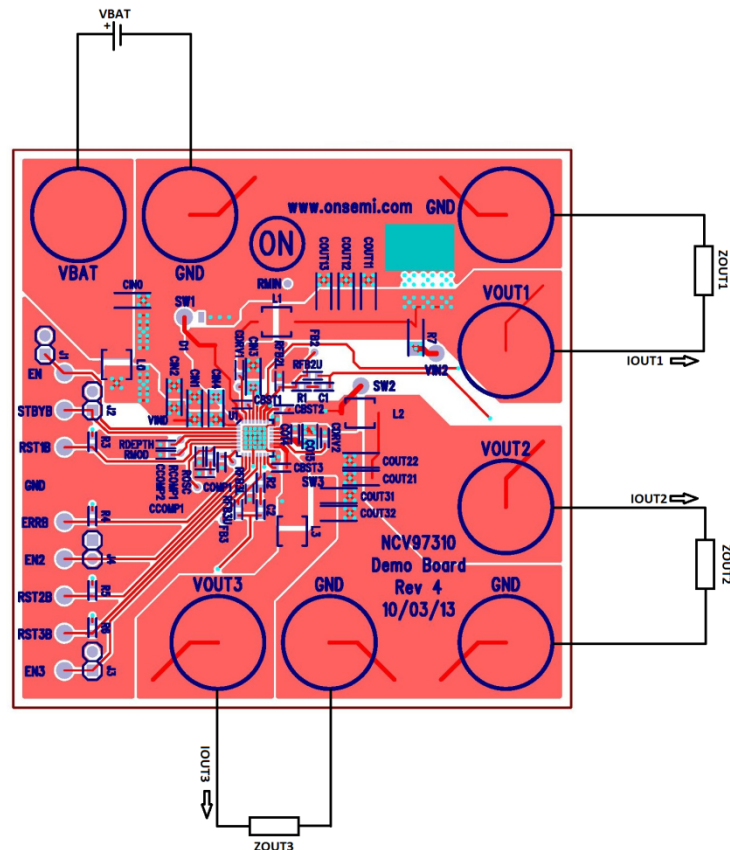


Figure 5. NCV97310 Board Connections

## APPLICATION INFORMATION

### Output Voltage Selection

The voltage outputs for switcher 2 and switcher 3 are adjustable and can be set with a resistor divider. The FB reference for both switchers is 1.2 V.

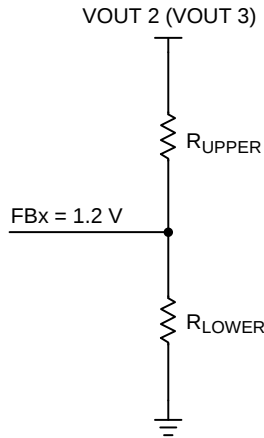

The upper resistor is set to 10 kΩ and is part of the feedback loop. To maintain stability over all conditions, it is recommended to change the only the lower feedback resistor to set the output voltage. Use the following equation:


$$R_{\text{LOWER}} = R_{\text{UPPER}} \frac{V_{\text{FB}}}{V_{\text{OUT}} - V_{\text{FB}}}$$

Some common setups are listed below:


| Desired Output (V) | VREF (V) | R <sub>UPPER</sub> (kΩ, 1%) | R <sub>LOWER</sub> (kΩ, 1%) |
|--------------------|----------|-----------------------------|-----------------------------|
| 1.2                | 1.2      | 10.0                        | NP                          |
| 1.5                | 1.2      | 10.0                        | 40.0                        |
| 1.8                | 1.2      | 10.0                        | 20.0                        |
| 2.5                | 1.2      | 10.0                        | 9.31                        |
| 3.3                | 1.2      | 10.0                        | 5.76                        |

### Spread Spectrum

In SMPS devices, switching translates to higher efficiency. Unfortunately, the switching leads to a much noisier EMI profile. We can greatly decrease some of the radiated emissions with some spread spectrum techniques. Spread spectrum is used to reduce the peak electromagnetic emissions of a switching regulator.


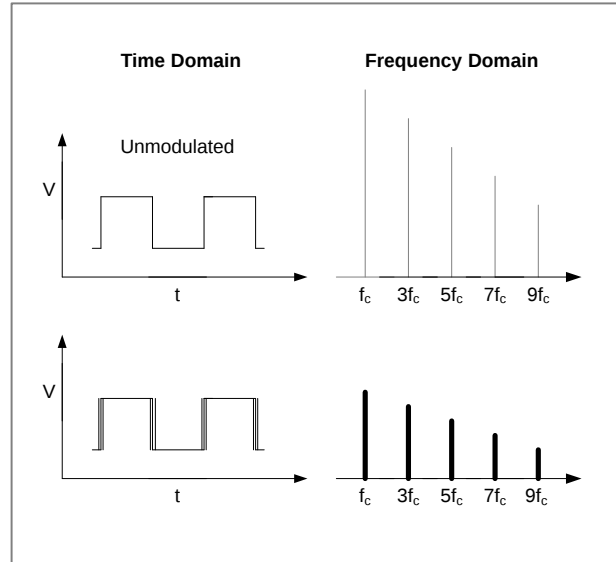


The spread spectrum used in the NCV97310 is an “up-spread” technique, meaning the switching frequency is spread upward from the 2.0 MHz base frequency. For example, a 5 % spread means that the switching frequency is swept (spread) from 2.0 MHz up to 2.1 MHz in a linear fashion – this is called the modulation depth. The rate at which this spread takes place is called the modulation frequency. For example, a 10 kHz modulation frequency means that the frequency is swept from 2.0 MHz to 2.1 MHz in 50 μs and then back down from 2.1 MHz to 2.0 MHz in 50 μs.

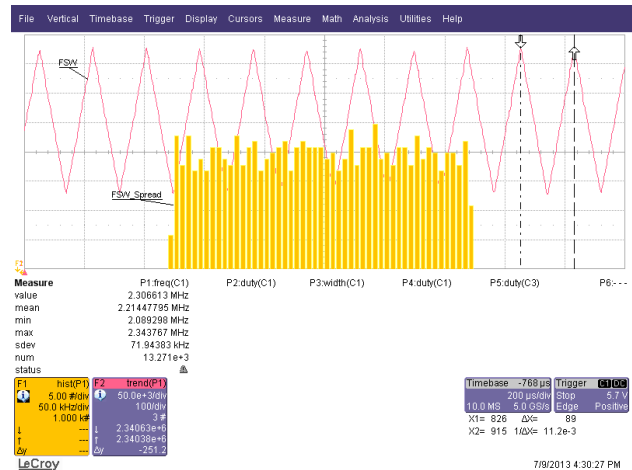

## NCV97310MW33GEVB

The modulation depth and modulation frequency are each set by 2 external resistors to GND. The modulation frequency can be set from 5 kHz up to 50 kHz using a resistor from the RMOD pin to GND. The modulation depth can be set from 3% up to 30% of the nominal switching depth using a resistor from the RDEPTH pin to GND. Please see the curves below for typical values:

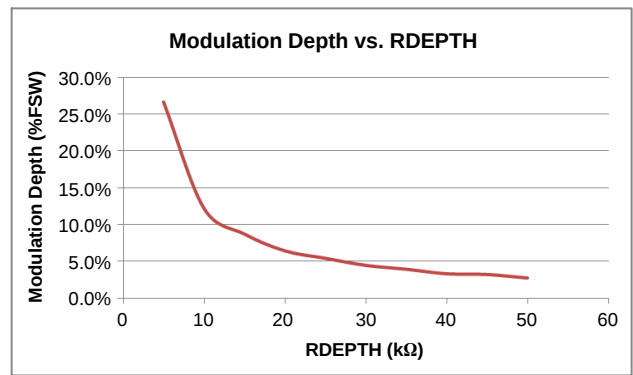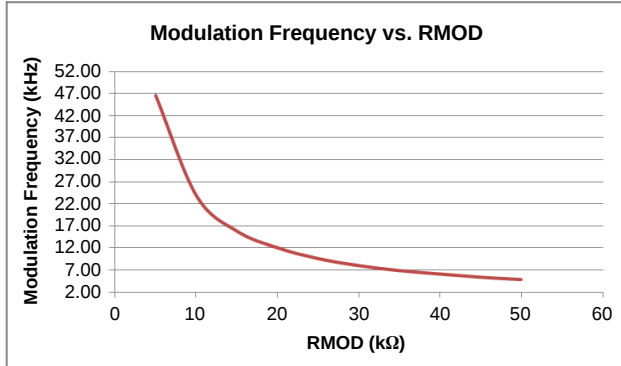

Spread spectrum is automatically turned off when there is a short to GND or an open circuit on either the RMOD pin or the RDEPTH pin. Please be sure that the ROSC pin is an open circuit when using spread spectrum.

## TYPICAL PERFORMANCE

### Efficiency

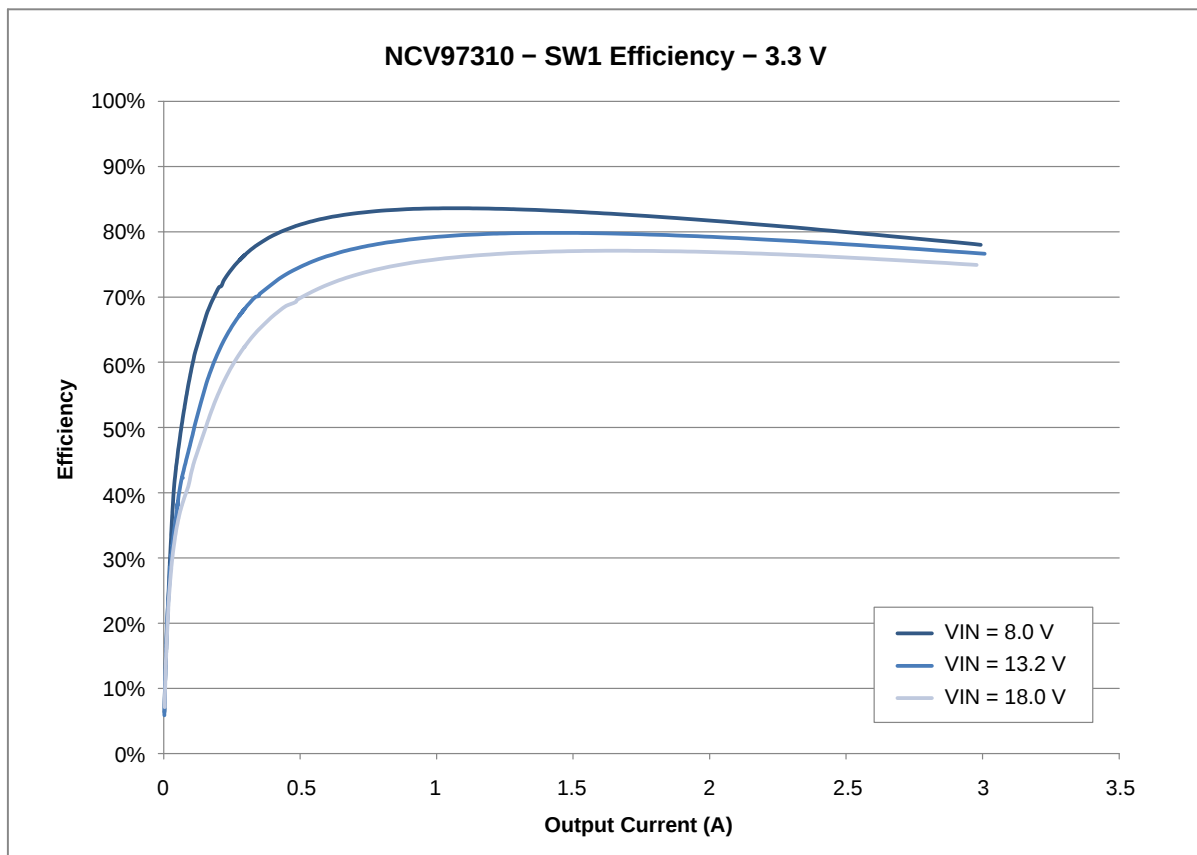


Figure 6. Efficiency for SW1 with a 3.3 V Output

## NCV97310MW33GEVB

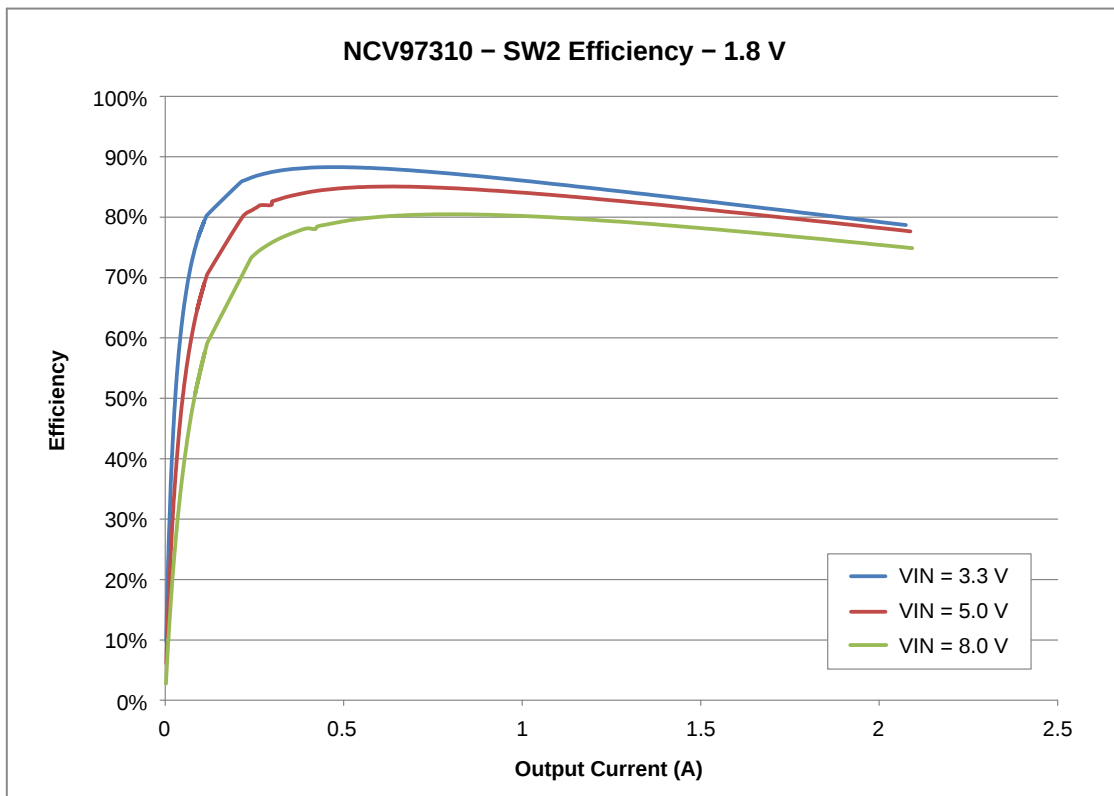


Figure 7. Efficiency for SW2 with a 1.8 V Output

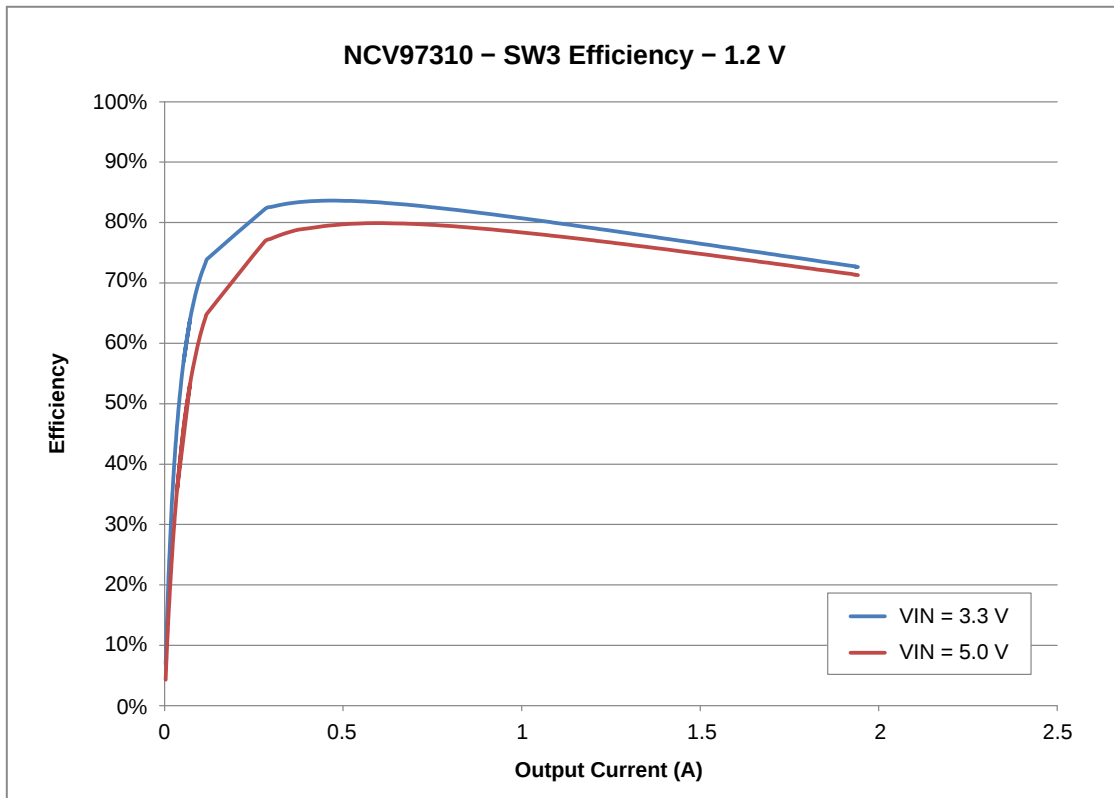


Figure 8. Efficiency for SW3 with a 1.2 V Output

# NCV97310MW33GEVB

## Line Regulation

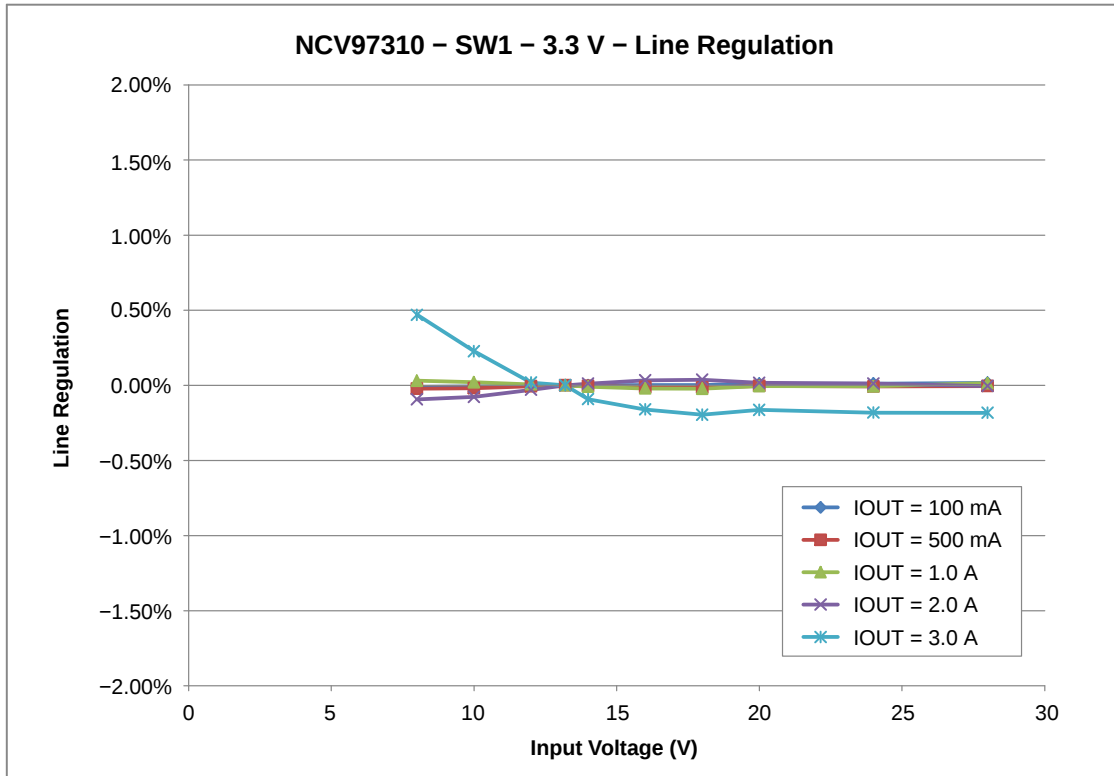


Figure 9. Line Regulation for SW1 with a 3.3 V Output

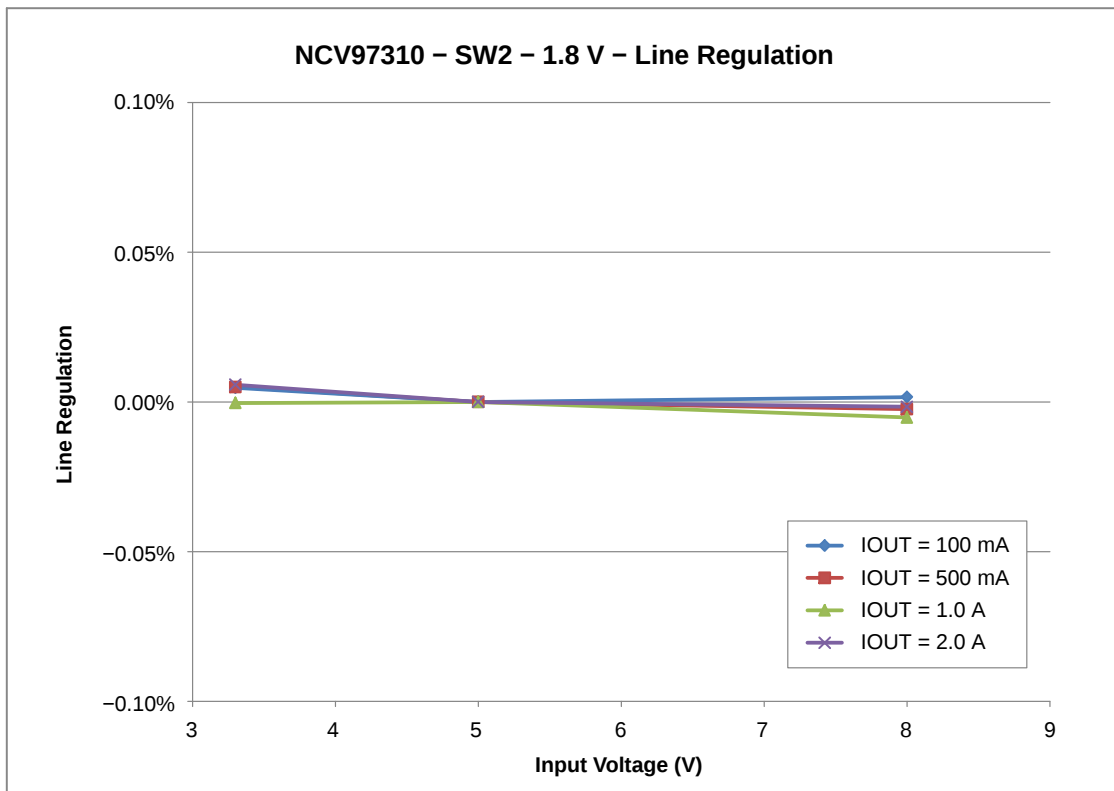


Figure 10. Line Regulation for SW2 with a 1.8 V Output

## NCV97310MW33GEVB

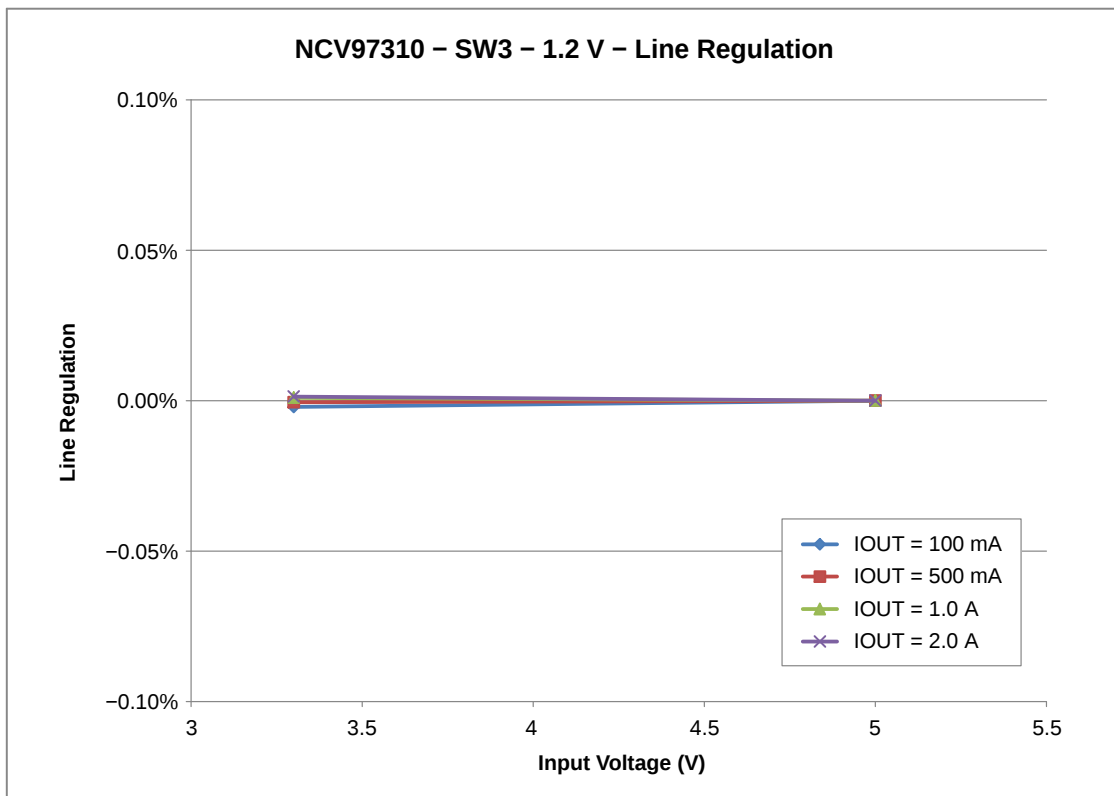


Figure 11. Line Regulation for SW3 with a 1.2 V Output

### Load Regulation

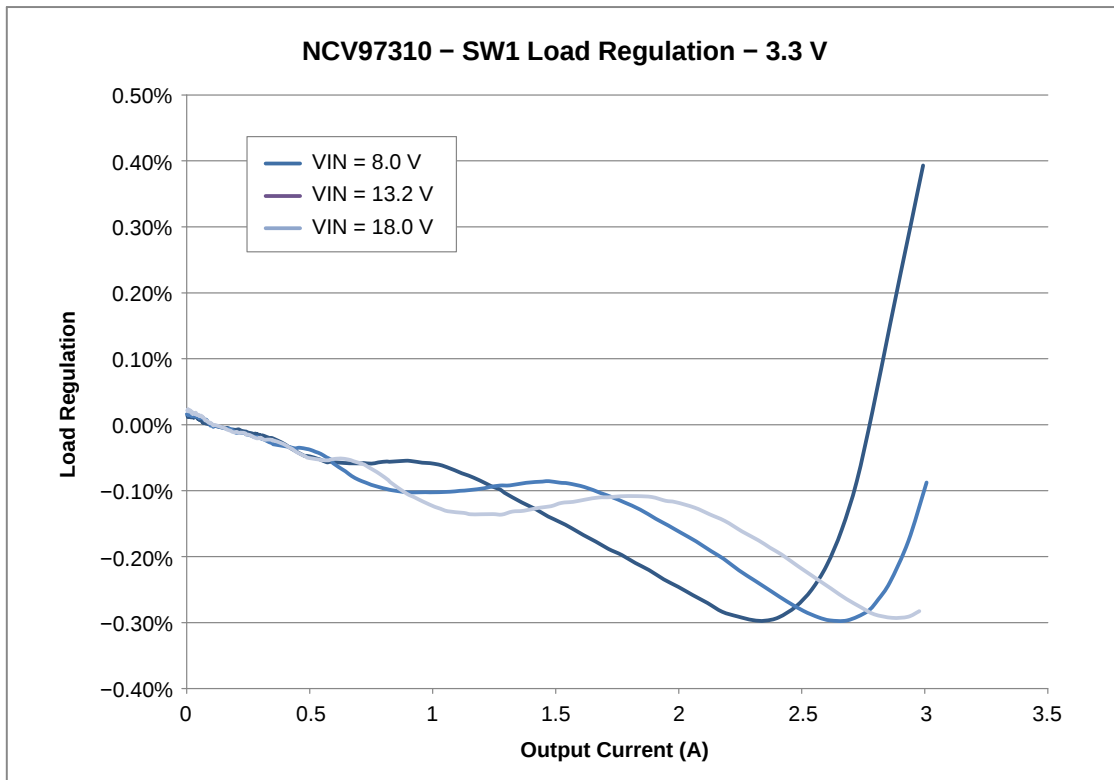


Figure 12. Load Regulation for SW1 with a 3.3 V Output

## NCV97310MW33GEVB

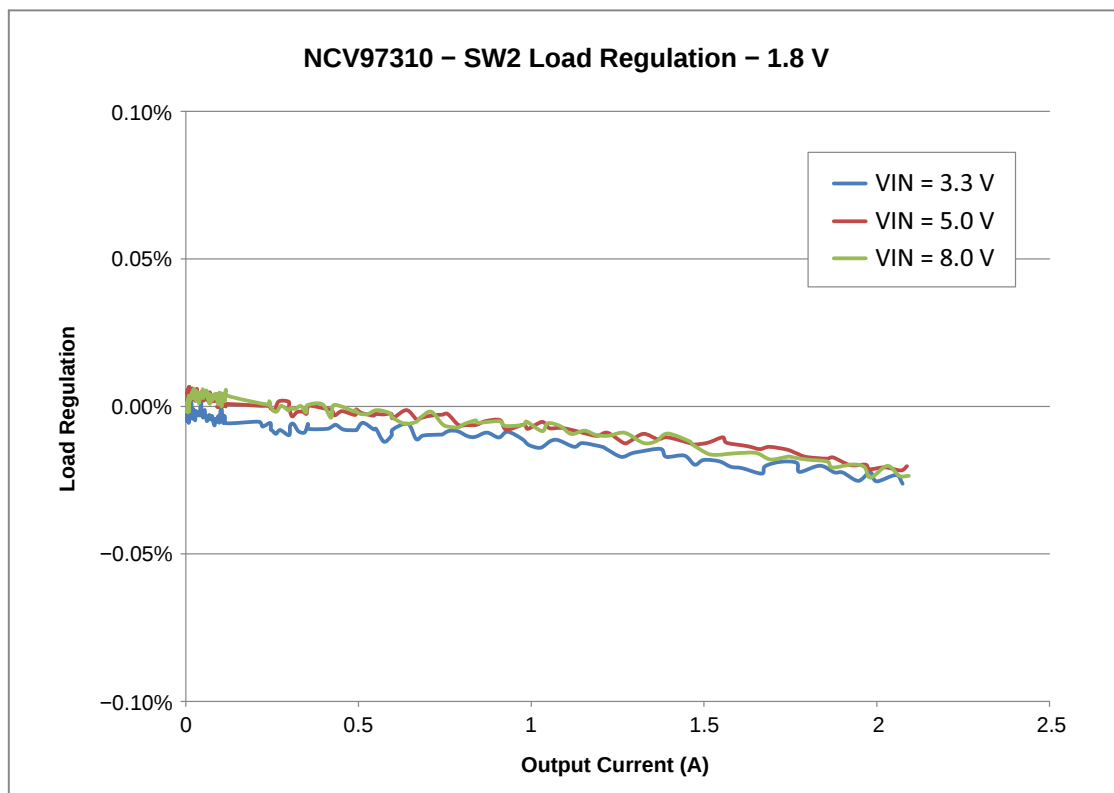


Figure 13. Load Regulation for SW2 with a 1.8 V Output


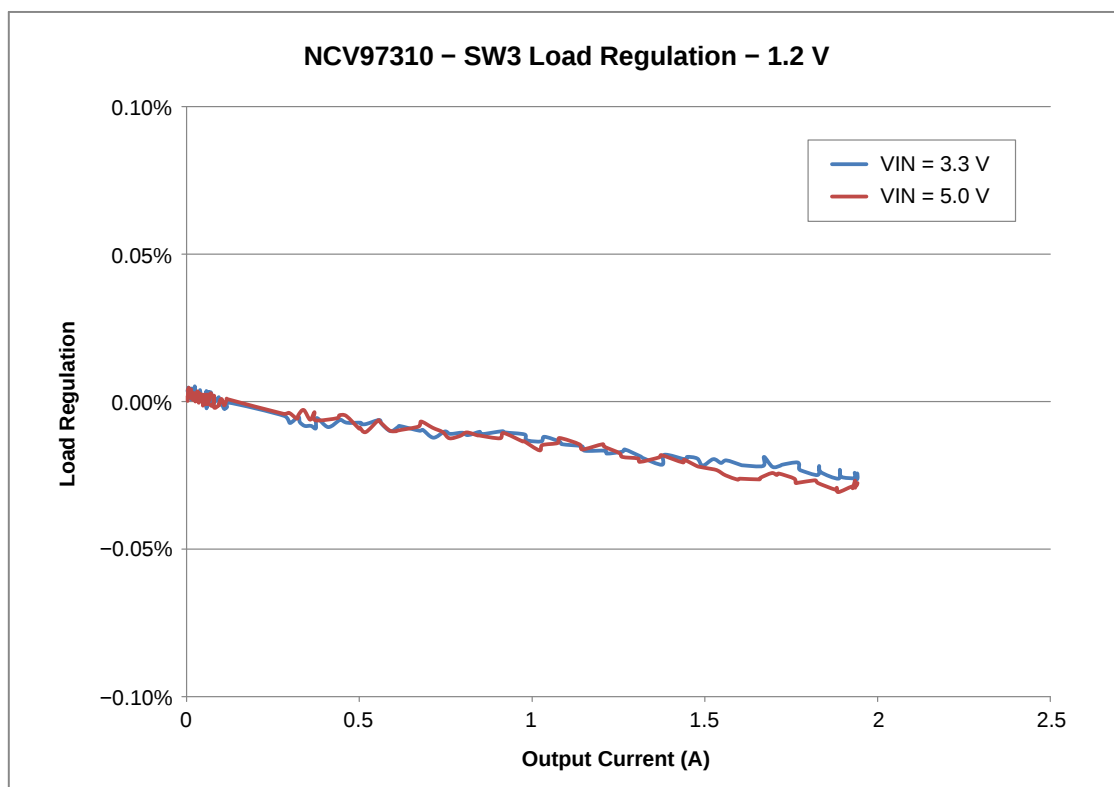



Figure 14. Load Regulation for SW3 with a 1.2 V Output

SCHEMATIC

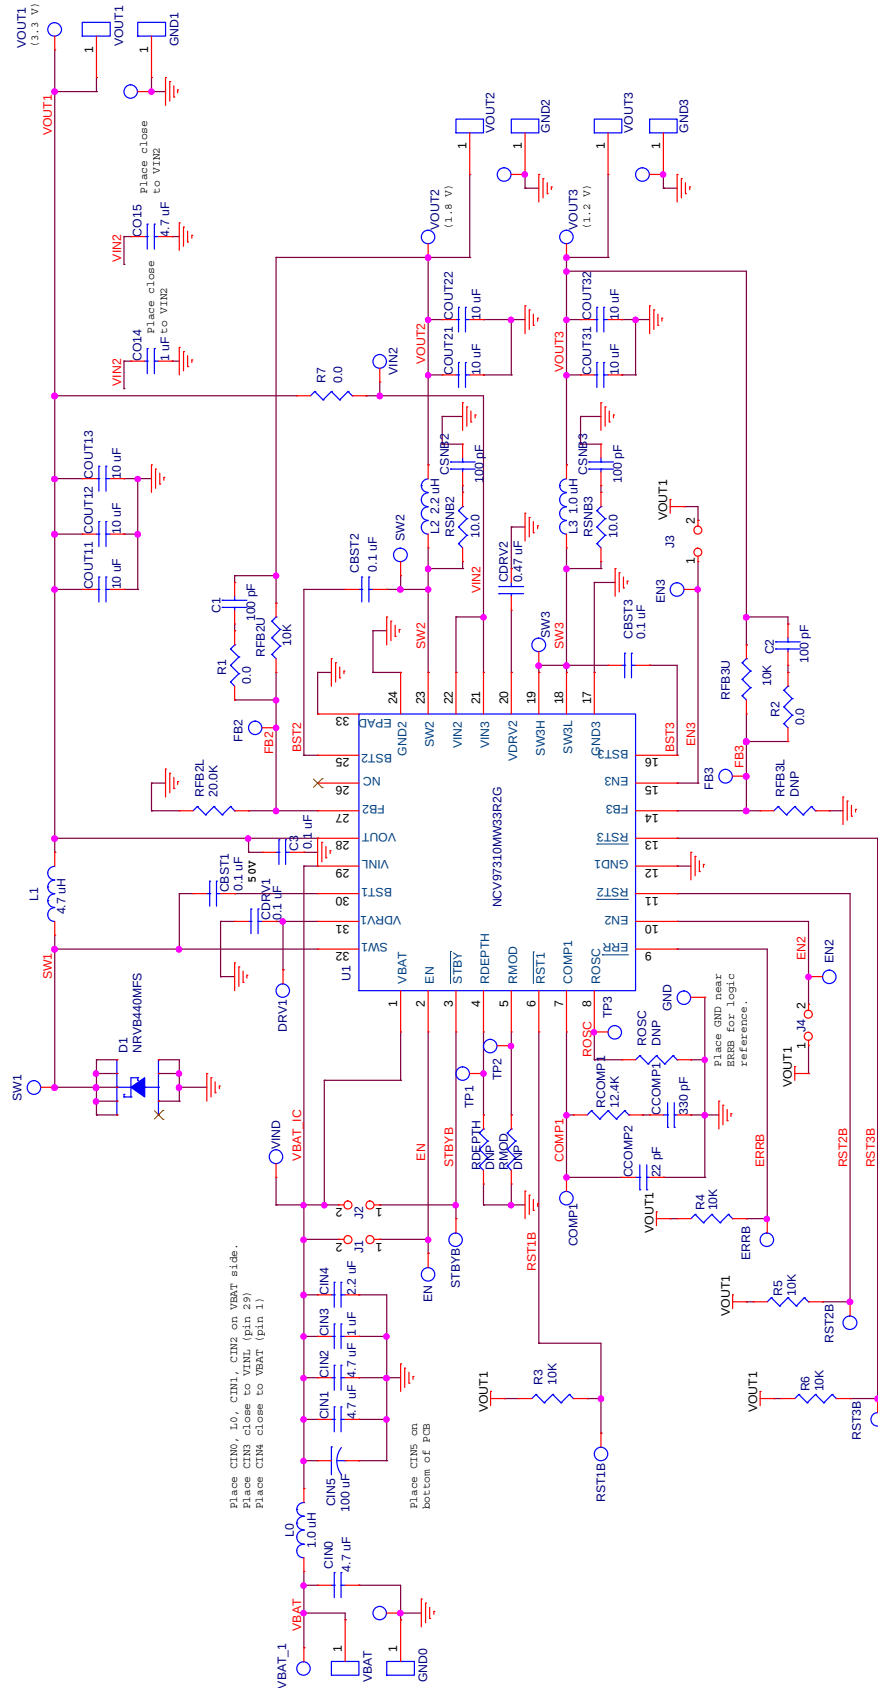

## PCB LAYOUT

NCV97310 Evaluation Board Rev 4 10/03/13 – BOTTOM Layer (mirrored)

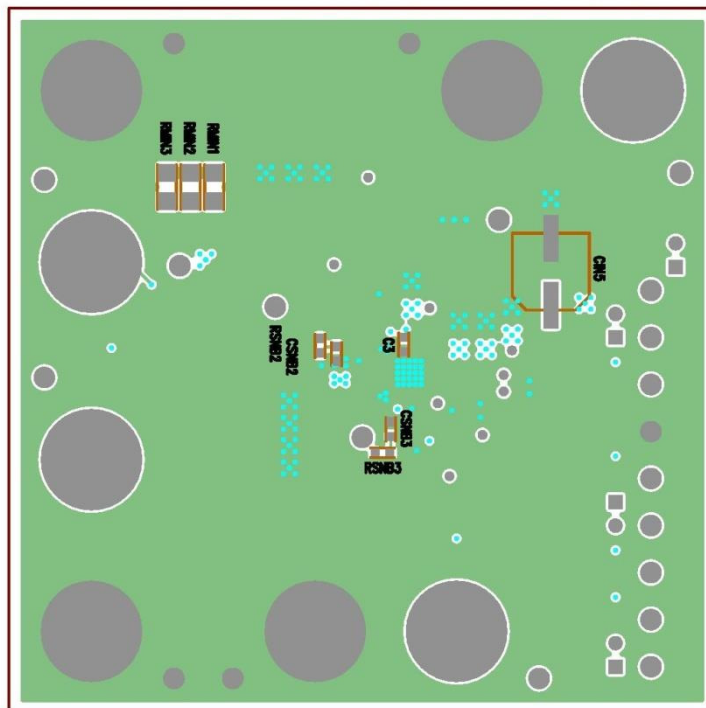

<http://onsemi.com>

# NCV97310MW33GEVB

## BILL OF MATERIALS

Table 4. BILL OF MATERIALS

| Reference Designator(s)                                | Qty. | Description                             | Value      | Tolerance | Footprint | Manufacturer                     | Manufacturer's Part Number | Substitution Allowed |
|--------------------------------------------------------|------|-----------------------------------------|------------|-----------|-----------|----------------------------------|----------------------------|----------------------|
| C1, C2, CSNB2, CSNB3                                   | 4    | CAP CER<br>100 pF 50 V 5%<br>NP0 0603   | 100 pF     | 5%        | 603       | Murata Electronics North America | GCM1885C1H101JA16D         | Yes                  |
| C3, CBST1, CBST2, CBST3, CDRV1                         | 5    | CAP CER<br>0.1 µF 50 V<br>10% X7R 0603  | 0.1 µF     | 10%       | 603       | Murata Electronics North America | GCM188R71H104KA57D         | Yes                  |
| CCOMP1                                                 | 1    | CAP CER<br>330 pF 50 V 5%<br>NP0 0603   | 330 pF     | 5%        | 603       | Murata Electronics North America | GCM1885C1H331JA16D         | Yes                  |
| CCOMP2                                                 | 1    | CAP CER<br>22 pF 50 V 5%<br>NP0 0603    | 22 pF      | 5%        | 603       | Murata Electronics North America | GCM1885C1H220JA16D         | Yes                  |
| CDRV2                                                  | 1    | CAP CER<br>0.47 µF 16 V<br>10% X7R 0603 | 0.47 µF    | 10%       | 603       | Murata Electronics North America | GCM188R71C474KA55D         | Yes                  |
| CIN0, CIN1, CIN2                                       | 3    | CAP CER<br>4.7 µF 50 V<br>10% X7R 1206  | 4.7 µF     | 10%       | 1206      | TDK Corporation                  | C3216X7R1H475K160AC        | Yes                  |
| CIN3                                                   | 1    | CAP CER<br>1.0 µF 50 V<br>10% X7R 1206  | 1.0 µF     | 10%       | 1206      | Murata Electronics North America | GCM31MR71H105KA55L         | Yes                  |
| CIN4                                                   | 1    | CAP CER<br>2.2 µF 50 V<br>10% X7R 1206  | 2.2 µF     | 10%       | 1206      | Murata Electronics North America | GCM31CR71H225KA55L         | Yes                  |
| CIN5                                                   | 1    | CAP ALUM<br>100 µF 50 V<br>20% SMD      | 100 µF     | 20%       | FK_V_E    | Chemi-Con                        | EMZA500ADA101MHA0G         | Yes                  |
| CO14                                                   | 1    | CAP CER 1 µF<br>16 V 10% X7R<br>0603    | 1.0 µF     | 10%       | 603       | Murata Electronics North America | GCM188R71C105KA64D         | Yes                  |
| CO15                                                   | 1    | CAP CER<br>4.7 µF 16 V<br>10% X7R 0805  | 4.7 µF     | 10%       | 805       | TDK Corporation                  | CGA4J3X7R1C475K125AB       | Yes                  |
| COUT11, COUT12, COUT13, COUT21, COUT22, COUT31, COUT32 | 7    | CAP CER<br>10 µF 10 V 10%<br>X7R 1206   | 10 µF      | 10%       | 1206      | Murata Electronics North America | GCM31CR71A106KA64L         | Yes                  |
| R1, R2                                                 | 2    | RES 0.0 Ω<br>1/10 W 0603<br>SMD         | 0 Ω        | Jumper    | 603       | Vishay/Dale                      | CRCW06030000Z0EA           | Yes                  |
| R3, R4, R5, R6, RFB2U, RFB3U                           | 6    | RES 10.0 kΩ<br>1/10 W 1%<br>0603 SMD    | 10.0 kΩ    | 1%        | 603       | Vishay/Dale                      | CRCW060310K0FKEA           | Yes                  |
| R7                                                     | 1    | RES 0.0 Ω<br>1/4 W 1206<br>SMD          | 0 Ω        | Jumper    | 1206      | Vishay/Dale                      | CRCW12060000Z0EA           | Yes                  |
| RCOMP1                                                 | 1    | RES 12.4 kΩ<br>1/10 W 1%<br>0603 SMD    | 12.4 kΩ    | 1%        | 603       | Vishay/Dale                      | CRCW060312K4FKEA           | Yes                  |
| RFB2L                                                  | 1    | RES 5.76 kΩ<br>1/10 W 1%<br>0603 SMD    | 5.76 kΩ    | 1%        | 603       | Vishay/Dale                      | CRCW06035K76FKEA           | Yes                  |
| RSNB2, RSNB3                                           | 2    | RES 10.0 Ω<br>1/10 W 1%<br>0603 SMD     | 10.0 Ω     | 1%        | 603       | Vishay/Dale                      | CRCW060310R0FKEA           | Yes                  |
| D1                                                     | 1    | DIODE<br>SCHOTTKY<br>4.0 A 40 V SMB     | 40 V/4.0 A | N/A       | SMB_DIODE | ON Semiconductor                 | NRVB440MFST1G              | No                   |

# NCV97310MW33GEVB

**Table 4. BILL OF MATERIALS** (continued)

| Reference Designator(s)                                                                                                                        | Qty. | Description                                           | Value           | Tolerance | Footprint     | Manufacturer                               | Manufacturer's Part Number | Substitution Allowed |
|------------------------------------------------------------------------------------------------------------------------------------------------|------|-------------------------------------------------------|-----------------|-----------|---------------|--------------------------------------------|----------------------------|----------------------|
| L0, L3                                                                                                                                         | 2    | High Current Shielded Inductor 1.0 $\mu$ H, 8.7 A SAT | 1.0 $\mu$ H     | 20%       | XAL4020-102ME | Coilcraft                                  | XAL4020-102ME              | No                   |
| L1                                                                                                                                             | 1    | High Current Shielded Inductor 4.7 $\mu$ H, 4.5 A SAT | 4.7 $\mu$ H     | 20%       | XAL4030-472ME | Coilcraft                                  | XAL4030-472ME              | No                   |
| L2                                                                                                                                             | 1    | High Current Shielded Inductor 2.2 $\mu$ H, 5.6 A SAT | 2.2 $\mu$ H     | 20%       | XAL4020-222ME | Coilcraft                                  | XAL4020-222ME              | No                   |
| EN, EN2, EN3, ERRB, GNDL, PGND1_1, PGND1_2, PGND2_1, PGND3_1, RST1B, RST2B, RST3B, STBYB, SW1, SW2, SW3, VIN2, VBAT, VOUT1_1, VOUT2_1, VOUT3_1 | 21   | PIN INBOARD .042" HOLE 1000/PKG                       | N/A             | N/A       | TP            | Vector Electronics                         | K24C/M                     | Yes                  |
| GND0, GND1, GND2, GND3, VBAT, VOUT1, VOUT2, VOUT3                                                                                              | 8    | CONN JACK BANANA UNINS PANEL MOU                      | N/A             | N/A       | BANANA        | Emerson Network Power Connectivity Johnson | 108-0740-001               | No                   |
| J1, J2, J3, J4                                                                                                                                 | 4    | CONN HEADER 2POS .100 VERT GOLD                       | N/A             | N/A       | JMP           | Molex Connector Corporation                | 22-28-4023                 | Yes                  |
|                                                                                                                                                | 4    | CONN JUMPER SHORTING GOLD                             | N/A             | N/A       | JMP           | Sullins Connector Solutions                | SSC02SYAN                  | Yes                  |
| COMP1, DRV1, FB2, FB3, RMIN, TP1, TP2, TP3, VIND                                                                                               | 9    | CIRCUIT PIN PRNTD .020"D .425"L                       | Do Not Populate | N/A       | SMALLTP       | Mill-Max Manufacturing Corp.               | 3128-2-00-15-00-00-08-0    | Yes                  |
| RDEPTH, RFB3L, RMOD, ROSC                                                                                                                      | 4    |                                                       | Do Not Populate |           | 603           |                                            |                            | Yes                  |
| U1                                                                                                                                             | 1    | Automotive Battery-Connected Low IQ Multi-Output PMU  | N/A             | N/A       | QFN32         | ON Semiconductor                           | NCV97310MW33R2G            | No                   |

NOTE: All devices are RoHS Compliant.

**ON Semiconductor** and  are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of SCILLC's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## PUBLICATION ORDERING INFORMATION

### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor  
P.O. Box 5163, Denver, Colorado 80217 USA  
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
Email: [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

**N. American Technical Support:** 800-282-9855 Toll Free  
USA/Canada  
**Europe, Middle East and Africa Technical Support:**  
Phone: 421 33 790 2910  
**Japan Customer Focus Center**  
Phone: 81-3-5817-1050

**ON Semiconductor Website:** [www.onsemi.com](http://www.onsemi.com)

**Order Literature:** <http://www.onsemi.com/orderlit>

For additional information, please contact your local Sales Representative

**EVBUM2223/D**

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9