

High Voltage Synchronous Buck Controller with Programmable Frequency and Sync

DESCRIPTION

Demonstration Circuit 1073 is a 100kHz-500kHz programmable frequency, high voltage, current-mode DC/DC step-down converter featuring the LT3845. The operating frequency can be synchronized up to 600kHz. The demo board is designed for 12V @ 6.25A (75W) output from a 20V to 55V input. A soft-start feature controls the output voltage slew rate at start-up, reducing current surges and voltage overshoots. The modes of operation (Burst Mode, Discontinuous Current Mode and Continuous Current Mode) are jumper selectable. Both Burst Mode and Discontinuous Current Mode increase the efficiency at light loads. Continuous Current Mode will maintain a constant switching frequency regardless of the load current.

An Optional Boost Bias circuit is provided on the bottom side of the board for back-driving the LT3845 internal regulator from the output voltage. Customers may want to use this optional circuit with modified applications that have relatively high input voltages and low (~ 3.3V)

output voltages. In such applications, the optional circuit can increase the overall efficiency by reducing the power loss in the LT3845. The demonstration board has also been laid out with the option of doubling the switching MOSFETs to facilitate higher output current. This board is suitable for a wide range of industrial control systems and particularly suitable for 12V/42V automotive applications and 48V Telecom power supplies.

The LT3845 datasheet gives a complete description of the part, operation and application information. The datasheet must be read in conjunction with this quick start guide for demo circuit 1073.

Note: It is best to ground the SYNC pin if the SYNC function is not being used.

Design files for this circuit board are available. Call the LTC factory.

LT, LTC and LT are registered trademarks of Linear Technology Corporation. ThinSOT and PowerPath are trademarks of Linear Technology Corporation.

Performance Summary ($T_A = 25^\circ\text{C}$)

PARAMETER FOR STEP-DOWN CONVERTER	CONDITION	VALUE
Minimum input voltage		20V
Maximum input voltage		55V
Output voltage V_{OUT}		12V +/- 4%
Maximum output current		6.25A
Typical switching frequency		300kHz

QUICK START PROCEDURE

Demonstration circuit 1073 is easy to set up to evaluate the performance of the LT3845. Refer to Figure 1 for proper measurement equipment setup and follow the procedure below:

NOTE. When measuring the input or output voltage ripple, care must be taken to avoid a long ground lead on the oscilloscope probe. Measure the input or output voltage ripple by touching the probe tip directly across the Vin or Vout and GND terminals. See Figure 2 for proper scope probe technique.

1. Place JP1 on the RUN position:
2. With power off, connect the input power supply to Vin and GND.

3. Turn on the power at the input.

NOTE. Make sure that the input voltage does not exceed 60V.

4. Check for the proper output voltages. .
5. Once the proper output voltages are established, adjust the loads within the operating range and observe the output voltage regulation, ripple voltage, efficiency and other parameters.

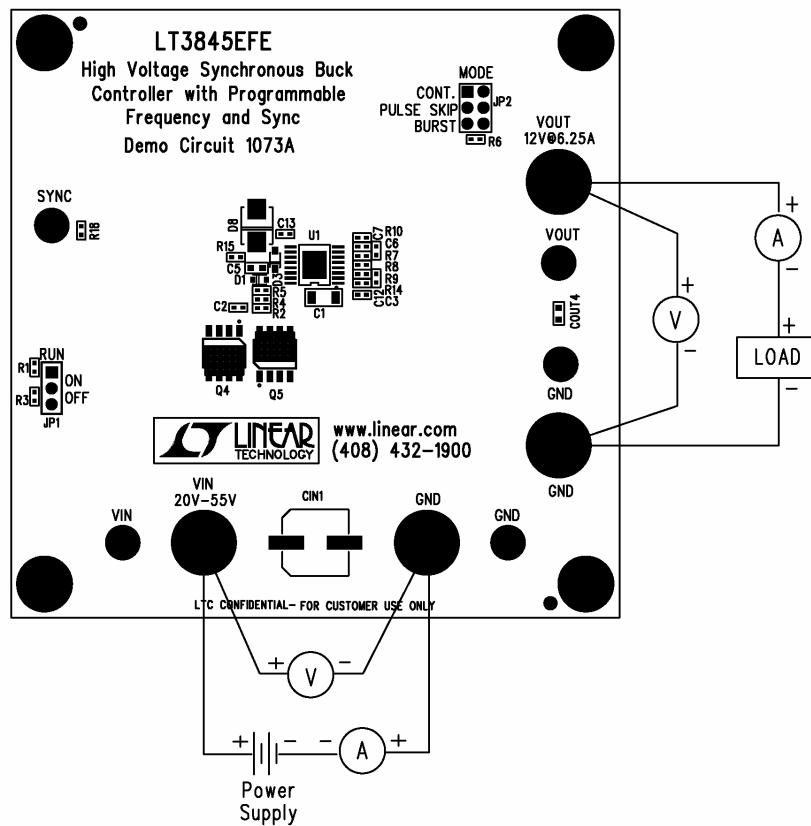


Figure 1. Proper Measurement Equipment Setup






Figure 2. Measuring Input or Output Ripple

LT3845

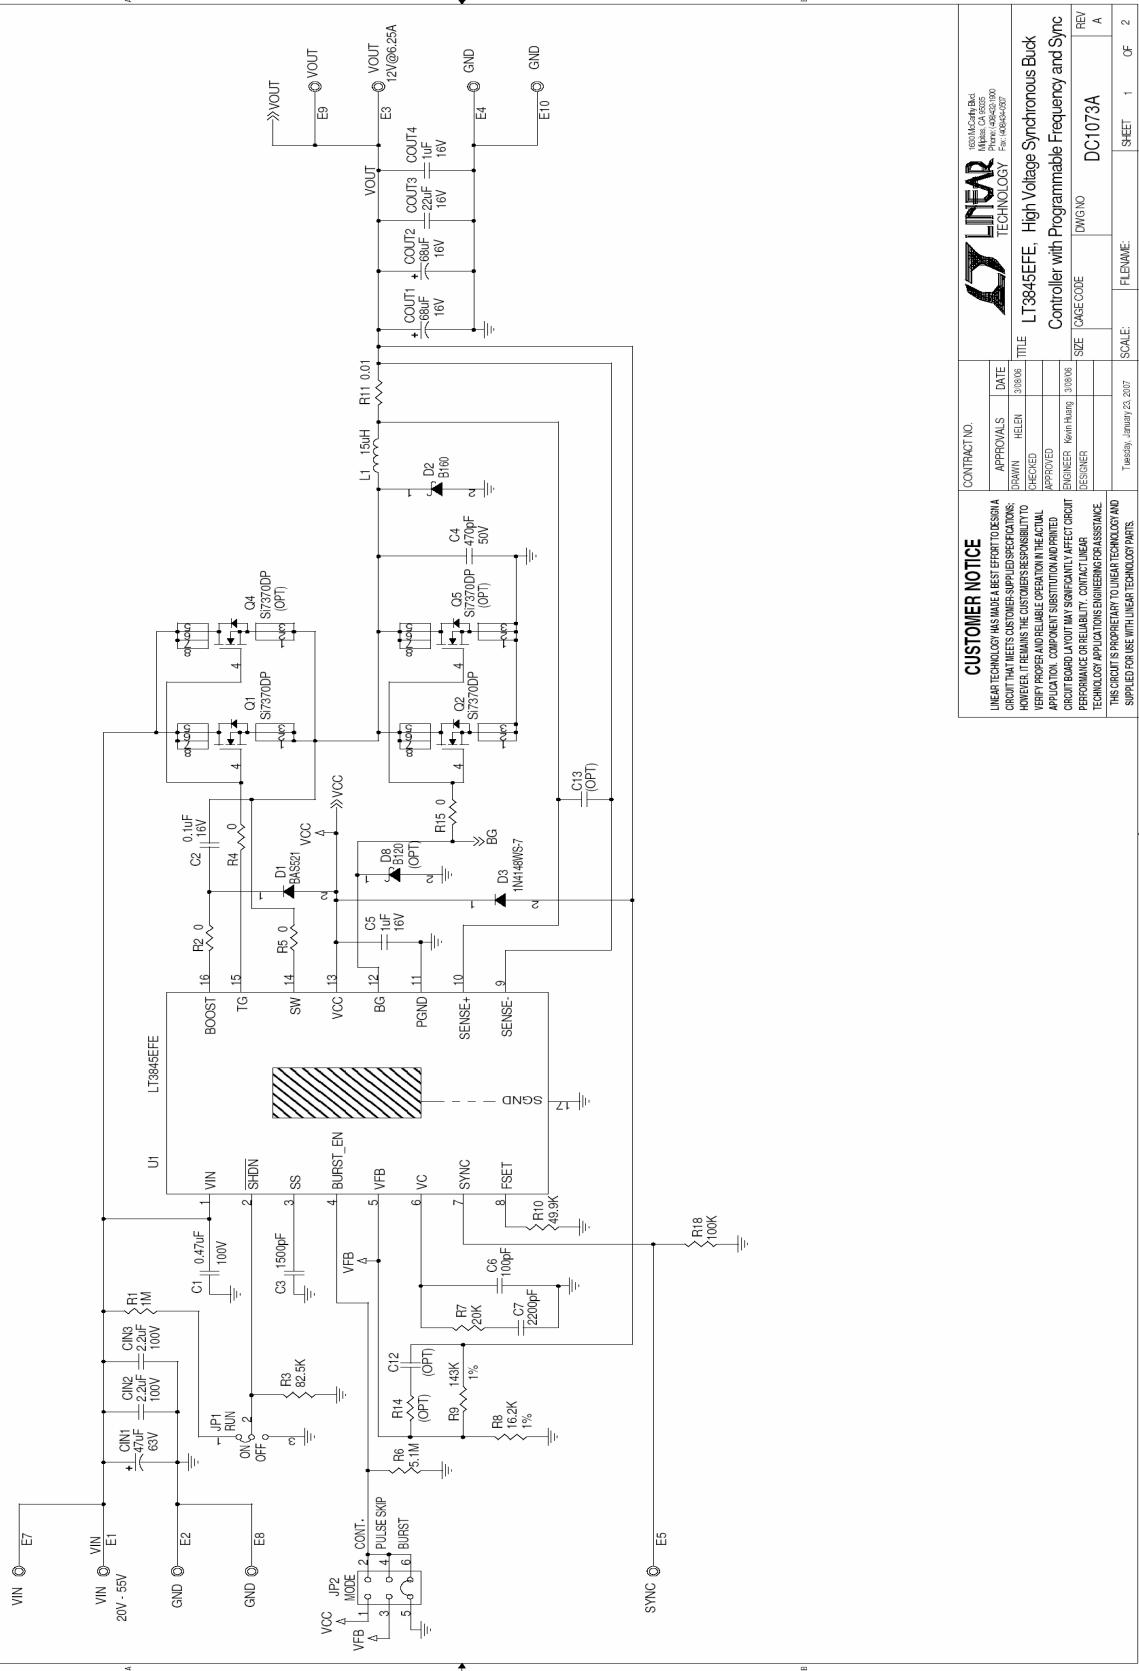

CUSTOMER NOTICE		CONTRACT NO.	
LINEAR TECHNOLOGY HAS MADE A BEST EFFORT DESIGNA CIRCUIT THAT MEETS CUSTOMER-SUPPLIED SPECIFICATIONS. HOWEVER, IT BEARNS THE CUSTOMER'S RESPONSIBILITY TO VERIFY PROPER UNDELBLE OPERATION IN THE ACTUAL APPLICATION. COMPONENTS SUBSTITUTED OR ADAPTED CIRCUIT BOARD LAYOUT MAY SIGNIFICANTLY AFFECT CIRCUIT PERFORMANCE OR RELIABILITY. CONTACT LINEAR TECHNOLOGY APPLICATIONS ENGINEERING FOR ASSISTANCE.		APPROVALS	DATE
		SIGNIN	TUELEN
		CHECKED	3/08/06
		APPROVED	
		ENGINEER	Karen Huang
		DESIGNER	
SIZE	CAGE CODE	DIAGNO	REV
		DC1073A	A
SCALE	FILENAME	SHEET	OF
		1	2

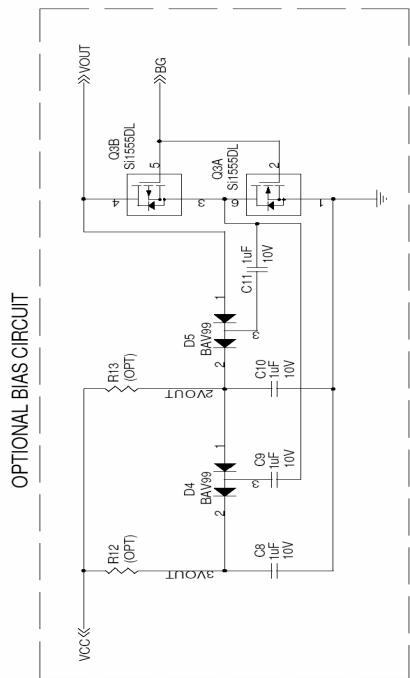

CUSTOMER NOTICE		CONTRACT NO.	LINEAR	
LINEAR TECHNOLOGY MAINTAINS THE BEST EFFORT TO DESIGN A CIRCUIT THAT MEETS CUSTOMER SPECIFICATIONS. HOWEVER, IT REMAINS THE CUSTOMER'S RESPONSIBILITY TO VERIFY PROPER AND RELIABLE OPERATION IN THE ACTUAL APPLICATION. CIRCUIT BOARD LAYOUT MAY SIGNIFICANTLY AFFECT CIRCUIT PERFORMANCE OR RELIABILITY. CONTACT LINEAR TECHNOLOGY APPLICATION ENGINEERS FOR ASSISTANCE.		APPROVALS	DATE	TECHNOLOGY
This circuit is proprietary to Linear Technology. No		DRAWN	3/8/06	©2006 Linear Technology Corp. 1601 McCarthy Blvd., Milpitas, CA 95035 Phone: 408-432-2000 Fax: 408-432-0077
Supplied for use within Linear Technology parts.		CHECDED		LT3845FFE, High Voltage Synchronous Buck Controller with Programmable Frequency and Sync
		APPROVED		REV
		ENGINEER	Kevin Hung	A
		DESIGNER		DC1073A
		SIZE	DRG NO.	
		CAGE CODE		
		WEDNESDAY, JANUARY 7, 2007	SCALE:	SHEET 2 OF 2
			FILENAME:	

Данный компонент на территории Российской Федерации**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибуторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ Р В 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru
moschip.ru_4

moschip.ru_6
moschip.ru_9