

Photologic Hermetic Sensors

OPL800, OPL800-OC, OPL801, OPL801-OC, OPL810, OPL810-OC, OPL811, OPL811-OC, OPL812-OC, OPL813-OC, OPL820, OPL820-OC, OPL821-OC



Features:

- Four output options available
- High noise immunity
- Direct TTL/LSTTL interface
- TO-18 hermetically sealed package
- Sensors mechanically and spectrally matched to other Optek devices (see device descriptions detailed below)

Description:

All **OPL800**, **OPL801**, **OPL820** and **OPL821** sensors consist of a photodiode, a linear amplifier and a Schmitt trigger on a single silicon chip (monolithic chip for **OPL820** and **OPL821**). **OPL810**, **OPL811**, **OPL812** and **OPL813** sensors also have a voltage regulator added to their photologic chips. Each device's photologic chip is mounted onto a standard TO-18 header and hermetically sealed in a lensed metal can.

All devices in the series feature TTL/LSTTL compatible logic level output, which can drive up to 8 TTL loads (**OPL800**, **OPL801**) or up to 10 TTL loads (**OPL810**, **OPL811**, **OPL812**, **OPL813**, **OPL820** and **OPL821**) without additional circuitry. On all these devices, the Schmitt trigger's hysteresis characteristics provide high immunity to noise on input and V_{CC} .

OPL800 series devices feature medium-speed data rates to 250 kBaud, with typical rise and fall times of 25 nanoseconds.

OPL800 and OPL801 devices are mechanically and spectrally matched to OP130 and OP231 series LEDs. OPL810, OPL811, OPL812 and OPL813 devices are mechanically and spectrally matched to OP130 and OP230 series devices. OPL820 and OPL821 devices are mechanically and spectrally matched to OP130 and OP231 series LEDs.

Applications:

- Non-contact reflective object sensor
- Assembly line automation
- Machine automation
- Machine safety
- End of travel sensor
- Door sensor

| Pin # | OPL80_ or OPL81_ | OPL82_ | Transistor |
|-------|------------------|----------|------------|
| 1 | Ground | Ground | Collector |
| 2 | V_{CC} | Output | Base |
| 3 | Output | V_{CC} | Emitter |

Mounted to TO-18 Base



RoHS

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | OPTEK Technology, Inc.
1645 Wallace Drive, Carrollton, TX 75006 | Ph: +1 972 323 2200
sensors@ttelelectronics.com | www.ttelelectronics.com

Photologic Hermetic Sensors

OPL800, OPL800-OC, OPL801, OPL801-OC, OPL810, OPL810-OC, OPL811, OPL811-OC, OPL812-OC, OPL813-OC, OPL820, OPL820-OC, OPL821-OC



| Ordering Information | | | | | | | |
|----------------------|---------------------|---|------------------------|-------------------|-------------|-------------|-------|
| Part Number | Photologic® | Input Power E_E ($\mu\text{W}/\text{cm}^2$) Min / Max | V_{CC} (V) Min / Max | I_{OH} / I_{OL} | Lead Length | | |
| OPL800 | Totem-Pole | 50 / 600 | 4.5 / 16.0 | 0.10 / 12.8 | 0.50" | | |
| OPL800-OC | Open-Collector | | | | | | |
| OPL801 | Inv-Totem-Pole | | | | | | |
| OPL801-OC | Inv-Open-Collector | | | | | | |
| OPL810 | Totem-Pole | 5 / 100 | | 4.5 / 16.0 | | 0.10 / 16.0 | 0.50" |
| OPL810-OC | Open-Collector | | | | | | |
| OPL811 | Inv-Totem-Pole | | | | | | |
| OPL811-OC | Inv-Open-Collector | | | | | | |
| OPL812-OC | Open-Collector | | | | | | |
| OPL813-OC | Inv-Open-Collector | | | | | | |
| OPL820 | 10K Pull-Up | 2 / 35 | | 4.5 / 16.0 | | 0.10 / 16.0 | 0.50" |
| OPL820-OC | Open Collector | | | | | | |
| OPL821-OC | Inv. Open Collector | | | | | | |

OPL800, OPL800OC, OPL801, OPL801-OC, OPL810, OPL810-OC, OPL811, OPL811-OC, OPL812-OC, OPL813-OC, OPL820-OC, OPL821-OC


OPL800/800B/810 Buffered Totem-Pole



OPL800-OC/810-OC/812-OC/820/OC Open-Collector



OPL801/811 Inverted Totem-Pole

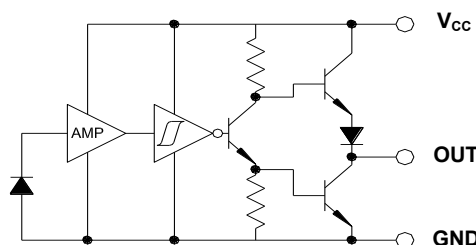

OPL801-OC/811-OC/813-OC/821-OC Inverted Open-Collector



General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | OPTEK Technology, Inc.
1645 Wallace Drive, Carrollton, TX 75006 | Ph: +1 972 323 2200
sensors@ttelelectronics.com | www.ttelelectronics.com

Photologic Hermetic Sensors

OPL800, OPL800-OC, OPL801, OPL801-OC, OPL810,
OPL810-OC, OPL811, OPL811-OC, OPL812-OC, OPL813-
OC, OPL820, OPL820-OC, OPL821-OC



OPL820

OPL820 10K Pull-Up



General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | OPTEK Technology, Inc.
1645 Wallace Drive, Carrollton, TX 75006 | Ph: +1 972 323 2200
sensors@ttelectronics.com | www.ttelectronics.com

Photologic Hermetic Sensors

OPL800, OPL800-OC, OPL801, OPL801-OC, OPL810,
OPL810-OC, OPL811, OPL811-OC, OPL812-OC, OPL813-
OC, OPL820, OPL820-OC, OPL821-OC



Electrical Specifications

Absolute Maximum Ratings ($T_A = 25^\circ\text{C}$ unless otherwise noted)
OPB800/801/810/811 and OPB800-OC Series

| Input Diode | |
|--|--|
| Operating Temperature Range OPL800, OPL801 OPL810, OPL811 OPL820 | -55° C to +110° C -55° C to +105° C -40° C to +100° C |
| Storage Temperature Range OPL800, OPL801 OPL810, OPL811 OPL820 | -65° C to +150° C -65° C to +125° C -55° C to +125° C |
| Lead Soldering Temperature [1/16 inch (1.6mm) from the case for 5 sec. with soldering iron] | 260°C ⁽¹⁾ |
| Input Infrared LED | |
| Supply Voltage, V_{CC} (not to exceed 3 seconds) OPL800, OPL801 OPL810, OPL811, OPL820 | 10 V 18 V |
| Sourcing Current OPL810, OPL811 | 10 mA |
| Output Voltage (high state) OPL800, OPL801, OPL810, OPL811 OPL820 | 35 V 30 V |
| Output Current Sink (low state) OPL810, OPL811 OPL820 | 50 mA 16 mA |
| Irradiance OPL800, OPL801 OPL810, OPL810-OC, OPL811, OPL811-OC OPL812, OPL812-OC, OPL813, OPL813-OC | 3 mW/cm ² 2 mW/cm ² 1 mW/cm ² |

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | OPTEK Technology, Inc.
1645 Wallace Drive, Carrollton, TX 75006 | Ph: +1 972 323 2200
sensors@ttelelectronics.com | www.ttelelectronics.com

Photologic Hermetic Sensors

OPL800, OPL800-OC, OPL801, OPL801-OC, OPL810,
OPL810-OC, OPL811, OPL811-OC, OPL812-OC, OPL813-
OC, OPL820, OPL820-OC, OPL821-OC



Electrical Specifications

Absolute Maximum Ratings ($T_A = 25^\circ\text{C}$ unless otherwise noted)
OPB800/801/810/811/812/813 and OPB800-OC Series

| Output Photologic® | |
|--|---|
| Voltage at Output Lead OPL800, OPL801, OPL810, OPL811 OPL820 | 35 V 30 V |
| Duration of Output Short to V_{CC} | 1 second |
| Power Dissipation OPL800, OPL801 OPL810, OPL811 OPL820 | 120 mW ⁽²⁾ 250 mW ⁽²⁾ 200 mW ⁽²⁾ |

Notes:

- (1) RMA flux is recommended. Duration can be extended to 10 sec. max. when flow soldering. For OPB820, a maximum of 20 grams force may be applied to leads while at soldering temperatures.
- (2) Derate linearly 2.5 mW/°C above 25° C for OPL800, OPL801, OPL810, OPL811. Derate linearly 5.7 mW/°C above 90° C for OPL820.
- (3) For OPL800, OPL801, OPL810, OPL811, light measurements are made with $\lambda_i = 935\text{ nm}$. For OPB820, light measurements are made with an LED source having a wavelength of 935 nm.

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | OPTEK Technology, Inc.
1645 Wallace Drive, Carrollton, TX 75006 | Ph: +1 972 323 2200
sensors@ttelectronics.com | www.ttelectronics.com

Photologic Hermetic Sensors

OPL800, OPL800-OC, OPL801, OPL801-OC, OPL810,
OPL810-OC, OPL811, OPL811-OC, OPL812-OC, OPL813-
OC, OPL820, OPL820-OC, OPL821-OC



Electrical Specifications

| Electrical Characteristics (T _A = 25° C unless otherwise noted) | | | | | | |
|--|---|-------|-------|-------|--------------------------|--|
| SYMBOL | PARAMETER | MIN | TYP | MAX | UNITS | TEST CONDITIONS |
| V _{CC} | Operating Supply Voltage | | | | | |
| | OPL800/801 | 4.5 | - | 5.5 | V | - |
| | OPL810/811 | 4.5 | - | 16 | V | - |
| | OP820 | 4.5 | - | 16 | V | - |
| | Peak-to-Peak V _{CC} Ripple Necessary to Cause False Triggering of Output | | | | | |
| | OPL800/801 | - | 2 | - | V | f = DC to 50 MHz |
| | OPL810/811 | - | - | 1 | V | f = DC to 50 MHz |
| I _{CC} | Supply Current | - | - | 15 | mA | E _e = 0 or 1 mW/cm ² |
| E _{eT} ⁽⁺⁾ | Positive-Going Threshold Irradiance ⁽³⁾ | | | | | |
| | OPL800/801 | 0.050 | 0.180 | 0.600 | mW/cm ² | T _A = 25°C |
| | OPL810/811 | 0.015 | 0.060 | 0.200 | mW/cm ² | T _A = 25°C |
| | OPL820 | 0.002 | 0.015 | 0.035 | mW/cm ² | See below ⁽³⁾ |
| E _{eT} ⁽⁺⁾ /E _{eT} ⁽⁻⁾ | Hysteresis Ratio | | | | | |
| | OPL800/801 | 1.5 | 2.0 | 2.5 | - | - |
| | OPL810/811 | 1.2 | 1.5 | 2.0 | - | - |
| E _e ⁽⁺⁾ /E _e ⁽⁻⁾ | Hysteresis Ratio | | | | | |
| OPL820 | 1.05 | 1.20 | 1.90 | - | See below ⁽³⁾ | |
| I _{CCH} | High State Supply Current | | | | | |
| OPL820 | - | 5 | 12 | mA | See below ⁽⁴⁾ | |
| I _{CCL} | Low State Supply Current | | | | | |
| OPL820 | - | 4 | 12 | mA | See below ⁽⁵⁾ | |

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | OPTEK Technology, Inc.
1645 Wallace Drive, Carrollton, TX 75006 | Ph: +1 972 323 2200
sensors@ttelelectronics.com | www.ttelelectronics.com

Photologic Hermetic Sensors

OPL800, OPL800-OC, OPL801, OPL801-OC, OPL810,
OPL810-OC, OPL811, OPL811-OC, OPL812-OC, OPL813-
OC, OPL820, OPL820-OC, OPL821-OC



Electrical Specifications

| Electrical Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted) | | | | | | |
|---|---------------------------|--------------|----------|-----|------------------------------------|---|
| SYMBOL | PARAMETER | MIN | TYP | MAX | UNITS | TEST CONDITIONS |
| V_{OH} | High Level Output Voltage | | | | | |
| | OPL800 | 2.4 | - | - | V | $I_{OH} = -800\ \mu\text{A}$, $E_e = 1\ \text{mW}/\text{cm}^2$ |
| | OPL801 | 2.4 | - | - | V | $I_{OH} = -800\ \mu\text{A}$, $E_e = 0$ |
| | OPL810 | $V_{CC}-2.1$ | - | - | V | $I_{OH} = -1\text{mA}$, $E_e = 0.4\ \text{mW}/\text{cm}^2$ |
| | OPL811 | $V_{CC}-2.1$ | - | - | V | $I_{OH} = -1\text{mA}$, $E_e = 0$ |
| OPL820-OC/821-OC | $V_{CC}-1.5$ | - | V_{CC} | V | $I_{OH} = -100\ \mu\text{A}^{(4)}$ | |

Notes:

- (1) RMA flux is recommended. Duration can be extended to 10 sec. max. when flow soldering. For OPL820, a maximum of 20 grams force may be applied to leads while at soldering temperatures.
- (2) Derate linearly $2.5\ \text{mW}/^\circ\text{C}$ above 25°C for OPL800, OPL801, OPL810, OPL811. Derate linearly $5.7\ \text{mW}/^\circ\text{C}$ above 90°C for OPL820.
- (3) For OPL800, OPL801, OPL810, OPL811, light measurements are made with $\lambda_i = 935\ \text{nm}$. For OPL820, light measurements are made with an LED source having a wavelength of $935\ \text{nm}$.
- (4) High output state limits are valid for $4.5\ \text{V} < V_{CC} < 16\ \text{V}$ and $E_e > 0.035\ \text{mW}/\text{cm}^2$ (OPL820, OPL820-OC), $E_e < 0.001\ \text{mW}/\text{cm}^2$ (OPL821-OC).
- (5) Low output state limits are valid for $4.5\ \text{V} < V_{CC} < 16\ \text{V}$ and $E_e > 0.035\ \text{mW}/\text{cm}^2$ (OPL821-OC), $E_e < 0.001\ \text{mW}/\text{cm}^2$ (OPL820, OPL820-OC).

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | OPTEK Technology, Inc.
1645 Wallace Drive, Carrollton, TX 75006 | Ph: +1 972 323 2200
sensors@ttelelectronics.com | www.ttelelectronics.com

Photologic Hermetic Sensors

OPL800, OPL800-OC, OPL801, OPL801-OC, OPL810,
OPL810-OC, OPL811, OPL811-OC, OPL812-OC, OPL813-
OC, OPL820, OPL820-OC, OPL821-OC



Electrical Specifications

| Electrical Characteristics (T _A = 25° C unless otherwise noted) | | | | | | |
|--|------------------------------|----------------------|-----------------|------|--|--|
| SYMBOL | PARAMETER | MIN | TYP | MAX | UNITS | TEST CONDITIONS |
| V _{OH} | High Level Output Voltage | | | | | |
| | OPL800 | 2.4 | - | - | V | I _{OH} = -800 μA, E _e = 1 mW/cm ² |
| | OPL801 | 2.4 | - | - | V | I _{OH} = -800 μA, E _e = 0 |
| | OPL810 | V _{CC} -2.1 | - | - | V | I _{OH} = -1mA, E _e = 0.4 mW/cm ² |
| | OPL811 | V _{CC} -2.1 | - | - | V | I _{OH} = -1mA, E _e = 0 |
| OPL820-OC/821-OC | V _{CC} -1.5 | - | V _{CC} | V | I _{OH} = -100 μA ⁽⁴⁾ | |
| V _{OL} | Low Level Output Voltage | | | | | |
| | OPL800/800-OC | - | - | 0.4 | V | I _{OL} = 12.8 mA, E _e = 0 |
| | OPL801/801-OC | - | - | 0.4 | V | I _{OL} = 12.8 mA, E _e = 1 mW/cm ² |
| | OPL810/810-OC | - | - | 0.4 | V | I _{OL} = 16 mA, E _e = 0 |
| | OPL811/811-OC | - | - | 0.4 | V | I _{OL} = 16 mA, E _e = 0.4 mW/cm ² |
| | OPL812-OC | - | - | 0.4 | V | I _{OL} = 16 mA, E _e = 0 |
| | OPL813-OC | - | - | 0.4 | V | I _{OL} = 16 mA, E _e = 0.2 mW/cm ² |
| OPL820 | - | - | 0.4 | V | I _{OL} = 16 mA ⁽⁵⁾ | |
| I _{OH} | High Level Output Current | | | | | |
| | OPL800-OC | - | - | 100 | μA | V _{OH} = 30 V, E _e = 2 mW/cm ² |
| | OPL801-OC | - | - | 100 | μA | V _{OH} = 30 V, E _e = 0 |
| | OPL810-OC | - | - | 100 | μA | V _{OH} = 30 V, E _e = 0.4 mW/cm ² |
| | OPL811-OC | - | - | 100 | μA | V _{OH} = 30 V, E _e = 0 |
| | OPL812-OC | - | - | 100 | μA | V _{OH} = 30 V, E _e = 0.2 mW/cm ² |
| OPL813-OC | - | - | 100 | μA | V _{OH} = 30 V, E _e = 0 | |
| I _{OS} | Short Circuit Output Current | | | | | |
| | OPL800 | -20 | | | mA | E _e = 1 mW/cm ² , Output = GND |
| | OPL801 | - | | -100 | mA | E _e = 0, Output = GND |

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | OPTEK Technology, Inc.
1645 Wallace Drive, Carrollton, TX 75006 | Ph: +1 972 323 2200
sensors@ttelelectronics.com | www.ttelelectronics.com

Photologic Hermetic Sensors

OPL800, OPL800-OC, OPL801, OPL801-OC, OPL810,
OPL810-OC, OPL811, OPL811-OC, OPL812-OC, OPL813-
OC, OPL820, OPL820-OC, OPL821-OC



Electrical Specifications

| Electrical Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted) | | | | | | |
|---|--|--------|----------|--------|--------------------------------|---|
| SYMBOL | PARAMETER | MIN | TYP | MAX | UNITS | TEST CONDITIONS |
| t_r, t_f | Output Rise Time, Fall Time OPL800/801 | - | 70 | - | ns | $T_A = 25^\circ\text{C}$, $E_e = 0$ or 1 mW/cm^2 , $R_L = 8$ TTL loads, $f = 10\text{ kHz}$, D.C. = 50% |
| | OPL800-OC/801-OC | - | 70 | - | ns | $T_A = 25^\circ\text{C}$, $E_e = 0$ or 1 mW/cm^2 , $R_L = 360\ \Omega$, $f = 10\text{ kHz}$, D.C. = 50% |
| | OPL810/811 | - | 70 | - | ns | $T_A = 25^\circ\text{C}$, $E_e = 0$ or 0.4 mW/cm^2 , $R_L = 10$ TTL loads, $f = 10\text{ kHz}$, D.C. = 50% |
| | OPL810-OC/811-OC/812-OC/ 813-OC | - | 100 | - | ns | $T_A = 25^\circ\text{C}$, $E_e = 0$ or 1 mW/cm^2 , $R_L = 300\ \Omega$, $f = 10\text{ kHz}$, D.C. = 50% |
| | OPL820 | - | 60 | - | ns | $R_L = 390\ \Omega$ |
| t_{PLH}, t_{PHL} | Propagation Delay Low/High - High/Low OPL800/801 | - | 5 | - | μs | $T_A = 25^\circ\text{C}$, $E_e = 0$ or 1 mW/cm^2 , $R_L = 8$ TTL loads, $f = 10\text{ kHz}$, D.C. = 50% |
| | OPL800-OC/801-OC | - | 5 | - | μs | $T_A = 25^\circ\text{C}$, $E_e = 0$ or 1 mW/cm^2 , $R_L = 8$ TTL loads, $f = 10\text{ kHz}$, D.C. = 50% |
| | OPL810/811 | - | 5 | - | μs | $T_A = 25^\circ\text{C}$, $E_e = 0$ or 0.4 mW/cm^2 , $R_L = 10$ TTL loads, $f = 10\text{ kHz}$, D.C. = 50% |
| | OPL810-OC/811-OC/812-OC/ 813-OC | - | 5 | - | μs | $T_A = 25^\circ\text{C}$, $E_e = 0$ or 1 mW/cm^2 , $R_L = 300\ \Omega$, $f = 10\text{ kHz}$, D.C. = 50% |
| | OPL820 (to high state) OPL820 (to low state) | - - | 1 2.1 | - - | μs μs | $E_e = 0.1\text{ mW/cm}^2$, $R_L = 390\ \Omega$ $E_e = 0.1\text{ mW/cm}^2$, $R_L = 390\ \Omega$ |
| Data Rate | Data Rate Using NRZ Format | - | 100 | - | kHz | $E_e = 0.1\text{ mW/cm}^2$, $R_L = 390\ \Omega$ |

Notes:

- (1) RMA flux is recommended. Duration can be extended to 10 sec. max. when flow soldering. For OPB820, a maximum of 20 grams force may be applied to leads while at soldering temperatures.
- (2) Derate linearly $2.5\text{ mW/}^\circ\text{C}$ above 25°C for OPL800, OPL801, OPL810, OPL811. Derate linearly $5.7\text{ mW/}^\circ\text{C}$ above 90°C for OPL820.
- (3) For OPL800, OPL801, OPL810, OPL811, light measurements are made with $\lambda_i = 935\text{ nm}$. For OPB820, light measurements are made with an LED source having a wavelength of 935 nm .
- (4) High output state limits are valid for $4.5\text{ V} < V_{CC} < 16\text{ V}$ and $E_e > 0.035\text{ mW/cm}^2$ (OPL820, OPL820-OC), $E_e < 0.001\text{ mW/cm}^2$ (OPL821-OC).
- (5) Low output state limits are valid for $4.5\text{ V} < V_{CC} < 16\text{ V}$ and $E_e > 0.035\text{ mW/cm}^2$ (OPL821-OC), $E_e < 0.001\text{ mW/cm}^2$ (OPL820, OPL820-OC).

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.


TT Electronics | OPTEK Technology, Inc.
1645 Wallace Drive, Carrollton, TX 75006 | Ph: +1 972 323 2200
sensors@ttelelectronics.com | www.ttelelectronics.com

Photologic Hermetic Sensors



OPL800, OPL800-OC, OPL801, OPL801-OC, OPL810, OPL810-OC, OPL811, OPL811-OC, OPL812-OC, OPL813-OC, OPL820, OPL820-OC, OPL821-OC



Performance OPL800, OPL801

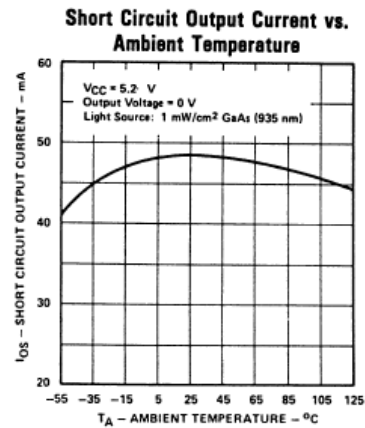

OPL800-OC, OPL801-OC

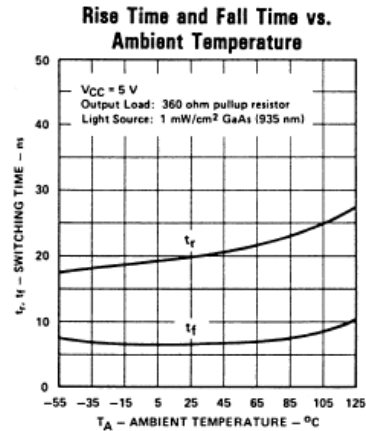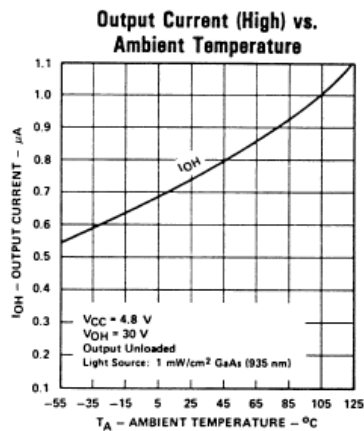

OPL800, OPL800-OC



OPL801, OPL801-OC



General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | OPTeK Technology, Inc.
1645 Wallace Drive, Carrollton, TX 75006 | Ph: +1 972 323 2200
sensors@ttelelectronics.com | www.ttelelectronics.com

Photologic Hermetic Sensors

OPL800, OPL800-OC, OPL801, OPL801-OC, OPL810, OPL810-OC, OPL811, OPL811-OC, OPL812-OC, OPL813-OC, OPL820, OPL820-OC, OPL821-OC



Performance

OPL800, OPL801 Series



General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | OPTEK Technology, Inc.
1645 Wallace Drive, Carrollton, TX 75006 | Ph: +1 972 323 2200
sensors@ttelelectronics.com | www.ttelelectronics.com

Photologic Hermetic Sensors

OPL800, OPL800-OC, OPL801, OPL801-OC, OPL810, OPL810-OC, OPL811, OPL811-OC, OPL812-OC, OPL813-OC, OPL820, OPL820-OC, OPL821-OC



Performance

OPL810, OPL811 Series

Output Voltage vs. Ambient Temp.



High Output Current vs. Ambient Temp.




Normalized Threshold Irradiance vs. T_A



OPL812, OPL813 Series

Normalized Threshold Irradiance vs. Amb. Temp.

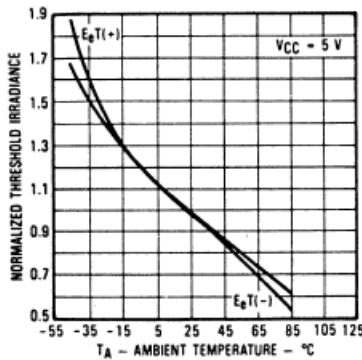

Normalized Spectral Response



Angular Displacement from Package Mechanical Axis



General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | OPTEK Technology, Inc.
1645 Wallace Drive, Carrollton, TX 75006 | Ph: +1 972 323 2200
sensors@ttelelectronics.com | www.ttelelectronics.com

Photologic Hermetic Sensors

OPL800, OPL800-OC, OPL801, OPL801-OC, OPL810, OPL810-OC, OPL811, OPL811-OC, OPL812-OC, OPL813-OC, OPL820, OPL820-OC, OPL821-OC



Performance

OPL812, OPL813 Series



Switching Test Curves

Switching Test Curve for Inverters



Switching Test Curve for Buffers



General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | OPTEK Technology, Inc.
 1645 Wallace Drive, Carrollton, TX 75006 | Ph: +1 972 323 2200
 sensors@ttelelectronics.com | www.ttelelectronics.com


Photologic Hermetic Sensors

OPL800, OPL800-OC, OPL801, OPL801-OC, OPL810, OPL810-OC, OPL811, OPL811-OC, OPL812-OC, OPL813-OC, OPL820, OPL820-OC, OPL821-OC



Performance

OPL820, OPL821 Series

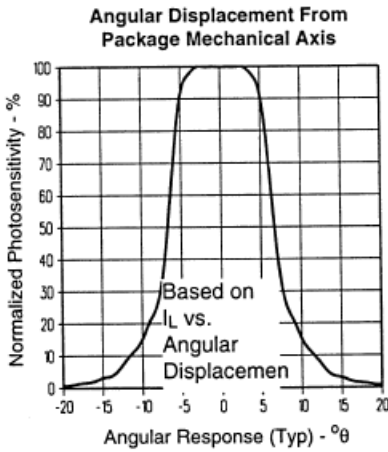

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | OPTEK Technology, Inc.
1645 Wallace Drive, Carrollton, TX 75006 | Ph: +1 972 323 2200
sensors@ttelectronics.com | www.ttelectronics.com



Photologic Hermetic Sensors

OPL800, OPL800-OC, OPL801, OPL801-OC, OPL810, OPL810-OC, OPL811, OPL811-OC, OPL812-OC, OPL813-OC, OPL820, OPL820-OC, OPL821-OC



Performance

OPL820, OPL821 Series

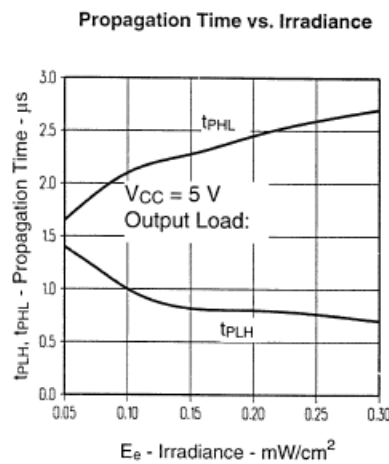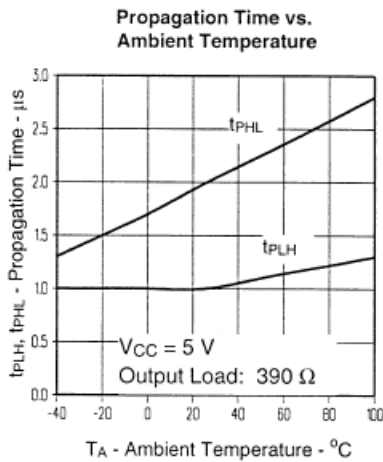

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | OPTeK Technology, Inc.
1645 Wallace Drive, Carrollton, TX 75006 | Ph: +1 972 323 2200
sensors@ttelelectronics.com | www.ttelelectronics.com

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9