

1309G8 Tool Kit

Assembly Instructions



Figure 1

NOTE: Instructions are included with each crimp tool for terminating specific contacts. Use of non-Anderson Power crimp tools can affect UL & CSA approval. See website for comprehensive tooling data.

The 1309G8 Tool Kit has three die sets, three locators and one frame for crimping 15-45 Amp APP contacts (See Figure 1). The following instructions describe how to change the configuration from the 1309G2, 1309G3 and 1309G6 configurations.

The dies and locators are color coded to identify the components required for each configuration (See Figure 2). See table below for configurations.

Modification Procedure

Disassemble

1. Remove the nut, wavy washer and locator.
2. Unscrew the top and bottom die screws.
3. Remove the dies from the frame. The tool can now be assembled with a different configuration.

Reassemble

1. Assemble the desired die in the top position with the supplied screw. (See Figure 3)
2. Place the bottom anvil die in the frame. (See Figure 3)
3. Tighten the screws until they bottom on the frame and loosen ½ turn.
4. Place the locator, wavy washer and nut on the screw; in that order. (See Figure 4 & Figure 5)
5. Tighten until the nut & locator bottom-out. (9 mm or 11/32" Wrench)
6. LOOSEN THE NUT ONE COMPLETE TURN. This is required for correct tool operation.
7. Adjust the release force to 25 lbf (111.21 N) minimum at the handle ends. The load can be checked by placing the end of one of the handles on a scale and pushing the other grip until the ratchet releases. If the tool requires adjustment, follow the adjustment procedure.



Figure 2

Color coded dies and locator

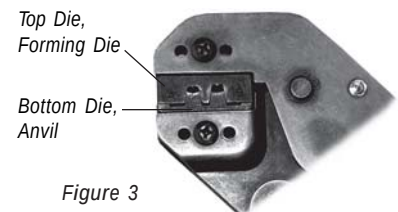


Figure 3



Figure 4

Wavy Washer in place



Figure 5

Tighten bottom out and then loosen one complete turn

How to Adjust Tool Preload

(It may be necessary, when changing dies, or over the normal life of the tool, to adjust the tool handle preload.)

1. To adjust tool to obtain proper crimp force values, open the handles and remove the cam lock screw with a hex key wrench supplied. (See Figure 6)
2. Rotate the cam clockwise to increase handle load or counterclockwise to decrease handle load.
3. Position odd numbers on the cam in the locking screw hole adjacent to the letter "L" and even numbers adjacent to the letter "T".
4. Lock the cam at the desired handle load setting and remeasure the force.
5. Continue adjustment if necessary.

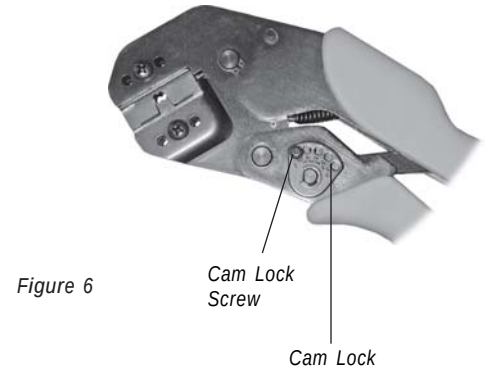


Figure 6

1309 Crimp Tool Series Operating Procedure

1. Strip cable according to manufacturer's specifications.
2. Select the appropriate tool cavity for the contact being crimped.
3. Place contact in die end of modular locator. Insert contact fully until the wire stops on the contact are recessed into the locator (See Figure 7a).
4. Close tool carefully until jaws grip the contact.
5. Insert the properly stripped wire into the contact.
6. Holding the wire in place, close the tool past the ratchet release position and allow the jaws to open.
7. Remove and inspect the crimp.
8. Test by holding contact and pulling firmly on cable.

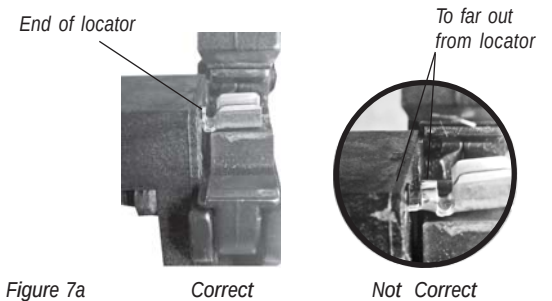


Figure 7a

Tooling Part Number	Contacts	Locator Color Code	Die Color Code	Wire Size AWG (mm²)	Pullout Values (lbf) (per UL standard 486A) When Properly Crimped **	Tool Cavity
1309G2	1331	Red	Red	#12-16 (4.0-1.5)	70-30	30
	1332	Red	Red	#16-20 (1.5-0.5)	30-13	15
	262G1	Red	Red	16-20 (1.5-0.5)	30-13	15
	200G2L	Red	Red	16-20 (1.5-0.5)	30-13	15
	269G2	Red	Red	16-20 (1.5-0.5)	30-13	15
1309G3	261G1	Yellow	Yellow	12/14/2016	70-50-30	A
	261G2	Yellow	Yellow	14-16 (2.5-1.5)	50-30	A
	261G2	Yellow	Yellow	10-12 (6.0-4.0)	80-70	B
	269G1	Yellow	Yellow	12-16 (4.0-1.5)	70-30	A
	269G3	Yellow	Yellow	10-14 (6.0-2.5)	80-50	A
1309G6	200G1L	Blue	Blue	6mm, #10-14	80, 80-50	B
	201G1H	Blue	Blue	6mm, #10-14	80, 80-50	B
	1830G1	Blue	Blue	6mm, #10-14	100,80-50	B

** Tool user is responsible to ensure that the crimps made conform to the required quality and agency specifications.

Certification

Tool user is responsible to ensure that the tool is adjusted to provide proper crimps, that conform to required quality and pull force values.

- If the tool does not meet minimum pull force values, handle preload should be increased and the pull test rerun, (See How to Adjust Preload).
- When the hand tool is no longer capable of achieving minimum pull force, it should be taken out of service and replaced.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Anderson Power Products:](#)

[1309G8](#)

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9