
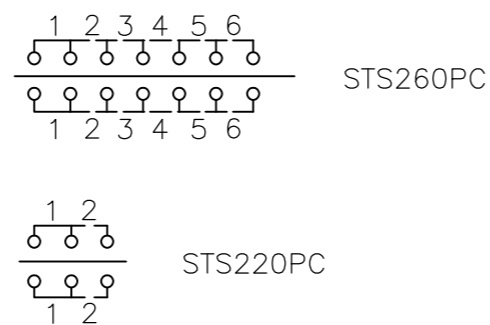
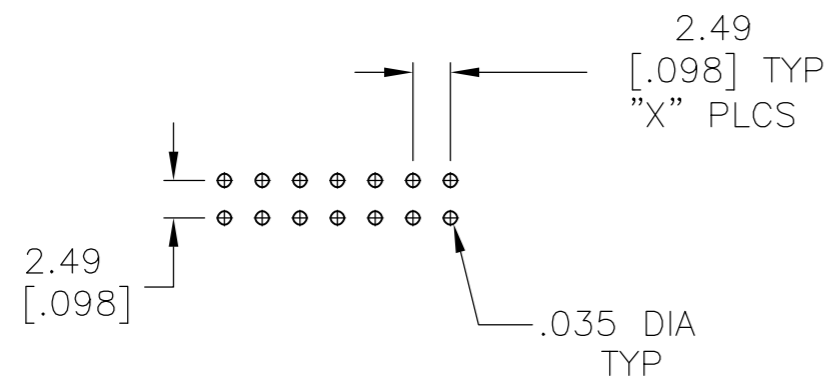
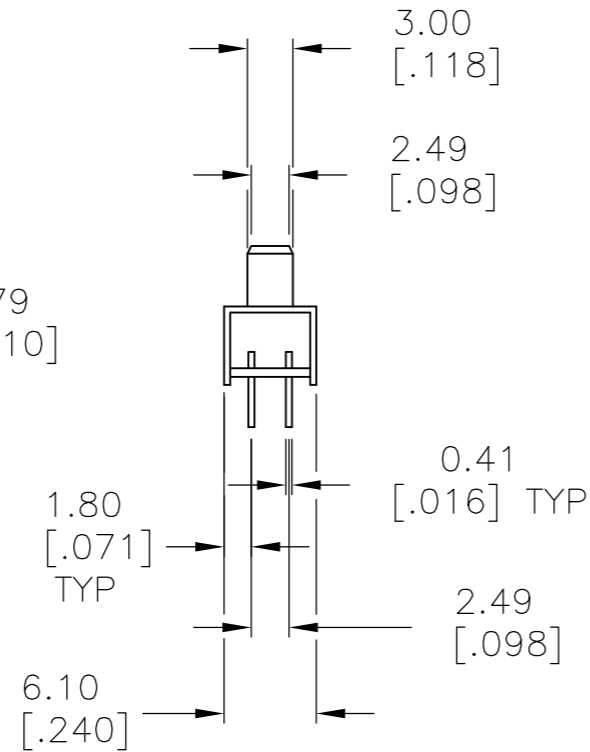
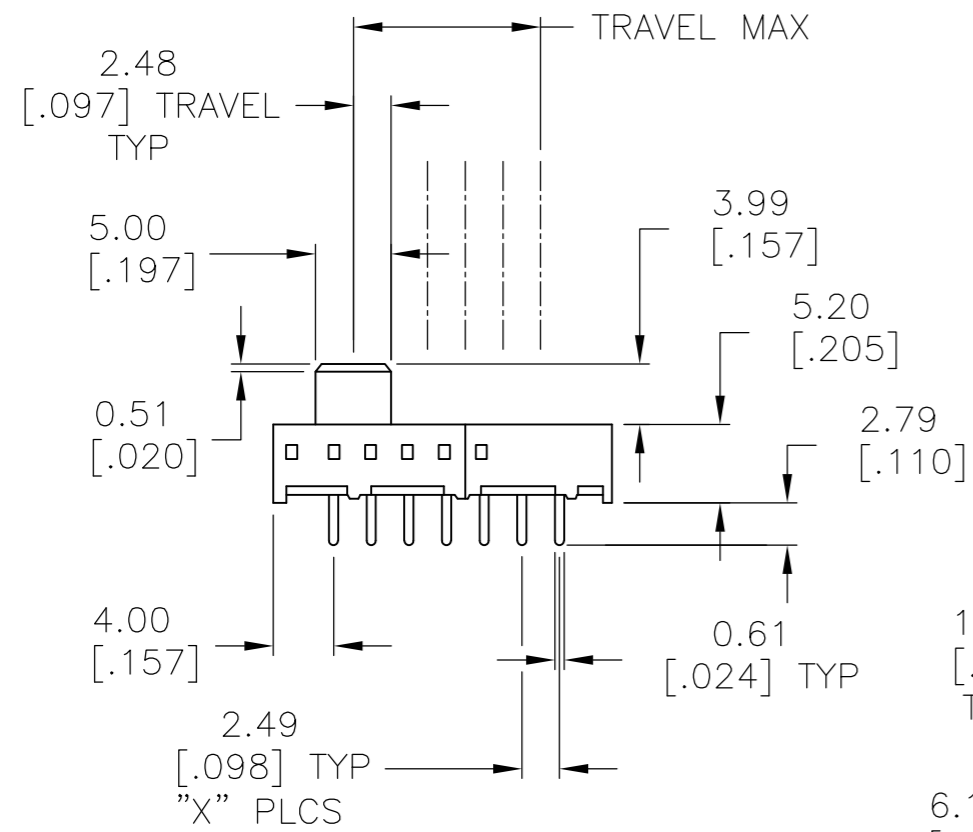


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
AD	00	A3	REVISED PER ECO-11-004820	11MAR11	RK	HMR	

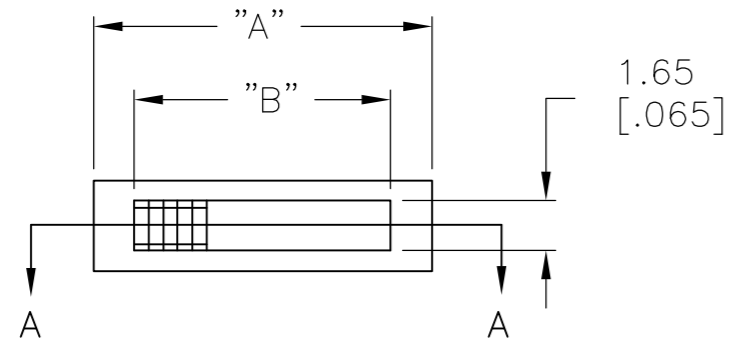

P.C. HOLE LAYOUT

EXAMPLES: MIN-MAX TRAVEL OF SWITCH

PART IDENTIFICATION	A DIM	B DIM	X PLC
STS 260PC (DP6T)	23.00 [0.906]	17.50 [0.689]	6 PLCS
STS 250PC (DP5T)	20.50 [0.807]	15.00 [0.591]	5 PLCS
STS 240PC (DP4T)	18.00 [0.709]	12.50 [0.492]	4 PLCS
STS 230PC (DP3T)	15.50 [0.610]	10.00 [0.394]	3 PLCS
STS 220PC (DP2T)	13.00 [0.512]	7.50 [0.295]	2.50 [0.098]

SPECIFICATIONS:  
 MAKE-BEFORE-BREAK

MATERIALS:

FRAME: STEEL, ZINC PLATE  
 ACTUATOR: POM UL94HB, BLACK  
 FIXED CONTACT/TERMINAL: COPPER ALLOY, SILVER OVER NICKEL PLATE  
 MOVING CONTACT: COPPER ALLOY, SILVER CLAD  
 COIL SPRING: TEMPERED STEEL WIRE  
 BALL- TEMPERED CARBON STEEL  
 TERMINAL BOARD: PHENOLIC, UL94HB  
 TERMINAL SEAL: EPOXY

ELECTRICAL:

CONTACT RATING: 250 MILLIAMPS@125V AC  
 CONTACT RESISTANCE: 30 MILLIOHMS MAX (INITIAL), 60 MILLIOHMS AFTER TEST  
 INSULATION RESISTANCE: 500 MEGOHMS MIN AT 500V DC  
 DIELECTRIC STRENGTH: 500 VAC RMS AT SEA LEVEL  
 LIFE EXPECTANCY: 10,000 CYCLES MIN. NO LOAD

MECHANICAL:

ACTUATION FORCE: 250 +150/-100 GRAMS  
 TRAVEL: .098 (2.49MM)

ENVIRONMENTAL:

OPERATING TEMPERATURE: -10°C TO +60°C  
 STORAGE TEMPERATURE: -10°C TO +60°C  
 RESISTANCE TO SOLDER HEAT: 260°C FOR 10 SEC PER 109-202, COND. B  
 SOLDERABILITY: PER EIA-364-56A, PROCEDURE 3, COND. B

NOTES:

- ALL MATERIALS AND FINISHES SHALL COMPLY WITH EU DIRECTIVE 2002/95/EC OF 27JAN2003 (ROHS)
- ALL PERFORMANCE SPECIFICATIONS WERE TESTED IN ACCORDANCE WITH JIS-C-5441 UNLESS OTHERWISE STATED.

6	17.50 [0.689]	23.00 [0.906]	DP6T	STS260PC04	1825163-5
5	15.00 [0.591]	20.50 [0.807]	DP5T	STS250PC04	1825163-4
4	12.50 [0.492]	18.00 [0.709]	DP4T	STS240PC04	1825163-3
3	10.00 [0.394]	15.50 [0.610]	DP3T	STS230PC04	1825163-2
2	7.50 [0.295]	13.00 [0.512]	DPDT	STS220PC04	1825163-1
X PLC	DIM B	DIM A	FUNCTION	T&B P/N	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B.S.VISWESWARA 31MAR05	TE Connectivity		
DIMENSIONS: mm [INCHES]		CHK M S SARVER			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD M S SARVER	PRODUCT SPEC		
0 PLC ± - 1 PLC ± - 2 PLC ± .008(0.20) 3 PLC ± - 4 PLC ± - ANGLES ± 1°		APPLICATION SPEC	SWITCH-SLIDE (DP*T) P/N STS2*0PC		
MATERIAL	FINISH	WEIGHT	SIZE A2	CAGE CODE 00779	DRAWING NO C=1825163
CUSTOMER DRAWING		SCALE 2:1	SHEET 1 of 2	REV A3	RESTRICTED TO

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.




LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD		
AD	00	SEE SHEET 1	-	-	-		

PART NUMBER POSITION BOTTOM VIEW

FUNCTION DIAGRAM





-1

2








-2

3









-3

4









-4

5

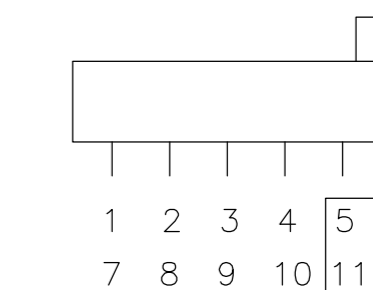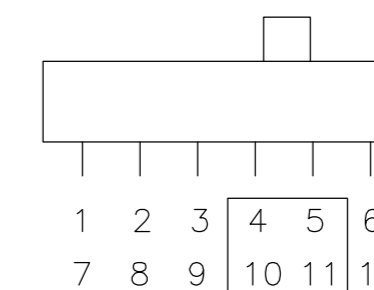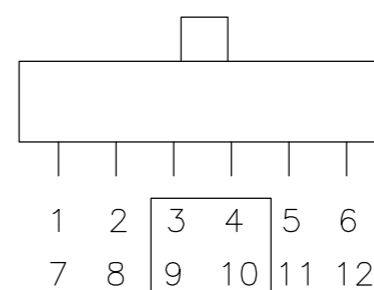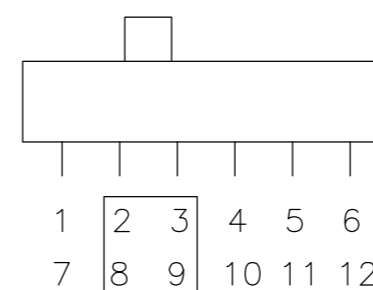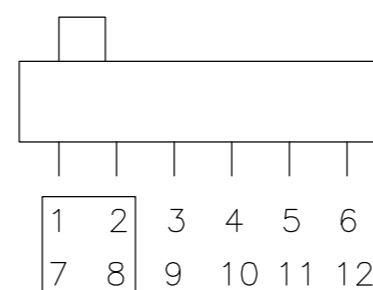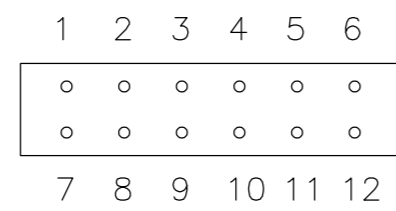

-5

6

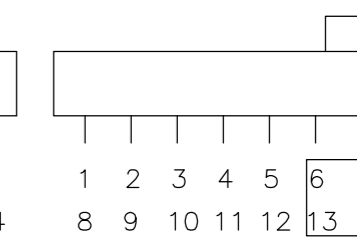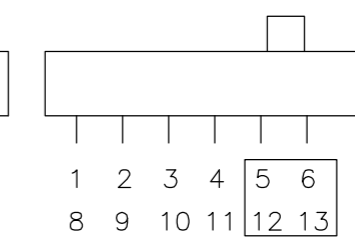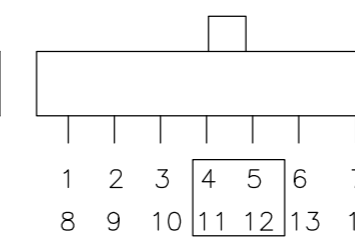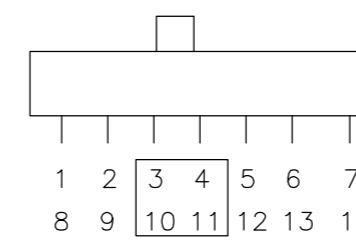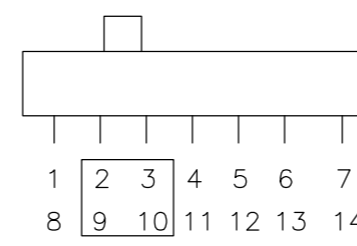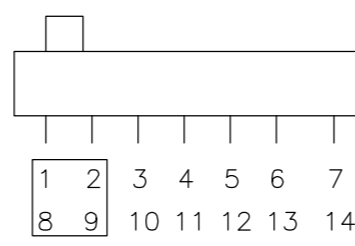

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B.S.VISWESWARA 31MAR05		
DIMENSIONS: mm [INCHES]		CHK M S SARVER		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD M S SARVER	NAME	
0 PLC ± - 1 PLC ± - 2 PLC ± .008(0.20) 3 PLC ± - 4 PLC ± - ANGLES ± 1°		PRODUCT SPEC	SWITCH-SLIDE (DP*T) P/N STS2*0PC	
MATERIAL		APPLICATION SPEC	SIZE	RESTRICTED TO
FINISH		WEIGHT	CAGE CODE	DRAWING NO
		CUSTOMER DRAWING	A2 00779	1825163
		SCALE	SHEET	REV
		2:1	2 OF 2	A3

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9