


Crimped MIL Connector Sockets for Discrete Wires

XG5N/XG5N-U


Crimped Sockets for Discrete Wires

Join the MIL Connector Series

- XG5N-U Sockets with OMRON's unique lock enable one-hand insertion with a secure lock.
- Save up to 24% of the space required for the XG4A.

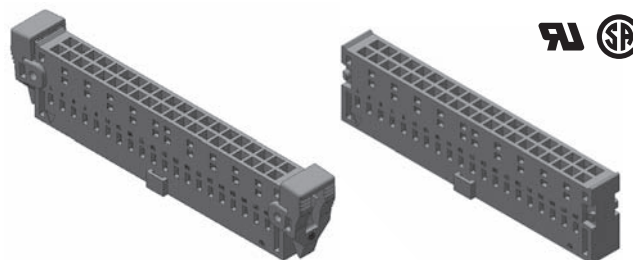

Conceptual Application Diagram

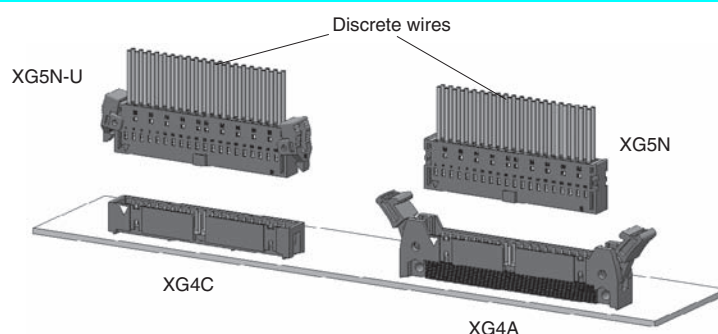

Ratings and Characteristics

Rated current	3 A/contact (with AWG22 wire) 2 A/contact (with AWG24 wire) 1 A/contact (with AWG26 or AWG28 wire)
Rated voltage	250 VAC
Contact resistance	20 mΩ max. (at 20 mV, 100 mA max.)
Insulation resistance	1,000 MΩ min. (at 500 V DC)
Withstand voltage	500 VAC for 60 s (leakage current: 1 mA max.)
Total insertion force	No. of contacts × 1.96 N max.
Individual pull-out force	0.29 N min.
Insertion durability	50 times
Ambient operating temperature	-55 to 105°C (with no icing at low temperature)


Applicable Contacts and Wires

Applicable Contacts	Applicable wires	
	AWG No. (UL1007 twisted wires)	Conductor construction (elements/element diameter (mm))
XG5W-0231	22	17/0.16
	24	11/0.16
	26	7/0.16
XG5W-0232	24	11/0.16
	26	7/0.16
	28	7/0.127

Materials and Finish

Housing		Fiber-glass reinforced PBT resin (UL94 V-2)/black
Lock Levers		POM resin (UL94 HB)/black
Contacts	Mating end	Phosphor bronze/nickel base, gold plated (0.15 μm)
	Crimped section	Phosphor bronze/nickel base, tin plated (2.0 μm)


Mating

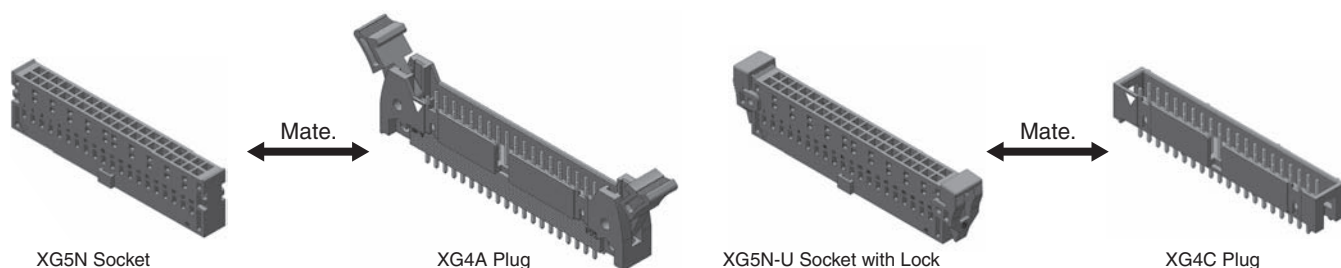

■ Dimensions


(Unit: mm)

XG5N-U (with Lock Levers Attached)

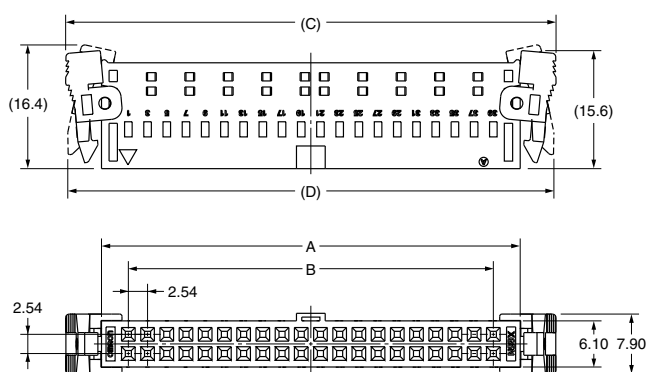

Dimension (mm) No. of contacts	A	B	C	D
10	17.26	10.16	26.80	26.20
14	22.34	15.24	31.88	31.28
16	24.88	17.78	34.42	33.82
20	29.96	22.86	39.50	38.90
26	37.58	30.48	47.12	46.52
30	42.66	35.56	52.20	51.60
34	47.74	40.64	57.28	56.68
40	55.36	48.26	64.90	64.30
50	68.06	60.96	77.60	77.00
60	80.76	73.66	90.30	89.70
64	85.84	78.74	95.38	94.78

XG5N

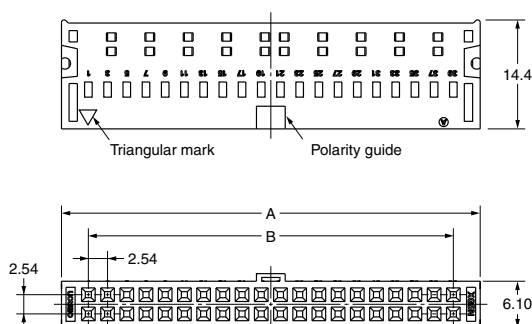

■ Ordering Information

Appearance		Socket and Lock Set Note: The Locks and Sockets are provided separately.	Socket Housing	Lock Levers *1	Crimp Contacts, Type 1	Crimp Contacts, Type 2
No. of contacts	No. of polarity guides	Model	Model	Model	Model	Model
10	0	XG5N-100-U	XG5N-100	XG5U-0001	XG5W-0231 (loose contacts)	XG5W-0232 (loose contacts)
	1	XG5N-101-U	XG5N-101			
14	1	XG5N-141-U	XG5N-141			
16	1	XG5N-161-U	XG5N-161			
20	1	XG5N-201-U	XG5N-201			
26	1	XG5N-261-U	XG5N-261			
30	1	XG5N-301-U	XG5N-301			
34	1	XG5N-341-U	XG5N-341			
40	1	XG5N-401-U	XG5N-401			
50	1	XG5N-501-U	XG5N-501		XG5W-0231-R *2 (reel contacts)	XG5W-0232-R *2 (reel contacts)
	2	XG5N-502-U	XG5N-502			
60	1	XG5N-601-U	XG5N-601			
	2	XG5N-602-U	XG5N602			
64	1	XG5N-641-U	XG5N-641			
	2	XG5N-642-U	XG5N-642			

*1. Each XG5N-□□□ Connector requires two Lock Levers.

*2. Order the required number of reels (10,000 contacts).

Note: The pitch between the two polarity guides on Connectors with 50, 60, or 64 contacts is 22.86 mm.

Specified Tools

Manual Crimping Tool

XY2B-7007



Model
XY2B-7007

Contact Removal Tool

XY2E-0003



Model
XY2E-0003

Automatic Applicator

Use an Applicator that is manufactured by Japan Automatic Machine Co., Ltd. Contact information is provided below.

Japan:

Japan Automatic Machine Co., Ltd.

TEL 03-3756-1434

China:

Japan Automatic Machine Technology (Huizhou) Ltd.

6-1-B, Songshan Industrial Park, Huizhou Zhongkai Hi-Tech

Industrial Development Zone, Huizhou, Guangdong, China

TEL (86-752) 2771-614 FAX (86-752) 2771-619

South-eastern Asia:

Japan Automatic Machine Singapore Pte. Ltd.

HB Centre 12 Tannery Road #04-02, Singapore 347722

TEL 65-6545-8140 FAX 65-6545-8141

USA, Europe:

Toyojamco, Ltd.

8370 Burnham Road Suite 200 EL Paso, TX 79907 USA

TEL (915) 595-8825 FAX (915) 595-8794

	Crimping Machine	Strip Crimper
Crimp Contacts, Type 1	Planned for the near future. *1	SCA-106700 *2
Crimp Contacts, Type 2		

*1. Inquire for details.

*2. This model number is for standard specifications. Inquire for other specifications.

Safety Precautions


Crimping Method

Always use the specified Crimping Tool or Applicator to wire the crimped contacts.

Refer to the instruction sheet that is provided separately for details.

Contact Insertion Method


Confirm the orientation of the crimped contacts and then insert them all the way to the back of the Socket. After insertion, confirm that the lances are securely set in the lance holes on the socket housing.

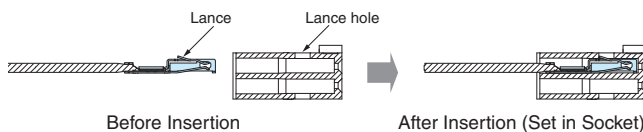

Contact Replacement Method

To remove contacts that have been incorrectly inserted, always use the XY2E-0003 Contact Removal Tool.


- (1) Insert the end of the Removal Tool into the lance hole in the socket housing and press the lance all the way inside the socket housing.
- (2) While pressing in on the lance, pull out the Contact.
- (3) Insert a new Contact.



Note: Do not use any Contacts that have been removed.

Attaching the Lock Levers

Attach the holes in the Lock Levers to the protrusions on both sides of the housing and make sure that they are set securely.

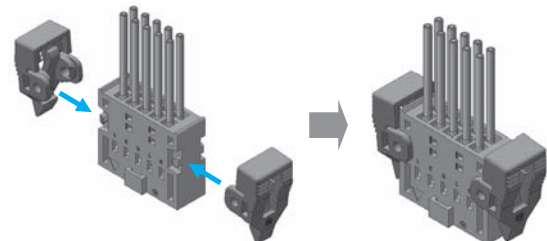

Precautions for Correct Use

When mating the Sockets with XG4C Box Plugs, always use the XG5U-0001 Lock Levers. Otherwise the Connectors may become disconnected due to vibration or shock.

Storage

- (1) Do not store the Sockets in locations subject to dust or high humidity.
- (2) Do not store the Sockets in locations close to sources of gases such as ammonia gas or sulfide gas.

- Application examples provided in this document are for reference only. In actual applications, confirm equipment functions and safety before using the product.
- Consult your OMRON representative before using the product under conditions which are not described in the manual or applying the product to nuclear control systems, railroad systems, aviation systems, vehicles, combustion systems, medical equipment, amusement machines, safety equipment, and other systems or equipment that may have a serious influence on lives and property if used improperly. Make sure that the ratings and performance characteristics of the product provide a margin of safety for the system or equipment, and be sure to provide the system or equipment with double safety mechanisms.

Note: Do not use this document to operate the Unit.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9