

Low-Power, High-Performance Audio DAC with Class H Headphone Drivers

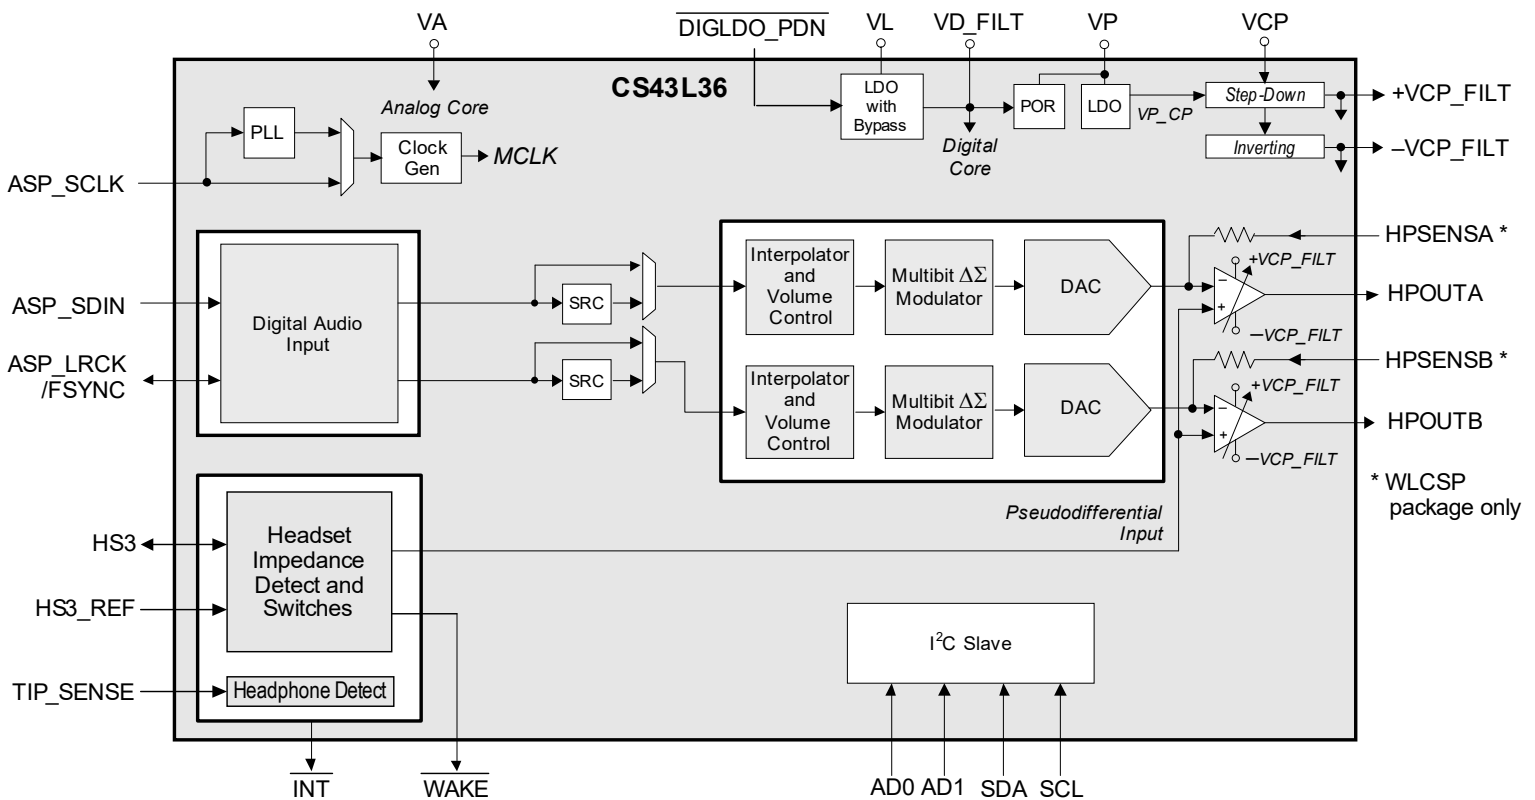
System Features

- Stereo headphone (HP) output with 114-dB dynamic range
 - Class H HP amplifier with four-level automatic or manual supply adjust
 - -98-dB THD+N into 30 Ω with 10-mW output power
 - 2 x 35 mW output power into 30 Ω with 0.018% THD+N
- Load detection
 - Headphone load detection of 15 or 30 Ω
 - Line-level load (3 kΩ) with capacitance detection
- Headphone insertion/removal detection with WAKE
- Audio serial port (ASP)
 - I²S (two channels) or TDM (up to four channels)
 - Slave or Hybrid-Master Mode (bit-clock slave and LRCK/FSYNC derived from bit clock)
 - Supports up to 32-bit audio
 - Sample rate support for 8 to 192 kHz
 - I²C control with interrupt output

- Integrated fractional-N PLL
 - Increases system-clock flexibility for audio processing
 - Reference clock sourced from I²S/TDM bit clock
- Bypassable SRCs for maximum flexibility
- Attenuation, mute, and volume controls for each output
- Integrated power management
 - Digital core operates from either an external 1.2-V supply or LDO from a 1.8-V supply.
 - Step-down charge pump improves HP efficiency
 - Independent peripheral power-down controls
 - Standby operation from VP with all other supplies powered off
 - VP monitor to detect and report brownout conditions
 - Low-impedance switching suppresses ground-noise

Applications

- Ultrabooks, tablets, and smartphones
- Digital headsets



General Description

The CS43L36 is a low-power, high dynamic-range, stereo audio DAC with integrated I²S/I²C/TDM interfaces designed for portable applications. The CS43L36 features support for up to 32-bit audio inputs and includes bypassable SRCs.

The bypassable fractional-N PLL sourced from the ASP SCLK allows for maximum flexibility in any system.

There is independent attenuation on each input along with volume adjustment and mute control.

The CS43L36 is available in 49-ball WLCSP package and a 40-pin QFN package, both supporting an extended commercial operational temperature range of -40°C to $+85^{\circ}\text{C}$.

Table of Contents

| | | | |
|---|-----------|--|-----------|
| 1 Pin Assignments and Descriptions | 4 | 7.14 Serial Port Receive Registers | 79 |
| 1.1 WLCSP Pin Out (Through-Package View) | 4 | 7.15 ID Registers | 81 |
| 1.2 QFN Pin Out (Through-Package View) | 5 | 8 PCB Layout Considerations | 82 |
| 1.3 Pin Descriptions | 5 | 8.1 Power Supply | 82 |
| 1.4 Electrostatic Discharge (ESD) Protection Circuitry | 7 | 8.2 Grounding | 82 |
| 2 Typical Connections | 10 | 8.3 QFN Thermal Pad | 82 |
| 2.1 Electromagnetic Compatibility (EMC) Circuitry | 11 | 9 Plots | 83 |
| 3 Characteristics and Specifications | 12 | 9.1 Digital Filter Response | 83 |
| Table 3-1. Parameter Definitions | 12 | 10 Package Dimensions | 87 |
| Table 3-2. Recommended Operating Conditions | 12 | 10.1 WLCSP Package Dimensions | 87 |
| Table 3-3. Absolute Maximum Ratings | 12 | 10.2 QFN Package Dimensions | 88 |
| Table 3-4. Combined DAC Digital, On-Chip Analog, and HPOUTx Filter Characteristics | 13 | 11 Thermal Characteristics | 89 |
| Table 3-5. DAC High-Pass Filter (HPF) Characteristics | 13 | 12 Ordering Information | 89 |
| Table 3-6. SDIN to HPOUTx with SRC-Enabled Datapath Characteristics | 13 | 13 References | 89 |
| Table 3-7. Serial Data In-to-HPOUTx Characteristics | 14 | 14 Revision History | 90 |
| Table 3-8. DC Characteristics | 15 | | |
| Table 3-9. Power-Supply Rejection Ratio (PSRR) Characteristics | 15 | | |
| Table 3-10. Power Consumption | 16 | | |
| Table 3-11. Register Field Settings | 16 | | |
| Table 3-12. Digital Audio Interface Timing Characteristics | 17 | | |
| Table 3-13. I ² C Slave Port Characteristics | 17 | | |
| Table 3-14. Digital Interface Specifications and Characteristics | 19 | | |
| 4 Functional Description | 20 | | |
| 4.1 Digital Volume Control | 21 | | |
| 4.2 Analog Output | 22 | | |
| 4.3 Class H Amplifier | 23 | | |
| 4.4 Clocking Architecture | 28 | | |
| 4.5 Audio Serial Port (ASP) | 34 | | |
| 4.6 Sample-Rate Converters (SRCs) | 40 | | |
| 4.7 Headset Interface | 41 | | |
| 4.8 Plug Presence Detect | 41 | | |
| 4.9 Power-Supply Considerations | 43 | | |
| 4.10 Control-Port Operation | 45 | | |
| 4.11 Reset | 47 | | |
| 4.12 Interrupts | 47 | | |
| 4.13 FILT+ Operation | 48 | | |
| 5 System Applications | 49 | | |
| 5.1 Power-Up Sequence | 49 | | |
| 5.2 Power-Down Sequence | 51 | | |
| 5.3 Page 0x30 Read Sequence | 52 | | |
| 5.4 PLL Clocking | 52 | | |
| 5.5 VD_FILT/VL ESD Diode | 52 | | |
| 6 Register Quick Reference | 53 | | |
| 6.1 Global Registers | 53 | | |
| 6.2 Power-Down and Headset-Detect Registers | 54 | | |
| 6.3 Clocking Registers | 55 | | |
| 6.4 Interrupt Registers | 55 | | |
| 6.5 Fractional-N PLL Registers | 56 | | |
| 6.6 HP Load Detect Registers | 57 | | |
| 6.7 Headset Interface Registers | 57 | | |
| 6.8 DAC Registers | 58 | | |
| 6.9 HP Control Registers | 58 | | |
| 6.10 Class H Registers | 58 | | |
| 6.11 Mixer Volume Registers | 58 | | |
| 6.12 AudioPort Interface Registers | 59 | | |
| 6.13 SRC Registers | 59 | | |
| 6.14 Serial Port Receive Registers | 59 | | |
| 6.15 ID Registers | 60 | | |
| 7 Register Descriptions | 60 | | |
| 7.1 Global Registers | 60 | | |
| 7.2 Power Down and Headset Detects | 63 | | |
| 7.3 Clocking Registers | 65 | | |
| 7.4 Interrupt Registers | 68 | | |
| 7.5 Fractional-N PLL Registers | 72 | | |
| 7.6 HP Load-Detect Registers | 74 | | |
| 7.7 Headset Interface Registers | 74 | | |
| 7.8 DAC Control Registers | 76 | | |
| 7.9 HP Control Register | 77 | | |
| 7.10 Class H Register | 77 | | |
| 7.11 Volume Control | 77 | | |
| 7.12 AudioPort Interface Registers | 78 | | |
| 7.13 SRC Registers | 79 | | |

1 Pin Assignments and Descriptions

This section shows pin assignments and describes pin functions.

1.1 WLCSP Pin Out (Through-Package View)

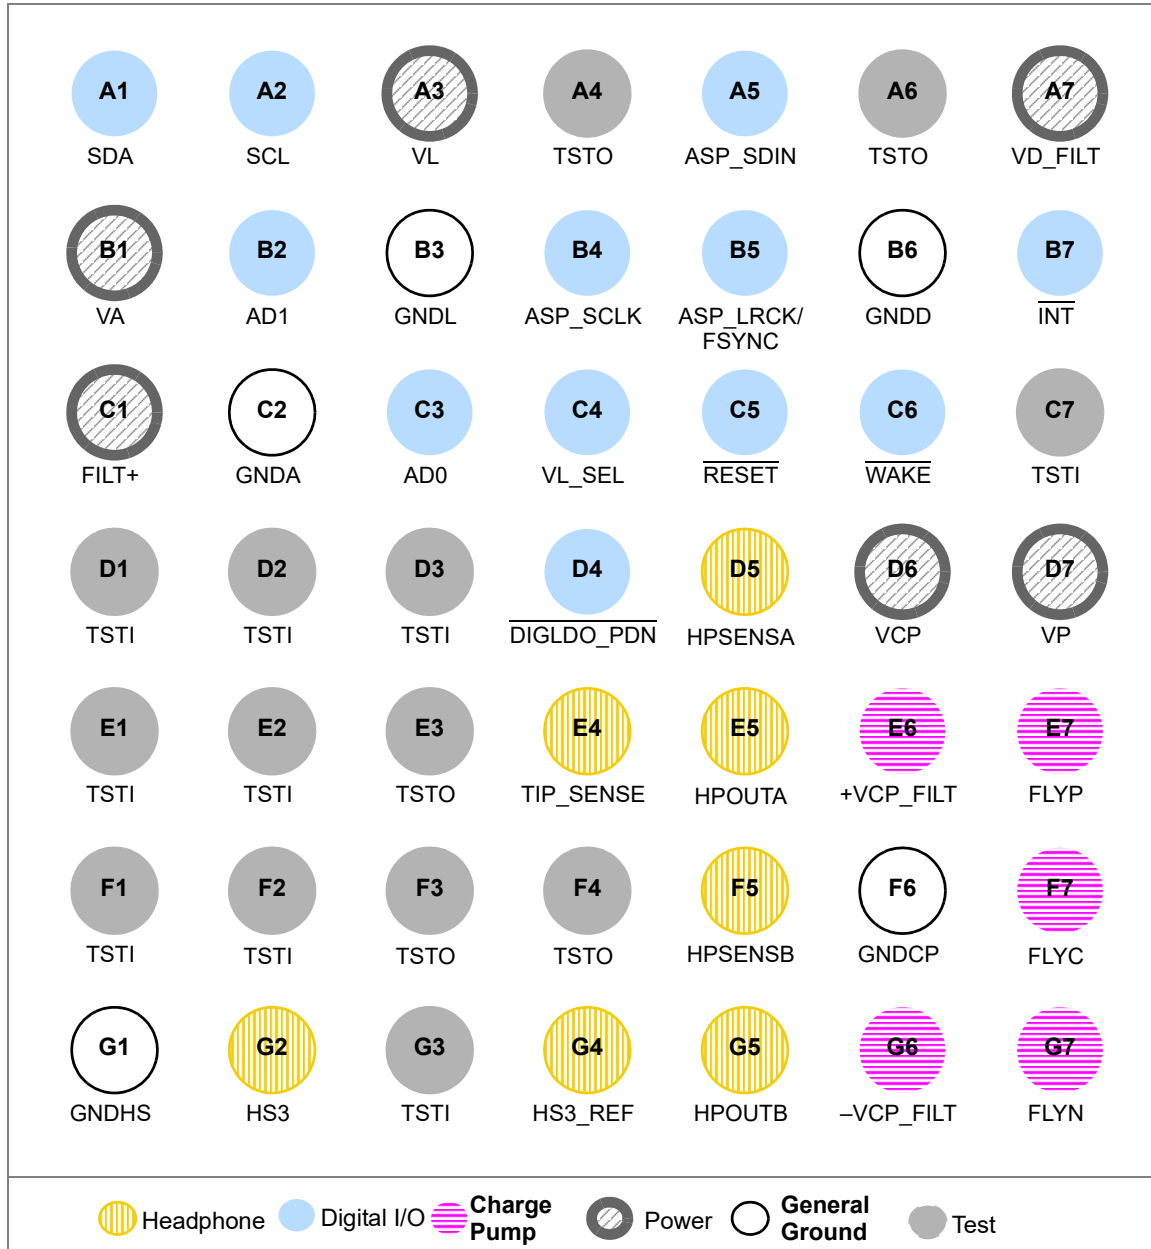


Figure 1-1. WLCSP Pin Diagram (Through-Package View)

1.2 QFN Pin Out (Through-Package View)

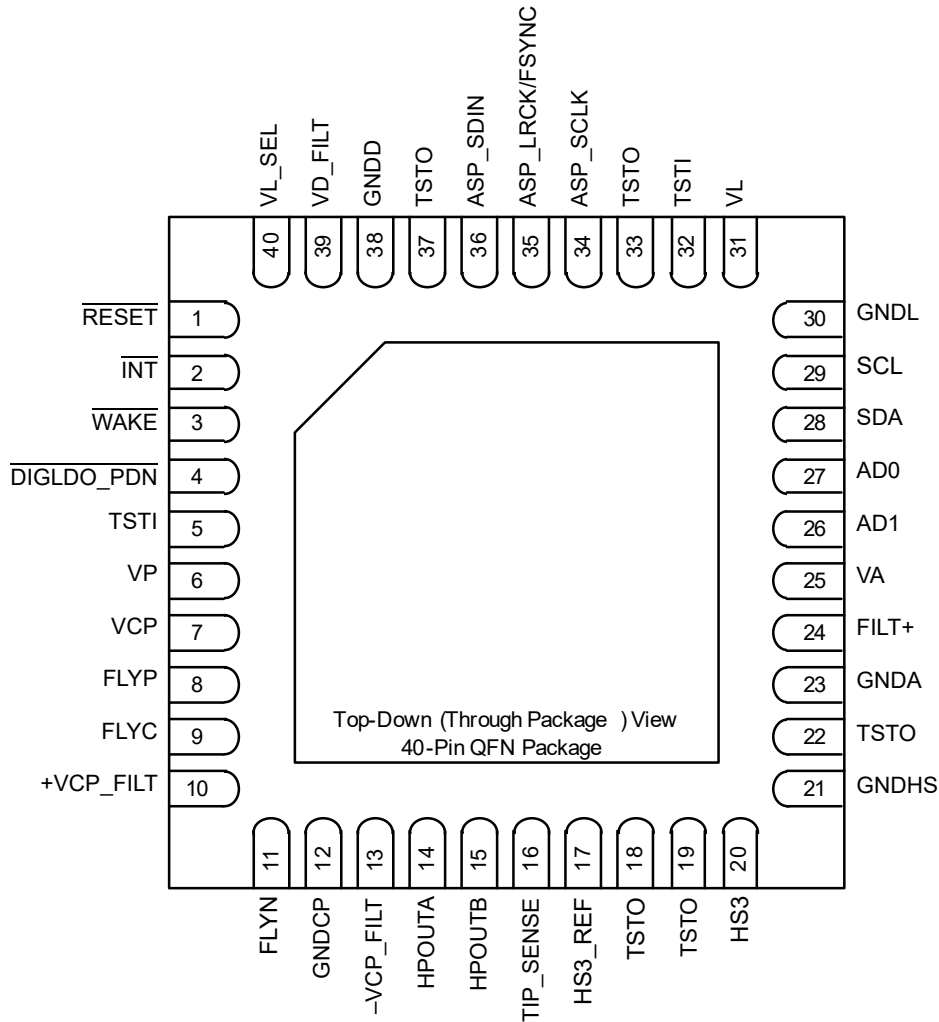


Figure 1-2. QFN Pin Diagram

1.3 Pin Descriptions

Table 1-1. Pin Descriptions


| Pin Name | CSP Pin # | QFN Pin # | Power Supply | I/O | Pin Description | Internal Connection ¹ | Driver | Receiver | State at Reset |
|--|-----------|-----------|---------------|-----|---|----------------------------------|--------|----------|----------------|
| Headphone  | | | | | | | | | |
| HS3_REF | G4 | 17 | VP | I | Headset Connection Reference. Input to pseudodifferential HP output reference | — | — | — | Input |
| HS3 | G2 | 20 | VP | I | Headset Connections. Input to headset and mic-button detection functions | — | — | — | Input |
| HPOUTA HPOUTB | E5 G5 | 14 15 | ±VCP_ FILT | O | Headphone Audio Output. Ground-centered audio output. | — | — | — | — |
| HPSENSA HPSENSB | D5 F5 | — — | ±VCP_ FILT | I | Headphone Audio Sense Input. Audio sense input. WLCSP package only | — | — | — | Input |
| TIP_SENSE | E4 | 16 | VP | I | Tip Sense. Output can be set to wake the system. Independently configurable to be debounced on plug and unplug events. | — | Hi-Z | — | — |

Table 1-1. Pin Descriptions (Cont.)




| Pin Name | CSP Pin # | QFN Pin # | Power Supply | I/O | Pin Description | Internal Connection ¹ | Driver | Receiver | State at Reset |
|--|-----------|-----------|-------------------------|-----|--|----------------------------------|------------------------------|--------------------------|----------------|
| Digital I/O  | | | | | | | | | |
| AD0 AD1 | C3 B2 | 27 26 | VL | I | I²C Address Input. Address pins for I ² C Instance ID [1:0] input. | — | — | Hysteresis on CMOS input | Input |
| ASP_LRCK/ FSY \bar{N} C | B5 | 35 | VL | I/O | ASP Left/Right Clock or Frame Sync. Left or right word select, or frame start sync for the ASP interface. | — | CMOS output | Hysteresis on CMOS input | Input |
| ASP_SCLK | B4 | 34 | VL | I | ASP/ Serial Data Clock. Serial data-shift clock for the ASP interface in I ² S/TDM Mode. Source clock used for internal master clock generation. | — | — | Hysteresis on CMOS input | Input |
| ASP_SDIN | A5 | 36 | VL | I/O | ASP Serial Data Input. Serial data input and output in serial data input for the ASP interface in I ² S/TDM mode. | — | CMOS output | Hysteresis on CMOS input | Input |
| DIGLDO_PDN | D4 | 4 | VP | I | Digital LDO Power Down. Digital core logic LDO power down. | — | — | Hysteresis on CMOS input | Input |
| $\bar{I}N\bar{T}$ | B7 | 2 | VP | O | Interrupt output. Programmable, open-drain, active-low programmable interrupt output. | — | CMOS open-drain output | — | Output |
| $\bar{R}E\bar{S}E\bar{T}$ | C5 | 1 | VP | I | Reset. Hardware reset. | — | — | Hysteresis on CMOS input | Input |
| SCL | A2 | 29 | VL | I | I²C Clock. Clock input for the I ² C interface. | — | — | Hysteresis on CMOS input | Input |
| SDA | A1 | 28 | VL | I/O | I²C Input/Output. I ² C input and output. | — | CMOS open-drain output | Hysteresis on CMOS input | Input |
| VL_SEL | C4 | 40 | VP | I | VL Supply Voltage Select. Select for VL power supply voltage level. Connect to VP for 1.8-V VL supply, connect to GNDD for 1.2-V VL supply | — | — | Hysteresis on CMOS input | Input |
| $\bar{W}A\bar{K}E$ | C6 | 3 | VP | O | Wake up. Programmable, open-drain, active-low output. This outputs the state of the Mic S0 or HP wake detect. | — | Hi-Z, CMOS open-drain output | — | Output |
| Charge Pump  | | | | | | | | | |
| -VCP_FILT | G6 | 13 | VCP/ VP ² | O | Inverting Charge Pump Filter Connection. Power supply for the inverting charge pump that provides the negative rail for the HP amplifier. | — | — | — | — |
| +VCP_FILT | E6 | 10 | VCP/ VP ² | O | Step Down Charge Pump Filter Connection. Power supply for the step down charge pump that provides the positive rail for the HP amplifier. | — | — | — | — |
| FLYC | F7 | 9 | VCP/ VP ² | O | Charge Pump Cap Common Node. Common positive node for the HP amplifiers' step-down and inverting charge pumps' flying capacitors. | — | — | — | — |
| FLYN | G7 | 11 | VCP/ VP ² | O | Charge Pump Cap Negative Node. Negative node for the inverting charge pump's flying capacitor. | — | — | — | — |
| FLYP | E7 | 8 | VCP/ VP ² | O | Charge Pump Cap Positive Node. Positive node for HP amps' step-down charge pump's flying capacitor. | — | — | — | — |
| Power  | | | | | | | | | |
| FILT+ | C1 | 24 | VA | I | Positive Voltage Reference. Positive reference voltage for internal sampling circuits. | — | — | — | — |
| VA | B1 | 25 | N/A | I | Analog Power Supply. Power supply for the internal analog section. | — | — | — | — |
| VCP | D6 | 7 | N/A | I | Charge Pump Power. Power supply for the internal HP amplifiers charge pump. | — | — | — | — |
| VD_FILT | A7 | 39 | N/A | I | 1.2-V Digital Core Power Supply. Power supply for internal digital logic. | — | — | — | — |
| VL | A3 | 31 | N/A | I | I/O Power Supply. Power supply for external interface and internal digital logic. | — | — | — | — |

Table 1-1. Pin Descriptions (Cont.)

| Pin Name | CSP Pin # | QFN Pin # | Power Supply | I/O | Pin Description | Internal Connection ¹ | Driver | Receiver | State at Reset |
|-----------------|------------------------|-----------|--------------|-----|---|----------------------------------|--------|----------|----------------|
| VP | D7 | 6 | N/A | I | High Voltage Interface Supply. Power supply for high voltage interface. | — | — | — | — |
| Ground ○ | | | | | | | | | |
| GND_A | C2 | 23 | N/A | I | Analog Ground. Ground reference for the internal analog section. | — | — | — | — |
| GND_L | B3 | 30 | N/A | I | Digital Ground. Ground reference for interface section. | — | — | — | — |
| GND_HS | G1 | 21 | N/A | I | Headset Ground. Ground reference for the internal analog section. | — | — | — | — |
| GND_CP | F6 | 12 | N/A | I | Charge Pump Ground. Ground reference for the internal HP amplifiers charge pump. | — | — | — | — |
| GND_D | B6 | 38 | N/A | I | Digital Ground. Ground reference for the internal digital circuits. | — | — | — | — |
| Test ● | | | | | | | | | |
| TST_I | C7 | 5 | N/A | I | Test input. Connect to GNDD | — | — | — | — |
| TST_I | D3 | 32 | VL | I | Test input. Connect to GNDD. | — | — | — | — |
| TST_I | D1, E1, E2, F1, F2, G3 | — | VP | I | Test input. Connect to GNDA. | — | — | — | — |
| TST_I | D2 | — | VA | I | Test input. Connect to GNDA. | — | — | — | — |
| TST_O | A4, A6 | 33,37 | VL | O | Test output. No connection | — | — | — | — |
| TST_O | E3, F3, F4 | 18,19, 22 | VP | O | Test output. No connection | — | — | — | — |

1. There are no internal connections for the CS43L36.

2. The power supply is determined by ADPTPWR setting (see Section 7.10.1). VP is used if ADPTPWR = 001 (VP_CP Mode) or when necessary for ADPTPWR = 111 (Adapt-to-Signal Mode).

1.4 Electrostatic Discharge (ESD) Protection Circuitry



ESD-sensitive device. The CS43L36 is manufactured on a CMOS process. Therefore, it is generically susceptible to damage from excessive static voltages. Proper ESD precautions must be taken while handling and storing this device. This device is qualified to current JEDEC ESD standards.

Fig. 1-3 provides a composite view of the ESD domains showing the ESD protection paths between each pad and the substrate (GNDA) and the interrelations between some domains. Note that this figure represents the structure for the internal protection devices and that additional protections can be implemented as part of the integration into the board.

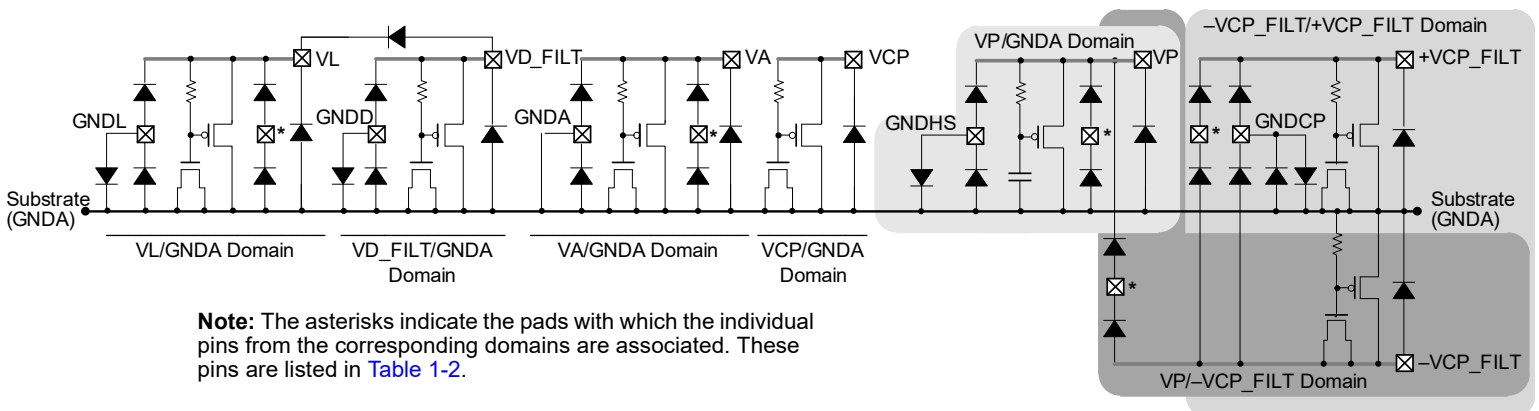

Figure 1-3. Composite ESD Topology

Table 1-2 shows the individual ESD domains and lists the pins associated with each domain.

Table 1-2. ESD Domains

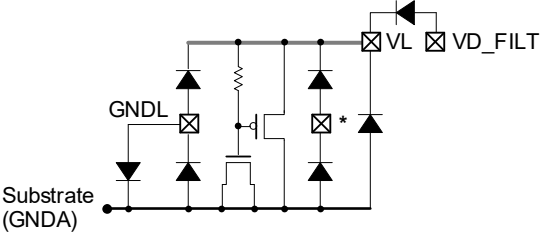
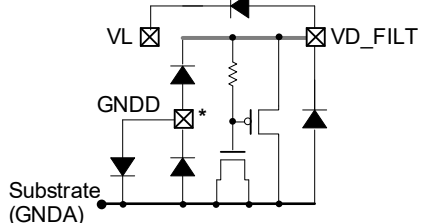
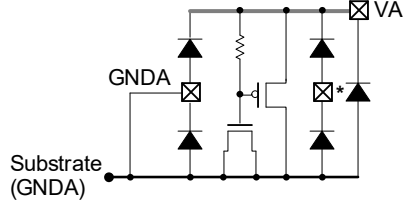
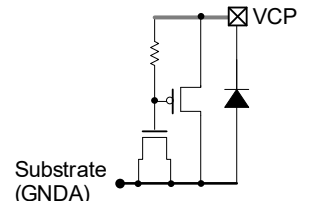
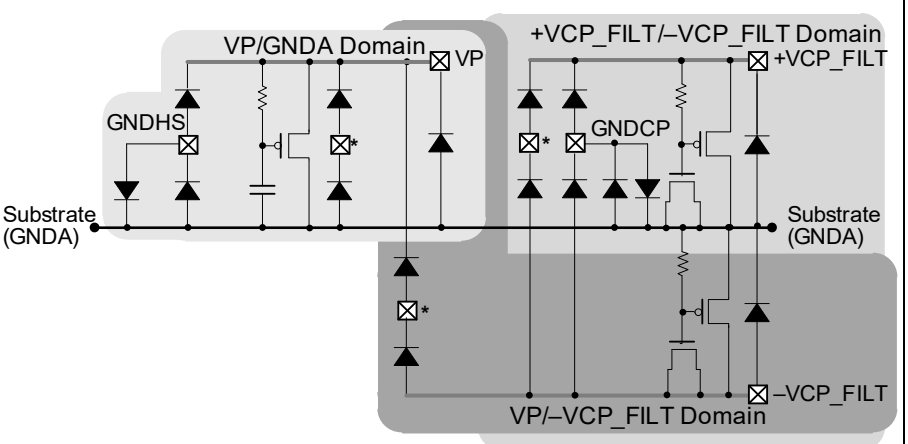
| ESD Domain | Signal Name (See * in Topology Figures for Pad) | Topology |
|------------------|---|---|
| VL/ GNDA 1 | AD0 AD1 ASP_LRCK/FSYNC GNDL SCL SDA TSTO TSTO TSTI ASP_SCLK ASP_SDIN VD_FILT VL |  |
| VD_FILT/ GNDA | VD_FILT GNDD TSTI |  |
| VA/ GNDA | FILT+ GNDA TSTI VA |  |
| VCP/ GNDA | VCP |  |

Table 1-2. ESD Domains (Cont.)

| ESD Domain | Signal Name (See * in Topology Figures for Pad) | Topology |
|-----------------------------|--|--|
| VP/ GNDA | GNDHS HS3 TSTO TSTI TSTI TSTO TSTO TSTI VP VL_SEL INT WAKE RESET DIGLDO_PDN |  |
| +VCP_FILTER/ -VCP_FILTER | +VCP_FILTER -VCP_FILTER FLYN HPSENSA HPSENSB HPOUTA HPOUTB GNDVCP | |
| VP/ -VCP_FILTER | FLYC FLYP HS3_REF TSTO TSTI TIP_SENSE | |

1. See [Section 5.5](#) for additional information regarding VD_FILTER and VL.

2 Typical Connections

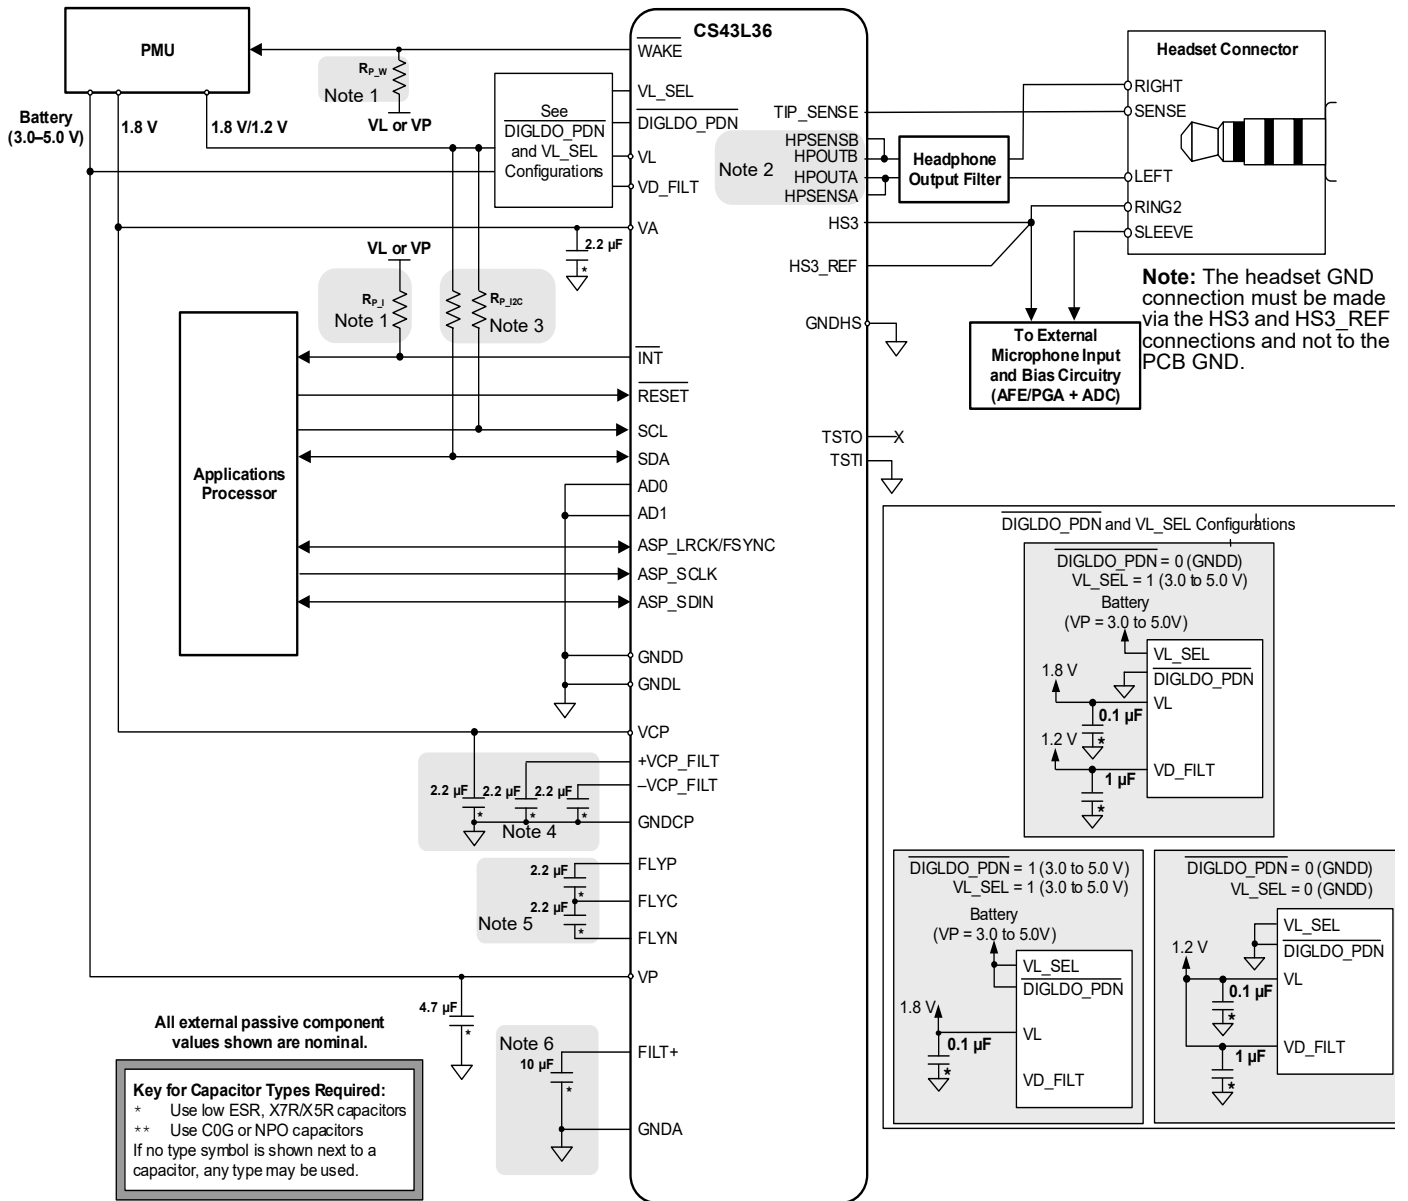


Figure 2-1. Typical Connection Diagram

Notes:

1. R_{P_I} and R_{P_W} values can be determined by the \overline{INT} and \overline{WAKE} pin specifications in [Table 3-14](#).
2. HPSENSA and HPSENSB are supported only on the WLCSP package.
3. R_{P_I2C} values can be determined by the I²C pull-up resistance specification in [Table 3-13](#).
4. The headphone amplifier's output power and distortion ratings use the nominal capacitances shown. Larger capacitance reduces ripple on the internal amplifiers' supplies and, in turn, reduces distortion at high-output power levels. Smaller capacitance may not reduce ripple enough to achieve output power and distortion ratings. Because actual values of typical X7R/X5R ceramic capacitors deviate from nominal values by a percentage specified in the manufacturer's data sheet, capacitors must be selected for minimum output power and maximum distortion required. Higher value capacitors than those shown may be used, however lower value capacitors must not (values can vary from the nominal by $\pm 20\%$). See [Section 2.1.2](#) for additional details.
5. Series resistance in the path of the power supplies must be avoided. Any voltage drop on VCP directly affects the negative charge-pump supply ($-VCP_FILT$) and clips the audio output.
6. Lowering capacitance below the value shown affects PSRR, THD+N performance, and interchannel isolation and intermodulation.

2.1 Electromagnetic Compatibility (EMC) Circuitry

The circuit in Fig. 2-2 may be applied to signals not local to the CS43L36 (i.e., that traverse significant distances) for EMC.

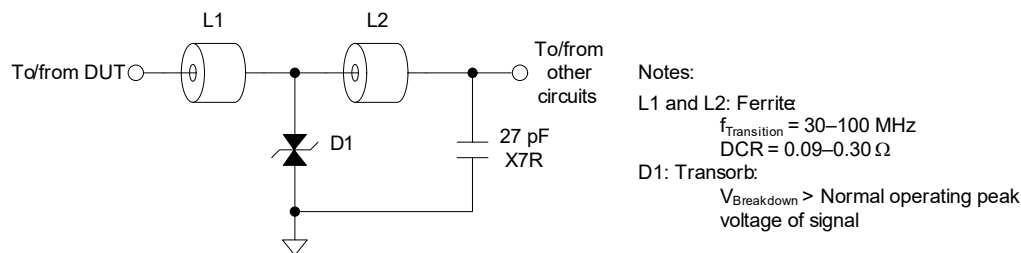


Figure 2-2. Optional EMC Circuit

2.1.1 Low-Profile Charge-Pump Capacitors

In the typical connection for analog mics (Fig. 2-1), the recommended capacitor values for the charge-pump circuitry are 2.2 μF , rated as X7R/X5R or better. The following low-profile versions of these capacitors are suitable for the application:

- Description: 2.2 μF $\pm 20\%$, 6.3 V, X5R, 0201
- Manufacturer, Part Number: Murata, GRM033R60J225ME47, nominal height = 0.3 mm
- Manufacturer, Part Number: AVX, 02016D225MAT2A, nominal height = 0.33 mm

Note: Although the 0201 capacitors described are suitable, larger capacitors such as 0402 or larger may provide acceptable performance.

2.1.2 Ceramic Capacitor Derating

Note 4 in Fig. 2-1 highlights that ceramic capacitor derating factors can significantly affect in-circuit capacitance values and, in turn, CS43L36 performance. Under typical conditions, numerous types and brands of large-value ceramic capacitors in small packages exhibit effective capacitances well below their $\pm 20\%$ tolerance, with some being derated by as much as -50% . These same capacitors, when tested by a multimeter, read much closer to their rated value. A similar derating effect has not been observed with tantalum capacitors.

The derating observed varied with manufacturer and physical size: Larger capacitors performed better, as did ones from Kemet Electronics Corp. and TDK Corp. of any size. This derating effect is described in data sheets and in applications notes from capacitor manufacturers. For instance, as DC and AC voltages are varied from the standard test points (applied DC and AC voltages for standard test points versus PSRR test are 0 and 1 V_{RMS} @ 1 kHz versus 0.9 V and $\sim 1\text{ mV}_{\text{RMS}}$ @ 20 Hz–20 kHz), it is documented that the capacitances vary significantly.

3 Characteristics and Specifications

Table 3-1 defines parameters as they are characterized in this section.

Table 3-1. Parameter Definitions

| Parameter | Definition |
|---|--|
| Dynamic range | The ratio of the rms value of the signal to the rms sum of all other spectral components over the specified bandwidth. A signal-to-noise ratio measurement over the specified bandwidth made with a –60 dB signal; 60 dB is added to resulting measurement to refer the measurement to full scale. This technique ensures that distortion components are below the noise level and do not affect the measurement. This measurement technique has been accepted by the Audio Engineering Society, AES17–1991, and the Electronic Industries Association of Japan, EIAJ CP–307. Dynamic range is expressed in decibel units. |
| Idle channel noise | The rms value of the signal with no input applied (properly back-terminated analog input, digital zero, or zero modulation input). Measured over the specified bandwidth. |
| Interchannel isolation | A measure of cross talk between the left and right channel pairs. Interchannel isolation is measured for each channel at the converter's output with no signal to the input under test and a full-scale signal applied to the other channel. Interchannel isolation is expressed in decibel units. |
| Load resistance and capacitance | The recommended minimum resistance and maximum capacitance required for the internal op-amp's stability and signal integrity. The load capacitance effectively moves the band-limiting pole of the amp in the output stage. Increasing load capacitance beyond the recommended value can cause the internal op-amp to become unstable. |
| Offset error | The deviation of the midscale transition (111...111 to 000...000) from the ideal. |
| Output offset voltage | The DC offset voltage present at the amplifier's output when its input signal is in a mute state. The offset exists due to CMOS process limitations and is proportional to analog volume settings. When measuring the offset out the headphone amplifier, the headphone amplifier is ON. |
| Total harmonic distortion + noise (THD+N) | The ratio of the rms sum of distortion and noise spectral components across the specified bandwidth (typically 20 Hz–20 kHz) relative to the rms value of the signal. THD+N is measured at –1 and –20 dBFS for the analog input and at 0 and –20 dB for the analog output, as suggested in AES17–1991 Annex A. THD+N is expressed in decibel units. |

Table 3-2. Recommended Operating Conditions

Test conditions: GNDA = GN DL = GNDCP = 0 V; voltages are with respect to ground.

| Parameters | | Symbol | Minimum | Maximum | Unit | |
|--|--|--|-----------|-----------|------|---|
| DC power supply | Charge pump | VCP | 1.66 | 1.94 | V | |
| | LDO regulator for digital ¹ | $\overline{\text{DIGLDO_PDN}} = 0$ and VL_SEL = 0 | VD_FILT | 1.10 | 1.30 | V |
| | Serial interface control port | $\overline{\text{DIGLDO_PDN}} = 0$ and VL_SEL = 0 | VL | 1.10 | 1.30 | V |
| | | VL_SEL = 1 | VL | 1.66 | 1.94 | V |
| | Analog | VA | 1.66 | 1.94 | V | |
| Battery supply | VP | 2.50 ² | 5.25 | V | | |
| External voltage applied to pin ^{3,4} | TIP_SENSE pin | V _{INHI} | –VCP_FILT | VP | V | |
| | ±VCP_FILT domain pins ⁵ | V _{VCPF} | –VCP_FILT | +VCP_FILT | V | |
| | VL domain pins | V _{VL} | 0 | VL | V | |
| | VA domain pins | V _{VA} | 0 | VA | V | |
| | VP domain pins | V _{VP} | 0 | VP | V | |
| Ambient temperature | | T _A | –40 | +85 | °C | |

Note: The device is fully functional and meets all parametric specifications in this section if operated within the specified conditions. Functionality and parametric performance is not guaranteed or implied outside of these limits. Operation outside of these limits may adversely affect device reliability.

1. If $\overline{\text{DIGLDO_PDN}}$ is deasserted, no external voltage must be applied to VD_FILT.
2. Although device operation is guaranteed down to 2.5 V, device performance is guaranteed only down to 3.0 V. The following are affected when VP < 3.0 V: charge pump LDO, TIP_SENSE threshold.
3. The maximum over/undervoltage is limited by the input current.
4. Table 1-1 lists the power supply domain in which each CS43L36 pin resides.
5. ±VCP_FILT is specified in Table 3-8.

Table 3-3. Absolute Maximum Ratings

Test conditions: GNDA = GN DL = GNDCP = 0 V; voltages are with respect to ground.

| Parameters | | Symbol | Minimum | Maximum | Unit |
|---|--|------------------|---------|---------|------|
| DC power supply | Charge pump, LDO, serial/control, analog (see Section 4.9) | VL, VA, VCP | –0.3 | 2.33 | V |
| | Digital core | VD_FILT | –0.3 | 1.55 | V |
| | Battery | VP | –0.3 | 6.3 | V |
| Input current ¹ | | I _{in} | — | ±10 | mA |
| Ambient operating temperature (power applied) | | T _A | –50 | +115 | °C |
| Storage temperature | | T _{stg} | –65 | +150 | °C |

Caution: Stresses beyond “Absolute Maximum Ratings” levels may cause permanent damage to the device. These levels are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in Table 3-2, “Recommended Operating Conditions” is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

1. Any pin except supply pins. Transient currents of up to ± 100 mA on analog input pins do not cause SCR latch-up.

Table 3-4. Combined DAC Digital, On-Chip Analog, and HPOUTx Filter Characteristics

Test conditions (unless specified otherwise): $T_A = +25^\circ\text{C}$; MCLK = 12 MHz, MCLK_SRC_SEL = 0, $F_{S_{INT}} = 48$ kHz; path is internal routing engine to HPOUTx, analog and digital gains are all set to 0 dB; HPF disabled.

| Parameter ¹ | Minimum | Typical | Maximum | Unit |
|--|-----------------|--------------------|---------|---------------|
| Passband | -0.05-dB corner | — | 0.48 | $F_{S_{INT}}$ |
| | -3.0-dB corner | — | 0.50 | $F_{S_{INT}}$ |
| Passband ripple ($0.417 \times 10^{-3} F_{S_{INT}}$ to $0.417 F_{S_{INT}}$; normalized to $0.417 \times 10^{-3} F_{S_{INT}}$) | -0.04 | — | 0.063 | dB |
| Stopband attenuation ($0.545 F_{S_{INT}}$ to $F_{S_{INT}}$) | 60 | — | — | dB |
| Total group delay ² | — | $5.35/F_{S_{INT}}$ | — | s |

1. Response scales with $F_{S_{INT}}$ (based on internal MCLK). Specifications are normalized to $F_{S_{INT}}$ and denormalized by multiplying by $F_{S_{INT}}$.

2. Informational only; group delay cannot be measured for this block by itself. An additional $5.5/F_{S_{INT}}$ group delay may be present through the serial ports and internal audio bus.

Table 3-5. DAC High-Pass Filter (HPF) Characteristics

Test conditions (unless specified otherwise) Analog and digital gains are all set to 0 dB; $T_A = +25^\circ\text{C}$.

| Parameter ¹ | Minimum | Typical | Maximum | Unit |
|---|-----------------|----------------------------------|------------------------|---------------|
| Passband | -0.05-dB corner | — | 0.180×10^{-3} | $F_{S_{INT}}$ |
| | -3.0-dB corner | — | 19.5×10^{-6} | $F_{S_{INT}}$ |
| Passband ripple ($0.417 \times 10^{-3} F_{S_{INT}}$ to $0.417 F_{S_{INT}}$; normalized to $0.417 F_{S_{INT}}$) | — | — | 0.01 | dB |
| Phase deviation @ $0.453 \times 10^{-3} F_{S_{INT}}$ | — | 2.45 | — | ° |
| Filter settling time ² | — | $24.5 \times 10^3 / F_{S_{INT}}$ | — | s |

1. Response scales with $F_{S_{INT}}$ (internal sample rate, based on MCLK). Specifications are normalized to $F_{S_{INT}}$ and are denormalized by multiplying by $F_{S_{INT}}$.

2. Required time for the magnitude of the DC component present at the output of the HPF to reach 5% of the applied DC signal.

Table 3-6. SDIN to HPOUTx with SRC-Enabled Datapath Characteristics

Test conditions (unless specified otherwise): LRCK = $F_{S_{INT}} = F_{S_{EXT}} = 48$ kHz; MCLK = 12 MHz; HPF disabled; passband/stopband levels normalized to $0.417 \times 10^{-3} F_{S_{EXT}}$; entire path characteristics including serial port + SRC + DAC + HPOUT.

| Parameters ¹ | Minimum | Typical | Maximum | Unit |
|--|-----------------------------|------------------|---|---------------|
| Passband | -0.2-dB corner | — | 0.463 | $F_{S_{EXT}}$ |
| | -3.0-dB corner | — | 0.466 | $F_{S_{EXT}}$ |
| Passband ripple ($0.417 \times 10^{-3} F_{S_{EXT}}$ to $0.417 F_{S_{EXT}}$; normalized to $0.417 \times 10^{-3} F_{S_{EXT}}$) | -0.16 | — | 0.02 | dB |
| Response at $0.5 F_{S_{EXT}}$ | — | — | -54.9 | dB |
| Stopband rejection from $0.480 F_{S_{EXT}}$ to $0.524 F_{S_{EXT}}$ | 55 | — | — | dB |
| Stopband rejection from $0.524 F_{S_{EXT}}$ to $0.545 F_{S_{EXT}}$ | 39 | — | — | dB |
| Stopband rejection from $0.545 F_{S_{EXT}}$ to $3 F_{S_{EXT}}$ | 60 | — | — | dB |
| Square wave overshoot | — | — | 3.1 | dB |
| Group delay, bark-weighted average | — | — | $34/F_{S_{EXT}}$ | s |
| Group delay | $F_{S_{EXT}} \leq 48$ kHz | — | $(15.8 \pm 1.5)/F_{S_{EXT}} + 10.3/F_{S_{INT}}$ | s |
| | $F_{S_{EXT}} \geq 88.2$ kHz | — | $(20.1 \pm 1)/F_{S_{EXT}} + (11.6 \pm 0.5)/F_{S_{INT}}$ | s |
| SRC disabled group delay ² | — | $(15 \pm 1)/F_s$ | — | s |

1. $F_{S_{EXT}}$ is the external sample rate (LRCK/FSYNC frequency). Response scales with $F_{S_{EXT}}$.


2. This value varies by up to 1 F_s . If SRC is disabled, $F_s = F_{S_{OUT}} = F_{S_{IN}}$.

Table 3-7. Serial Data In-to-HPOUTx Characteristics

Test conditions (unless specified otherwise): Fig. 2-1 shows CS43L36 connections; input test signal is a 24-bit full-scale 997-Hz sine wave with 1 LSB of triangular PDF dither applied; GND_A = GND_L = GND_{CP} = 0 V; voltages are with respect to ground; parameters can vary with V_A; typical performance data taken with V_L = V_A = 1.8 V, V_P = 3.6 V; min/max performance data taken with V_A = 1.66–1.94 V; V_L = 1.8 V, V_P = 3.6 V; VCP Mode; T_A = +25°C; measurement bandwidth is 20 Hz–20 kHz; ASP_LRCK = F_{SINT} = 48-kHz mode; MCLK = 12 MHz, MCLK_SRC_SEL = 0; volume = 0 dB; FULL_SCALE_VOL = 0 (0dB); HP load: R_L = 30 Ω, C_L = 1 nF (HPOUT_LOAD = 0) and R_L = 3 kΩ, C_L = 10 nF (HPOUT_LOAD = 1) SRC bypassed.

| Parameter ¹ | | | | Minimum | Typical | Maximum | Unit | |
|---|--|-----------|---------------------|-------------------------------|---------------------|---------------------|---------------------|-----------------|
| R _L = 3 kΩ VP_CP Mode | Dynamic range | 18–24 bit | A-weighted | 108 | 114 | — | dB | |
| | | | unweighted | 105 | 111 | — | dB | |
| | THD+N ² (defined in Table 3-1) | 18–24 bit | 0 dB | — | –90 | –84 | dB | |
| | | | –20 dB | — | –83 | — | dB | |
| | | | –60 dB | — | –51 | –48 | dB | |
| | | | 16 bit | 0 dB | — | –88 | –82 | dB |
| | | –20 dB | — | –73 | — | dB | | |
| | | –60 dB | — | –33 | –27 | dB | | |
| Idle channel noise (A-weighted) | | | | — | 2.0 | — | μV | |
| Full-scale output voltage ³ | | | | 1.50•V _A | 1.58•V _A | 1.66•V _A | V _{PP} | |
| R _L = 30 Ω VP_CP Mode | Dynamic range (defined in Table 3-1) | 18–24 bit | A-weighted | 108 | 114 | — | dB | |
| | | | unweighted | 105 | 111 | — | dB | |
| | THD+N ² (defined in Table 3-1) | | Pout = 10 mW | — | –98 | — | dB | |
| | | | Pout = 35 mW | — | –75 | –69 | dB | |
| Full-scale output voltage ³ | | | | 1.50•V _A | 1.58•V _A | 1.66•V _A | V _{PP} | |
| Output power ² | | | | — | 35.0 | — | mW | |
| R _L = 15 Ω VCP Mode (FULL_SCALE_VOL = 1 [–6 dB]) | Dynamic range (defined in Table 3-1) | 18–24 bit | A-weighted | 102 | 108 | — | dB | |
| | | | unweighted | 99 | 105 | — | dB | |
| | THD+N ² (defined in Table 3-1) | | Pout = 17.3 mW | — | –75 | –69 | dB | |
| | Full-scale output voltage ³ | | | | 0.71•V _A | 0.79•V _A | 0.86•V _A | V _{PP} |
| Output power ² | | | | — | 17.3 | — | mW | |
| Other characteristics (Table 3-1 gives parameter definitions.) | Interchannel isolation ³ (3 kΩ) | | 217 Hz | — | 90 | — | dB | |
| | | | 1 kHz | — | 90 | — | dB | |
| | | | 20 kHz | — | 80 | — | dB | |
| | Interchannel isolation ³ (30 Ω) | | 217 Hz | — | 90 | — | dB | |
| | | | 1 kHz | — | 90 | — | dB | |
| | | | 20 kHz | — | 70 | — | dB | |
| | Output offset voltage: mute ^{3,4} (ANA_MUTE_x = 1, see p. 77) | | | HPOUTx | — | ±0.5 | ±1.0 | mV |
| | Output offset voltage ^{3,4} | | | HPOUTx | — | ±0.5 | ±2.5 | mV |
| | Load resistance (R _L) | | | Normal operation ³ | 15 | — | — | Ω |
| | Load capacitance (C _L) ^{3,5} | | | HPOUT_LOAD = 0 | — | — | 1 | nF |
| HPOUT_LOAD = 1 | | | | — | — | 10 | nF | |
| Turn-on time ⁶ | | | SLOW_START_EN = 000 | — | — | 25 | ms | |

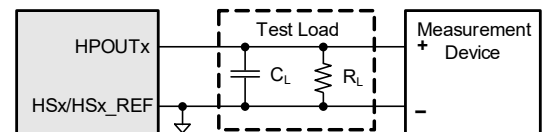- One LSB of triangular PDF dither is added to data.
- Because VCP settings lower than V_A reduce the HP amplifier headroom, the specified THD+N performance at full-scale output voltage and power may not be achieved.
- HP output test configuration. Symbolized component values are specified in the test conditions above.



- Assumes no external impedance on HSx/HSx_REF. External impedance on HSx/HSx_REF affects the offset and step deviation. See Section 4.2.1.
- Amplifier is guaranteed to be stable with either headphone load setting.
- Turn-on time is measured from when the HP_PDN = 0 ACK signal is received to when the signal appears on the HP output. In most cases, enabling the SRC increases the turn-on time and may exceed the maximum specified value.

Table 3-8. DC Characteristics

Test conditions (unless specified otherwise): Fig. 2-1 shows CS43L36 connections; GNDA = GNDL = GNDCP = 0 V; voltages are with respect to ground; VL = VCP = VA = 1.8 V, VP = 3.6 V; TA = +25°C.

| Parameters | | | Minimum | Typical | Maximum | Unit |
|--|---|-------------|---------|---------|---------|------|
| VCP_FILTER (No load connected to HPOUTx.) | VP_CP Mode (ADPTPWR = 001) | +VCP_FILTER | — | 2.6 | — | V |
| | | -VCP_FILTER | — | -2.6 | — | V |
| | VCP Mode (ADPTPWR = 010) | +VCP_FILTER | — | VCP | — | V |
| | | -VCP_FILTER | — | -VCP | — | V |
| VCP/2 Mode (ADPTPWR = 011) | +VCP_FILTER | — | VCP/2 | — | V | |
| | -VCP_FILTER | — | -VCP/2 | — | V | |
| VCP/3 Mode (ADPTPWR = 100) | +VCP_FILTER | — | VCP/3 | — | V | |
| | -VCP_FILTER | — | -VCP/3 | — | V | |
| HS3 ground switch resistance (Typical values have ±25% tolerance.) | | | — | 0.5 | — | Ω |
| Other DC filter | FILT+ voltage | | — | VA | — | V |
| | HP output current limiter on threshold. See Section 4.3.4. 1 | | 80 | 115 | 160 | mA |
| | VD_FILTER and VL power-on reset threshold (V _{POR}) | Up | — | 0.777 | — | V |
| Down | | — | 0.628 | — | V | |
| HPOUT pull-down resistance 2,3 | HPOUT_PULLDOWN = 0000–0111, 1100 | | — | 0.9 | — | kΩ |
| | HPOUT_PULLDOWN = 1001 | | — | 9.3 | — | kΩ |
| | HPOUT_PULLDOWN = 1010 | | — | 5.8 | — | kΩ |

1. The HP output current limiter threshold spec is valid only while the Class H rails are in VCP Mode.

2. Typical values have ±20% tolerance.

3. Clamp is disabled (HPOUT_CLAMP = 1) and channel is powered down (HPOUT_PDN = 1).

Table 3-9. Power-Supply Rejection Ratio (PSRR) Characteristics

Test conditions (unless specified otherwise): Fig. 2-1 shows CS43L36 connections; input test signal held low (all zero data); GNDA = GNDL = GNDCP = 0 V; voltages are with respect to ground; VL = VA = 1.8 V, VP = 3.6 V; TA = +25°C.

| Parameters 1 | | Minimum | Typical | Maximum | Unit |
|--|--------|---------|---------|---------|------|
| HPOUTx (-6-dB analog gain) PSRR with 100-mVpp signal AC coupled to VA supply 2 | 217 Hz | — | 75 | — | dB |
| | 1 kHz | — | 75 | — | dB |
| | 20 kHz | — | 70 | — | dB |
| HPOUTx (-6-dB analog gain) PSRR with 100-mVpp signal AC-coupled to VCP supply 2 | 217 Hz | — | 85 | — | dB |
| | 1 kHz | — | 85 | — | dB |
| | 20 kHz | — | 65 | — | dB |
| HPOUTx (0-dB analog gain) PSRR with 100-mVpp signal AC coupled to VP supply | 217 Hz | — | 80 | — | dB |
| | 1 kHz | — | 80 | — | dB |
| | 20 kHz | — | 60 | — | dB |

1. PSRR test configuration: Typical PSRR can vary by approximately 6 dB below the indicated values.

2. No load connected to any analog outputs.

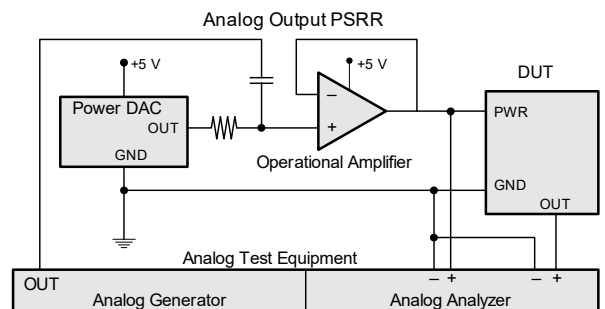


Table 3-10. Power Consumption

Test conditions (unless specified otherwise): Fig. 2-1 shows CS43L36 connections; GND_A = GND_L = GND_{CP} = 0 V; voltages are with respect to ground; performance data taken with V_A = V_{CP} = V_L = 1.8 V; DIGLDO_PDN is deasserted; V_P = 3.6 V; T_A = +25°C; ASP_LRCK = 48-kHz Mode; F_{SINT} = 48 kHz; SCLK = 12 MHz, MCLK_SRC_SEL = 0; volume = 0 dB; FULL_SCALE_VOL = 1 (–6 dB) for HPOUT_x, TIP_SENSE_CTRL = 11, all other fields are set to defaults; no signal on any input; control port inactive; input clock/data are held low when not required; test load is R_L = 30 Ω and C_L = 1 nF for HPOUT_x; measured values include currents consumed by the DAC and do not include current delivered to external loads unless specified otherwise (e.g., HPOUT_x); see Fig. 3-1.

| Use Cases | | | Class H Mode | Typical Current (μA) | | | | Total Power (μW) |
|-----------|---|--|--------------|----------------------|------------------|-----------------|-----------------|------------------|
| | | | | i _{VA} | i _{VCP} | i _{VL} | i _{VP} | |
| 1 | A | Off 1 | — | 0 | 0 | 0 | 3.1 | 11.16 |
| 2 | A | Standby 2,3 | — | 0 | 0 | 0 | 20 | 72.0 |
| 3 | A | Standby (RCO Mode) 4,5 | — | 0 | 0 | 343 | 31 | 729 |
| 4 | A | Playback Stereo HPOUT (no signal, HPOUT_LOAD = 0) | VCP/3 | 1413 | 1204 | 858 | 58 | 6464 |
| | B | | VCP/3 | 1441 | 2336 | 965 | 58 | 8744 |

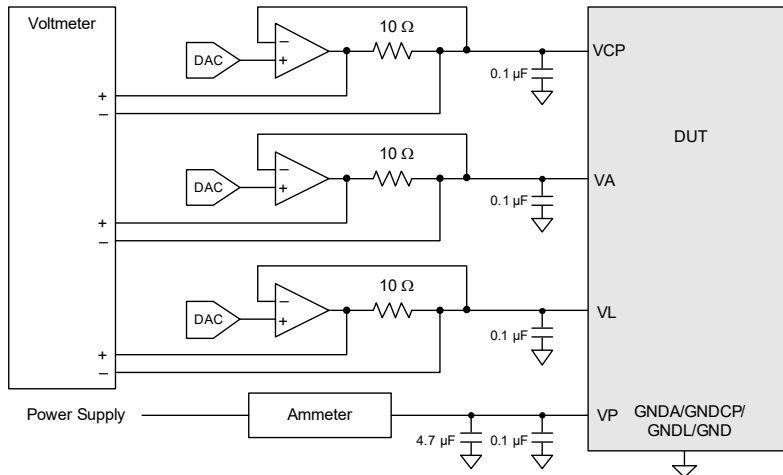
1. Off configuration: Clock/data lines held low; RESET = LOW; V_A = V_L = V_{CP} = 0 V; V_P = 3.6 V.

2. Standby configuration: Clock/data lines held low; V_A = V_L = V_{CP} = 0 V; V_P = 3.6 V; M_HP_WAKE = 0 (unmasked).

3. SCLK_PRESENT = 1.

4. SCLK_PRESENT = 0 (RCO clocking).

5. Standby configuration (RCO clocking): Clock/data lines held low; V_A = 0 V; V_L = 1.8 V, V_{CP} = 0 V, V_P = 3.6 V; M_HP_WAKE = 0 (unmasked).



Note: The current draw on the V_A, V_{CP}, and V_L power supply pins is derived from the measured voltage drop across a 10-Ω series resistor between the associated supply source and each voltage supply pin. Given the larger currents that are possible on the V_P supply, an ammeter is used for the measurement.

Figure 3-1. Power Consumption Test Configuration
Table 3-11. Register Field Settings

| Use Cases | Register Fields and Settings | | | | Class H Mode p. 23 |
|-----------|------------------------------|-------------|--------|--|-----------------------|
| | PDN_ALL | ASP_DAI_PDN | HP_PDN | | |
| 1 A | — | — | — | | — |
| 2 A | 1 | — | — | | — |
| 3 A | 1 | — | — | | — |
| 4 A | 0 | 0 | 0 | | VCP/3 |
| | B | 0 | 0 | | VCP/3 |


Table 3-12. Digital Audio Interface Timing Characteristics

Test conditions (unless specified otherwise): G_{NDA} = G_{NDL} = G_{NDCP} = 0 V; all voltages with respect to ground; values are for both V_L = 1.2 and 1.8 V; inputs: Logic 0 = G_{NDL} = 0 V, Logic 1 = V_L; T_A = +25°C; C_{LOAD} = 30 pF (for V_L = 1.2 V) and 60 pF (for V_L = 1.8 V); input timings are measured at V_{IL} and V_{IH} thresholds; output timings are measured at V_{OL} and V_{OH} thresholds (see Table 3-14); ASP_TX_HIZ_DLY = 00.


| Parameters ^{1,2,3} | | Symbol | Minimum | Typical | Maximum | Unit | |
|--|--|------------------------|-------------------------|---------|-------------------------|------|----|
| ASP_SCLK frequency ⁴ | | f _{SCLK} | 0.973 [5] | — | 25.81 | MHz | |
| SCLK high period ⁴ | | t _{HI:SCLK} | 18.5 | — | — | ns | |
| SCLK low period ⁴ | | t _{LO:SCLK} | 18.5 | — | — | ns | |
| SCLK duty cycle ⁴ | | — | 45 | — | 55 | % | |
| Hybrid-Master Mode | FSYNC/LRCK frame rate | — | 0.99 | — | 1.01 | Fs | |
| | LRCK duty cycle | — | 45 | — | 55 | % | |
| | FSYNC high period ⁶ | t _{HI:FSYNC} | 1/f _{SCLK} | — | (n-1)/f _{SCLK} | s | |
| | FSYNC/LRCK delay time after SCLK launching edge ⁷ | V _L = 1.8 V | t _{D:CLK-LRCK} | 0 | — | 15 | ns |
| | | V _L = 1.2 V | t _{D:CLK-LRCK} | 0 | — | 17 | ns |
| | SDIN setup time before SCLK latching edge ⁷ | t _{SU:SDI} | 10 | — | — | ns | |
| SDIN hold time after SCLK latching edge ⁷ | t _{H:SDI} | 5 | — | — | ns | | |
| Slave Mode | FSYNC/LRCK frame rate | — | 0.99 | — | 1.01 | Fs | |
| | FSYNC/LRCK duty cycle | — | 45 | — | 55 | % | |
| | FSYNC/LRCK setup time before SCLK latching edge ⁷ | t _{SU:LRCK} | 10 | — | — | ns | |
| | FSYNC/LRCK hold time after SCLK latching edge ⁷ | t _{H:LRCK} | 5 | — | — | ns | |
| | SDIN hold time after SCLK latching edge ⁷ | t _{H:SDI} | 5 | — | — | ns | |
| | FSYNC/LRCK duty cycle | — | 45 | — | 55 | % | |

1. Output clock frequencies follow SCLK frequency proportionally. Deviation of the bit-clock source from nominal supported rates is directly imparted to the output clock rate by the same factor (e.g., +100-ppm offset in the frequency of SCLK becomes a +100-ppm offset in MCLK and LRCK).

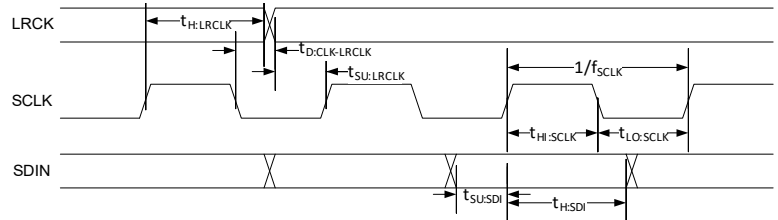2. I²S interface timing. Note: SCPOL = 1



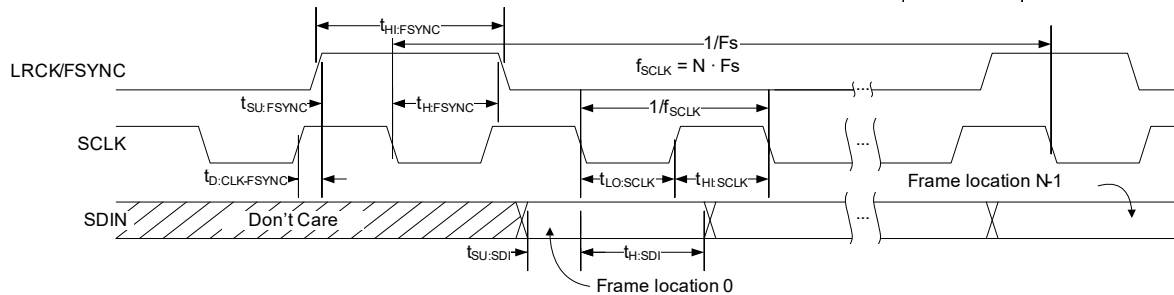3. TDM interface timing. Note: SCPOL = 0



4. SCLK is mastered from an external device. The external device is expected to maintain SCLK timing specifications.

5. SCLK operation below 2.8224 MHz may result in degraded performance.

6. Maximum LRCK duty cycle is equal to frame length, in SCLK periods, minus 1. Maximum duty cycle occurs when LRCK_HI is set to 511 SCLK periods and LRCK period is set to 512 SCLK periods.

7. Data is latched on the rising or falling edge of SCLK, as determined by ASP_SCPOL_IN_x and ASP_FSD (See Section 7.3.6 and Section 7.3.7).

Table 3-13. I²C Slave Port Characteristics

Test conditions (unless specified otherwise): Fig. 2-1 shows typical connections; Inputs: G_{NDA} = G_{NDL} = G_{NDCP} = 0 V; all voltages with respect to ground; min/max performance data taken with V_L = 1.66–1.94 V (V_{L_SEL} = VP) or V_L = 1.1–1.3 V (V_{L_SEL} = GNDD); inputs: Logic 0 = G_{NDA} = 0 V, Logic 1 = V_L; T_A = +25°C; SDA load capacitance equal to maximum value of C_B = 400 pF; minimum SDA pull-up resistance, R_{P(min)}.¹ Table 3-1 describes some parameters in detail. All specifications are valid for the signals at the pins of the CS43L36 with the specified load capacitance.

| Parameter ² | Symbol ³ | Minimum | Maximum | Unit | |
|--|---------------------|-----------------|---------|------|----|
| SCL clock frequency | f _{SCL} | — | 1000 | kHz | |
| Clock low time | t _{LOW} | 500 | — | ns | |
| Clock high time | t _{HIGH} | 260 | — | ns | |
| Start condition hold time (before first clock pulse) | t _{HDST} | 260 | — | ns | |
| Setup time for repeated start | t _{SUST} | 260 | — | ns | |
| Rise time of SCL and SDA | Standard Mode | t _{RC} | — | 1000 | ns |
| | Fast Mode | t _{RC} | — | 300 | ns |
| | Fast Mode Plus | t _{RC} | — | 120 | ns |

Table 3-13. I²C Slave Port Characteristics (Cont.)


Test conditions (unless specified otherwise): Fig. 2-1 shows typical connections; Inputs: GNDA = GNDL = GNDP = 0 V; all voltages with respect to ground; min/max performance data taken with VL = 1.66–1.94 V (VL_SEL = VP) or VL = 1.1–1.3 V (VL_SEL = GNDD); inputs: Logic 0 = GNDA = 0 V, Logic 1 = VL; TA = +25°C; SDA load capacitance equal to maximum value of CB = 400 pF; minimum SDA pull-up resistance, RP(min).¹ Table 3-1 describes some parameters in detail. All specifications are valid for the signals at the pins of the CS43L36 with the specified load capacitance.

| Parameter ² | | Symbol ³ | Minimum | Maximum | Unit |
|---|--------------------------|---------------------|---------|---------|------|
| Fall time of SCL and SDA | Standard Mode | t _{FC} | — | 300 | ns |
| | Fast Mode | | — | 300 | ns |
| | Fast Mode Plus | | — | 120 | ns |
| Setup time for stop condition | | t _{SUSP} | 260 | — | ns |
| SDA setup time to SCL rising | | t _{SUD} | 50 | — | ns |
| SDA input hold time from SCL falling ⁴ | | t _{HDDI} | 0 | — | ns |
| Output data valid (Data/Ack) ⁵ | Standard Mode | t _{VDDO} | — | 3450 | ns |
| | Fast Mode | | — | 900 | ns |
| | Fast Mode Plus | | — | 450 | ns |
| Bus free time between transmissions | | t _{BUF} | 500 | — | ns |
| SDA bus capacitance | Fast Mode Plus | CB | — | 550 | pF |
| | Standard Mode, Fast Mode | | — | 400 | pF |
| SCL/SDA pull-up resistance ¹ | VL = 1.2 V | RP | 200 | — | Ω |
| | VL = 1.8 V | | 250 | — | Ω |
| Switching time between RCO and PLL or SCLK ⁶ | | — | 150 | — | μs |

1. The minimum RP value (see Fig. 2-1) is determined by using the maximum VL level, the minimum sink current strength of its respective output, and the maximum low-level output voltage, VOL. The maximum RP value may be determined by how fast its associated signal must transition (e.g., the lower the RP value, the faster the I²C bus can operate for a given bus load capacitance). See the I²C bus specification referenced in Section 13.

2. All timing is relative to thresholds specified in Table 3-14, VIL and VIH for input signals, and VOL and VOH for output signals.

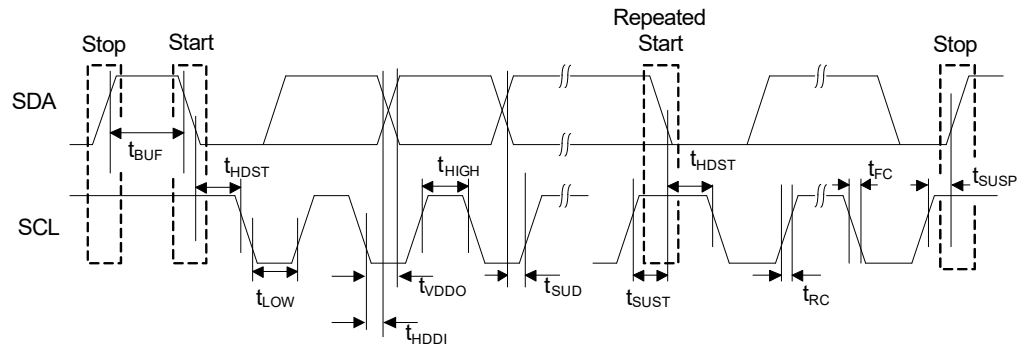3. I²C control-port timing



4. Data must be held long enough to bridge the SCL transition time, t_F.

5. Time from falling edge of SCL until data output is valid.

6. The switch between RCO and either SCLK or PLL occurs upon setting/clearing SCLK_PRESENT (see p. 64) and sending the I²C stop condition. An SCLK_PRESENT transition (0 to 1 or 1 to 0) starts a switch between RCO and the selected SCLK or PLL. An I²C stop condition is sent, after which a wait time of at least 150 μs is required before the next I²C transaction can begin using the newly selected clock.

Table 3-14. Digital Interface Specifications and Characteristics

Test conditions (unless specified otherwise): Fig. 2-1 shows CS43L36 connections; GNDD = GNDCP = GNDA = 0 V; voltages are with respect to ground; parameters can vary with VL and VP; min/max performance data taken with VCP = VA = 1.8 V, VD_FILT = 1.2 V; VP = 3.0–5.25 V; VL = 1.66–1.94 V (VL_SEL = VP) or VL = 1.1–1.3 V (VL_SEL = GNDD); TA = +25°C; CL = 60 pF.


| Parameters ¹ | Symbol | Min | Max | Unit | |
|--|--|---|-----------------------------|----------------------------------|----------------------------|
| Input leakage current ^{2,3} | ASP_LRCK/FSYNC ASP_SCLK,ASP_SDIN TIP_SENSE SDA, SCL INT, WAKE, RESET | I _{in} | — — — — — | ±4 ±3 ±100 ±100 ±100 | μA μA nA nA nA |
| Internal weak pull-down | — | — | 550 | 2450 | kΩ |
| Input capacitance ² | — | — | — | 10 | pF |
| INT or WAKE current sink (V _{OL} = 0.3 V maximum) | — | — | 825 | — | μA |
| VL Logic (non-I ² C) | High-level output voltage (I _{OH} = –100 μA) Low-level output voltage High-level input voltage Low-level input voltage | V _{OH} V _{OL} V _{IH} V _{IL} | 0.9*VL — 0.7*VL — | — 0.1*VL — 0.3*VL | V V V V |
| VL Logic (I ² C only) | Low-level output voltage High-level input voltage Low-level input voltage Hysteresis voltage | V _{OL} V _{IH} V _{IL} V _{HYS} | — 0.7*VL — 0.05*VL | 0.2*VL — 0.3*VL — | V V V V |
| VP Logic (excluding TIP_SENSE) | Low-level output voltage High-level input voltage Low-level input voltage | V _{OL} V _{IH} V _{IL} | — 0.9 — | 0.2 — 0.2 | V V V |
| TIP_SENSE ⁴ | High-level input voltage Low-level input voltage | V _{IH} V _{IL} | 0.87*VP — | — 2.0 | V V |
| TIP_SENSE current to –VCP_FILT ⁴ | TIP_SENSE_CTRL = 11 (Short-Detect Mode) | I _{TIP_SENSE} | 1.00 | 2.91 | μA |

1. See Table 1-1 for serial and control-port power rails.

2. Specification is per pin. The CS43L36 is not a low-leakage device, per the MIPI Specification. See Section 13.

3. Includes current through internal pull-up or pull-down resistors on pin.

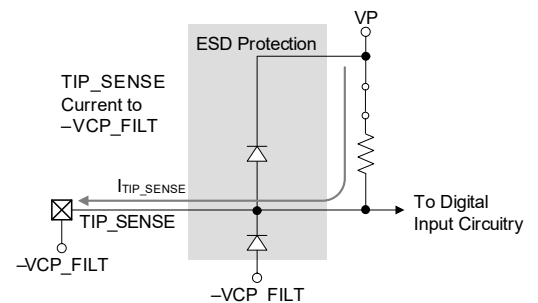4. TIP_SENSE input circuit. This circuit allows the TIP_SENSE signal to go as low as –VCP_FILT and as high as VP. Section 4.8.2 provides configuration details.



4 Functional Description

This section provides a general description of the CS43L36 architecture and detailed functional descriptions of the various blocks that make up the CS43L36. Fig. 4-1 shows the flow of signals through the CS43L36 and gives links to detailed descriptions of the respective sections.

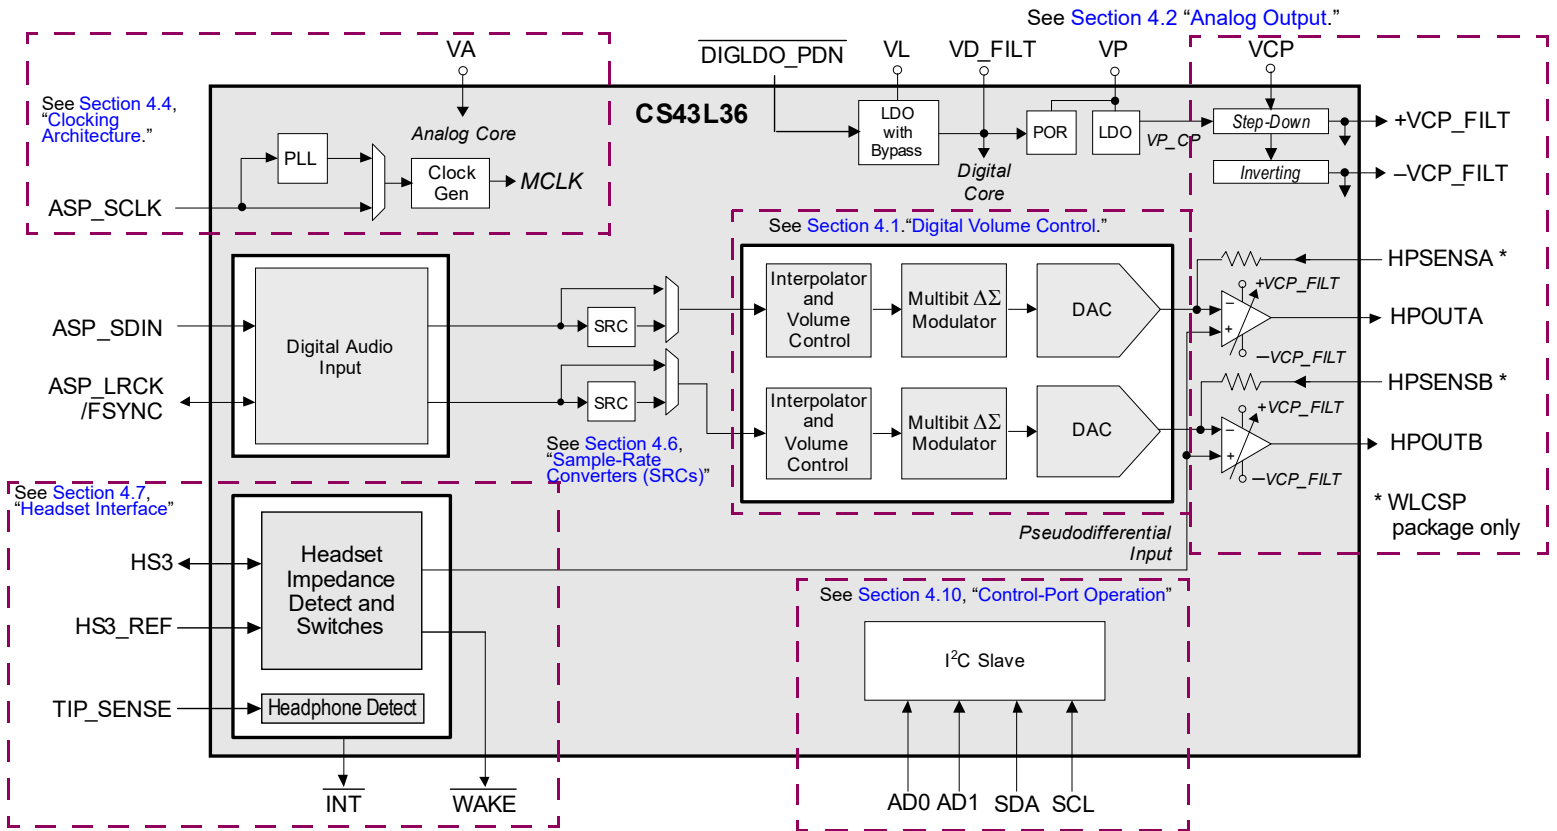


Figure 4-1. Overview of Signal Flow

The CS43L36 is an ultralow-power stereo DAC. The DAC feeds a stereo pseudodifferential output amplifier. The converters operate at a low oversampling ratio, maximizing power savings while maintaining high performance.

The serial data interface ports operate either at standard audio-sample rates as timing slaves or in Hybrid-Master Mode as a bit-clock slave generating LRCK internally. An onboard fractional-N PLL can be used to generate the internal-core timing ($MCLK_{INT}$) if the SCLK source is not one of the following rates (where $N = 2$ or 4):

- $N \times 5.6448$ or 6.1440 MHz
- USB rates ($N \times 6$ MHz)

The CS43L36 significantly reduces overall power consumption, with a very low-voltage digital core and with low-voltage Class H amplifiers (powered from an integrated LDO regulator and a step-down/inverting charge pump, respectively). The CS43L36 comprises the following subblocks:

- Volume control, described in [Section 4.1](#), uses selectable attenuation to provide relative volume control and to avoid clipping.
- Analog outputs. The analog output block, described in [Section 4.2](#), includes separate pseudodifferential headphone Class H amplifiers. An on-chip step-down/inverting charge pump creates a positive and negative voltage equal to the input or to either one-half or one-third of the input supply for the amplifiers, allowing an adaptable, full-scale output swing centered around ground. The resulting internal amplifier supply can be $\pm VCP/3$, $\pm VCP/2$, $\pm VCP$, or ± 2.5 V.

The inverting architecture eliminates the need for large DC-blocking capacitors and allows the amplifier to deliver more power to HP loads at lower supply voltages. The step-down architecture allows the amplifier's power supply to adapt to the required output signal. This adaptive power-supply scheme converts traditional Class AB amplifiers into more power-efficient Class H amplifiers.

- Class H amplifier. The HP output amplifiers, described in [Section 4.3](#), use a patented Cirrus Logic four-mode Class H technology that maintains high performance and maximizes operating efficiency of a typical Class AB amplifier.
- Clocking architecture. Described in [Section 4.4](#), the clock for the device can be supplied internally from an integrated fractional-N PLL using ASP_SCLK/ as the source clock or the internal PLL can be bypassed and derived directly from the input pin.
- Serial port. The CS43L36 TDM/I²S (ASP) port is a highly configurable serial port. See [Section 4.5](#).
The ASP can operate in TDM Mode, which includes full-duplex communication, flexible data structuring via control port registers, clock slave mode, and higher bandwidth, enabling more data to be transferred to and from the device.
- Sample-rate converters (SRCs). SRCs, described in [Section 4.6](#), are used to bridge different sample rates at the serial ports within the digital-processing core. SRCs can be bypassed.
- Headset interface. This interface is described in [Section 4.7](#).
- Power management. Several control registers provide independent power-down control of the analog and digital sections of the CS43L36, allowing operation in select applications with minimal power consumption. Power management considerations are described in [Section 4.9](#).
- Control-port operation. The control port, described in [Section 4.10](#), provides access to the registers for configuring the DAC. The control port operation may be completely asynchronous with respect to the audio sample rates. To avoid potential interference problems, control-port data pins must remain static if no operation is required.
- Resets. [Section 4.11](#) describes the reset options—power-on reset (POR), asserting and $\overline{\text{RESET}}$.
- Interrupts. The CS43L36 includes an open-drain interrupt output, $\overline{\text{INT}}$. Interrupt mask registers control whether an event associated with an interrupt status/mask bit pair triggers the assertion of INT. See [Section 4.12](#).

Note that the following terms are used interchangeably in this document:

— ASP RX, DAI0, and DAC input

4.1 Digital Volume Control

The internal stereo volume control is shown in [Fig. 4-2](#). Each input can be attenuated via CHx_VOLy. Outputs are available as a source for the DACs.

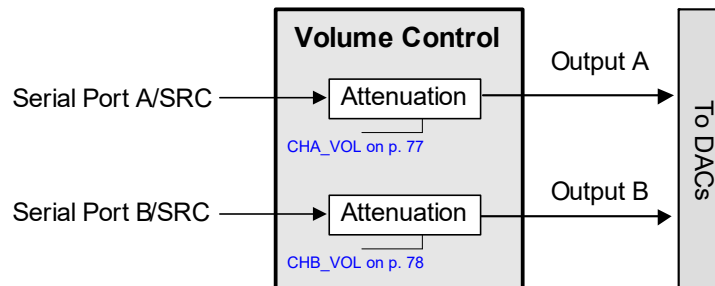


Figure 4-2. Digital Volume Control Subblocks

4.1.1 Attenuation Values

The volume control contains programmable attenuation blocks that are configured as described in the CHx_VOLy field descriptions in [Section 7.11.1](#)—[Section 7.11.2](#). For all settings except 0 dB, attenuation on the mixer input includes an offset that increases as attenuation increases, as follows:

- For commonly used $-6n$ dB ($n = \{1, 2, \text{etc.}\}$) attenuation settings, the offset rounds the attenuation exactly to the desired $1/2^n$ factor (e.g., $20\text{Log}(1/2) = 6.021$ dB, not 6.000 dB).
- For attenuation settings other than $-6n$ dB, the always positive offset provides slightly more attenuation, giving enough margin to avoid mixer clipping.

4.2 Analog Output

This section describes the headphone (HP) outputs. The CS43L36 provides an analog output that is fed from the mixer. Fig. 4-3 shows the general flow of the analog outputs.

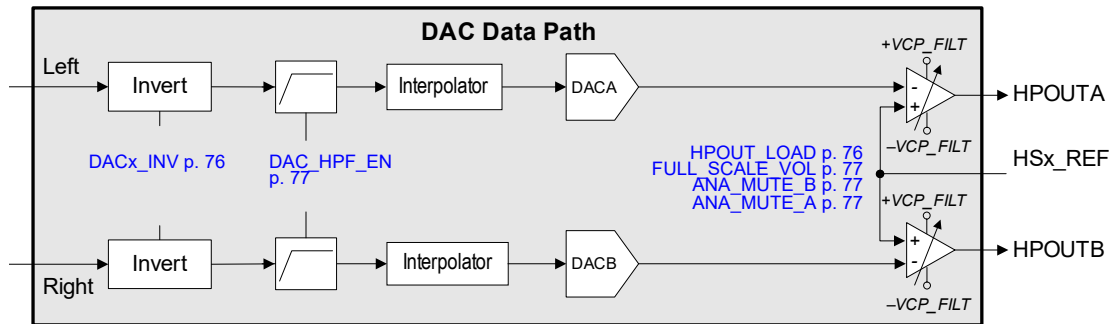


Figure 4-3. Analog-Output Signal Flow

The output path is sourced directly from the digital volume control output. The playback path uses advanced analog and digital signal-processing techniques to adapt to the input signal content and enhance dynamic range and power consumption of the playback path. The HP output must be muted before changing the state of `FULL_SCALE_VOL` (see p. 77), which sets the maximum HPOUT output voltage. See Table 3-7. HP outputs are muted by `ANA_MUTE_B` and `ANA_MUTE_A` (see p. 77).

Fig. 4-4 is an op-amp-level schematic for the analog output flow.

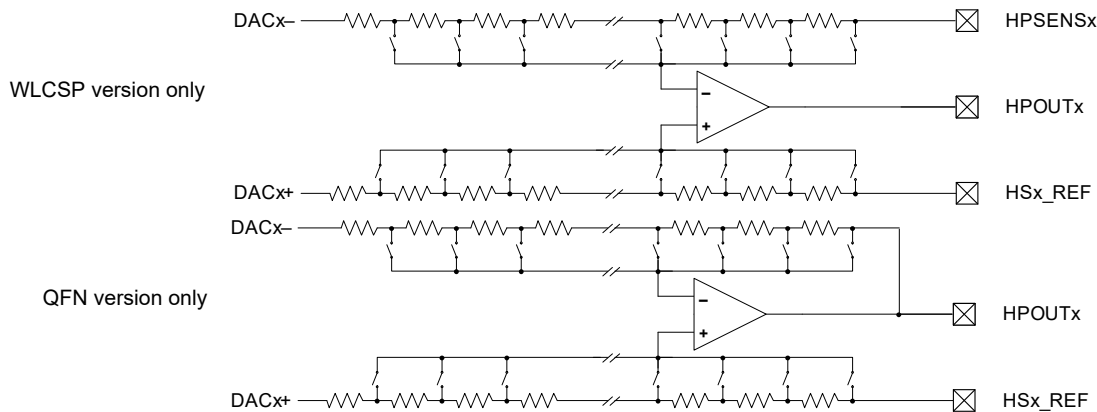


Figure 4-4. Op-Amp-Level Schematic—Analog Outputs

4.2.1 Pseudodifferential Outputs

The analog output amplifiers use a pseudodifferential output topology that allows the amplifier to monitor the ground potential at the load through the reference pins (`HSx_REF`). Minimize the impedance from the CS43L36 reference pin to the load ground (typically the connector ground). Impedance in this path affects analog output attenuation as well as the common-mode rejection of the output amplifier, which affects output offset and step deviation.

4.2.2 Output Load Detection

The CS43L36 can distinguish between the following output loads:

- $R_L = 15, 30, \text{ or } 3 \text{ k}\Omega$
- $C_L < \sim 2 \text{ nF}$ (low capacitance); $C_L > \sim 2 \text{ nF}$ (high capacitance)

Note: Channels A and B must have matching loads, although load detection is performed using Channel A.

Before output load detection is initiated, the following steps must be performed:

1. HS-type information must be determined to run a headset load-detection sequence, as described in Section 4.8.

2. Power down the HP block: `HP_PDN = 1` (see p. 63).
3. Mute the analog outputs: `ANA_MUTE_B = ANA_MUTE_A = 1` (see p. 77).
4. Disable the DAC high-pass filter: `DAC_HPF_EN = 0` (see p. 77).
Note: Restore the previous setup after detection completes.
5. Set `LATCH_TO_VP` (see p. 75).
6. Set `ADPTPWR = 100` (see p. 77).
7. Set the analog soft-ramp rate (`ASR_RATE = 0111`; see p. 61).
8. Set the digital soft-ramp rate (`DSR_RATE = 0001`; see p. 61).
9. After load detection completes, `ASR_RATE`, `DSR_RATE`, `ADPTPWR`, and `DAC_HPF_EN` must be restored to their previous values. See Section 4.3 for details.

After an HP-detect event, if `HP_LD_EN` is set (see p. 74), the CS43L36 proceeds to detect the resistance and capacitance of the output load. A 24-kHz tone is output on HPOUTA, and HS3 is measured using an internal resistor bank as a reference.

`RLA_STAT` (see p. 74) reports resistance-detection results for Channel A as follows:

- 00: 15 Ω
- 01: 30 Ω
- 10: 3 k Ω
- 11: Reserved

If the typical output resistance of less than $\sim 300 \Omega$ is indicated, a low-capacitance load is assumed. If the resistance is greater than 300Ω , capacitance detection proceeds. After the detection sequence completes, `HPLOAD_DET_DONE` (see p. 74) is set. The results of capacitor detection is reported in `CLA_STAT` (see p. 74). This result can be used to program the value in `HPOUT_LOAD` (see p. 76), which determines the compensation of the headphone amplifier.

Notes:

- The HP path must be powered down before updating the `HPOUT_LOAD` setting and repowered afterwards.
- Low capacitance results were determined with $C_L = 1 \text{ nF}$; high capacitance results were determined with $C_L = 10 \text{ nF}$.

4.2.3 Slow Start Control

Volume control, DAC, and HP soft ramping is enabled through `SLOW_START_EN` (p. 62). If `SLOW_START_EN = 111`, changes to DAC/HP volumes are applied slowly by stepping through each volume-control setting with a delay between steps equal to an integer number of F_s periods. The delay between steps, which can vary from $1/F_s$ to $72/F_s$ periods, is set via `DSR_RATE` and `ASR_RATE` (see p. 61).

If ramping is disabled, changes occur immediately with the clock edge.

4.3 Class H Amplifier

Fig. 4-5 shows the Class H operation.

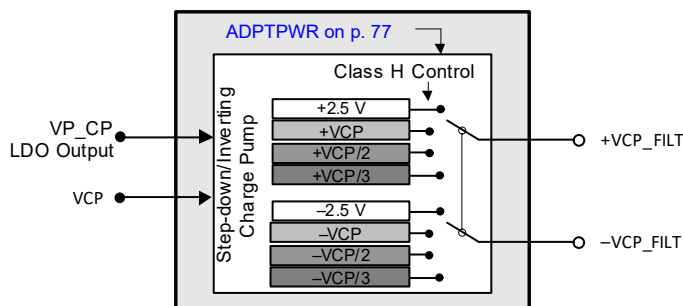


Figure 4-5. Class H Operation

The CS43L36 HP output amplifiers use a Cirrus Logic four-mode Class H technology, which maximizes operating efficiency of the typical Class AB amplifier while maintaining high performance. In a Class H amplifier design, the rail voltages supplied to the amplifier vary with the needs of the music passage being amplified. This conserves energy during low-power passages and when the program material is played back at low volume.

The internal charge pump, which creates the rail voltages for the HP amplifiers, is the central component of the four-mode Class H technology. The charge pump receives its input voltage from the voltage present on either the VCP or VP pin. From this voltage, the charge pump generates the differential rail voltages supplied to the amplifier output stages. The charge pump can supply four sets of differential rail voltages: ± 2.5 , $\pm VCP$, $\pm VCP/2$, and $\pm VCP/3$.

Table 4-1 shows the nominal signal- and volume-level ranges if the amplifier is set to the adapt-to-signal mode explained in Section 4.3.1. In addition to adapting to the input signal, the Class H control is capable of monitoring the internal headphone amplifier supply to allow more efficient, load-dependent, automatic Smart Class H Mode selection. In fixed modes, if the signal level exceeds the maximum value of the indicated range, clipping can occur.

Table 4-1. Class H Supply Modes

| Load | | Mode | Class-H Supply Voltage | Signal-Level Range ^{1,2,3,4} |
|--------------|-------------|------|------------------------|---------------------------------------|
| Resistance | Capacitance | | | |
| 15 Ω | 1 nF | 0 | ± 2.5 V | ≥ -8 dB |
| | | 1 | $\pm VCP$ | -9 to -14 dB |
| | | 2 | $\pm VCP/2$ | -15 to -20 dB |
| | | 3 | $\pm VCP/3$ | ≤ -21 dB |
| | 10 nF | 0 | ± 2.5 V | ≥ -9 dB |
| | | 1 | $\pm VCP$ | -10 to -14 dB |
| | | 2 | $\pm VCP/2$ | -15 to -19 dB |
| | | 3 | $\pm VCP/3$ | ≤ -20 dB |
| 30 Ω | 1 or 10 nF | 0 | ± 2.5 V | ≥ -4 dB |
| | | 1 | $\pm VCP$ | -5 to -11 dB |
| | | 2 | $\pm VCP/2$ | -12 to -16 dB |
| | | 3 | $\pm VCP/3$ | ≤ -17 dB |
| 3 k Ω | 1 or 10 nF | 0 | ± 2.5 V | ≥ -1 dB |
| | | 1 | $\pm VCP$ | -2 to -8 dB |
| | | 2 | $\pm VCP/2$ | -9 to -13 dB |
| | | 3 | $\pm VCP/3$ | ≤ -14 dB |

1. In Adapt-to-Signal Mode, volume level ranges are approximations but are within -0.5 dB from the values shown.

2. Relative to digital full scale with FULL_SCALE_VOL set to 0 dB.

3. In fixed modes, clipping occurs if the signal level exceeds the maximum of this range due to setting the amplifier's supply too low.

4. To optimize efficiency, smart Class H thresholds automatically vary based on load conditions.

4.3.1 Power Control Options

This section describes the supported types of operation: standard Class AB and adapt to signal. The set of rail voltages supplied to the amplifier output stages depends on the ADPTPWR setting, as described in Section 7.10.1.

4.3.1.1 Standard Class AB Operation (ADPTPWR = 001, 010, 011, or 100)

If ADPTPWR is set to 001, 010, 011, or 100, the rail voltages supplied to the amplifiers are held to ± 2.5 , $\pm VCP$, $\pm VCP/2$, or $\pm VCP/3$, respectively. For these settings, the rail voltages supplied to the output stages are held constant, regardless of the signal level. In these settings, the CS43L36 amplifiers operate in a traditional Class AB configuration.

4.3.1.2 Adapt-to-Output Signal (ADPTPWR = 111)

If ADPTPWR = 111, the rail voltage sent to the amplifiers is based only on whether the signal sent to the amplifiers would cause the amplifiers to clip when operating on the lower set of rail voltages at certain threshold values.

- If clipping can occur, the control logic instructs the charge pump to provide the next higher set of rail voltages.
- If clipping could not occur, the control logic instructs the charge pump to provide the lower set of rail voltages, eliminating the need to advise the CS43L36 of volume settings external to the device.

4.3.2 Power-Supply Transitions

Charge-pump transitions from the lower to the higher set of rail voltages occur on the next FLYN/FLYP clock cycle. Despite the system's fast response time, the VCP_FILT pin's capacitive elements prevent rail voltages from changing instantly. Instead, the rail voltages ramp from the lower to the higher supply, based on the time constant created by the output impedance of the charge pump and the capacitor on the VCP_FILT pin (the transition time is approximately 20 μ s).

Fig. 4-6 shows Class H supply switching. During this transition, a high dV/dt transient on the inputs may briefly clip the outputs before the rail voltages charge to the full higher supply level. This transitory clipping has been found to be inaudible in listening tests.

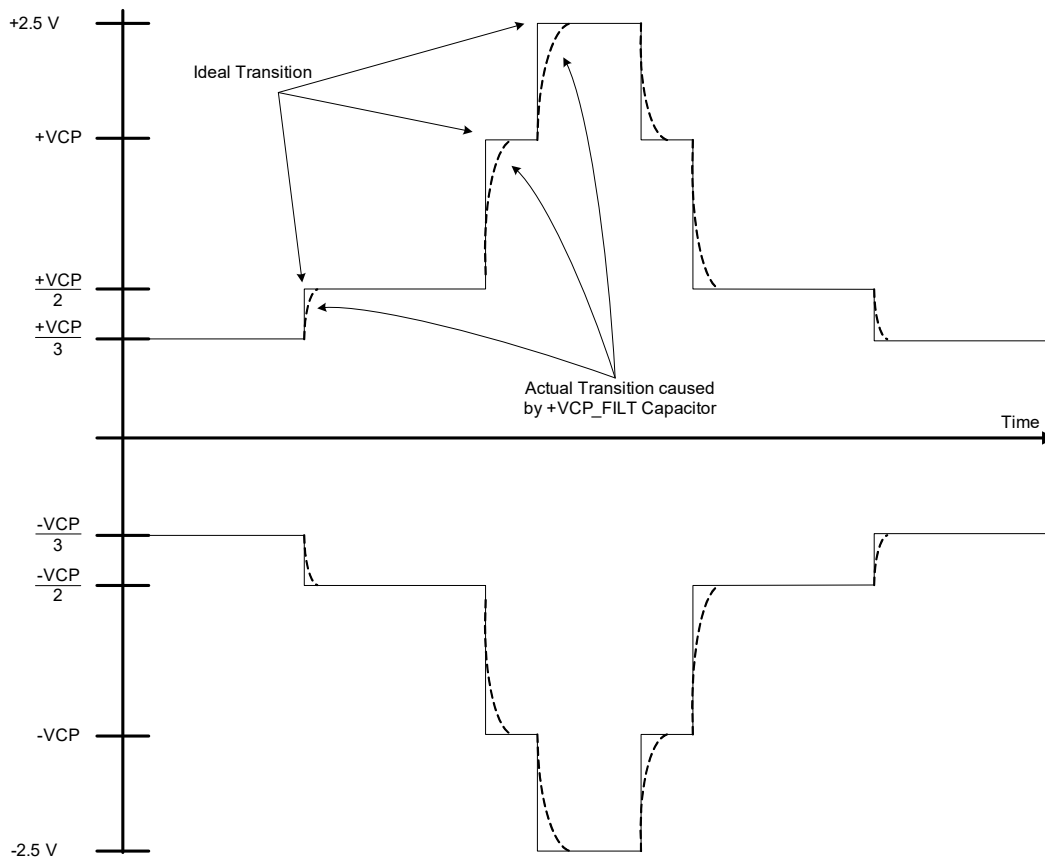


Figure 4-6. VCP_FILT Transitions—Headphone Output

When the charge pump transitions from the higher to the lower set of rail voltages, there is a 5.5-s delay before the charge pump supplies the lower rail voltages to the amplifiers. This hysteresis ensures that the charge pump does not toggle between the two rail voltages as signals approach the clip threshold. It also prevents clipping in the instance of repetitive high-level transients in the input signal. Fig. 4-7 shows this transitional behavior.

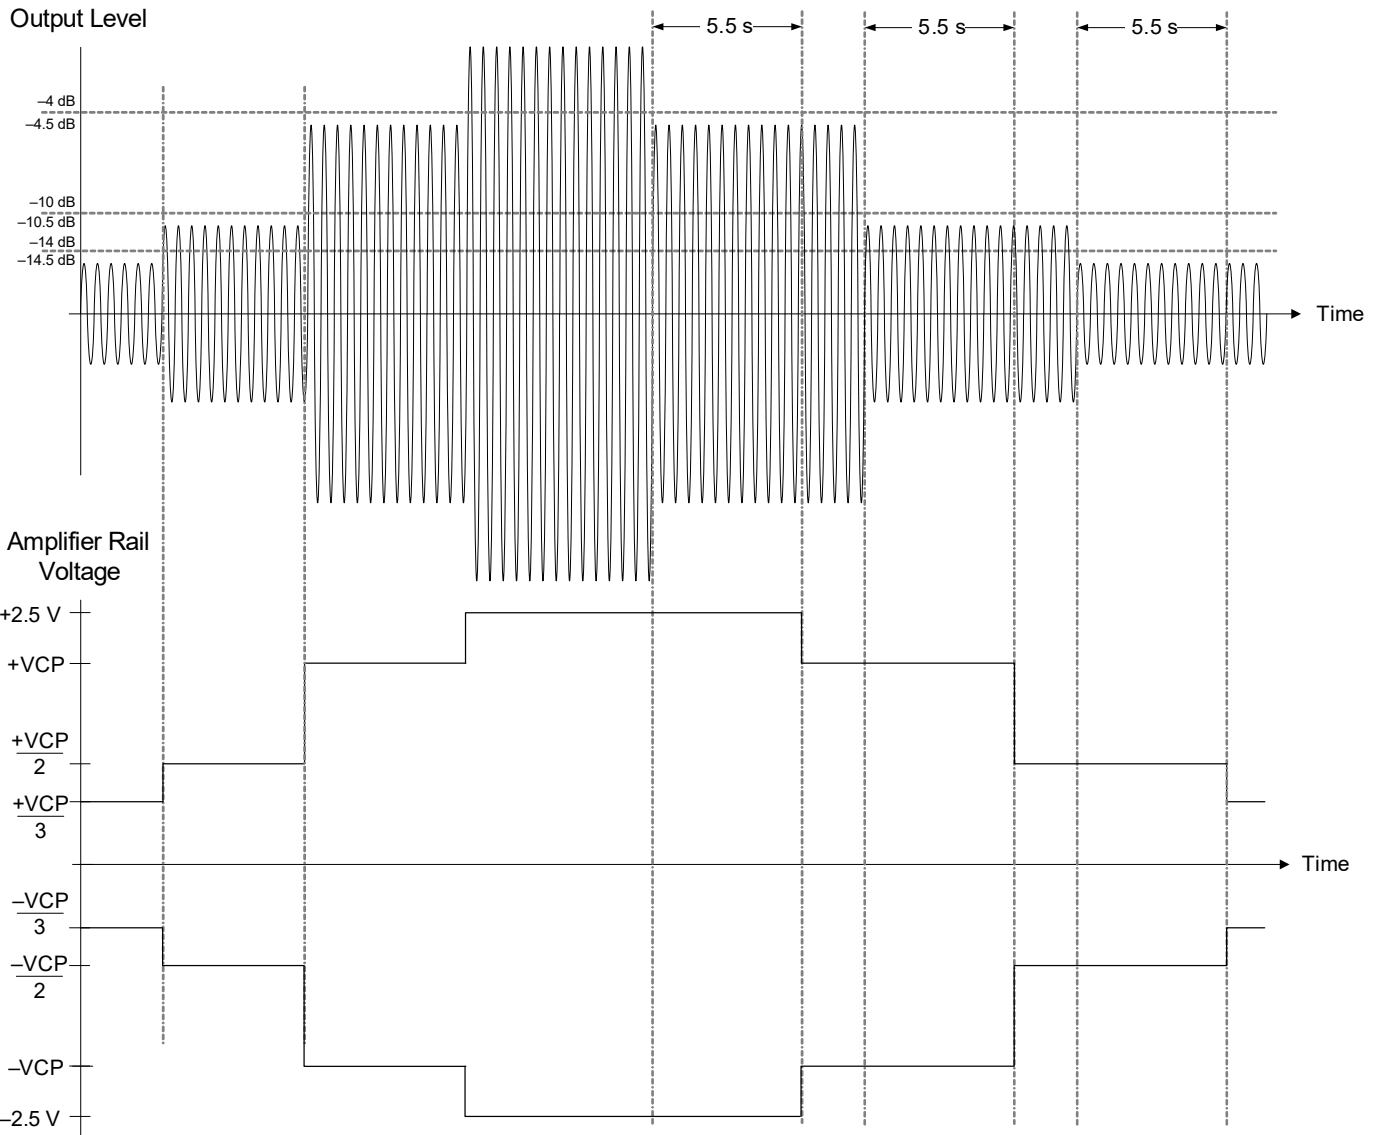


Figure 4-7. VCP_FILT Hysteresis—Headphone Output

4.3.3 Efficiency

As discussed in previous sections, amplifiers internal to the CS43L36 operate from one of four sets of rail voltages, based on the needs of the signal being amplified. Fig. 4-8 and Fig. 4-9 show power curves for all modes of operation and provides details regarding the power supplied to 15- and 30- Ω stereo loads versus the power drawn from the supply for each Class H mode.

If rail voltages are set to ± 2.5 V, the amplifiers operate in their least efficient mode for low-level signals. If they are held at $\pm VCP$, $\pm VCP/2$, or $\pm VCP/3$, amplifiers operate more efficiently, but are clipped if required to amplify a full-scale signal.

The adapt-to-signal trace shows the benefit of four-mode Class H operation. At lower output levels, amplifier output is represented by the $\pm VCP/3$ or $\pm VCP/2$ curve, depending on the signal level. At higher output levels, amplifier output is represented by the $\pm VCP$ or ± 2.5 -V curve. The duration for which the amplifiers operate within any of the four curves ($\pm VCP/3$, $\pm VCP/2$, $\pm VCP$, or ± 2.5 V) depends on both the content and the output level of the material being amplified. The highest efficiency operation results from maintaining an output level that is close to, without exceeding, the clip threshold of the particular supply curve.

Note that the Adapt-to-Signal Mode trace in Fig. 4-8 shows that it never transitions to Mode 0, because FULL_SCALE_VOL = 1 (–6 dB) due to a 15- Ω stereo load.

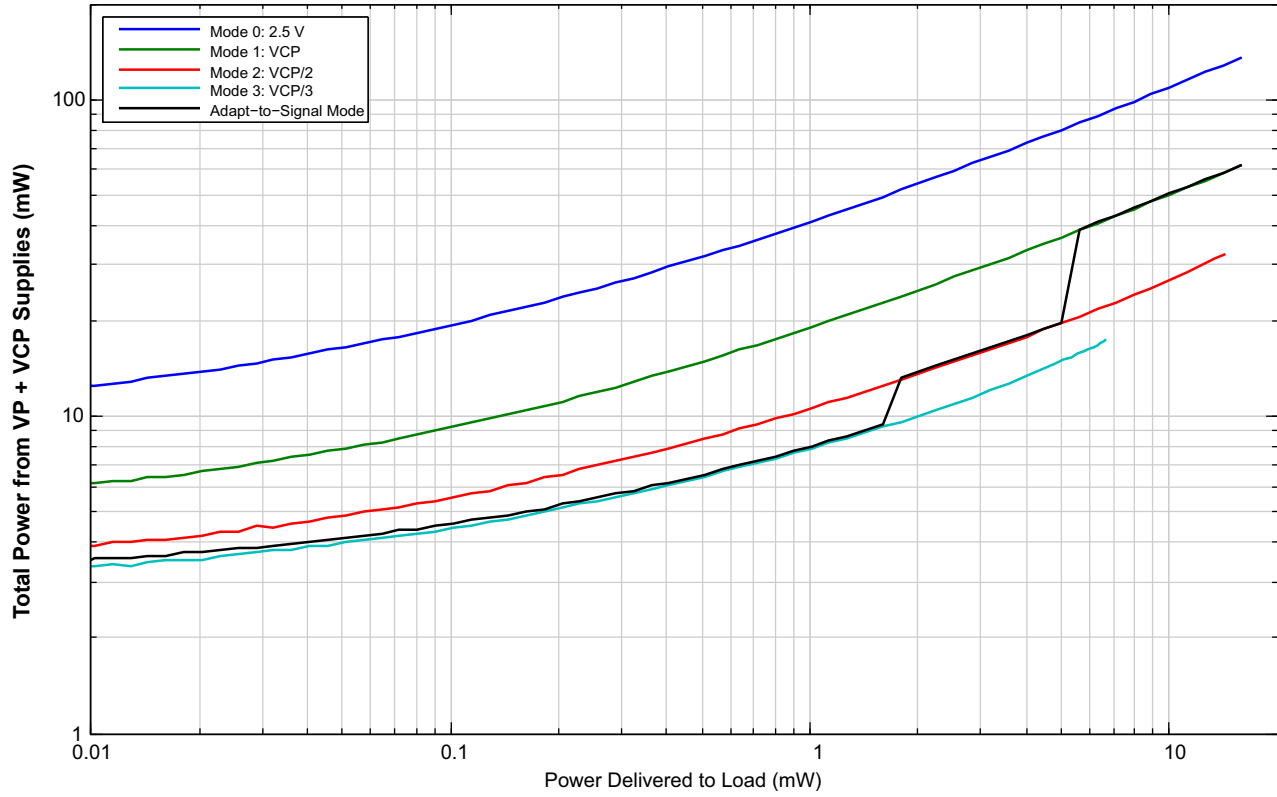


Figure 4-8. Class H Power-to-Load Versus Power from Supply (15 Ω , Stereo)

The Adapt-to-Signal Mode trace in Fig. 4-9 shows the transition to Mode 0, because FULL_SCALE_VOL = 0 (0 dB) due to a 30- Ω stereo load.

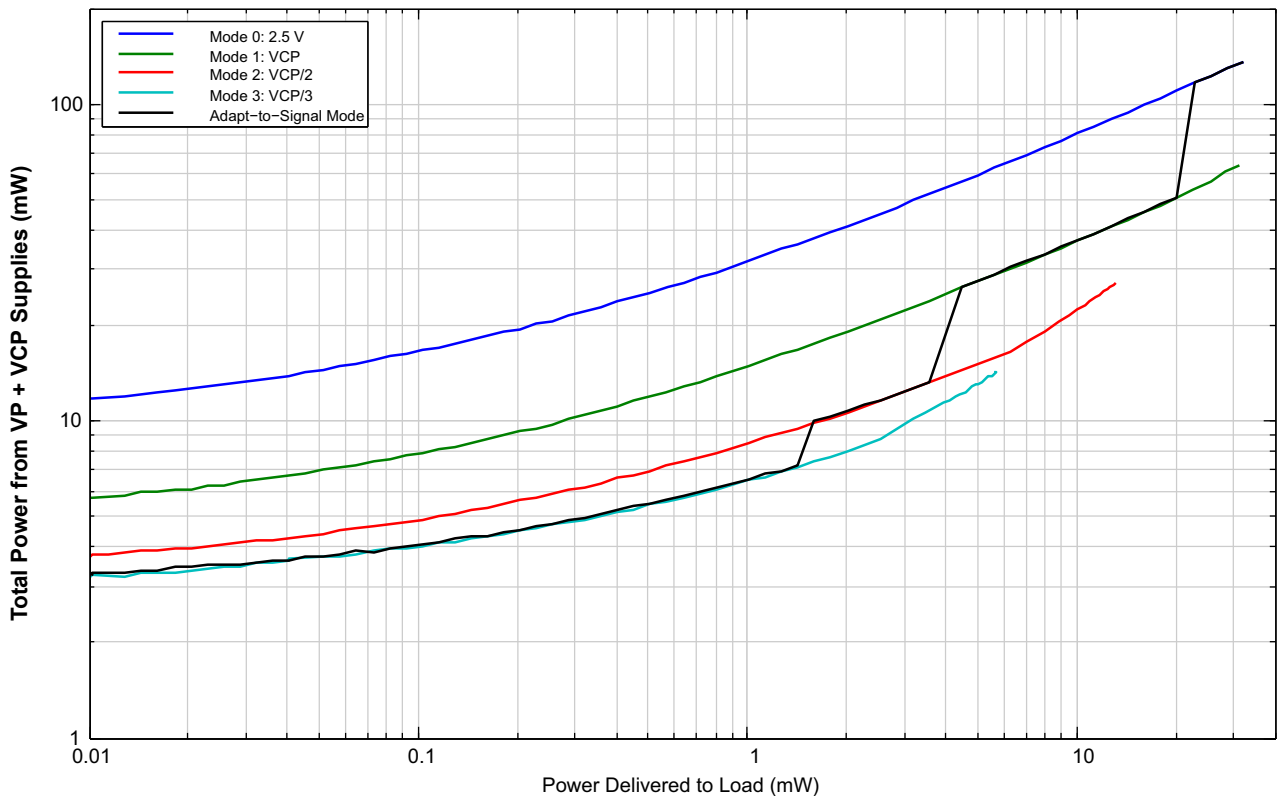


Figure 4-9. Class H Power-to-Load Versus Power from Supply (30 Ω , Stereo)

4.3.4 HP Current Limiter

The CS43L36 features built-in current-limit protection for the HP output. Table 3-8 lists the current limit threshold during the short-circuit conditions shown in Fig. 4-10. For HP amplifiers, current is from the internal charge-pump output, and, as such, applies the current from VCP or VP, depending on the mode.

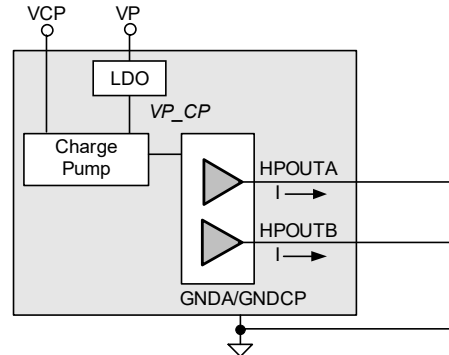


Figure 4-10. HP Short-Circuit Setup

4.4 Clocking Architecture

The CS43L36 offers several ways to support control, ASP operation, data conversion, and signal processing. Internal clocks are generated either from SCLK (ASP_SCLK) or from the integrated fractional-N PLL; see Fig. 4-11. Depending on the MCLK_SRC_SEL setting (see Fig. 4-12), MCLK_{INT} is provided by one of the following methods:

- Externally sourced directly from the ASP_SCLK input pin
- Internally generated from an integrated fractional-N PLL with ASP_SCLK as a reference clock

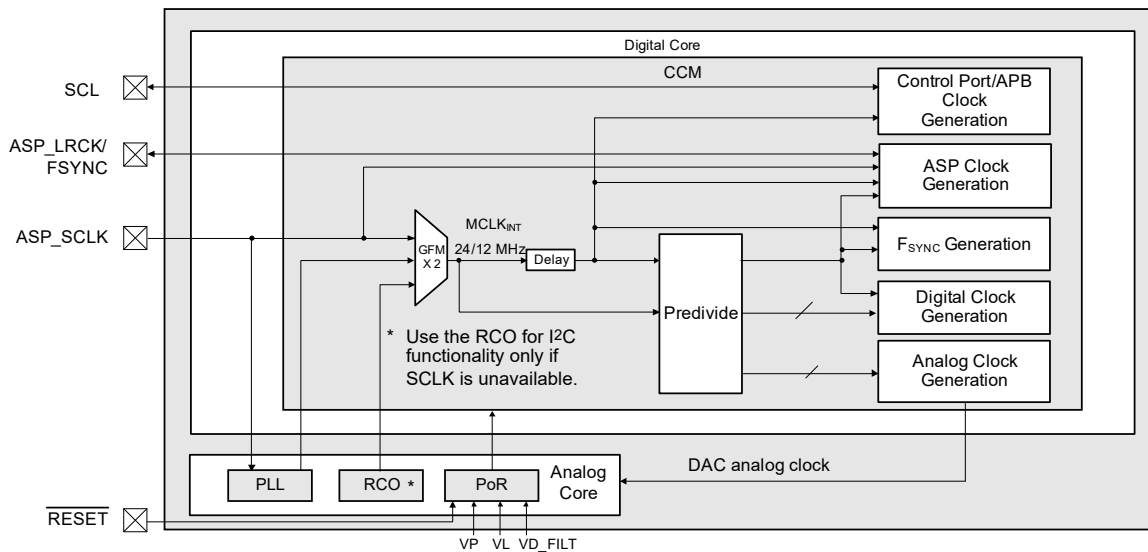


Figure 4-11. Clock Architecture Block Diagram

4.4.1 Start-Up Clocking Using the RC Oscillator (RCO)

At power on, an integrated low-power RCO, shown in Fig. 4-11, functions as the default clock for the digital core of the CS43L36, during which time SCLK is unavailable. A reset event always returns it to running off of the RCO. If SCLK is unavailable, RCO clocking must be used only for I²C functionality.

RCO is multiplexed with MCLK_{INT} and fed to the I²C slave control port. The SCLK must become active and the RCO must be disabled before data conversion.

Note the following:

- **OSC_SW_SEL_STAT** (see p. 64) indicates the status of the clock switching (in transition, RCO, or SCLK/PLL). With the existing encoding, only one bit can physically change at a time, and the bit changing is always synchronous to the clock that is currently selected.
- **OSC_PDNB_STAT** (see p. 64) indicates the RCO power-down status.
- **SCLK_PRESENT** is used to determine the internal MCLK source. See Section 7.2.4 for details.

The clock-switch state machine uses the transition of SCLK_PRESENT to both initiate switches between the selected internal MCLK between the SCLK pin (SCLK_PRESENT = 1) or the internal RCO (SCLK_PRESENT = 0) and to send the I²C stop condition that each switching event requires. During switching, a delay of at least 150 μs is needed before additional successful I²C communication can begin to use the new clocking source.

Notes:

- Muting the system is recommended when a new clock source is chosen.
- For normal operation, SCLK—not RCO—must be used (SCLK_PRESENT = 1) for running the ASP data path.

4.4.1.1 Switching from RCO

With SCLK running, an SCLK_PRESENT 0-to-1 transition starts a switch from the RCO to the selected SCLK or PLL. This switch is superseded by any outstanding I²C transactions. After the I²C stop condition is sent, the transition begins, taking 150 μs to complete, during which time the system requires that no new I²C transactions be initiated. The next I²C transaction can begin after this 150-μs delay.

4.4.1.2 Switching to RCO

To stop SCLK, the system must revert to RCO clocking to ensure that I²C communications function properly. To power the RCO back up, SCLK_PRESENT must be cleared before stopping SCLK. A 1-to-0 SCLK_PRESENT transition generates a glitch-free mux switch timing from SCLK to RCO. SCLK must remain running during the transition and new I²C transactions must not be initiated for at least 150 μs after an I²C stop is received. The next I²C transaction cannot begin until after this 150 μs delay.

Failure to account for this 150 μs delay could cause I²C communications to fail.

4.4.2 MCLK_{INT} Sources

The MCLK_{INT} source is supplied directly from ASP_SCLK input pin or from the fractional-N PLL. MCLKDIV must be set according to the MCLK_{INT} frequency, which must be set to either the 12-MHz region (11.2896–12.288 MHz) or the 24-MHz region (22.5792–24.576 MHz). Table 4-4 shows several examples. Table 4-2 lists further restrictions.

Table 4-2. MCLK_{INT} Source Restrictions

| MCLK _{INT} Source | MCLK_SRC_SEL (see p. 65) | MCLKDIV (see p. 65) | Nominal ASP_SCLK Pin Frequency |
|----------------------------|--------------------------|---------------------|--------------------------------|
| ASP_SCLK | 0 | 0 | 12 MHz |
| | | 1 | 24 MHz |
| Fractional-N PLL | 1 | 0 | 12 MHz |
| | | 1 | 24 MHz |

MCLK_{INT} is switched through internal glitchless clock muxing. Doing so during operation may cause audible artifacts, but does not put the device into an unrecoverable state. Therefore, it is recommended to mute the system for at least 150 μs.

If $MCLK_{INT}$ is sourced from the PLL, on-the-fly frequency changes to the source may cause the PLL to go out of phase lock with the clock source. To reduce the risk of audible artifacts, it is recommended to mute the system first. Any necessary configuration changes based on the new clock source frequency must occur before unmuting the system.

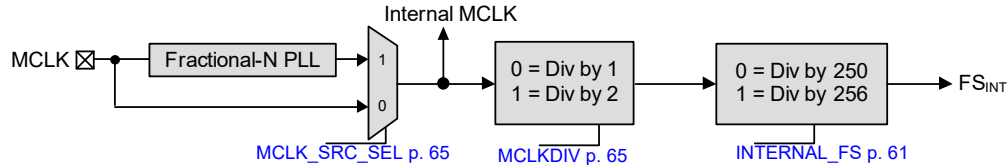


Figure 4-12. MCLK INT Source Switching

For proper internal F_s clocking, the `INTERNAL_FS` and `MCLKDIV` bits must be configured, as shown in [Table 4-2](#).

Table 4-3. Determining $F_{s_{INT}}$

| MCLK _{INT} (MHz) | MCLKDIV (see p. 65) | INTERNAL_FS (see p. 61) | Resulting $F_{s_{INT}}$ (kHz) |
|---------------------------|---------------------|-------------------------|-------------------------------|
| 11.2896 | 0 | 1 | 44.1 |
| 12 | 0 | 0 | 48 |
| 12.288 | 0 | 1 | 48 |
| 22.5792 | 1 | 1 | 44.1 |
| 24 | 1 | 0 | 48 |
| 24.576 | 1 | 1 | 48 |

Note: The control-port frequency is equal to the $MCLK_{INT}$ frequency.

4.4.3 Fractional-N PLL

The CS43L36 has an integrated fractional-N PLL to support the clocking requirements of the internal analog circuits and converters. This PLL can be enabled or bypassed to suit system-clocking needs. The input reference clock for the PLL is the `ASP_SCLK` input pin. The reference clock frequency must be between 2.8224 and 25 MHz.

The PLL can be configured for a wide range of combinations of `SCLK` and $MCLK_{INT}$. `PLL_REF_INV` (see p. 67) can be used to invert the PLL reference clock. [Table 4-4](#) lists common settings.

Table 4-4. Common PLL Setting Examples

| SCLK (MHz) | MCLK_SRC_SEL (see p. 65) ¹ | SCLK_PREDIV (see p. 67) ² | PLL_DIV_INT (see p. 73) | PLL_DIV_FRAC (see p. 73) ² | PLL_MODE (see p. 73) | PLL_DIVOUT (see p. 73) ³ | MCLK _{INT} (MHz) | PLL_CAL_RATIO (see p. 73) | n [4] |
|------------|---------------------------------------|--------------------------------------|-------------------------|---------------------------------------|----------------------|-------------------------------------|---------------------------|---------------------------|-------|
| 1.024 | 1 | 00 | 0xAC | 0x44 0000 | 01 | 0x10 | 11.2896 | 118 | 3 |
| | 1 | 00 | 0xBB | 0x80 0000 | 11 | 0x10 | 12 | 125 | 3 |
| | 1 | 00 | 0xC0 | 0x00 0000 | 11 | 0x10 | 12.288 | 128 | 3 |
| 1.536 | 1 | 00 | 0x72 | 0xD8 0000 | 01 | 0x10 | 11.2896 | 118 | 2 |
| | 1 | 00 | 0x7D | 0x00 0000 | 11 | 0x10 | 12 | 125 | 2 |
| | 1 | 00 | 0x80 | 0x00 0000 | 11 | 0x10 | 12.288 | 128 | 2 |
| | 1 | 00 | 0x7D | 0x00 0000 | 11 | 0x08 | 24 | 125 | 4 |
| | 1 | 00 | 0x80 | 0x00 0000 | 11 | 0x08 | 24.576 | 128 | 4 |
| 2.048 | 1 | 00 | 0x56 | 0x22 0000 | 01 | 0x10 | 11.2896 | 88 | 2 |
| | 1 | 00 | 0x5D | 0xC0 0000 | 11 | 0x10 | 12 | 94 | 2 |
| | 1 | 00 | 0x60 | 0x00 0000 | 11 | 0x10 | 12.288 | 96 | 2 |
| 2.8224 | 1 | 00 | 0x40 | 0x00 0000 | 11 | 0x10 | 11.2896 | 128 | 1 |
| | 1 | 00 | 0x40 | 0x00 0000 | 11 | 0x08 | 22.5792 | 128 | 2 |
| 3 | 1 | 00 | 0x3C | 0x36 1134 | 11 | 0x10 | 11.2896 | 120 | 1 |
| | 1 | 00 | 0x40 | 0x00 0000 | 11 | 0x10 | 12 | 128 | 1 |
| | 1 | 00 | 0x40 | 0x00 0000 | 01 | 0x10 | 12.288 | 131 | 1 |
| | 1 | 00 | 0x40 | 0x00 0000 | 11 | 0x08 | 24 | 128 | 2 |
| | 1 | 00 | 0x40 | 0x00 0000 | 01 | 0x08 | 24.576 | 131 | 2 |
| 3.072 | 1 | 00 | 0x39 | 0x6C 0000 | 01 | 0x10 | 11.2896 | 118 | 1 |
| | 1 | 00 | 0x3E | 0x80 0000 | 11 | 0x10 | 12 | 125 | 1 |
| | 1 | 00 | 0x40 | 0x00 0000 | 11 | 0x10 | 12.288 | 128 | 1 |
| | 1 | 00 | 0x3E | 0x80 0000 | 11 | 0x08 | 24 | 125 | 2 |
| | 1 | 00 | 0x40 | 0x00 0000 | 11 | 0x08 | 24.576 | 128 | 2 |

Table 4-4. Common PLL Setting Examples (Cont.)

| SCLK (MHz) | MCLK_SRC_SEL (see p. 65) ¹ | SCLK_PREDIV (see p. 67) ² | PLL_DIV_INT (see p. 73) | PLL_DIV_FRAC (see p. 73) ² | PLL_MODE (see p. 73) | PLL_DIVOUT (see p. 73) ³ | MCLK _{INT} (MHz) | PLL_CAL_RATIO (see p. 73) | n ^[4] |
|------------|---------------------------------------|--------------------------------------|-------------------------|---------------------------------------|----------------------|-------------------------------------|---------------------------|---------------------------|------------------|
| 4.00 | 1 | 00 | 0x2D | 0x28 8CE7 | 11 | 0x10 | 11.2896 | 90 | 1 |
| | 1 | 00 | 0x30 | 0x00 0000 | 11 | 0x10 | 12 | 96 | 1 |
| | 1 | 00 | 0x30 | 0x00 0000 | 01 | 0x10 | 12.288 | 98 | 1 |
| 4.096 | 1 | 00 | 0x2B | 0x11 0000 | 01 | 0x10 | 11.2896 | 88 | 1 |
| | 1 | 00 | 0x2E | 0xE0 0000 | 11 | 0x10 | 12 | 94 | 1 |
| | 1 | 00 | 0x30 | 0x00 0000 | 11 | 0x10 | 12.288 | 96 | 1 |
| 5.6448 | 1 | 01 | 0x40 | 0x00 0000 | 11 | 0x10 | 11.2896 | 128 | 1 |
| | 1 | 01 | 0x40 | 0x00 0000 | 11 | 0x08 | 22.5792 | 128 | 2 |
| 6 | 1 | 01 | 0x3C | 0x36 1134 | 11 | 0x10 | 11.2896 | 120 | 1 |
| | 1 | 01 | 0x40 | 0x00 0000 | 11 | 0x10 | 12 | 128 | 1 |
| | 1 | 01 | 0x40 | 0x00 0000 | 01 | 0x10 | 12.288 | 131 | 1 |
| | 1 | 01 | 0x40 | 0x00 0000 | 11 | 0x08 | 24 | 128 | 2 |
| | 1 | 01 | 0x40 | 0x00 0000 | 01 | 0x08 | 24.576 | 131 | 2 |
| 6.144 | 1 | 01 | 0x39 | 0x6C 0000 | 01 | 0x10 | 11.2896 | 118 | 1 |
| | 1 | 01 | 0x3E | 0x80 0000 | 11 | 0x10 | 12 | 125 | 1 |
| | 1 | 01 | 0x40 | 0x00 0000 | 11 | 0x10 | 12.288 | 128 | 1 |
| | 1 | 01 | 0x3E | 0x80 0000 | 11 | 0x08 | 24 | 125 | 2 |
| | 1 | 01 | 0x40 | 0x00 0000 | 11 | 0x08 | 24.576 | 128 | 2 |
| 9.6 | 1 | 10 | 0x49 | 0x80 0000 | 01 | 0x10 | 11.2896 | 150 | 1 |
| | 1 | 10 | 0x50 | 0x00 0000 | 11 | 0x10 | 12 | 80 | 2 |
| | 1 | 10 | 0x50 | 0x00 0000 | 01 | 0x10 | 12.288 | 82 | 2 |
| | 1 | 10 | 0x49 | 0x80 0000 | 01 | 0x08 | 22.5792 | 150 | 2 |
| | 1 | 10 | 0x50 | 0x00 0000 | 11 | 0x08 | 24 | 107 | 3 |
| | 1 | 10 | 0x50 | 0x00 0000 | 01 | 0x08 | 24.576 | 109 | 3 |
| 11.2896 | 0 | — | — | — | — | — | 11.2896 | — | — |
| | 1 | 10 | 0x40 | 0x00 0000 | 11 | 0x08 | 22.5792 | 128 | 2 |
| 12 | 1 | 10 | 0x3C | 0x36 1134 | 11 | 0x10 | 11.2896 | 120 | 1 |
| | 0 | — | — | — | — | — | 12.0000 | — | — |
| | 1 | 10 | 0x40 | 0x00 0000 | 01 | 0x10 | 12.288 | 131 | 1 |
| | 1 | 10 | 0x40 | 0x00 0000 | 11 | 0x08 | 24 | 128 | 2 |
| | 1 | 10 | 0x40 | 0x00 0000 | 01 | 0x08 | 24.576 | 131 | 2 |
| 12.2880 | 1 | 10 | 0x39 | 0x6C 0000 | 01 | 0x10 | 11.2896 | 118 | 1 |
| | 1 | 10 | 0x3E | 0x80 0000 | 11 | 0x10 | 12 | 125 | 1 |
| | 0 | — | — | — | — | — | 12.2880 | — | — |
| | 1 | 10 | 0x3E | 0x80 0000 | 11 | 0x08 | 24 | 125 | 2 |
| 13 | 1 | 10 | 0x40 | 0x00 0000 | 11 | 0x08 | 24.576 | 128 | 2 |
| | 1 | 10 | 0x39 | 0xAB 52B5 | 01 | 0x11 | 11.2896 | 111 | 1 |
| | 1 | 10 | 0x3B | 0x13 B13B | 11 | 0x10 | 12 | 118 | 1 |
| 19.2 | 1 | 10 | 0x3B | 0x13 B13B | 01 | 0x10 | 12.288 | 121 | 1 |
| | 1 | 11 | 0x49 | 0x80 0000 | 01 | 0x10 | 11.2896 | 150 | 1 |
| | 1 | 11 | 0x50 | 0x00 0000 | 11 | 0x10 | 12 | 80 | 2 |
| | 1 | 11 | 0x50 | 0x00 0000 | 01 | 0x10 | 12.288 | 82 | 2 |
| | 1 | 11 | 0x49 | 0x80 0000 | 01 | 0x08 | 22.5792 | 150 | 2 |
| | 1 | 11 | 0x50 | 0x00 0000 | 11 | 0x08 | 24 | 107 | 3 |
| 22.5792 | 1 | 11 | 0x50 | 0x00 0000 | 01 | 0x08 | 24.576 | 109 | 3 |
| | 1 | 11 | 0x40 | 0x00 0000 | 11 | 0x10 | 11.2896 | 128 | 1 |
| | 0 | — | — | — | — | — | 22.5792 | — | — |
| 24 | 1 | 11 | 0x3C | 0x36 1134 | 11 | 0x10 | 11.2896 | 120 | 1 |
| | 1 | 11 | 0x40 | 0x00 0000 | 11 | 0x10 | 12 | 128 | 1 |
| | 1 | 11 | 0x40 | 0x00 0000 | 01 | 0x10 | 12.288 | 131 | 1 |
| | 0 | — | — | — | — | — | 24 | — | — |
| | 1 | 11 | 0x40 | 0x00 0000 | 01 | 0x08 | 24.576 | 131 | 2 |
| 24.576 | 1 | 11 | 0x39 | 0x6C 0000 | 01 | 0x10 | 11.2896 | 118 | 1 |
| | 1 | 11 | 0x3E | 0x80 0000 | 11 | 0x10 | 12 | 125 | 1 |
| | 1 | 11 | 0x40 | 0x00 0000 | 11 | 0x10 | 12.288 | 128 | 1 |
| | 1 | 11 | 0x3E | 0x80 0000 | 11 | 0x08 | 24 | 125 | 2 |
| | 0 | — | — | — | — | — | 24.576 | — | — |

Table 4-4. Common PLL Setting Examples (Cont.)

| SCLK (MHz) | MCLK_SRC_SEL (see p. 65) ¹ | SCLK_PREDIV (see p. 67) ² | PLL_DIV_INT (see p. 73) | PLL_DIV_FRAC (see p. 73) ² | PLL_MODE (see p. 73) | PLL_DIVOUT (see p. 73) ³ | MCLK _{INT} (MHz) | PLL_CAL_RATIO (see p. 73) | <i>n</i> [4] |
|------------|---------------------------------------|--------------------------------------|-------------------------|---------------------------------------|----------------------|-------------------------------------|---------------------------|---------------------------|--------------|
| 26 | 1 | 11 | 0x39 | 0xAB 52B5 | 01 | 0x11 | 11.2896 | 111 | 1 |
| | 1 | 11 | 0x3B | 0x13 B13B | 11 | 0x10 | 12 | 118 | 1 |
| | 1 | 11 | 0x3B | 0x13 B13B | 01 | 0x10 | 12.288 | 121 | 1 |

- If MCLK_SRC_SEL = 0, the PLL is bypassed and can be powered down by clearing PLL_START (see p. 72).
- Refer to the register description for the decode.
- The text following this table explains the use of PLL_DIVOUT, shown by the example configurations in Section 4.4.3.1 and Section 4.4.3.2.
- The variable *n* represents the divide ratio. See Eq. 4-2.

Powering up the PLL can be accomplished in several configurations. Table 4-4 shows example configurations; the sequences in Section 4.4.3.1 and Section 4.4.3.2 can be used as models.

MCLK_{INT} combinations not shown in Table 4-4 can be determined by Eq. 4-1:

Equation 4-1. Configuring SCLK, MCLK_{INT} Configurations

$$MCLK_{INT} = \frac{SCLK}{SCLK_PREDIV} \times \frac{(PLL_DIV_INT + PLL_DIV_FRAC)}{(500/512 \text{ or } 1029/1024 \text{ or } 1)} \times \frac{1}{PLL_DIVOUT}$$

The internal PLL output must be between ~150 and ~300 MHz. The PLL_DIVOUT value must be an even integer. To maximize flexibility in sample-rate choice, MCLK_{INT} must be nominally 12 or 24 MHz.

PLL_CAL_RATIO determines the operating point for the internal VCO. For most configurations, the default value gives proper performance. However, to keep the VCO within range, some scenarios require PLL_CAL_RATIO to be set during the PLL power-up sequence (see Section 4.4.3). Use Eq. 4-2 to calculate the proper VCO setting at PLL start-up:

Equation 4-2. Calculating the PLL_CAL_RATIO

$$PLL_CAL_RATIO = \frac{MCLK_{INT} \times 32 \times SCLK_PREDIV}{n \times SCLK}$$

The value of *n* in Eq. 4-2 is determined by the following:

- If the result is less than or equal to 151, by default, *n* equals 1.
- If the result is less than 151, use the result to determine the PLL_CAL_RATIO setting.
- If the result is greater than 151, select another divide factor of *n* configurations for SCLK (where *n* = 2, 3, ...). The result must be between 50 and 151 (see the power-up sequence in Section 4.4.3.2). Use the same *n* value to multiply PLL_DIVOUT during the power-up sequence; see Step 2 in Section 4.4.3.1. The functional value must be restored (Step 8). The same is shown in both standard examples.

4.4.3.1 PLL Power-Up Sequence (Example: SCLK = 4.096 MHz and MCLK_{INT} = 12.288 MHz)

In this example, SCLK = 4.096 MHz and MCLK_{INT} = 12.288 MHz.

- Set SCLK_PREDIV to Divide-by-1 Mode (0x00).
- Set PLL_DIVOUT to Divide-by-16 Mode (0x10). This reflects a value of *n* = 1, because the PLL_CAL_RATIO generated by Eq. 4-2 equals 96. See that the PLL_DIVOUT entry for this configuration in Table 4-4 used a Divide-by-16 Mode (0x10).
- Clear the three fractional factor registers, PLL_DIV_FRAC (see Section 7.5.2).
- Set the integer factor, PLL_DIV_INT to 48 (0x30).
- Set the PLL Mode multipliers, PLL_MODE to 11 to bypass both 500/512 and 1029/1024 factors (0x03).
- Set the PLL_CAL_RATIO to 96 (0x60, see Section 7.5.5).
- Turn on the PLL by setting PLL_START (see p. 72).
- As part of a standard sequence, after at least 800 μs, the PLL_DIVOUT value would need to be restored to 16 (0x10), which is unnecessary here because that value did not change.

4.4.3.2 PLL Power-Up Sequence (Example: SCLK = 12 MHz and MCLK_{INT} = 24 MHz)

In this example, SCLK = 12 MHz and MCLK_{INT} = 24 MHz.

1. Set SCLK_PREDIV to Divide-by-4 Mode (0x02).
2. Set PLL_DIVOUT to Divide-by-16 Mode (0x10). This reflects a value of $n = 2$, because the PLL_CAL_RATIO generated by Eq. 4-2 was greater than 151. See that the PLL_DIVOUT entry for this configuration in Table 4-4 used a Divide-by-8 Mode (0x08).
3. Clear the three fractional factor registers, PLL_DIV_FRAC.
4. Set the integer factor, PLL_DIV_INT to 64 (0x40).
5. Set the PLL mode multipliers, PLL_MODE to 11 to bypass both 500/512 and 1029/1024 factors (0x03).
6. Set the PLL_CAL_RATIO to 128 (0x80).
7. Turn on the PLL by setting PLL_START.
8. After at least 800 μ s, the PLL_DIVOUT value must be restored from 16 to 8 (0x08).

4.4.3.3 Nonstandard PLL Setting (Example: SCLK = 19.2 MHz and MCLK_{INT} = 12 MHz)

In this example, SCLK = 19.2 MHz and MCLK_{INT} = 12 MHz. (Note that a power-up sequence similar to Section 4.4.3.2 is required for this configuration due to $n = 1$.)

- SCLK = 19.2 MHz = available reference clock.
- MCLK_{INT} = 12 MHz = desired internal MCLK.
- SCLK_PREDIV = 11 = divide SCLK by 8 as reference to PLL.
- PLL_DIV_INT = 0x50 = multiply reference clock by 80, yielding PLL out = 192 MHz.
- PLL_DIV_FRAC = 0x00 0000 = fractional portion equal to zero.
- PLL_MODE = 11 = 500/512 and 1029/1024 multipliers are bypassed.
- PLL_DIVOUT = 0x10 = divide PLL out by 16 to achieve MCLK_{INT} of 12 MHz.

Table 4-5 shows nonstandard PLL configurations.

Table 4-5. Nonstandard PLL Settings

| SCLK (MHz) | MCLK_SRC_SEL (see p. 65) | SCLK_PREDIV (see p. 67) | PLL_DIV_INT (see p. 73) | PLL_DIV_FRAC (see p. 73) | PLL_MODE (see p. 73) | PLL_DIVOUT (see p. 73) | MCLK _{INT} (MHz) | PLL_CAL_RATIO (see p. 73) | n [1] |
|------------|--------------------------|-------------------------|-------------------------|--------------------------|----------------------|------------------------|---------------------------|---------------------------|---------|
| 9.6 | 1 | 10 | 0x6E | 0x40 0000 | 01 | 0x18 | 11.2896 | 75 | 1 |
| | 1 | 10 | 0x50 | 0x00 0000 | 11 | 0x10 | 12 | 80 | 1 |
| | 1 | 10 | 0x50 | 0x00 0000 | 01 | 0x10 | 12.288 | 82 | 1 |
| | 1 | 10 | 0x6E | 0x400000 | 01 | 0x0C | 22.5792 | 150 | 1 |
| | 1 | 10 | 0x50 | 0x00 0000 | 11 | 0x08 | 24 | 80 | 2 |
| | 1 | 10 | 0x50 | 0x00 0000 | 01 | 0x08 | 24.576 | 82 | 2 |
| 19.2 | 1 | 11 | 0x6E | 0x40 0000 | 01 | 0x18 | 11.2896 | 150 | 1 |
| | 1 | 11 | 0x50 | 0x00 0000 | 11 | 0x10 | 12 | 80 | 2 |
| | 1 | 11 | 0x50 | 0x00 0000 | 01 | 0x10 | 12.288 | 82 | 2 |
| | 1 | 11 | 0x6E | 0x40 0000 | 01 | 0x0C | 22.5792 | 150 | 2 |
| | 1 | 11 | 0x50 | 0x00 0000 | 11 | 0x08 | 24 | 107 | 3 |
| | 1 | 11 | 0x50 | 0x00 0000 | 01 | 0x08 | 24.576 | 109 | 3 |

1. The variable n represents the divide ratio. See Eq. 4-2.

As shown in Fig. 4-13, the input to the PLL is the ASP_SCLK input pin.

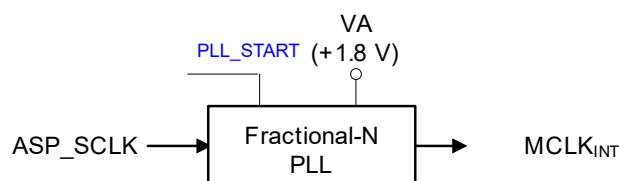


Figure 4-13. Clocking Architecture

4.4.3.4 Powering Down the PLL

To power down the PLL, clear PLL_START.

4.5 Audio Serial Port (ASP)

The CS43L36 has an ASP to communicate audio and voice data between system devices, such as application processors and Bluetooth® transceivers. ASP_SCLK_EN (see p. 66) must be set whenever DAI is used. The ASP can be configured to TDM, I²S, and left justified (LJ) audio interfaces.

Note: A maximum of two input channels are supported in TDM Mode.

4.5.1 Slave Mode Timing

The ASP can operate as a slave to another device's timing, requiring ASP_SCLK and ASP_LRCK/FSYNC to be mastered by the external device. If ASP_HYBRID_MODE is cleared (see p. 66), the serial port acts as a slave. If ASP_HYBRID_MODE is set, the port is in Hybrid-Master Mode (see Section 4.5.2).

In Slave Mode, ASP_SCLK and ASP_LRCK are inputs. Although the CS43L36 does not generate interface timings in Slave Mode, the expected LRCK and SCLK format must be programmed as it is in Hybrid-Master Mode. Table 4-8 shows supported serial-port sample rate examples. Note that some rates require use of the PLL and/or SRC.

4.5.2 Hybrid-Master Mode Timing

In Hybrid-Master Mode, ASP_LRCK is derived from ASP_SCLK; the ASP_SCLK/ASP_LRCK ratio must be $N \times F_S$, where N is a large enough integer to support the total number of bits per ASP_LRCK period for the audio stream to be transferred. In either 50/50 Mode or I²S/LJ Mode, the ASP_SCLK/ASP_LRCK ratio must be $N_E \times F_S$, where N_E is an even integer.

The serial port generates an internal LRCK/FSYNC from an externally mastered ASP_SCLK, allowing single clock-source mastering to the CS43L36. In Hybrid-Master Mode, the serial port must provide a left-right/frame sync signal (ASP_LRCK/FSYNC) given an externally generated bit clock (ASP_SCLK).

Table 4-6 shows supported serial-port sample-rate examples. Other rates are possible, but the rules stipulated above must be met. Note that some rates require use of the PLL or SRC.

Table 4-6. Supported Serial-Port Sample Rates

| SCLK Frequency (MHz) | Serial Port Sample Rate (kHz) | | | | | | | | | | | | | | | | | |
|-------------------------|-------------------------------|--------|--------|----|----|-------|--------|----|----|------|--------|----|------|--------|----|-------|---------|-----|
| | 8.0 | 11.025 | 11.029 | 12 | 16 | 22.05 | 22.059 | 24 | 32 | 44.1 | 44.118 | 48 | 88.2 | 88.235 | 96 | 176.4 | 176.471 | 192 |
| 1.4112 | — | x | — | — | — | x | — | — | — | x | — | — | x | — | — | x | — | — |
| 2.8224 | — | x | — | — | — | x | — | — | — | x | — | — | x | — | — | x | — | — |
| 5.6448 | — | x | — | — | — | x | — | — | — | x | — | — | x | — | — | x | — | — |
| 11.2896 | — | x | — | — | — | x | — | — | — | x | — | — | x | — | — | x | — | — |
| 22.5792 | — | x | — | — | — | x | — | — | — | x | — | — | x | — | — | x | — | — |
| 1.024 | x | — | — | — | x | — | — | — | x | — | — | — | — | — | — | — | — | — |
| 2.048 | x | — | — | — | x | — | — | — | x | — | — | — | — | — | — | — | — | — |
| 4.096 | x | — | — | — | x | — | — | — | x | — | — | — | — | — | — | — | — | — |
| 8.192 | x | — | — | — | x | — | — | — | x | — | — | — | — | — | — | — | — | — |
| 2 | x | — | — | — | x | — | — | — | — | — | — | — | — | — | — | — | — | — |
| 3 | x | — | x | x | — | — | x | x | — | — | x | — | — | x | — | — | x | — |
| 4 | x | — | — | — | x | — | — | — | x | — | — | — | — | — | — | — | — | — |
| 6 | x | — | x | x | x | — | x | x | — | — | x | x | — | x | — | — | x | — |
| 12 | x | — | x | x | x | — | x | x | x | — | x | x | — | x | x | — | x | — |
| 24 | x | — | x | x | x | — | x | x | x | — | x | x | — | x | x | — | x | x |
| 1.536 | x | — | — | x | x | — | — | x | x | — | — | x | — | — | x | — | — | x |
| 3.072 | x | — | — | x | x | — | — | x | x | — | — | x | — | — | x | — | — | x |
| 6.144 | x | — | — | x | x | — | — | x | x | — | — | x | — | — | x | — | — | x |
| 12.288 | x | — | — | x | x | — | — | x | x | — | — | x | — | — | x | — | — | x |
| 24.576 | x | — | — | x | x | — | — | x | x | — | — | x | — | — | x | — | — | x |
| 9.6 | x | — | — | x | x | — | — | x | x | — | — | x | — | — | x | — | — | x |
| 19.2 | x | — | — | x | x | — | — | x | x | — | — | x | — | — | x | — | — | x |

Fig. 4-14 and Fig. 4-15 show the serial-port clocking architectures.

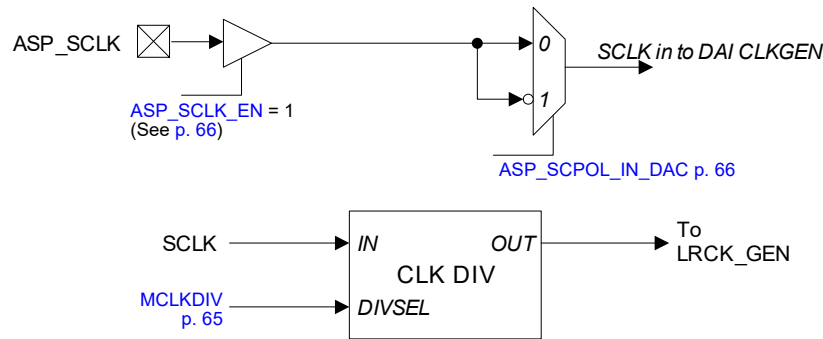


Figure 4-14. ASP SCLK Architecture

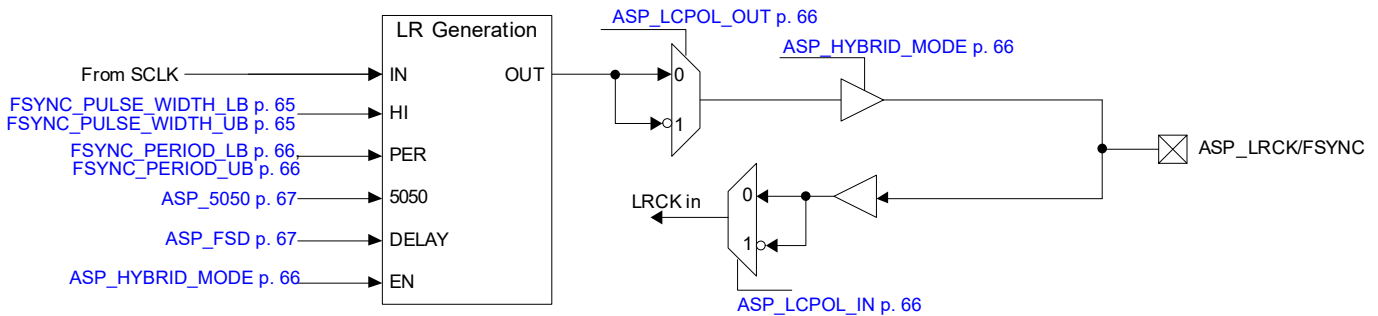


Figure 4-15. ASP LRCK Architecture

As shown in Fig. 4-16, the LRCK period ([FSYNC_PERIOD_LB](#) and [FSYNC_PERIOD_UB](#), see p. 66) controls the number of SCLK periods per frame. This effectively sets the frame length and the number of SCLK periods per F_s . Frame length may be programmed in single SCLK period multiples from 16 to 4096 SCLK: F_s . If [ASP_HYBRID_MODE](#) (see p. 66) is set, the SCLK period multiples must be set to $2 * n * F_s$, where $n \in \{8, 9, \dots, 2048\}$.

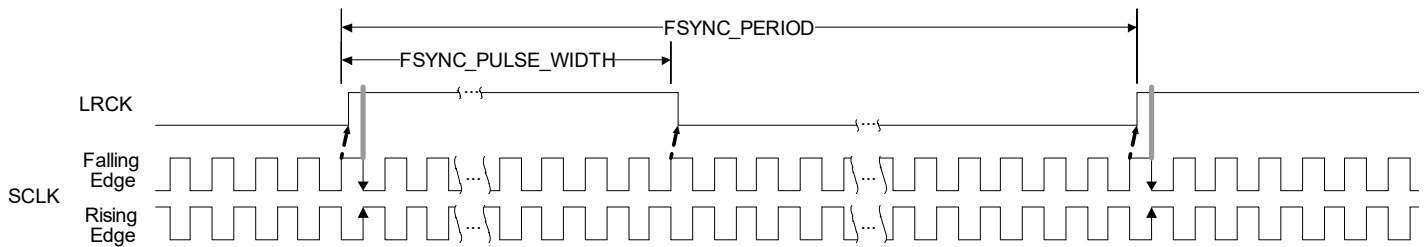


Figure 4-16. ASP LRCK Period, High Width

[FSYNC_PULSE_WIDTH_LB](#) and [FSYNC_PULSE_WIDTH_UB](#) (see p. 65) control the number of SCLK periods for which the LRCK signal is held high during each frame. Like the LRCK period, the LRCK-high width is programmable in single SCLK periods, from at least one period to at most the LRCK period minus one. That is, the LRCK-high width must be shorter than the LRCK period.

As shown in Fig. 4-17, if 50/50 Mode is enabled ([ASP_5050](#) = 1, see p. 67), the LRCK high duration must be programmed to the LRCK period divided by two (rounded down to the nearest integer when the LRCK period is odd). When the serial port is in 50/50 Mode, setting the LRCK high duration to a value other than half of the period causes erroneous operation.

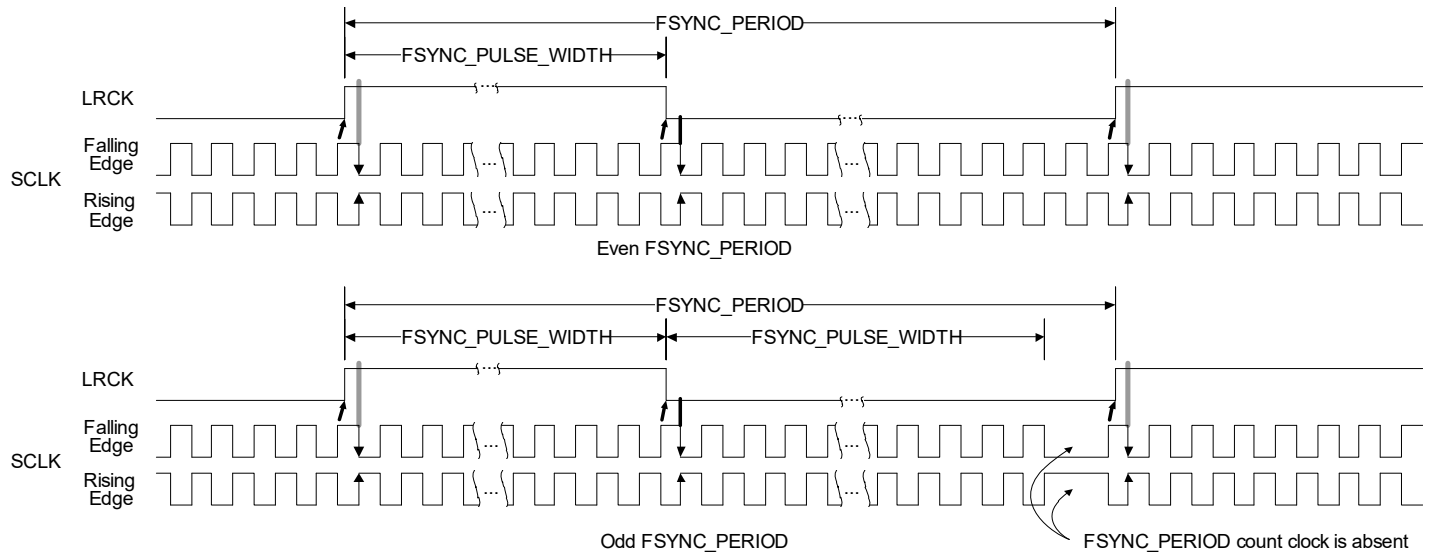


Figure 4-17. ASP LRCK Period, High Width, 50/50 Mode

Fig. 4-18 shows how LRCK frame start delay (**ASP_FSD**, see p. 67) controls the number of SCLK periods from LRCK synchronization edge to the start of frame data.

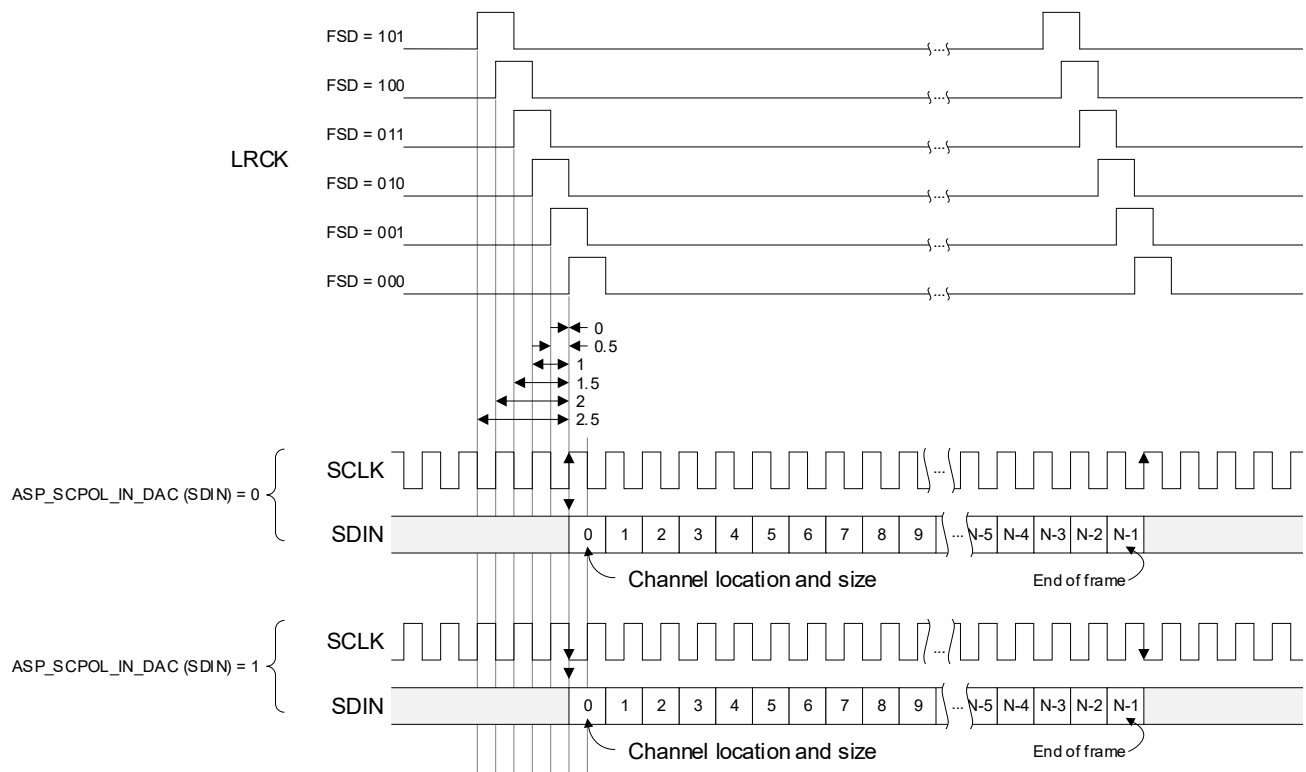


Figure 4-18. LRCK FSD and SCLK Polarity Example Diagram

4.5.3 Channel Location and Resolution

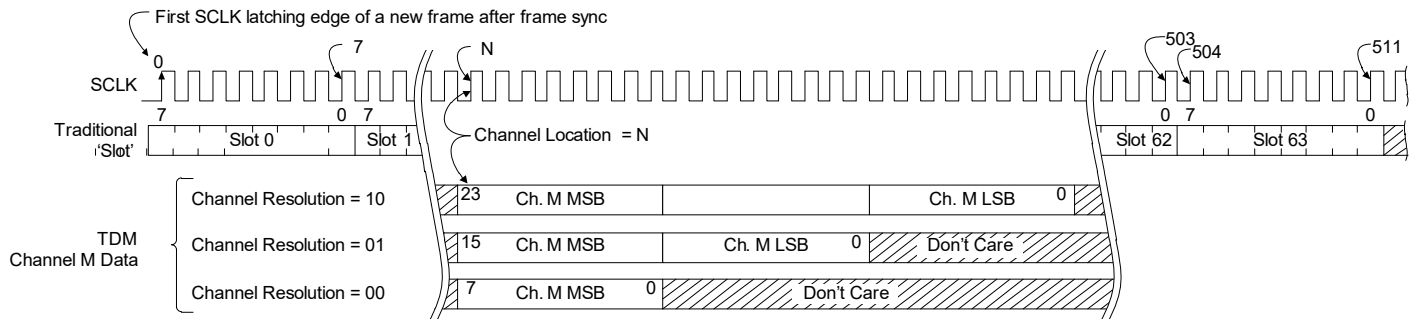
Each serial-port channel's location and offset is configured through the registers in [Table 4-7](#). Location is programmable in single SCLK-period resolution. If set to the minimum location offset, a channel sends or receives on the first SCLK period of a new frame. Channel size is programmable in 8- to 32-bit byte resolutions. DAC ports are limited to 24 bits and truncate the 8 LSBs of a 32-bit audio stream.

Table 4-7. ASP Channel Controls

| Channel | Resolution | MSB Location | LSB Location |
|----------------------------|---------------------------------|--|--|
| ASP Receive DAI0 Channel 1 | ASP_RX0_CH1_RES | ASP_RX0_CH1_BIT_ST_MSB | ASP_RX0_CH1_BIT_ST_LSB |
| ASP Receive DAI0 Channel 2 | ASP_RX0_CH2_RES | ASP_RX0_CH2_BIT_ST_MSB | ASP_RX0_CH2_BIT_ST_LSB |

Channel size and location must not be programmed such that channel data exceeds the frame boundary. In other words, channel size and offset must not exceed the expected SCLK per LRCK settings. Size and location must not be programmed such that data from a given SCLK period is assigned to more than one channel. However, an exception exists for the DAI as the same data can be used for both received channels' location, if desired. For an example, see [Section 5.1](#).

[Fig. 4-19](#) shows channel location and size. See [ASP_RX0_2FS](#) (p. 79).


Figure 4-19. Example Channel Location and Size

4.5.4 Isochronous Serial-Port Operation

In Isochronous Mode, audio data can be transferred between the internal audio data paths and a serial port at isochronous frequencies slower than the LRCK frequency. In all cases, the sample rate/LRCK frequency ratio must be one for which there are points at which rising edges regularly align.

Notes: Combining an isochronous audio stream on a channel (or on multiple channels) concurrently with a native audio stream on another channel (or other multiple channels) is not supported.

In Isochronous Mode, if a stream's sample rate does not match the LRCK frequency, it must include nulls, indicated by the negative full-scale (NFS) code (1 followed by 0s) or by adding nonaudio bits (NSB Mode) to the data stream.

[SP_RX_NFS_NSBB](#) (see p. 78) selects between the NFS and NSB modes. In NFS Mode, to achieve a desired isochronous output sample rate, a null-insert block adds NFS samples to the output stream. NFS samples input to the null-insert block are incremented and are passed to the output as valid, nonnull samples.

In NSB Mode, a null-insert block adds 8 bits to the data stream and inserts null samples to achieve a desired isochronous output sample rate. Inserted null samples are defined as NFS including the nonaudio bits. NFS samples that are input to the null-insert block are passed as valid, nonnull samples to the output. Valid samples are indicated by a nonzero value in the null sample indicator bit. The null sample indicator bit is globally defined by the [SP_RX_NSBB_POS](#) (see p. 78). Total data stream sample width, including the nonaudio bits, is $N + 8$ bits. Therefore, the maximum HD audio sample width is 24 bits in NSB Mode.

In NFS Mode, a null-remove block deletes null samples, restoring the stream's original sample rate. NFS samples that are input to the null-remove block are removed from the data stream as invalid, null samples.

In NSB Mode, a null-remove block deletes samples that have a zero null sample indicator bit, restoring the stream's original sample rate. Furthermore, the output data has the least-significant 8 bits of nonaudio data removed. Samples with a zero null sample indicator bit are removed from the data stream as invalid, null samples.

In either NSB or NFS Mode, setting the Rx rate fields ([SP_RX_FS](#), see p. 79) matters only if an isochronous mode is selected via [SP_RX_ISOC_MODE](#) (see p. 78). Supported isochronous rates are 48k, 96k, and 192k. The ASPx Rx rate bits are used only to help determine when to remove nulls and to provide the correct f_{S1}/f_{S0} to the SRCs while in Isochronous Mode.

For null-remove operations, the rates do not need to match the actual data rate. Likewise, if data is being or captured at its native rate, these registers have no effect.

As Fig. 4-20 shows, the null-sample bit (NSB) flag may be any bit of the least-significant sample byte. NSB-encoded streams are assumed to contain 8 bits of nonaudio data as the LSB.

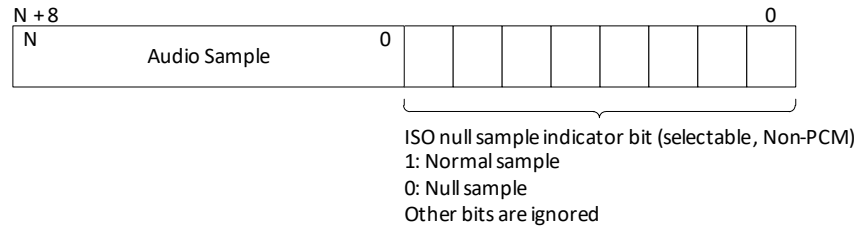


Figure 4-20. NSB Null Encoding

To send isochronous audio data to a serial port, the data pattern must be such that the LRCK/FSYNC transition preceding any given nonnull sample on the 48-kHz serial port does not deviate by more than one sample period from a virtual clock running at the desired sample rate. Use the following example to determine the data word as it appears on the serial port.

```
error = 0
for each LRCK
  if(error < 1/FLRCK)
    output = <<next sample>>
    error = error + (1/Fs - 1/FLRCK)
  else
    output = NULL
    error = error - 1/FLRCK
```

The null-sample sequences in Table 4-8 result from the example above for common sample rates. This method ensures that the internal receive data FIFO does not underrun or overrun, which would cause audio data loss. Depending on the internal audio data FIFOs' startup conditions and on the serial-port clock-phase relationships, isochronous data sent from a serial port may not adhere to the data patterns in Table 4-8. In all cases, the transmitted audio data rate matches the stream sample rate.

Table 4-8. Isochronous Input Data Pattern Examples

| Sample Rate (kHz) | Isochronous Data Pattern for LRCK = 48 kHz |
|-------------------|---|
| 8.000 | 1 _S 5 _N (repeat) |
| 11.025 | [[[1s3nx2]1s4n]x5 1s3n1s4n]x4 [[1s3nx2]1s4n]x4 1s3n1s4n [[[1s3nx2]1s4n]x5 1s3n1s4n]x3 [[1s3nx2]1s4n]x4 1s3n1s4n (repeat) |
| 12.000 | 1 _S 3 _N (repeat) |
| 16.000 | 1 _S 2 _N (repeat) |
| 22.05 | [[1s1nx6]1n [1s1nx6]1n [1s1nx5]1n]x8 [1s1nx6]1n [1s1nx5]1n (repeat) |
| 24.000 | 1 _S 1 _N (repeat) |
| 32.000 | 2 _S 1 _N (repeat) |
| 44.100 | [12s1n[11s1n]x2]x3 11s1n (repeat) |
| 48.000 | 1 _S (repeat) |

Note: N = Null sample, S = Normal sample

4.5.5 50/50 Mode

Regardless of the state of ASP_LRCK/FSYNC, in 50/50 Mode (`ASP_5050 = 1`, see p. 67), the ASP can start a frame.

The `ASP_STP` setting (see p. 67) determines which LRCK/FSYNC phase starts a frame in 50/50 Mode, as follows:

- If ASP_STP = 0, the frame begins when LRCK/FSYNC transitions from high to low. See Fig. 4-21.

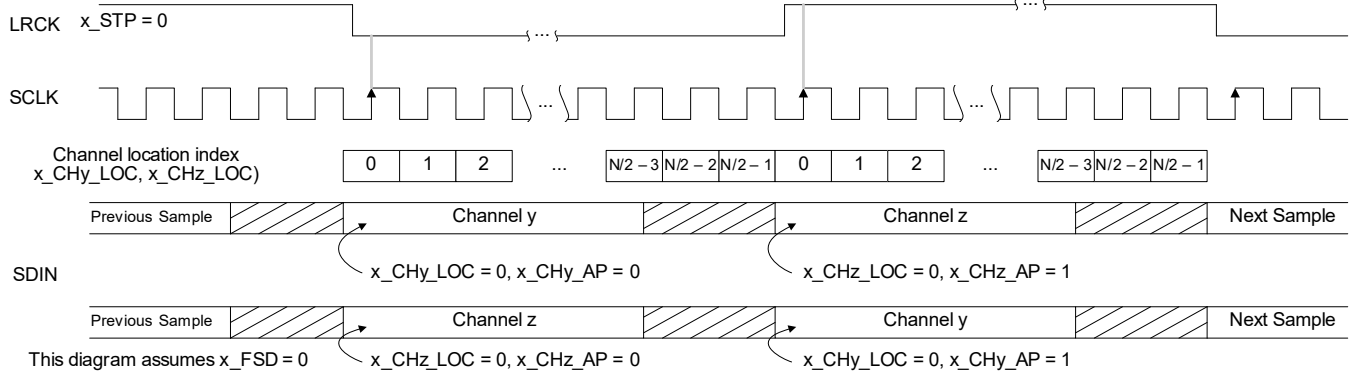


Figure 4-21. Example 50/50 Mode (ASP_STP = 0)

- If ASP_STP = 1, the frame begins when LRCK/FSYNC transitions from low to high. See Fig. 4-22.

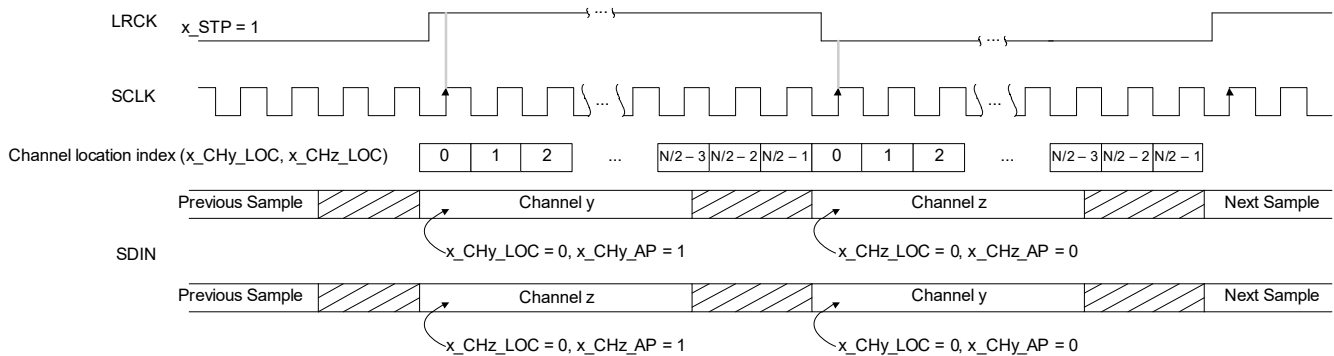


Figure 4-22. Example 50/50 Mode (ASP_STP = 1)

In 50/50 Mode, left and right channels are programmed independently to output when LRCK/FSYNC is high or low—that is, the channel-active phase. The active phase is controlled by ASP_RXx_CHy_AP (see Section 7.14). If x_AP = 1, the respective channel is output if LRCK/FSYNC is high. If x_AP = 0, the channel is output if LRCK/FSYNC is low.

Note: Active phase has no function if 50/50 Mode = 0 or ASP_RX1_2FS = 1.

In 50/50 Mode, the channel location (see Section 4.5.3) is calculated within the channel-active phase. If there are N bits in a frame, the location of the last bit of each active phase is equal to $(N/2) - 1$.

4.5.6 Serial Port Status

Each serial port has sticky, write-1-to-clear status bits related to capture paths. These bits are described in Section 7.4.3. Mask bits (Section 7.4.12) determine whether INT is asserted when a status bit is set. Table 4-9 provides an overview.

Table 4-9. Serial Port Status

| Name | Direction | Description | Register Reference |
|------------------|-----------|---|--------------------|
| Request Overload | Rx | Set when too many input buffers request processing at the same time. If all channel registers are properly configured, this error status should never be set. | ASPRX_OVLD p. 68 |
| LRCK Error | Rx | Logical OR of LRCK Early and LRCK Late (see below). | ASPRX_ERROR p. 68 |
| LRCK Early | Rx | Set when the number of SCLK periods per LRCK phase (high or low) is less than the expected count as determined by x_LCPR and x_LCHI. Note: The Rx LRCK early interrupt status is set during the first receive LRCK early event. Subsequent receive LRCK early events are indicated only if valid LRCK transitions are detected. | ASPRX_EARLY p. 68 |
| LRCK Late | Rx | Set when the number of SCLK periods per LRCK phase (high or low) is greater than the expected count as determined by x_LCPR and x_LCHI. | ASPRX_LATE p. 68 |
| No LRCK | Rx | Note: Set when the number of SCLK periods counted exceeds twice the value of LRCK period (x_LCPR) without an LRCK edge. | ASPRX_NOLRCK p. 68 |

4.5.7 Recommended Serial-Port Power-Up and Power-Down Strategies

Although multiple safeguards and controls are implemented to prevent a run on the FIFOs involved in passing data from the input port to the output port, the following power-up sequence is recommended. [Section 5](#) gives detailed sequences.

1. Configure all playback channel characteristics—bit resolution, channel select, source (DAI), native/isochronous, sample rates, etc.
2. Power up playback, and ASRCs.
3. Release the PDN_ALL bit.
4. Power up the serial ports (DAI).

The following power-down sequence is recommended:

1. Power down the playback path.
2. Power down the serial ports.

4.6 Sample-Rate Converters (SRCs)

SRCs bridge different sample rates at the serial ports within the digital-processing core. SRCs are used for the following:

- Two ASP input channels (Channels 1 and 2).
- SRCs are bypassable by setting [SRC_BYPASS_DAC](#) (see [p. 61](#)).

An SRC's digital-processing side (as opposed to its serial-port side) connects to the DAC. Multirate DSP techniques are used to up-sample incoming data to a very high rate and then down-sample to the outgoing rate. Internal filtering is designed so that a full-input audio bandwidth of 20 kHz is preserved if the input and output sample rates are at least 44.1 kHz. If the output sample rate becomes less than the input sample rate, the input is automatically band limited to avoid aliasing artifacts in the output signal.

The following restrictions must be met:

- The F_{SO} -to- F_{SI} ratio must be no more than 1:6 or 6:1. For example, if the DAC is at 48 kHz, the input to the SRC must be at least 8 kHz.
- SRC operation cannot be changed on-the-fly. Before changing the SRC operation (e.g., changing SRC frequencies or bypassing or adding the SRCs), the user must follow the power sequences provided in [Section 4.5.7](#).
- The MCLK frequency must be as close as possible to, but not less than the minimum SRC MCLK frequency, $MCLK_{MIN}$, which must be at least 125 times the higher of the two sample rates (F_{SI} or F_{SO}).
For example, if F_{SO} is 48 kHz and F_{SI} is 32 kHz, the MCLK must be as close as possible to, but not less than, an $MCLK_{MIN}$ of 6.0 MHz. The MCLK frequency for the SRCs is configured through [CLK_IASRC_SEL](#) (see [p. 67](#)).

[Table 4-10](#) shows settings for the supported sample rates and corresponding $MCLK_{INT}$ frequencies.

Table 4-10. Supported Sample Rates and Corresponding $MCLK_{INT}$ Encodings

| Fsint (kHz) | Serial Port Sample Rate (kHz) | | | | | | | | | | | | | | | | | |
|-------------|-------------------------------|--------|--------|----|----|-------|--------|----|----|------|--------|----|------|--------|----|-------|---------|-----|
| | 8.0 | 11.025 | 11.029 | 12 | 16 | 22.05 | 22.059 | 24 | 32 | 44.1 | 44.118 | 48 | 88.2 | 88.235 | 96 | 176.4 | 176.471 | 192 |
| 44.1 | 00 | 00 | 00 | 00 | 00 | 00 | 00 | 00 | 00 | 00 | 00 | 00 | 01 | 01 | 01 | 10 | 10 | 10 |
| 48 | 00 | 00 | 00 | 00 | 00 | 00 | 00 | 00 | 00 | 00 | 00 | 00 | 01 | 01 | 01 | 10 | 10 | 10 |

Note: SRC MCLKINT Freq= 00 (6 MHz), 01 (12 MHz), 11 (24 MHz), configured in [CLK_IASRC_SEL](#) (see [p. 67](#))

Jitter in the incoming signal has little effect on rate-converter dynamic performance. It does not affect the output clock.

A digital PLL continually measures the heavily low-pass-filtered phase difference and the frequency ratio between input and output sample rate clocks. It uses the data to dynamically adjust coefficients of a linear time-varying filter that processes a synchronously oversampled version of the input data. The filter output is resampled to the output sample rate.

For input serial ports, input and output sample-rate clocks are respectively derived from the external serial-port sample clock (x_LRCK) and the internal F_s clock. [FS_EN](#) (see [p. 67](#)) must be set according to the F_{SI} or F_{SO} SRC sample rates.

Minimize the SRCs' lock time by programming the serial-port interface sample rates into the x_FS registers (see Section 7.13.1). If the rates are unknown, programming these registers to "don't know" would likely increase lock times. Proper operation is not assured if sample rates are misprogrammed.

4.7 Headset Interface

Split digital-power domains (VD_FILT and VP) within the headset interface support an ultralow-power standby mode where only the VP supply is used. An output signal may be used to tell the system to wake from its low-power state when a headset plug is inserted or removed. The interface may be reset by three types of resets with progressively less effect.

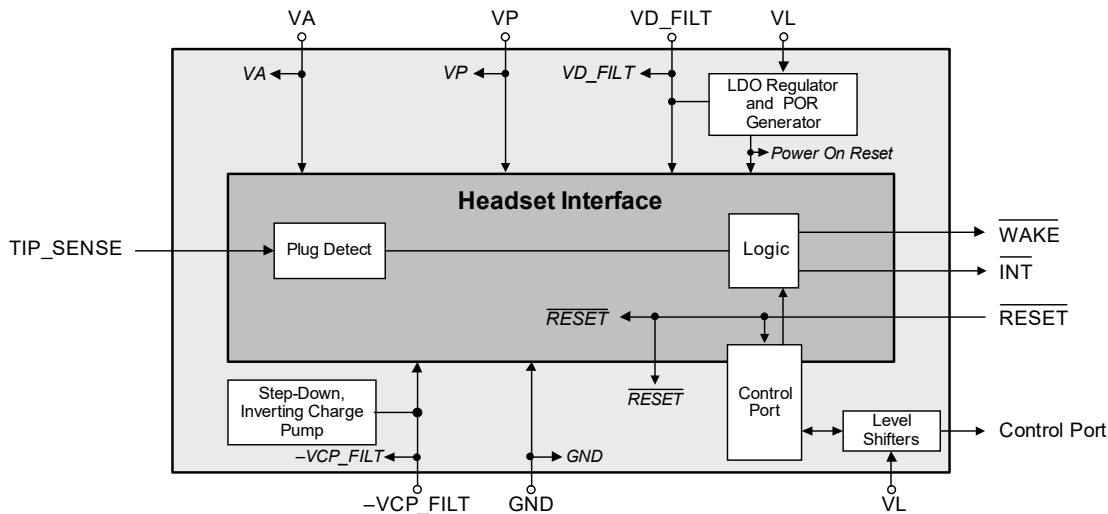


Figure 4-23. Headset Interface Block Diagram

The control port includes registers that source individually maskable interrupts. Event-change debouncing is used to filter applicable status registers. Latchable duplicate registers are used to pass information to the Standby Mode supply domain.

4.8 Plug Presence Detect

The CS43L36 uses TIP_SENSE to detect plug presence. The sense pin is debounced to filter out brief events before being reported to the corresponding presence-detect bit and generating an interrupt if appropriate.

4.8.1 Plug Types

The CS43L36 supports the following industry-standard plug types:

- Tip–Ring–Sleeve (TRS)—Consists of a segmented metal barrel with the tip connector used for HPOUTA, a ring connector used for HPOUTB, and a sleeve connector used for HSGND.
- Tip–Ring–Ring–Sleeve (TRRS)—Like TRS, with an additional ring connector for the mic connection. There are two common pinouts for TRRS plugs:
 - One uses the tip for HPOUTA, the first ring for HPOUTB, the second ring for HSGND, and the sleeve for mic.
 - The CS43L36 does not support OMTP, or China, headset, which swaps the third and fourth connections, so that the second ring carries mic and the sleeve carries HSGND.

4.8.2 Tip-Sense Methods

The following methods are used to detect the presence or absence of a plug:

- Tip sense (TS)—A sense pin is connected to a terminal on the receptacle such that, if no plug is inserted, the pin is floating. If a plug is inserted, the pin is shorted to the tip (T) terminal. The tip is sensed by having a small current source in the device pull up the pin if it is left floating (no plug). If a plug is inserted and the sense pin is shorted to HPOUTA, the sense

pin is assumed to be pulled low via clamps at the HP amp output when it is in power down. If the HP amp is running, the sense pin is shorted to the output signal and, therefore, is pulled below a certain threshold via the output stage of the HP amp. Thus, a low level at the sense pin indicates plug inserted, and a high level at the sense pin indicates plug removed.

- Inverted tip sense (ITS)—Like tip sense, but with a connector whose sense pin is shorted to the tip terminal if the plug is removed and is left floating if it is inserted. Therefore, a low level at the sense pin indicates plug removed and a high level at the sense pin indicates plug inserted. Inversion is controlled by the following:
 - The invert ([TIP_SENSE_INV](#), p. 75), which goes to the analog and affects a number of other features.
 - The tip-sense invert ([TS_INV](#), p. 64), which affects only the configuration bits in [Section 6.2](#).

4.8.3 Tip-Sense Debounce Settings

Fig. 4-24 shows the tip-sense controls and the associated interrupt, status, and mask registers.

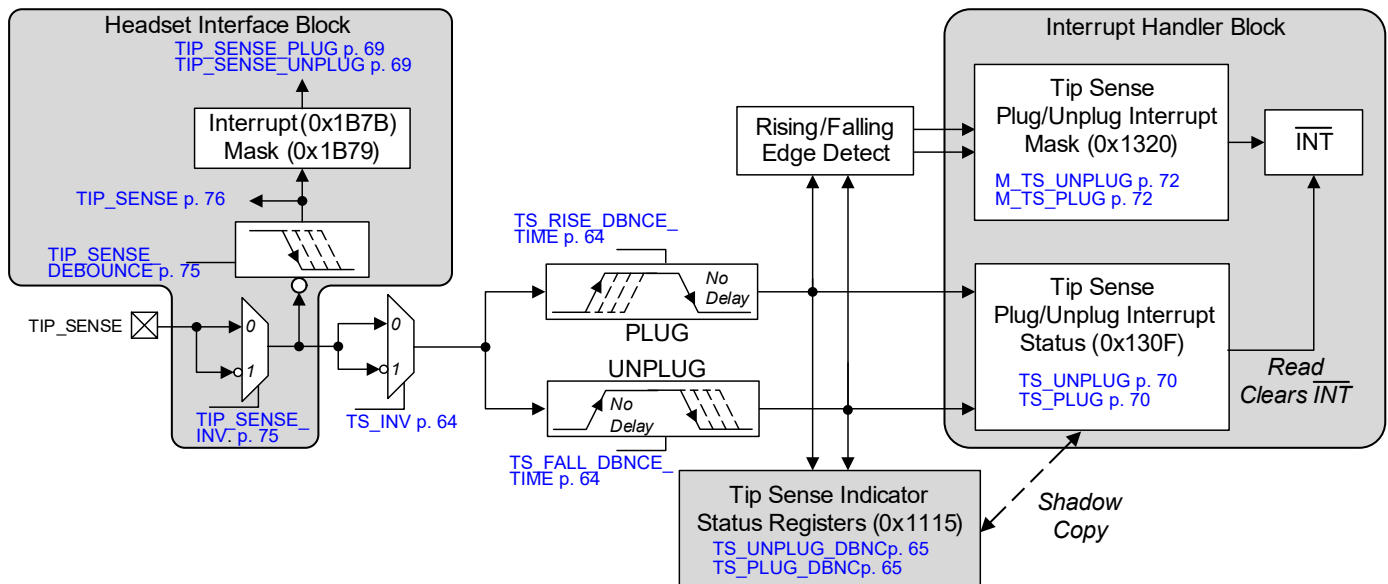


Figure 4-24. Tip-Sense Controls

The tip-sense debounce register fields behave and interact as follows:

- [TS_UNPLUG_DBNC](#). Shows tip sense status after being unplugged with the associated debounce time.
- [TS_PLUG_DBNC](#). Shows tip sense status after being plugged in with the associated debounce time.

Note: [TS_INV](#) must be set to have [TS_PLUG](#)/[TS_PLUG_DBNC](#) status match [TIP_SENSE_PLUG](#) status.

The debounce bits are described in [Section 7.2.7](#). Multiple debounce settings can be configured for insertion, removal, and tip sense:

- [TIP_SENSE_DEBOUNCE](#) (see p. 75) controls the tip-sense removal debounce time.
- [TS_FALL_DBNCE_TIME](#) and [TS_RISE_DBNCE_TIME](#) (see p. 64) settings configure the corresponding debounce times.

4.8.4 Setup Instructions

The following steps are required to activate the tip-sense debounce interrupt status:

1. Clear [PDN_ALL](#) (see p. 63).
2. Set [LATCH_TO_VP](#) (see p. 75) to latch analog controls into analog circuits.
3. Write [TIP_SENSE_CTRL](#) (see p. 75) to 01 or 11 to enable debounce for tip sense plug/unplug.
4. Clear interrupt masks (0x1320, see [Section 7.4.17](#)).

Interrupt status (see [Section 7.4.9](#)) does not contain an event-capture latch—a read always yields the current condition.

Table 4-11 describes the plug/unplug status.

Table 4-11. Tip Plug/Unplug Status

| Plug Status | Unplug Status | Interpretation |
|-------------|---------------|---|
| 0 | 0 | Tip is fully unplugged/not present |
| 1 | 0 | Reserved |
| 0 | 1 | Tip connection is in a transitional state |
| 1 | 1 | Tip is fully plugged/present |

4.9 Power-Supply Considerations

Because some power supply combinations can produce unwanted system behavior, note the following:

- Control-port transactions can occur 1 ms after VP, VD_FILT, VCP, and VL exceed the minimum operating voltage.
- If VP supply is off, it is recommended that all other supplies are also off. VP must be the first supply turned on.
- $\overline{\text{RESET}}$ must be asserted until VP is valid.
- If VD_FILT is supplied externally ($\text{DIGLDO_PDN} = \text{GND}$), VL must be supplied before VD_FILT, VA, VL, and VCP can come up in any order. Due to the VD_FILT POR, VD_FILT must be turned off before VA, VL, or VCP are turned off; otherwise, current could be drawn from supplies that remain on.

Table 4-12 shows the maximum current for each supply when VP is on, but other supplies are on or off (all clocks are off and all registers are set to default values, i.e., reset).

Table 4-12. Typical Leakage Current during Nonoperational Supply States (with VP Powered On)

| Supply | | | Current (μA) | | | | Notes |
|--------|-----|-----|---------------------------|-----------|----------|----------|-------------------------------|
| VCP | VA | VL | I_{VP} | I_{VCP} | I_{VA} | I_{VL} | |
| Off | On | Off | 14 | 0 | 0 | 0 | VA may source or sink current |
| Off | On | On | 25 | 0 | 0 | 328 | VA may source or sink current |
| On | Off | Off | 14 | 0 | 0 | 0 | — |
| On | Off | On | 25 | 0 | 0 | 328 | — |
| On | On | Off | 14 | 0 | 0 | 0 | VA may source or sink current |
| On | On | On | 25 | 0 | 0 | 328 | — |

- Notes:**
- Values shown reflect typical voltage and temperature. Leakage current may vary by orders of magnitude across the maximum and minimum recommended operating supply voltages and temperatures listed in Table 3-2.
 - Test conditions: Clock/data lines are held low, $\overline{\text{RESET}}$ is held high, and all registers are set to their default values.

Table 4-13 shows requirements and available features for valid power-supply configurations.

Table 4-13. Valid Power-Supply Configurations

| Configuration | Notes |
|--|--|
| On: VP Off: VD_FILT = VCP = VL = VA | Limited set of headset plug-detect and WAKE output features, see Section 4.7 and Section 4.8. |
| On: VP = VL Off: VD_FILT = VCP = VA = OFF | Limited set of headset plug-detect and WAKE output features, see Section 4.7 and Section 4.8. Digital I/O ESD diodes are powered to prevent conduction in pin-sharing applications. |
| On: VP = VD_FILT = VCP = VL = VA | Full chip functionality |

4.9.1 VP Monitor

The CS43L36 voltage comparator monitors the VP power supply for potential brown-out conditions due to power-supply overload or other fault conditions. To perform according to specifications, VP is expected to remain above 3.0 V at all times. The VP monitor is enabled by setting VPMON_PDNB (see p. 64) and must be powered up after VP is above 3.0 V

to eliminate erroneous faulty condition detection. Fig. 4-25 shows the behavior of the VP monitor.

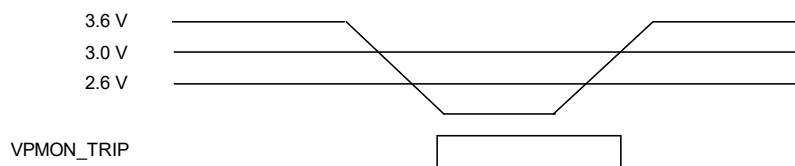


Figure 4-25. VP Monitor

The following describes the VP monitor behavior with respect to the voltage level:

- If VP drops below 3.0 V, TIP_SENSE performance may be compromised.
- If VP drops below 2.6 V, the `VPMON_TRIP` status bit is set (see p. 69). An interrupt is triggered if `M_VPMON_TRIP = 0` (see p. 72). This bit must be unmasked/enabled only if VP is above the detection-voltage threshold. It must be masked/disabled by default to eliminate erroneous interrupts while VP is ramping or is known to be below the threshold voltage.
- A brown-out condition remains until VP returns to a voltage level above 3.0 V.
- The VP monitor circuit becomes unreliable at VP levels below 2.4 V as it may trigger a power-on reset sequence by the device.
- The VP monitor is intended to detect slow transitioning signals about the 2.6-V threshold. Pulses of short duration are filtered by the monitor and may not trigger at the 2.6-V threshold, but at a value much lower than expected.

4.10 Control-Port Operation

Control-port registers are accessed through the I²C interface, allowing the DAC to be configured for the desired operational modes and formats.

4.10.1 I²C Control-Port Operation

The I²C control port can operate completely asynchronously with the audio sample rates. However, to avoid interference problems, the I²C control port pins must remain static if no operation is required.

The control port uses the I²C interface, with the DAC acting as a slave device. The I²C control port can operate in the following modes, which are configured through the I²C debounce register in [Section 7.1.9](#):

- Standard Mode (SM), with a bit rate of up to 100 kbit/s
- Fast Mode (FM), with a bit rate of up to 400 kbit/s
- Fast Mode Plus (FM+), with a bit rate of up to 1 Mbit/s.

Note: ASP_SCLK is not required to be on when the control port is accessed, for state machines affected by register settings to advance.

SDA is a bidirectional data line. Data is clocked into and out of the CS43L36 by the SCL clock. [Fig. 4-26](#)–[Fig. 4-29](#) show signal timings for read and write cycles. A Start condition is defined as a falling transition of SDA while the clock is high. A Stop condition is defined as a rising transition of SDA while the clock is high. All other SDA transitions occur while the clock is low.

The register address space is partitioned into 8-bit page spaces that each comprise up to 127 8-bit registers. Address 0x00 of each page is reserved as the page indicator, PAGE. Writing to address 0x00 of any page changes the page pointer to the address written to address 0x00.

To initiate a write to a particular register in the map, the page address, 0x00, must be written following the chip address. Subsequent accesses to register addresses are treated as offsets from the page address written in the initial transaction. To change the page address, initiate a write to address 0x00. To determine which page is active, read address 0x00.

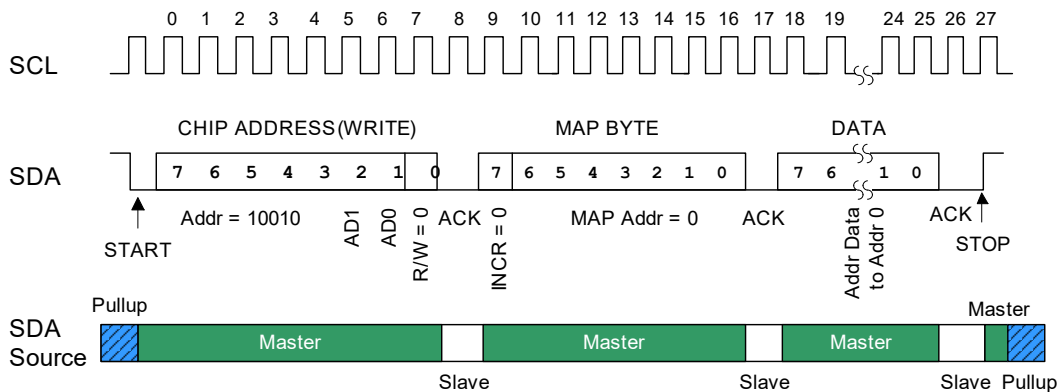


Figure 4-26. Control-Port Timing, I²C Write of Page Address

The first byte sent to the CS43L36 after a Start condition consists of a 7-bit chip address field and a $\overline{R/W}$ bit (high for a read, low for a write) in the LSB. To communicate with the CS43L36, the chip address field must match 1_0010, followed by the state of the AD1 and AD0 pins.

Note: Because AD0 and AD1 logic states are latched at POR, dynamic addressing is not supported.

If the operation is a write, the next byte is the memory address pointer (MAP); the 7 LSBs of the MAP byte select the address of the register to be read or written to next. The MSB of the MAP byte, INCR, selects whether autoincrementing is to be used (INCR = 1), allowing successive reads or writes of consecutive registers.

Each byte is separated by an acknowledge (ACK) bit, which the CS43L36 outputs after each input byte is read and is input to the CS43L36 from the microcontroller after each transmitted byte.

For write operations, the bytes following the MAP byte are written to the CS43L36 register addresses pointed to by the last received MAP address, plus however many autoincrements have occurred. Note that, while writing, any autoincrementing block accesses that go past the maximum 0x7F address write to address 0x00—the page address. The writes then continue to the newly selected page. Fig. 4-27 shows a write pattern with autoincrementing.

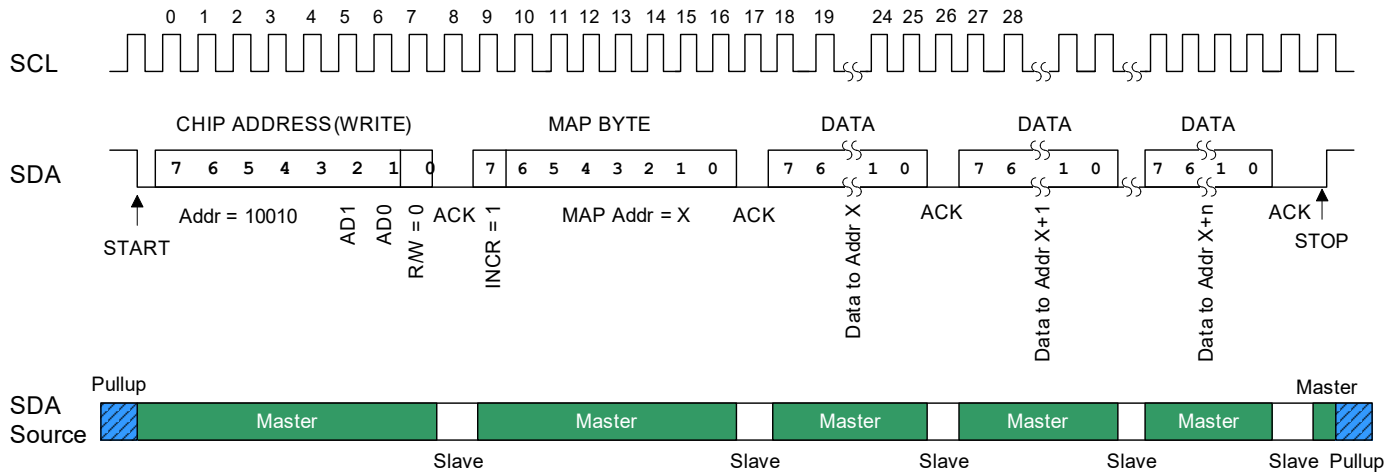


Figure 4-27. Control-Port Timing, I²C Writes with Autoincrement

For read operations, the contents of the register pointed to by the last received MAP address, plus however many autoincrements have occurred, are output in the next byte. While reading, any autoincrementing block access that goes past the maximum 0x7F address wraps around and continues reading from the same page address. Fig. 4-28 shows a read pattern following the write pattern in Fig. 4-27. Notice how read addresses are based on the MAP byte from Fig. 4-27.

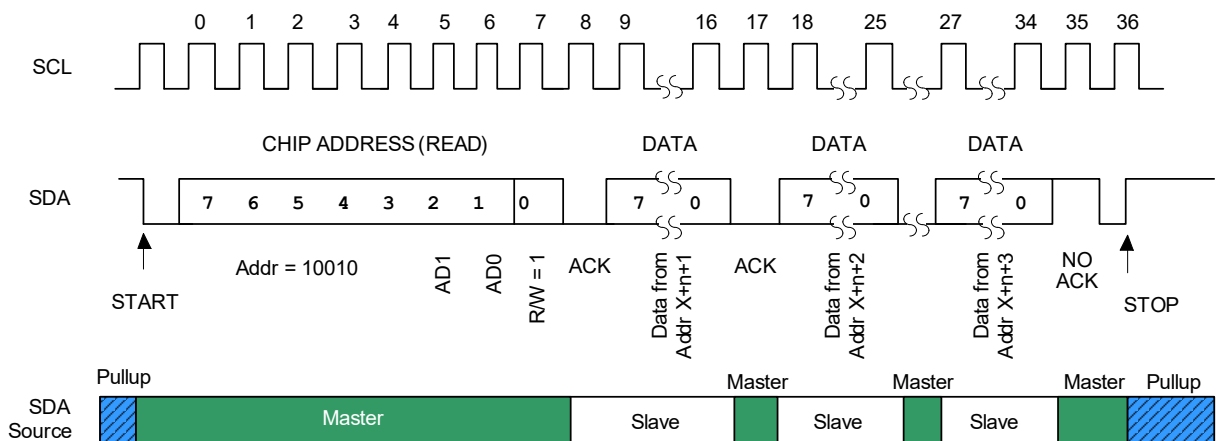


Figure 4-28. Control-Port Timing, I²C Reads with Autoincrement

To generate a read address not based on the last received MAP address, an aborted write operation can be used as a preamble (see Fig. 4-29). Here, a write operation is aborted (after the ACK for the MAP byte) by sending a Stop condition.

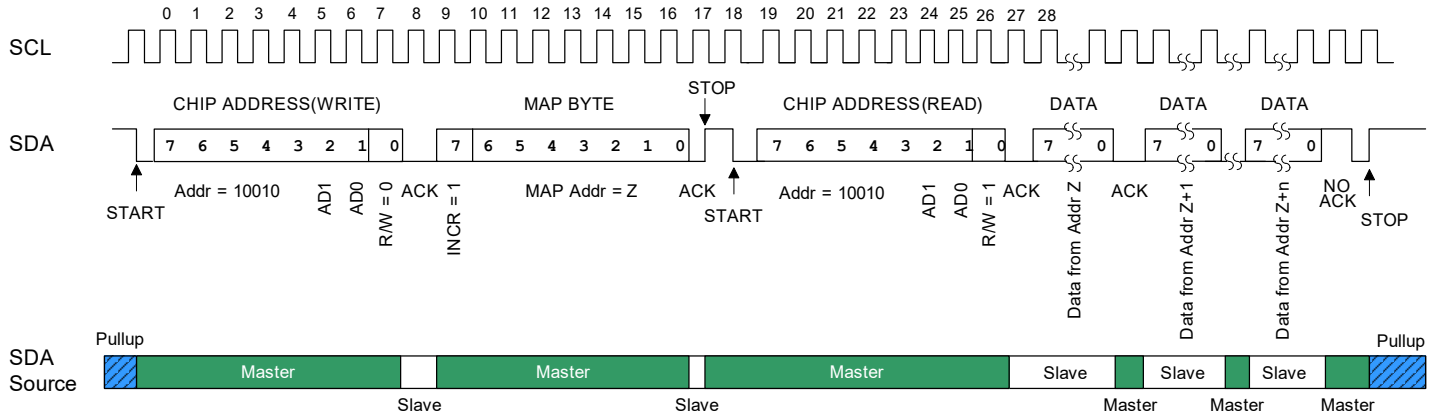


Figure 4-29. Control-Port Timing, I²C Reads with Preamble and Autoincrement

The following pseudocode illustrates an aborted write operation followed by a single read operation, assumes page address has been written. For multiple read operations, autoincrement would be set on (as shown in Fig. 4-29).

```

Send start condition.
Send 10010 (AD1) (AD0)0 (chip address and write operation).
Receive acknowledge bit.
Send MAP byte, autoincrement off.
Receive acknowledge bit.
Send stop condition, aborting write.
Send start condition.
Send 10010 (AD1) (AD0)1 (chip address and read operation).
Receive acknowledge bit.
Receive byte, contents of selected register.
Send acknowledge bit.
Send stop condition.
    
```

4.11 Reset

The CS43L36 offers the reset options described in Table 4-14.

Table 4-14. Reset Summary

| Reset | Cause | Result |
|----------------------|-------------------------------------|--|
| Device hard reset | Asserting $\overline{\text{RESET}}$ | If $\overline{\text{RESET}}$ is asserted, all registers (both VP and VD_FILTER domains) and all state machines are immediately set to their defaults. No operation can begin until $\overline{\text{RESET}}$ is deasserted. Before normal operation can begin, $\overline{\text{RESET}}$ must be asserted at least once after the VP supply is first brought up. |
| Power-on reset (POR) | Power up | If VD_FILTER is lower than the POR threshold, the VD_FILTER register fields and the state machines are held in reset, setting them to their default values/states. This does not reset the VP registers. The POR releases the reset when the VD_FILTER supply goes above the POR threshold. VL and VA supplies must be turned at the same time the VD_FILTER supply is turned on. |

4.12 Interrupts

The following sections describe the CS43L36 interrupt implementation.

4.12.1 Standard Interrupts

The interrupt output pin, $\overline{\text{INT}}$, is used to signal the occurrence of events within the device's interrupt status registers. Events can be masked individually by setting corresponding bits in the interrupt mask registers. Table 4-15 lists interrupt status and mask registers. The configuration of mask bits determines which events cause the immediate assertion of $\overline{\text{INT}}$:

- When an unmasked interrupt status event is detected, the status bit is set and $\overline{\text{INT}}$ is asserted.
- When a masked interrupt status event is detected, the interrupt status bit is set, but $\overline{\text{INT}}$ is not affected.

Once asserted, $\overline{\text{INT}}$ remains asserted until all status bits that are unmasked and set have been read. Interrupt status bits are sticky and read-to-clear: Once set, they remain set until the register is read and the associated interrupt condition is not present. If a condition is still present and the status bit is read, although $\overline{\text{INT}}$ is deasserted, the status bit remains set.

To clear status bits set due to initiation of a path or block, the status bits must be read after the corresponding module is enabled and before normal operation begins. Otherwise, unmasking previously set status bits causes assertion of `INT`.

Table 4-15. Interrupt Status Registers and Corresponding Mask Registers—0x13

| Interrupt Source Status Register | Interrupt Mask Register |
|---|--|
| SRC Interrupt Status (Section 7.4.2) | SRC Interrupt Mask (Section 7.4.11) |
| ASP RX Interrupt Status (Section 7.4.3) | ASP RX Interrupt Mask (Section 7.4.12) |
| DAC Interrupt Status (Section 7.4.4) | DAC Interrupt Mask (Section 7.4.13) |
| Detect Interrupt Status 1 (Section 7.4.5) | Detect Interrupt Mask 1 (Section 7.7.5) |
| SRC Partial Lock Interrupt Status (Section 7.4.6) | SRC Partial Lock Interrupt Mask (Section 7.4.14) |
| VP Monitor Interrupt Status (Section 7.4.7) | VP Monitor Interrupt Mask (Section 7.4.15) |
| PLL Lock Interrupt Status (Section 7.4.8) | PLL Lock Mask (Section 7.4.16) |

As Table 4-16 indicates, interrupt sources are categorized into two groups:

- Condition-based interrupt source bits are set when the condition is present and they remain set until the register is read and the condition that caused the bit to assert is no longer present.
- Event-based interrupt source bits are cleared when read. In the absence of subsequent source events, reading one of these status bits returns a 0.

Table 4-16. Interrupt Source Types

| Group | Status Registers | Interrupt Source Type |
|--|--|--|
| Tip sense debounce (see Section 7.2.7) | TS_UNPLUG_DBNC TS_PLUG_DBNC | Event Event |
| Channel Overflow Interrupt (see Section 7.4.1) | CHA_OVFL CHB_OVFL | Event Event |
| Serial port (see Section 7.4.2, Section 7.4.3) | ASPRX_OVLD ASPRX_ERROR ASPRX_LATE ASPRX_EARLY ¹ ASPRX_NOLRCK ¹ SRC_IUNLK SRC_ILK | Event Event Event Event Condition Condition Condition |
| Global (see Section 7.4.4) | PDN_DONE | Condition |
| Headset (see Section 7.4.5) | TIP_SENSE_PLUG TIP_SENSE_UNPLUG | All are events. |
| DAC (see Section 7.4.6) | DAC_LK | Condition |
| VP monitor (see Section 7.4.7) | VPMON_TRIP | Condition |
| PLL (see Section 7.4.8) | PLL_LOCK | Condition |
| Tip sense plug/unplug status (see Section 7.4.9) | TS_UNPLUG TS_PLUG | Events. Although a true event interrupt clears when read, these dynamically reflect the state of the debounced input signal. |

1. Reading this bit following an early LRCK/SM error/no LRCK returns a 1. Subsequent reads return a 0. Valid LRCK transitions or exiting the transmit overflow condition rearms the detection of the corresponding event. See Table 4-9 for details.

4.13 FILT+ Operation

FILT+ provides the internal voltage reference for the D/A converters. When powering-up the codec, FILT+ rises to its operating voltage in less than 10 ms when exiting from Power Down Mode (PDM) state.

If the integrated fractional-N PLL is enabled while the headphone interface is disabled when FILT+ is at its operating voltage, FILT+ will start discharging and drop to 0 V.

When the headphone interface is later enabled, it may take up to 1 second for FILT+ to rise again to its operating voltage. In this scenario, the headphone interface may begin operation before FILT+ is fully charged, causing unwanted distortion.

To prevent this issue, set `PDN_ALL` and clear `PLL_START` before applying any recommended power-up sequence.

5 System Applications

This section provides recommended procedures and instruction sequences for standard operations.

5.1 Power-Up Sequence

Note: Set **PDN_ALL** and clear **PLL_START** before applying any recommended power-up sequence.

Ex. 5-1 is the procedure for implementing HP playback from the ASP. This example sequence configures the CS43L36 for SCLK = 12.288 MHz, LRCK = 48 kHz, and TDM playback, in Slave Mode.

Example 5-1. Power-Up Sequence

| STEP | TASK | REGISTER/BIT FIELDS | VALUE | DESCRIPTION |
|------|--|--|-----------|--|
| 1 | Apply all relevant power supplies, then assert RST before applying SCLK and LRCK to the CS43L36. | | | |
| 2 | Wait 2.5 ms. | | | |
| 3 | Power up the DAC. | Power Down Control 2. 0x1102 | 0x83 | |
| | | Reserved | 100 | — |
| | | DISCHARGE_FILT+ | 0 | FILT+ is not clamped to ground. |
| | | SRC_PDN_OVERRIDE | 0 | SRC is powered up. |
| | | Reserved | 0 | — |
| | | DAC_SRC_PDNB | 1 | DAC SRC is powered up. |
| | | Reserved | 1 | — |
| 4 | Configure the device's ASP and ASP SRC. | | | |
| 4.1 | Configure switch from RCO to SCLK. | Oscillator Switch Control. 0x1107 | 0x01 | |
| | | Reserved | 0000 000 | — |
| | | SCLK_PRESENT | 1 | SCLK is present. |
| 4.2 | Power down the RCO. | Oscillator Switch Status. 0x1109 | 0x01 | |
| | | Reserved | 0000 0 | — |
| | | OSC_PDNB_STAT | 0 | RCO powered down |
| | | OSC_SW_SEL_STAT | 01 | RCO selected for internal MCLK |
| 4.3 | Configure device's internal sample rate with the applied MCLK signal. | MCLK Control. 0x1009 | 0x02 | |
| | | Reserved | 0000 00 | — |
| | | INTERNAL_FS | 1 | Internal sample rate is MCLK/256= 48 kHz. |
| | | Reserved | 0 | — |
| 4.4 | Select MCLK source. | MCLK Source Select. 0x1201 | 0x00 | |
| | | Reserved | 0000 00 | — |
| | | MCLKDIV | 0 | Divide by 1. |
| | | MCLK_SRC_SEL | 0 | SCLK pin is MCLK source. |
| 4.5 | Configure the FSYNC period. | FSYNC Period, Lower Byte. 0x1205 | 0xFF | |
| | | FSYNC_PERIOD_LB | 1111 1111 | 256 SCLKs per LRCK lower byte. |
| 4.6 | Configure the FSYNC period. | FSYNC Period, Upper Byte. 0x1206 | 0x00 | |
| | | FSYNC_PERIOD_UB | 0000 0000 | 0 SCLKs per LRCK upper byte |
| 4.7 | Configure FSYNC pulse width. | FSYNC Pulse Width, Lower Byte. 0x1203 | 0x1F | |
| | | FSYNC_PULSE_WIDTH_LB | 0001 1111 | LRCK is one SCLK Wide. |
| 4.8 | Configure the ASP clock. | ASP Clock Configuration 1. 0x1207 | 0x00 | |
| | | Reserved | 00 | — |
| | | ASP_SCLK_EN | 0 | ASP SCLK disabled. |
| | | ASP_HYBRID_MODE | 0 | LRCK is an input from an external source. |
| | | Reserved | 0 | — |
| | | ASP_SCPOL_IN_DAC | 0 | SCLK input drive polarity for DAC is normal. |
| | | ASP_LCPOL_OUT | 0 | LRCK output drive polarity is normal. |
| | | ASP_LCPOL_IN | 0 | LRCK input polarity (pad to logic) is normal. |
| 4.9 | Configure the ASP frame. | ASP Frame Configuration. 0x1208 | 0x10 | |
| | | Reserved | 000 | — |
| | | ASP_STP | 1 | Frame begins when LRCK transitions low to high |
| | | ASP_5050 | 0 | LRCK duty cycle per FSYNC_PULSE_WIDTH_LB/UB |
| | | ASP_FSD | 000 | Zero SCLK frame start delay |
| 4.10 | Configure serial port receive channel positions. | Serial Port Receive Channel Select. 0x2501 | 0x04 | |
| | | Reserved | 0000 | — |
| | | SP_RX_CHB_SEL | 01 | SP RX Channel B position is 1. |
| | | SP_RX_CHA_SEL | 00 | SP RX Channel A position is 0. |
| 4.11 | Set receive sample rate. | Serial Port Receive Sample Rate. 0x2503 | 0x8C | |
| | | Reserved | 100 | — |
| | | SP_RX_FS | 0 1100 | SP receive sample rate = 48 kHz. |
| 4.12 | Configure the SRC sample rate detection. | SRC Input Sample Rate. 0x2601 | 0x20 | |
| | | Reserved | 0010 | — |
| | | SRC_SDIN_FS | 0000 | ASP sample rate is autodetected. |

Example 5-1. Power-Up Sequence (Cont.)

| STEP | TASK | REGISTER/BIT FIELDS | VALUE | DESCRIPTION | |
|---------|---|---|--|---|-------------------------|
| 4.13 | Configure Channel 2 size to 24 bits per sample. | ASP Receive DAI0 Channel 2 Phase and Resolution. 0x2A05 | 0x02 | | |
| | | Reserved | 0 | — | |
| | | ASP_RX0_CH2_AP | 0 | In 50/50 mode, channel data valid if LRCK is low. | |
| | | Reserved | 00 00 | — | |
| 4.14 | Configure location of the Channel 2 MSB with respect to SOF. | ASP Receive DAI0 Channel 2 Bit Start MSB. 0x2A06 | 0x00 | | |
| | | Reserved | 0000 000 | — | |
| 4.15 | Configure location of the Channel 2 LSB with respect to SOF. | ASP Receive DAI0 Channel 2 Bit Start LSB. 0x2A07 | 0x18 | | |
| | | ASP_RX0_CH2_BIT_ST_LSB | 0001 1000 | ASP transmit bit start LSB = 24. | |
| 4.16 | Disable the SRC bypass. | Serial Port SRC Control. 0x1007 | 0x10 | | |
| | | Reserved | 0001 | — | |
| | | I2C_DRIVE | 0 | I ² C output drive strength normal | |
| | | Reserved | 0 | — | |
| | | SRC_BYPASS_DAC | 0 | SRC not bypassed for DAC path | |
| 5 | Enable SCLK. | ASP Clock Configuration 1. 0x1207 | 0x20 | | |
| | | Reserved | 00 | — | |
| | | ASP_SCLK_EN | 1 | ASP SCLK enabled. | |
| | | ASP_HYBRID_MODE | 0 | LRCK is an input generated from SCLK. | |
| | | Reserved | 0 | — | |
| | | ASP_SCPOL_IN_DAC | 0 | SCLK input drive polarity for DAC is normal. | |
| 6 | Configure the DAC. | DAC Control 1. 0x1F01 | 0x00 | | |
| | | Reserved | 0000 00 | — | |
| | | DACB_INV | 0 | DACA signal not inverted. | |
| | | DACA_INV | 0 | DACB signal not inverted. | |
| | | Reserved | 0 | — | |
| 7 | Configure the appropriate volume controls and DAC source selects. | 7.1 Set Mixer A input to 0 dB. | Channel A Input Volume. 0x2301 | 0x00 | |
| | | | Reserved | 00 | — |
| | | 7.2 Set Mixer B input to 0 dB. | CHA_VOL | 00 0000 | Input A is set to 0 dB. |
| | | | Reserved | 00 | — |
| 8 | Configure the HP control. | HP Control. 0x2001 | 0x03 | | |
| | | Reserved | 0000 | — | |
| | | ANA_MUTE_B | 0 | Channel B is unmuted. | |
| | | ANA_MUTE_A | 0 | Channel A is unmuted. | |
| | | FULL_SCALE_VOL | 1 | Full-scale volume is -6dB for headphone output. | |
| 9 | Power up the DAC/HP. | Power Down Control 1. 0x1101 | 0x96 | | |
| | | Reserved | 1 | — | |
| | | ASP_DAI_PDN | 0 | ASP input path is powered up. | |
| | | MIXER_PDN | 0 | Mixer is powered up. | |
| | | Reserved | 1 | — | |
| | | HP_PDN | 0 | HPOUT powered up. | |
| | | Reserved | 11 | — | |
| PDN_ALL | 0 | DAC powered up. | | | |
| 10 | The headphone amplifier is operational after 10 ms. | | | | |

5.2 Power-Down Sequence

Ex. 5-2 is the procedure for powering down the HP playback.

Example 5-2. Power-Down Sequence

| STEP | TASK | REGISTER/BIT FIELDS | VALUE | DESCRIPTION |
|------|---|---|----------|--|
| 1 | Configure the DAC/volume Channels. | | | |
| 1.1 | Mute Volume A input. | Channel A Input Volume. 0x2301 | 0x3F | |
| | | Reserved | 00 | — |
| | | CHA_VOL | 11 1111 | Input A is muted. |
| 1.2 | Mute Volume B input. | Channel B Input Volume. 0x2303 | 0x3F | |
| | | Reserved | 00 | — |
| | | CHB_VOL | 11 1111 | Input B is muted. |
| 1.3 | Mute Channel A and B inputs. | HP Control. 0x2001 | 0x0F | |
| | | Reserved | 0000 | — |
| | | ANA_MUTE_B | 1 | Channel B is muted. |
| | | ANA_MUTE_A | 1 | Channel A is muted. |
| | | FULL_SCALE_VOL | 1 | Full-scale volume is -6 dB for headphone output. |
| | | Reserved | 1 | — |
| 1.4 | Disable SCLK. | ASP Clock Configuration 1. 0x1207 | 0x00 | |
| | | Reserved | 00 | — |
| | | ASP_SCLK_EN | 0 | ASP SCLK disabled. |
| | | ASP_HYBRID_MODE | 0 | LRCK is an output generated from SCLK. |
| | | Reserved | 0 | — |
| | | ASP_SCPOL_IN_DAC | 0 | SCLK input drive polarity for DAC is normal. |
| | | ASP_LCPOL_OUT | 0 | LRCK output drive polarity is normal. |
| | | ASP_LCPOL_IN | 0 | LRCK input polarity (pad to logic) is normal. |
| 2 | Power down the HP amplifier. | Power Down Control 1. 0x1101 | 0xFE | |
| | | Reserved | 1 | — |
| | | ASP_DAI_PDN | 1 | ASP input path is powered down |
| | | MIXER_PDN | 1 | Mixer is powered down |
| | | Reserved | 1 | — |
| | | HP_PDN | 1 | HPOUT powered down |
| | | Reserved | 11 | — |
| | | PDN_ALL | 0 | DAC powered up |
| 3 | Power down the ASP and SRC. | Power Down Control 2. 0x1102 | 0x8C | |
| | | Reserved | 100 | — |
| | | DISCHARGE_FILT+ | 0 | FILT+ is not clamped to ground. |
| | | SRC_PDN_OVERRIDE | 1 | SRC is powered down. |
| | | Reserved | 1 | — |
| | | DAC_SRC_PDNB | 0 | DAC SRC is powered down. |
| | | Reserved | 0 | — |
| 4 | Power down the DAC. | Power Down Control 1. 0x1101 | 0xFF | |
| | | Reserved | 1 | — |
| | | ASP_DAI_PDN | 1 | ASP input path is powered down |
| | | MIXER_PDN | 1 | Mixer is powered down |
| | | Reserved | 1 | — |
| | | HP_PDN | 1 | HPOUT powered down |
| | | Reserved | 11 | — |
| | | PDN_ALL | 1 | DAC powered down. |
| 5 | Read PDN_DONE to confirm that the DAC is completely powered down. | DAC Interrupt Status. 0x1308 | 0x01 | |
| | | Reserved | 0000 000 | — |
| | | PDN_DONE | 1 | Power-down done. |
| 6 | Repeat Step 5 until the PDN_DONE status bit indicates the DAC has powered down. | | | |
| 7 | Discharge the capacitor attached to the FILT+ pin. | Power Down Control 2. 0x1102 | 0x9C | |
| | | Reserved | 100 | — |
| | | DISCHARGE_FILT+ | 1 | FILT+ is clamped to ground. |
| | | SRC_PDN_OVERRIDE | 1 | SRC is powered down. |
| | | Reserved | 1 | — |
| | | DAC_SRC_PDNB | 0 | DAC SRC is powered down. |
| | | Reserved | 0 | — |
| 8 | If required, remove the SCLK signal. | | | |
| 9 | If required, remove all relevant power supplies from the DAC. | | | |

5.3 Page 0x30 Read Sequence

The following sequence is required to read from Page 0x30:

1. Power up Page 0x30 by clearing bit 7 of register 0x1102.
2. Enable Page 0x30 reads by writing the value 0x01 to register 0x1801.
3. Perform the read from Page 0x30.

5.4 PLL Clocking

Data-path logic is in the MCLK domain, where SCLK is expected to be 12 or 24 MHz. For clocking scenarios where ASP_SCLK is neither 12 nor 24 MHz, the PLL must be turned on to provide the desired internal MCLK. At startup, the system sets the SCLK bypass as default mode and switches to PLL output after it settles. PLL start-up time is a maximum of 1 ms.

5.5 VD_FILT/VL ESD Diode

Note the following:

- If VD_FILT is supplied externally, VL must be supplied before VD_FILT.
- If the internal LDO is enabled, it generates VD_FILT from VL.
- If the LDO is disabled ($\overline{\text{DIGLDO_PDN}}$ asserted) and VD_FILT is supplied externally; however, the LDO diode could be forward biased in cases where VD_FILT is supplied first.
- If the LDO is disabled and VD_FILT and VL are respectively powered via separate 1.2- and 1.8-V supplies, it is recommended to have an ESD diode between VD_FILT and VL.

6 Register Quick Reference

Table 6-1 lists the register page addresses for each module.

Table 6-1. Register Base Addresses

| Module Group | Page | Module | Reference |
|------------------|-----------|-------------------------------|---------------------------------------|
| Chip-Level | 0x10 | Global | Section 6.1 on p. 53 |
| | 0x11 | Power-down and headset detect | Section 6.2 on p. 54 |
| | 0x12 | Clocking | Section 6.3 on p. 55 |
| | 0x13 | Interrupt | Section 6.4 on p. 55 |
| | 0x14 | Reserved | — |
| | 0x15 | Fractional-N PLL | Section 6.5 on p. 56 |
| | 0x16–0x18 | Reserved | — |
| | 0x19 | Headphone load detect | Section 6.6 on p. 57 |
| | 0x1A | Reserved | — |
| Analog Input | 0x1B | Headset Interface | Section 6.7 on p. 57 |
| | 0x1E | Reserved | — |
| Analog Outputs | 0x1F | DAC | Section 6.8 on p. 58 |
| | 0x20 | HP control | Section 6.9 on p. 58 |
| | 0x21 | Class H | Section 6.10 on p. 58 |
| | 0x22 | Reserved | — |
| Internal Modules | 0x23 | Mixer volume | Section 6.11 on p. 58 |
| | 0x24 | Reserved | — |
| | 0x25 | AudioPort interface | Section 6.12 on p. 59 |
| | 0x26 | SRC | Section 6.13 on p. 59 |
| | 0x27 | Reserved | — |
| Serial Ports | 0x28 | Reserved | — |
| | 0x29 | Reserved | — |
| | 0x2A | ASP receive | Section 6.14 on p. 59 |
| — | 0x2B–0x2F | Reserved | — |
| ID registers | 0x30 | ID registers | Section 6.15 on p. 60 |
| — | 0x31–0xFF | Reserved | — |

Notes:

- Default values are shown below the bit field names.
- Default bits marked “x” are reserved or undetermined.
- Fields shown in **red** are controls that are also located in the VP power supply domain.
- Fields shown in **turquoise** are status indicators from the VP power supply domain that are selectively raw or sticky.
- Fields shown in **orange** are affected by the **FREEZE** bit (see [p. 60](#)).

6.1 Global Registers

| I ² C Address: 10010(AD1)(AD0)[R/W] through 10010(AD1)(AD0)0 = 0x94(Write); 10010(AD1)(AD0)1 = 0x95 (Read) | | | | | | | | | | |
|---|-------------------------|--------|---|---|---|------------------------|---|----------------|--------|--|
| Page 0x10—Global Registers | | | | | | | | | | |
| Address | Function | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |
| 0x00 | Control Port Page | PAGE | | | | | | | | |
| | | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | |
| 0x01–0x04 | Reserved | — | | | | | | | | |
| | | x | x | x | x | x | x | x | x | |
| 0x05 p. 60 | Revision ID (Read Only) | AREVID | | | | MTLREVID | | | | |
| | | x | x | x | x | x | x | x | x | |
| 0x06 p. 60 | Freeze Control | — | | | | | | | FREEZE | |
| | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | |
| 0x07 p. 61 | Serial Port SRC Control | — | | | | I ² C_DRIVE | — | SRC_BYPASS_DAC | — | |
| | | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | |

| I ² C Address: 10010(AD1)(AD0)[R/W] through 10010(AD1)(AD0)0 = 0x94(Write); 10010(AD1)(AD0)1 = 0x95 (Read) | | | | | | | | | |
|---|---------------------------|------------------|------------|------------|-----------------|------------------|------------|-----------------------|-----------------|
| Page 0x10—Global Registers | | | | | | | | | |
| Address | Function | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| 0x08 p. 61 | MCLK Status (Read Only) | 0 | 0 | 0 | 0 | 0 | 0 | INTERNAL_FS_STAT x | — |
| 0x09 p. 61 | MCLK Control | 0 | 0 | 0 | 0 | 0 | 0 | INTERNAL_FS 1 | — |
| 0x0A p. 61 | Soft Ramp Rate | ASR_RATE | | | | DSR_RATE | | | |
| | | 1 | 0 | 1 | 0 | 0 | 1 | 0 | 0 |
| 0x0B p. 62 | Slow Start Enable | SLOW_START_EN | | | | — | | | |
| | | 0 | 1 | 1 | 1 | 0 | 0 | 0 | 0 |
| 0x0C–0x0D | Reserved | — | | | | | | | |
| | | x | x | x | x | x | x | x | x |
| 0x0E p. 62 | I ² C Debounce | I2C_SDA_DBNC_CNT | | | I2C_SDA_DBNC_EN | I2C_SCL_DBNC_CNT | | | I2C_SCL_DBNC_EN |
| | | 1 | 0 | 0 | 0 | 1 | 0 | 0 | 0 |
| 0x0F p. 62 | I ² C Stretch | I2C_STRETCH | | | | | | | |
| | | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 |
| 0x10 p. 62 | I ² C Timeout | MAS_I2C_NACK | MAS_TO_DIS | MAS_TO_SEL | | ACC_TO_DIS | ACC_TO_SEL | | |
| | | 1 | 0 | 1 | 1 | 0 | 1 | 1 | 1 |
| 0x11–0x7F | Reserved | — | | | | | | | |
| | | x | x | x | x | x | x | x | x |

6.2 Power-Down and Headset-Detect Registers

| I ² C Address: 10010(AD1)(AD0)[R/W] through 10010(AD1)(AD0)0 = 0x94(Write); 10010(AD1)(AD0)1 = 0x95 (Read) | | | | | | | | | |
|---|--|--------|-------------|--------------------|-----------------|------------------|--------------------|-----------------|-------------------|
| Page 0x11—Power-Down and Headset-Detect Registers | | | | | | | | | |
| Address | Function | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| 0x00 | Control Port Page | PAGE | | | | | | | |
| | | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 1 |
| 0x01 p. 63 | Power Down Control 1 | — | ASP_DAI_PDN | MIXER_PDN | — | HP_PDN | — | | PDN_ALL |
| | | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| 0x02 p. 63 | Power Down Control 2 | — | | | DISCHARGE_FILT+ | SRC_PDN_OVERRIDE | — | DAC_SRC_PDNB | |
| | | 1 | 0 | 0 | 0 | 0 | 1 | 0 | 0 |
| 0x03 p. 64 | Power Down Control 3 | — | | | | VPMON_PDNB | | — | |
| | | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 |
| 0x04–0x06 | Reserved | — | | | | | | | |
| | | x | x | x | x | x | x | x | x |
| 0x07 p. 64 | Oscillator Switch Control | — | | | | | | | |
| | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | SCLK_PRESENT 0 |
| 0x08 | Reserved | — | | | | | | | |
| | | x | x | x | x | x | x | x | x |
| 0x09 p. 64 | Oscillator Switch Status (Read Only) | — | | | | | OSC_PDNB_STAT | OSC_SW_SEL_STAT | |
| | | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 1 |
| 0x0A–0x12 | Reserved | — | | | | | | | |
| | | x | x | x | x | x | x | x | x |
| 0x13 p. 64 | Tip Sense Control 1 | TS_INV | — | TS_FALL_DBNCE_TIME | | | TS_RISE_DBNCE_TIME | | |
| | | 0 | 0 | 0 | 1 | 1 | 0 | 1 | 1 |
| 0x15 p. 65 | Tip Sense Indicator Status (Read Only) | — | | | | TS_UNPLUG_DBNC | TS_PLUG_DBNC | — | |
| | | 0 | 0 | 0 | 0 | x | x | x | x |
| 0x16–0x7F | Reserved | — | | | | | | | |
| | | x | x | x | x | x | x | x | x |

6.3 Clocking Registers

| I ² C Address: 10010(AD1)(AD0)[R/W] through 10010(AD1)(AD0)0 = 0x94 (Write); 10010(AD1)(AD0)1 = 0x95 (Read) | | | | | | | | | | |
|--|------------------------------|----------------------|---|-------------|-----------------|----------------------|---------|------------------|---------------|--------------|
| Page 0x12—Clocking Registers | | | | | | | | | | |
| Address | Function | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |
| 0x00 | Control Port Page | PAGE | | | | | | | | |
| | | 0 | 0 | 0 | 1 | 0 | 0 | 1 | 0 | |
| 0x01 | MCLK Source Select | — | | | | | | MCLKDIV | MCLK_SRC_SEL | |
| p. 65 | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | |
| 0x02 | Reserved | — | | | | | | | | |
| | | x | x | x | x | x | x | x | x | |
| 0x03 | FSYNC Pulse Width Lower Byte | FSYNC_PULSE_WIDTH_LB | | | | | | | | |
| p. 66 | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | |
| 0x04 | FSYNC Pulse Width Upper Byte | — | | | | FSYNC_PULSE_WIDTH_UB | | | | |
| p. 66 | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | |
| 0x05 | FSYNC Period Lower Byte | FSYNC_PERIOD_LB | | | | | | | | |
| p. 66 | | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 1 | |
| 0x06 | FSYNC Period Upper Byte | — | | | | FSYNC_PERIOD_UB | | | | |
| p. 66 | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | |
| 0x07 | ASP Clock Configuration 1 | — | | ASP_SCLK_EN | ASP_HYBRID_MODE | — | | ASP_SCPOL_IN_DAC | ASP_LCPOL_OUT | ASP_LCPOL_IN |
| p. 66 | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | |
| 0x08 | ASP Frame Configuration | — | | | ASP_STP | ASP_5050 | ASP_FSD | | | |
| p. 67 | | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | |
| 0x09 | Fs Rate Enable | — | | | | | FS_EN | | | |
| p. 67 | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | |
| 0x0A | Input ASRC Clock Select | — | | | | | | CLK_IASRC_SEL | | |
| p. 67 | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | |
| 0x0B | Reserved | — | | | | | | | | |
| | | x | x | x | x | x | x | x | x | |
| 0x0C | PLL Divide Configuration 1 | — | | | | | | SCLK_PREDIV | | |
| p. 67 | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | |
| 0x0D–0x7F | Reserved | — | | | | | | | | |
| | | x | x | x | x | x | x | x | x | |

6.4 Interrupt Registers

| I ² C Address: 10010(AD1)(AD0)[R/W] through 10010(AD1)(AD0)0 = 0x94 (Write); 10010(AD1)(AD0)1 = 0x95 (Read) | | | | | | | | | | | |
|--|---|------|----------------|------------------|------------|-------------|------------|-------------|--------------|-------------|--------------|
| Page 0x13—Interrupt Registers | | | | | | | | | | | |
| Address | Function | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | |
| 0x00 | Control Port Page | PAGE | | | | | | | | | |
| | | 0 | 0 | 0 | 1 | 0 | 0 | 1 | 1 | | |
| 0x01 | Reserved | — | | | | | | | | | |
| | | x | x | x | x | x | x | x | x | | |
| 0x02 | Channel Overflow Interrupt Status (Read Only) | — | | | | | SRC_IUNLK | | CHA_OVFL | CHB_OVFL | |
| p. 68 | | 0 | 0 | 0 | 0 | x | x | x | x | | |
| 0x03 | SRC Interrupt Status (Read Only) | — | | | | ASPRX_OVLD | | ASPRX_ERROR | ASPRX_LATE | ASPRX_EARLY | ASPRX_NOLRCK |
| p. 68 | | 0 | 0 | 0 | x | x | x | x | x | | |
| 0x04 | ASP RX Interrupt Status (Read Only) | — | | | ASPRX_OVLD | ASPRX_ERROR | ASPRX_LATE | ASPRX_EARLY | ASPRX_NOLRCK | | |
| p. 68 | | 0 | 0 | 0 | x | x | x | x | x | | |
| 0x05–0x07 | Reserved | — | | | | | | | | | |
| | | x | x | x | x | x | x | x | x | | |
| 0x08 | DAC Interrupt Status (Read Only) | — | | | | | | PDN_DONE | | | |
| p. 69 | | 0 | 0 | 0 | 0 | 0 | 0 | x | x | | |
| 0x09 | Detect Status 1 (Read Only) | — | TIP_SENSE_PLUG | TIP_SENSE_UNPLUG | — | | | | | | |
| p. 69 | | x | x | x | x | x | x | x | x | | |
| 0x0A | Reserved | — | | | | | | | | | |
| | | x | x | x | x | x | x | x | x | | |

| I ² C Address: 10010(AD1)(AD0)[R/W] through 10010(AD1)(AD0)0 = 0x94 (Write); 10010(AD1)(AD0)1 = 0x95 (Read) | | | | | | | | | |
|--|--|--------|-----------------|--------|-------------------|--------------------|-------------------|--------------------|---------------------|
| Page 0x13—Interrupt Registers | | | | | | | | | |
| Address | Function | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| 0x0B p. 69 | DAC Lock Status (Read Only) | — x | DAC_UNLK x | — x | — x | — x | DAC_LK x | — x | — x |
| 0x0C | Reserved | x | x | x | x | x | x | x | x |
| 0x0D p. 69 | VPMON Interrupt (Read Only) | 0 | 0 | 0 | — | 0 | 0 | 0 | VPMON_TRIP x |
| 0x0E p. 70 | PLL Lock (Read Only) | 0 | 0 | 0 | — | 0 | 0 | 0 | PLL_LOCK x |
| 0x0F p. 70 | Tip Sense Plug/Unplug Interrupt Status (Read Only) | x | x | — | x | TS_UNPLUG x | TS_PLUG x | — | x |
| 0x10–0x16 | Reserved | x | x | x | x | x | x | x | x |
| 0x17 p. 70 | Channel Overflow Interrupt Mask | 0 | 0 | 0 | — | 1 | 1 | M_CHA_OVFL 1 | M_CHB_OVFL 1 |
| 0x18 p. 70 | SRC Interrupt Mask | 0 | 0 | 0 | — | 1 | M_SRC_IUNLK 1 | 1 | M_SRC_ILK 1 |
| 0x19 p. 71 | ASP RX Interrupt Mask | 0 | 0 | 0 | M_ASPRX_OVLD 1 | M_ASPRX_ERROR 1 | M_ASPRX_LATE 1 | M_ASPRX_EARLY 1 | M_ASPRX_NOLRCK 1 |
| 0x1A | Reserved | x | x | x | x | x | x | x | x |
| 0x1B p. 71 | DAC Interrupt Mask | 0 | 0 | 0 | — | 0 | 0 | 1 | M_PDN_DONE 1 |
| 0x1C p. 71 | DAC Lock Mask | 0 | M_DAC_UNLK 1 | 1 | — | 1 | M_DAC_LK 1 | 1 | 1 |
| 0x1D | Reserved | 0 | 0 | 0 | — | 0 | 0 | 0 | 0 |
| 0x1E p. 72 | VPMON Interrupt Mask | 0 | 0 | 0 | — | 0 | 0 | 0 | M_VPMON_TRIP 1 |
| 0x1F p. 72 | PLL Lock Mask | 0 | 0 | 0 | — | 0 | 0 | 0 | M_PLL_LOCK 1 |
| 0x20 p. 72 | Tip Sense Plug/Unplug Interrupt Mask | 0 | 0 | 0 | — | M_TS_UNPLUG 1 | M_TS_PLUG 1 | — | 1 |
| 0x21–0x7F | Reserved | 0 | 0 | 0 | — | 0 | 0 | 0 | 0 |

6.5 Fractional-N PLL Registers

| I ² C Address: 10010(AD1)(AD0)[R/W] through 10010(AD1)(AD0)0 = 0x94 (Write); 10010(AD1)(AD0)1 = 0x95 (Read) | | | | | | | | | | |
|--|--------------------------------|---|---|---|---------------------|---|---|---|----------------|---|
| Page 0x15—Fractional-N PLL Registers | | | | | | | | | | |
| Address | Function | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |
| 0x00 | Control Port Page | 0 | 0 | 0 | PAGE | | | | | 1 |
| 0x01 p. 72 | PLL Control 1 | 0 | 0 | 0 | — | 0 | 0 | 0 | PLL_START 0 | |
| 0x02 p. 73 | PLL Division Fractional Byte 0 | 0 | 0 | 0 | PLL_DIV_FRAC[7:0] | | | | | 0 |
| 0x03 p. 73 | PLL Division Fractional Byte 1 | 0 | 0 | 0 | PLL_DIV_FRAC[15:8] | | | | | 0 |
| 0x04 p. 73 | PLL Division Fractional Byte 2 | 0 | 0 | 0 | PLL_DIV_FRAC[23:16] | | | | | 0 |
| 0x05 p. 73 | Division Integer | 0 | 1 | 0 | PLL_DIV_INT[7:0] | | | | | 0 |
| 0x06–0x07 | Reserved | x | x | x | x | x | x | x | x | |

| I ² C Address: 10010(AD1)(AD0)[R/W] through 10010(AD1)(AD0)0 = 0x94 (Write); 10010(AD1)(AD0)1 = 0x95 (Read) | | | | | | | | | | |
|--|-----------------------|---------------|---|---|---|---|---|---|----------|--|
| Page 0x15—Fractional-N PLL Registers | | | | | | | | | | |
| Address | Function | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |
| 0x08 p. 73 | PLL Control 3 | PLL_DIVOUT | | | | | | | | |
| | | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | |
| 0x09 | Reserved | x | x | x | x | x | x | x | x | |
| 0x0A p. 73 | PLL Calibration Ratio | PLL_CAL_RATIO | | | | | | | | |
| | | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | |
| 0x0B–0x1A | Reserved | x | x | x | x | x | x | x | x | |
| 0x1B p. 73 | PLL Control 4 | — | | | | | | | PLL_MODE | |
| | | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | |
| 0x1C–0x7F | Reserved | x | x | x | x | x | x | x | x | |

6.6 HP Load Detect Registers

| I ² C Address: 10010(AD1)(AD0)[R/W] through 10010(AD1)(AD0)0 = 0x94 (Write); 10010(AD1)(AD0)1 = 0x95 (Read) | | | | | | | | | |
|--|------------------------------------|------|---|----------|---|---|---|----------|----------------------|
| Page 0x19—HP Load Detect Registers | | | | | | | | | |
| Address | Function | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| 0x00 | Control Port Page | PAGE | | | | | | | |
| | | 0 | 0 | 0 | 1 | 1 | 0 | 0 | 1 |
| 0x01–0x24 | Reserved | x | x | x | x | x | x | x | x |
| 0x25 p. 74 | Load Detect R/C Status (Read Only) | — | | CLA_STAT | | — | | RLA_STAT | |
| | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 0x26 p. 74 | HP Load Detect Done (Read Only) | — | | | | | | | |
| | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | HPLOAD_DET_DONE 0 |
| 0x27 p. 74 | HP Load Detect Enable | — | | | | | | | |
| | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | HP_LD_EN 0 |
| 0x28–0x7F | Reserved | x | x | x | x | x | x | x | x |

6.7 Headset Interface Registers

| I ² C Address: 10010(AD1)(AD0)[R/W] through 10010(AD1)(AD0)0 = 0x94 (Write); 10010(AD1)(AD0)1 = 0x95 (Read) | | | | | | | | | |
|--|-----------------------------|----------------|------------------|---------------|---|---|---|--------------------|---|
| Page 0x1B—Headset Interface Registers | | | | | | | | | |
| Address | Function | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| 0x00 | Control Port Page | PAGE | | | | | | | |
| | | 0 | 0 | 0 | 1 | 1 | 0 | 1 | 1 |
| 0x01–0x6F | Reserved | x | x | x | x | x | x | x | x |
| 0x70 | Reserved | x | x | x | x | x | x | x | x |
| 0x71 p. 74 | Wake Control | — | M_HP_WAKE | WAKEB_MODE | — | | | WAKEB_CLEAR | |
| | | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 |
| 0x72 | Reserved | x | x | x | x | x | x | x | x |
| 0x73 p. 75 | Tip Sense Control | TIP_SENSE_CTRL | | TIP_SENSE_INV | | — | | TIP_SENSE_DEBOUNCE | |
| | | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 |
| 0x74 | Reserved | x | x | x | x | x | x | x | x |
| 0x75 p. 75 | Mic Detect Control 1 | LATCH_TO_VP | EVENT STATUS_SEL | | — | | | | |
| | | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 |
| 0x76 | Reserved | x | x | x | x | x | x | x | x |
| 0x77 p. 76 | Detect Status 1 (Read Only) | TIP_SENSE | | — | | | | | |
| | | x | x | 0 | x | x | x | x | x |

| I ² C Address: 10010(AD1)(AD0)[R/W] through 10010(AD1)(AD0)0 = 0x94 (Write); 10010(AD1)(AD0)1 = 0x95 (Read) | | | | | | | | | |
|--|--|---|------------------|--------------------|---|---|---|---|---|
| Page 0x1B—Headset Interface Registers | | | | | | | | | |
| Address | Function | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| 0x78 | Reserved | x | x | x | x | — | x | x | x |
| 0x79 | Detect Interrupt Mask 1 p. 76 | — | M_TIP_SENSE_PLUG | M_TIP_SENSE_UNPLUG | — | — | — | — | — |
| 0x7A–0x7F | Reserved | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 |
| 0x7A–0x7F | Reserved | x | x | x | x | — | x | x | x |

6.8 DAC Registers

| I ² C Address: 10010(AD1)(AD0)[R/W] through 10010(AD1)(AD0)0 = 0x94 (Write); 10010(AD1)(AD0)1 = 0x95 (Read) | | | | | | | | | | |
|--|--|----------------|---|---|---|------------|-------------|------------|----------|---|
| Page 0x1F—DAC Registers | | | | | | | | | | |
| Address | Function | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |
| 0x00 | Control Port Page | PAGE | | | | | | | | 1 |
| 0x01 | DAC Control 1 p. 76 | 0 | 0 | 0 | 1 | 1 | 1 | DACB_INV | DACA_INV | |
| 0x02–0x05 | Reserved | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | |
| 0x02–0x05 | Reserved | x | x | x | x | x | x | x | x | |
| 0x06 | DAC Control 2 p. 76 | HPOUT_PULLDOWN | | | | HPOUT_LOAD | HPOUT_CLAMP | DAC_HPF_EN | — | — |
| 0x06 | DAC Control 2 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | |
| 0x07–0x7F | Reserved | x | x | x | x | x | x | x | x | |

6.9 HP Control Registers

| I ² C Address: 10010(AD1)(AD0)[R/W] through 10010(AD1)(AD0)0 = 0x94 (Write); 10010(AD1)(AD0)1 = 0x95 (Read) | | | | | | | | | | |
|--|-------------------------------------|------|---|---|---|------------|------------|----------------|---|---|
| Page 0x20—HP Control Registers | | | | | | | | | | |
| Address | Function | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |
| 0x00 | Control Port Page | PAGE | | | | | | | | 0 |
| 0x01 | HP Control p. 77 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | |
| 0x01 | HP Control | 0 | 0 | 0 | 0 | ANA_MUTE_B | ANA_MUTE_A | FULL_SCALE_VOL | — | |
| 0x01 | HP Control | 0 | 0 | 0 | 0 | 1 | 1 | 0 | 1 | |
| 0x02–0x7F | Reserved | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | |

6.10 Class H Registers

| I ² C Address: 10010(AD1)(AD0)[R/W] through 10010(AD1)(AD0)0 = 0x94 (Write); 10010(AD1)(AD0)1 = 0x95 (Read) | | | | | | | | | | |
|--|--|------|---|---|---|---|---|---------|---|---|
| Page 0x21—Class H Registers | | | | | | | | | | |
| Address | Function | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |
| 0x00 | Control Port Page | PAGE | | | | | | | | 1 |
| 0x00 | Control Port Page | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 1 | |
| 0x01 | Class H Control p. 77 | 0 | 0 | 0 | 0 | 0 | 1 | ADPTPWR | 1 | |
| 0x01 | Class H Control | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | |
| 0x02–0x7F | Reserved | x | x | x | x | x | x | x | x | |

6.11 Mixer Volume Registers

| I ² C Address: 10010(AD1)(AD0)[R/W] through 10010(AD1)(AD0)0 = 0x94 (Write); 10010(AD1)(AD0)1 = 0x95 (Read) | | | | | | | | | | |
|--|---|------|---|---|---|---------|---|---|---|---|
| Page 0x23—Mixer Volume Registers | | | | | | | | | | |
| Address | Function | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |
| 0x00 | Control Port Page | PAGE | | | | | | | | 1 |
| 0x00 | Control Port Page | 0 | 0 | 1 | 0 | 0 | 0 | 1 | 1 | |
| 0x01 | Channel A Input Volume p. 77 | 0 | — | 1 | 1 | CHA_VOL | 1 | 1 | 1 | |
| 0x01 | Channel A Input Volume | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | |
| 0x02 | Reserved | x | x | x | x | — | x | x | x | |
| 0x02 | Reserved | x | x | x | x | x | x | x | x | |
| 0x03 | Channel B Input Volume p. 78 | 0 | — | 1 | 1 | CHB_VOL | 1 | 1 | 1 | |
| 0x03 | Channel B Input Volume | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | |

| I ² C Address: 10010(AD1)(AD0)[R/W] through 10010(AD1)(AD0)0 = 0x94 (Write); 10010(AD1)(AD0)1 = 0x95 (Read) | | | | | | | | | |
|--|----------|---|---|---|---|---|---|---|---|
| Page 0x23—Mixer Volume Registers | | | | | | | | | |
| Address | Function | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| 0x04–0x7F | Reserved | x | x | x | x | — | x | x | x |

6.12 AudioPort Interface Registers

| I ² C Address: 10010(AD1)(AD0)[R/W] through 10010(AD1)(AD0)0 = 0x94 (Write); 10010(AD1)(AD0)1 = 0x95 (Read) | | | | | | | | | | |
|--|---|------|-------------|---------------|---|---------------|----------------|-----------------|---|---|
| Page 0x25—AudioPort Interface Registers | | | | | | | | | | |
| Address | Function | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |
| 0x00 | Control Port Page | PAGE | | | | | | | | 1 |
| 0x01 | Serial Port Receive Channel Select | 0 | 0 | 0 | 0 | SP_RX_CHB_SEL | | SP_RX_CHA_SEL | | |
| 0x02 | Serial Port Receive Isochronous Control | — | SP_RX_RSYNC | SP_RX_NSB_POS | | | SP_RX_NFS_NSBB | SP_RX_ISOC_MODE | | |
| 0x03 | Serial Port Receive Sample Rate | 1 | 0 | 0 | 0 | 1 | SP_RX_FS | | | |
| 0x04–0x7F | Reserved | x | x | x | x | x | x | x | x | |

6.13 SRC Registers

| I ² C Address: 10010(AD1)(AD0)[R/W] through 10010(AD1)(AD0)0 = 0x94 (Write); 10010(AD1)(AD0)1 = 0x95 (Read) | | | | | | | | | | |
|--|-----------------------|------|---|---|---|-------------|---|---|---|---|
| Page 0x26—SRC Registers | | | | | | | | | | |
| Address | Function | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |
| 0x00 | Control Port Page | PAGE | | | | | | | | 0 |
| 0x01 | SRC Input Sample Rate | 0 | 1 | 0 | 0 | SRC_SDIN_FS | | | | |
| 0x02–0x08 | Reserved | x | x | x | x | x | x | x | x | |
| 0x09–0x7F | Reserved | x | x | x | x | x | x | x | x | |

6.14 Serial Port Receive Registers

| I ² C Address: 10010(AD1)(AD0)[R/W] through 10010(AD1)(AD0)0 = 0x94 (Write); 10010(AD1)(AD0)1 = 0x95 (Read) | | | | | | | | | | |
|--|---|------------------------|----------------|---|---|----------------|----------------|-----------------|------------------------|---|
| Page 0x2A—Serial Port Receive Registers | | | | | | | | | | |
| Address | Function | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |
| 0x00 | Control Port Page | PAGE | | | | | | | | 0 |
| 0x01 | ASP Receive DAI0 Enable | 0 | 0 | 0 | 0 | ASP_RX0_CH2_EN | ASP_RX0_CH1_EN | — | | |
| 0x02 | ASP Receive DAI0 Channel 1 Phase and Resolution | — | ASP_RX0_CH1_AP | 0 | 0 | 0 | 0 | ASP_RX0_CH1_RES | | |
| 0x03 | ASP Receive DAI0 Channel 1 Bit Start MSB | 0 | 0 | 0 | 0 | 0 | 0 | 0 | ASP_RX0_CH1_BIT_ST_MSB | |
| 0x04 | ASP Receive DAI0 Channel 1 Bit Start LSB | ASP_RX0_CH1_BIT_ST_LSB | | | | | | | | 0 |
| 0x05 | ASP Receive DAI0 Channel 2 Phase and Resolution | — | ASP_RX0_CH2_AP | 0 | 0 | 0 | 0 | ASP_RX0_CH2_RES | | |
| 0x06 | ASP Receive DAI0 Channel 2 Bit Start MSB | 0 | 0 | 0 | 0 | 0 | 0 | 0 | ASP_RX0_CH2_BIT_ST_MSB | |
| 0x07 | ASP Receive DAI0 Channel 2 Bit Start LSB | ASP_RX0_CH2_BIT_ST_LSB | | | | | | | | 0 |

| I ² C Address: 10010(AD1)(AD0)[R/W] through 10010(AD1)(AD0)0 = 0x94 (Write); 10010(AD1)(AD0)1 = 0x95 (Read) | | | | | | | | | |
|--|----------|---|---|---|---|---|---|---|---|
| Page 0x2A—Serial Port Receive Registers | | | | | | | | | |
| Address | Function | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| 0x08–0x7F | Reserved | x | x | x | x | — | x | x | x |

6.15 ID Registers

| I ² C Address: 10010(AD1)(AD0)[R/W] through 10010(AD1)(AD0)0 = 0x94(Write); 10010(AD1)(AD0)1 = 0x95 (Read) | | | | | | | | | |
|---|-------------------------------|-------------|---|---|---|--------|---|---|---|
| Page 0x30—ID Registers | | | | | | | | | |
| Address | Function | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| 0x00 | Control Port Page | PAGE | | | | | | | |
| | | 0 | 0 | 1 | 1 | 0 | 0 | 0 | 0 |
| 0x01–0x13 | Reserved | x | x | x | x | — | x | x | x |
| 0x14 p. 81 | Subrevision | SUBREVISION | | | | | | | |
| | | x | x | x | x | x | x | x | x |
| 0x15 p. 81 | Device ID A and B (Read Only) | DEVIDA | | | | DEVIDB | | | |
| | | 0 | 1 | 0 | 0 | 0 | 0 | 1 | 1 |
| 0x16 p. 81 | Device ID C and D (Read Only) | DEVIDC | | | | DEVIDD | | | |
| | | 1 | 0 | 1 | 0 | 0 | 0 | 1 | 1 |
| 0x17 p. 81 | Device ID E (Read Only) | DEVIDE | | | | — | | | |
| | | 0 | 1 | 1 | 0 | x | x | x | x |
| 0x–0x7F | Reserved | x | x | x | x | — | x | x | x |

7 Register Descriptions

The tables in this section give bit assignments, definitions, and default states after power-up or reset. Reserved register fields must maintain default states. [Section 6](#) describes the red, turquoise, and orange indicators.

7.1 Global Registers

7.1.1 Revision ID

Address 0x1005

| R/O | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|---------|--------|---|---|---|----------|---|---|---|
| | AREVID | | | | MTLREVID | | | |
| Default | x | x | x | x | x | x | x | x |

| Bits | Name | Description |
|------|----------|---|
| 7:4 | AREVID | Alpha revision. CS43L36 alpha revision level. AREVID and MTLREVID form the complete device revision ID (e.g.,: A0, B2). 0x00 ... 0xFF |
| 3:0 | MTLREVID | Metal revision. CS43L36 metal revision level. AREVID and MTLREVID form the complete device revision ID (e.g.,: A0, B2). 0x00 ... 0xFF |

7.1.2 Freeze Control

Address 0x1006

| R/W | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|---------|---|---|---|---|---|---|---|--------|
| | — | | | | | | | FREEZE |
| Default | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| Bits | Name | Description |
|------|--------|--|
| 7:1 | — | Reserved |
| 0 | FREEZE | Freeze registers. Configures a hold on all volume-control and power-down register settings. Use this bit only during normal operation after all circuit blocks in use have powered up. Using the bit when an affected circuit block is powering up could cause the change to occur immediately when power up completes (i.e., not gated by the FREEZE bit). Bits affected by FREEZE are shown in orange throughout Section 6 and Section 7 . 0 (Default) Volume-control and power-down register changes take effect immediately. 1 Modifications made to volume-control and power-down registers take effect only after this bit is cleared. |

7.1.3 Serial Port SRC Control
Address 0x1007

| | | | | | | | | |
|---------|---|---|---|---|-----------|---|----------------|---|
| R/W | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | | I2C_DRIVE | — | SRC_BYPASS_DAC | — |
| Default | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 |

| Bits | Name | Description |
|------|----------------|--|
| 7:4 | — | Reserved |
| 3 | I2C_DRIVE | I2C output drive strength. Selects drive strength used for the SDA output 0 (Default) Normal 1 Decreased |
| 2 | — | Reserved |
| 1 | SRC_BYPASS_DAC | Bypass SRC (DAC path). Determines the bypass of the input SRCs. See Section 4.6 for details. 0 (Default) No bypass 1 Bypass. SRC_SDIN_FS (see p. 79) must be set equal to FS _{INT} . |
| 0 | — | Reserved |

7.1.4 MCLK Status
Address 0x1008

| | | | | | | | | |
|---------|---|---|---|---|---|---|------------------|---|
| R/W | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | | | | INTERNAL_FS_STAT | — |
| Default | 0 | 0 | 0 | 0 | 0 | 0 | x | 0 |

| Bits | Name | Description |
|------|------------------|--|
| 7:2 | — | Reserved |
| 1 | INTERNAL_FS_STAT | Internal sample rate status. Indicates the divide ratio from MCLK _{INT} (set in INTERNAL_FS, see Section 7.1.5) to produce the internal sample rate for all converters. 0 FS _{INT} = MCLK _{INT} /250. Indicates that the internal MCLK is 12 or 24 MHz. 1 FS _{INT} = MCLK _{INT} /256. Indicates that the internal MCLK is 11.2896, 12.288, 22.5792, or 24.576 MHz. |
| 0 | — | Reserved |

7.1.5 MCLK Control
Address 0x1009

| | | | | | | | | |
|---------|---|---|---|---|---|---|-------------|---|
| R/W | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | | | | INTERNAL_FS | — |
| Default | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 |

| Bits | Name | Description |
|------|-------------|---|
| 7:2 | — | Reserved |
| 1 | INTERNAL_FS | Internal sample rate (FS _{INT}). Selects the divide ratio from MCLK _{INT} to produce the internal sample rate for all converters. See Table 4-4 for programming details. This bit always returns zero when read. Reports status in INTERNAL_FS_STAT. 0 FS _{INT} = MCLK _{INT} /250. Set if internal MCLK is 12 or 24 MHz. 1 (Default) FS _{INT} = MCLK _{INT} /256. Set if internal MCLK is 11.2896, 12.288, 22.5792, or 24.576 MHz. If MCLK _{INT} 11.2896, 12, or 12.288 MHz, MCLKDIV must be 0. If it is 22.5792, 24, or 24.576 MHz, MCLKDIV must be 1. |
| 0 | — | Reserved |

7.1.6 Soft Ramp Rate
Address 0x100A

| | | | | | | | | |
|---------|----------|---|---|---|----------|---|---|---|
| R/W | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | ASR_RATE | | | | DSR_RATE | | | |
| Default | 1 | 0 | 1 | 0 | 0 | 1 | 0 | 0 |

| Bits | Name | Description |
|------|----------|---|
| 7:4 | ASR_RATE | Analog soft-ramp rate (number of Fs periods between steps). Selects the soft ramp rate for all analog volumes. Step size = 1 dB or 2 dB for HPOUTx. See Section 4.2.2 for details. 0000 1 0010 4 0100 8 0110 12 1000 22 1010 (Default) 33 1100 44 1110 66 0001 2 0011 6 0101 11 0111 16 1001 24 1011 36 1101 48 1111 72 |
| 3:0 | DSR_RATE | Digital soft-ramp rate (number of Fs periods between steps). Selects soft ramp rate for all digital volumes. Step size = 0.125 dB. 0000 1 0010 4 0100 (Default) 8 0110 12 1000 22 1010 33 1100 44 1110 66 0001 2 0011 6 0101 1 0111 16 1001 24 1011 36 1101 48 1111 72 |

7.1.7 Slow Start Enable
Address 0x100B

| | | | | | | | | |
|---------|---------------|---|---|---|---|---|---|---|
| R/W | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | SLOW_START_EN | | | | | | | |
| Default | 0 | 1 | 1 | 1 | 0 | 0 | 0 | 0 |

| Bits | Name | Description |
|------|---------------|---|
| 7 | — | Reserved |
| 6:4 | SLOW_START_EN | Slow startup enable. Selects between fast and slow start-up times. See Section 4.2.3 for details. 000 Disabled. Shortens start-up time of the volume control, DAC, and HP. Useful for high-definition audio applications. 111 (Default) Enabled |
| 3:0 | — | Reserved |

7.1.8 I²C Debounce
Address 0x100E

| | | | | | | | | |
|---------|------------------|---|---|-----------------|------------------|---|---|-----------------|
| R/W | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | I2C_SDA_DBNC_CNT | | | I2C_SDA_DBNC_EN | I2C_SCL_DBNC_CNT | | | I2C_SCL_DBNC_EN |
| Default | 1 | 0 | 0 | 0 | 1 | 0 | 0 | 0 |

| Bits | Name | Description |
|------|------------------|---|
| 7:5 | I2C_SDA_DBNC_CNT | I ² C debounce count. Number of MCLKs to debounce SDA input Note: The I2C_SDA_DBNC_CNT and I2C_SCL_DBNC_CNT settings must be identical. 000 0 MCLKs 010 2 MCLKs 100 (Default) 4 MCLKs 110 6 MCLKs 001 1 MCLK 011 3 MCLKs 101 5 MCLKs 111 7 MCLKs |
| 4 | I2C_SDA_DBNC_EN | I ² C SDA debounce enable. SDA debounce enable Note: The I2C_SDA_DBNC_EN and I2C_SCL_DBNC_EN settings must be identical. 0 (Default) Disabled. Must be 0 for Fast Mode or Fast-Mode Plus. 1 Enabled |
| 3:1 | I2C_SCL_DBNC_CNT | I ² C SCL debounce count. Number of MCLKs to debounce SCL input Note: The I2C_SDA_DBNC_CNT and I2C_SCL_DBNC_CNT settings must be identical. 000 0 MCLKs 010 2 MCLKs 100 (Default) 4 MCLKs 110 6 MCLKs 001 1 MCLK 011 3 MCLKs 101 5 MCLKs 111 7 MCLKs |
| 0 | I2C_SCL_DBNC_EN | I ² C SCL debounce count enable. Note: The settings of I2C_SDA_DBNC_EN and I2C_SCL_DBNC_EN must be identical. 0 (Default) Disabled. Must be 0 for Fast Mode or Fast-Plus Mode. 1 Enabled |

7.1.9 I²C Stretch
Address 0x100F

| | | | | | | | | |
|---------|-------------|---|---|---|---|---|---|---|
| R/W | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | I2C_STRETCH | | | | | | | |
| Default | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 |

| Bits | Name | Description |
|------|-------------|---|
| 7:0 | I2C_STRETCH | I ² C stretch. Number of additional MCLKs to clock stretch after the slave is ready 0000 0011 (Default) 3 MCLKs |

7.1.10 I²C Timeout
Address 0x1010

| | | | | | | | | |
|---------|--------------|------------|------------|---|------------|------------|---|---|
| R/W | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | MAS_I2C_NACK | MAS_TO_DIS | MAS_TO_SEL | | ACC_TO_DIS | ACC_TO_SEL | | |
| Default | 1 | 0 | 1 | 1 | 0 | 1 | 1 | 1 |

| Bits | Name | Description |
|------|--------------|---|
| 7 | MAS_I2C_NACK | APB master I ² C NACK. Determines whether clock stretching or a NACK occurs if an APB access is attempted and I ² C is not APB master. 0 I ² C clock stretches if an APB access is attempted while I ² C is not APB master. 1 (Default) I ² C NACKs if APB access is attempted while I ² C is not APB master. |
| 6 | MAS_TO_DIS | APB master access timeout disable 0 (Default) Enabled 1 Disabled |
| 5:4 | MAS_TO_SEL | APB master access timeout select. Determines the timeout duration. 00 64 ms 01 128 ms 10 256 ms 11 (Default) 512 ms |
| 3 | ACC_TO_DIS | APB access timeout disable. 0 (Default) Enabled 1 Disabled |

| Bits | Name | Description |
|------|------------|--|
| 2:0 | ACC_TO_SEL | APB access timeout select. Determines the timeout duration in MCLKs. 000 7 MCLKs 010 31 MCLKs 100 127 MCLKs 110 511 MCLKs 001 15 MCLKs 011 63 MCLKs 101 255 MCLKs 111 (Default) 65,535 MCLKs |

7.2 Power Down and Headset Detects

7.2.1 Power Down Control 1

Address 0x1101

| R/W | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|---------|---|-------------|-----------|---|--------|---|---|---------|
| | — | ASP_DAI_PDN | MIXER_PDN | — | HP_PDN | — | — | PDN_ALL |
| Default | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |

| Bits | Name | Description |
|------|-------------|---|
| 7 | — | Reserved |
| 6 | ASP_DAI_PDN | ASP DAI0 input path power down. Configures ASP DAI0 SDIN path power state. 0 Powered up 1 (Default) Powered down. Setting this bit does not tristate the serial port clock. |
| 5 | MIXER_PDN | Mixer power down. Configures the mixer power state. 0 The mixer is powered up. 1 (Default) The mixer is powered down. |
| 4 | — | Reserved |
| 3 | HP_PDN | HPOUTx power down 0 The HP driver and DACx are powered up. 1 (Default) The HP driver and DACx are powered down. |
| 2:1 | — | Reserved |
| 0 | PDN_ALL | DAC power down. Configures the entire DAC's power state except for PLL_START. After power up (PDN_ALL: 1 → 0), individual subblocks are powered according to power-control programming. This bit is affected by LATCH_TO_VP (see p. 75). Note: The SRC power-down state depends on the SRC_PDN_OVERRIDE setting (see p. 63). 0 Powered up, per the individual x_PDN controls 1 (Default) Powered down. PDN_ALL must not be set without first enabling LATCH_TO_VP. After PDN_ALL is set and the entire DAC is powered down, PDN_DONE is set, indicating that SCLK can be removed. |

7.2.2 Power Down Control 2

Address 0x1102

| R/W | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|---------|---|---|---|-----------------|------------------|---|--------------|---|
| | — | — | — | DISCHARGE_FILT+ | SRC_PDN_OVERRIDE | — | DAC_SRC_PDNB | — |
| Default | 1 | 0 | 0 | 0 | 0 | 1 | 0 | 0 |

| Bits | Name | Description |
|------|------------------|---|
| 7:5 | — | Reserved |
| 4 | DISCHARGE_FILT+ | Discharge FILT+ capacitor. Configures the state of the FILT+ pin internal clamp. Before setting this bit, ensure that the VD_FILT device input is connected to a supply, as shown in Table 3-2. 0 (Default) FILT+ is not clamped to ground. 1 FILT+ is clamped to ground. This must be set only if PDN_ALL = 1. Discharge time with an external 2.2-μF capacitor on FILT+ is ~46 ms. |
| 3 | SRC_PDN_OVERRIDE | SRC power down override. Configures the SRCs' power states. 0 (Default) Power state control for the DAC SRCs, which are controlled by the following smart logic: <ul style="list-style-type: none"> • DAC SRCs are off if SRC_BYPASS_DAC = 1. • If PDN_ALL = 1, all SRCs are off. • If PDN_ALL = 0 and the respective DAC bypass bits = 0, the following controls each SRC's power state: <ul style="list-style-type: none"> –If DAI0 is enabled, the DAC SRCs are powered up. –If DAI0 is disabled, the DAC SRCs are powered down. 1 DAC SRCs are controlled by DAC_SRC_PDNB. |
| 2 | — | Reserved |
| 1 | DAC_SRC_PDNB | DAC SRC power down. Configures the DAC ASP power state if SRC_PDN_OVERRIDE = 1. 0 (Default) Power down 1 Power up audio DAC SRC only |
| 0 | — | Reserved |

7.2.3 Power Down Control 3
Address 0x1103

| | | | | | | | | |
|---------|---|---|---|---|---|------------|---|---|
| R/W | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | — | | | VPMON_PDNB | | — |
| Default | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 |

| Bits | Name | Description |
|------|------------|--|
| 7:3 | — | Reserved |
| 2 | VPMON_PDNB | VPMON power down. VP monitor is described in Section 4.9.1 . 0 (Default) Power down VPMON. 1 Power up VPMON. |
| 1:0 | — | Reserved |

7.2.4 Oscillator Switch Control
Address 0x1107

| | | | | | | | | |
|---------|---|---|---|---|---|---|---|--------------|
| R/W | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | — | | | | SCLK_PRESENT |
| Default | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| Bits | Name | Description |
|------|--------------|---|
| 7:1 | — | Reserved |
| 0 | SCLK_PRESENT | SCLK present. Used to select the internal MCLK source. See Section 4.4 for programming details. 0→1 transition starts switch from RCO to selected internal MCLK (SCLK must be running first). 1→0 transition starts switch from selected internal MCLK to RCO (SCLK must keep running during transition). 0 (Default) SCLK may be present, but the internal MCLK is sourced from the RCO. 1 SCLK is present and the internal MCLK is sourced from the SCLK pin. |

7.2.5 Oscillator Switch Status
Address 0x1109

| | | | | | | | | |
|---------|---|---|---|---|---|---------------|-----------------|---|
| R/O | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | — | | | OSC_PDNB_STAT | OSC_SW_SEL_STAT | |
| Default | 0 | 0 | 0 | 0 | 0 | 1 | x | x |

| Bits | Name | Description |
|------|-----------------|--|
| 7:3 | — | Reserved |
| 2 | OSC_PDNB_STAT | RCO power-down status. Indicates the RCO power state. See Section 4.4 for programming details. 0 RCO powered down 1 (Default) RCO powered up |
| 1:0 | OSC_SW_SEL_STAT | RCO switch status. Indicates the RCO oscillator switch status. See Section 4.4 for programming details. 00 In transition 10–11 Reserved 01 (Default) RCO selected for internal MCLK |

7.2.6 Tip Sense Control 1
Address 0x1113

| | | | | | | | | |
|---------|--------|---|---|--------------------|---|---|--------------------|---|
| R/W | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | TS_INV | — | | TS_FALL_DBNCE_TIME | | | TS_RISE_DBNCE_TIME | |
| Default | 0 | 0 | 0 | 1 | 1 | 0 | 1 | 1 |

| Bits | Name | Description |
|------|--------------------|---|
| 7 | TS_INV | Tip sense raw signal invert. Used to invert the raw signal from the tip-sense circuit. Reverses the meaning of TS_UNPLUG_DBNC and TS_PLUG_DBNC (see p. 65). 0 (Default) Not inverted 1 Inverted |
| 6 | — | Reserved |
| 5:3 | TS_FALL_DBNCE_TIME | Tip sense falling debounce time. Section 4.8.3 gives programming details. 000 0 ms 001 125 ms 010 250 ms 011 (Default) 500 ms 100 750 ms 101 1.0 s 110 1.25 s 111 1.5 s |
| 2:0 | TS_RISE_DBNCE_TIME | Tip sense rising debounce time. Section 4.8.3 gives programming details. 000 0 ms 001 125 ms 010 250 ms 011 (Default) 500 ms 100 750 ms 101 1.0 s 110 1.25 s 111 1.5 s |

7.2.7 Tip Sense Indicator Status
Address 0x1115

| | | | | | | | | |
|---------|---|---|---|---|----------------|--------------|---|---|
| R/O | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | — | | | | TS_UNPLUG_DBNC | TS_PLUG_DBNC | — | |
| Default | 0 | 0 | 0 | 0 | x | x | x | x |

| Bits | Name | Description |
|------|----------------|---|
| 7:4 | — | Reserved |
| 3 | TS_UNPLUG_DBNC | Tip sense unplug debounce status. See Section 4.8.3 for details. Setting TS_INV reverses the meaning of this bit. 0 Condition is not present. 1 Condition is present. |
| 2 | TS_PLUG_DBNC | Tip sense plug debounce status. See Section 4.8.3 for details. Setting TS_INV reverses the meaning of this bit. 0 Condition is not present. 1 Condition is present. |
| 1:0 | — | Reserved |

7.3 Clocking Registers
7.3.1 MCLK Source Select
Address 0x1201

| | | | | | | | | |
|---------|---|---|---|---|---|---|---------|--------------|
| R/W | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | — | | | | | | MCLKDIV | MCLK_SRC_SEL |
| Default | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| Bits | Name | Description |
|------|--------------|--|
| 7:2 | — | Reserved |
| 1 | MCLKDIV | Master clock divide ratio. Selects the divide ratio between the selected MCLK source and the MCLK _{INT} . Section 4.4.2 lists supported MCLK rates and their associated programming settings. 0 (Default) Divide by 1 (source MCLK _{INT} = ~12 MHz). 1 Divide by 2 (source MCLK _{INT} = ~24 MHz) Note: Change this field only if PDN_ALL = 1. |
| 0 | MCLK_SRC_SEL | Master clock source select. Selects the internal master clock source. For programming details and examples, see Section 4.4 . 0 (Default) SCLK pin 1 PLL clock |

7.3.2 FSYNC Pulse Width, Lower Byte
Address 0x1203

| | | | | | | | | |
|---------|----------------------|---|---|---|---|---|---|---|
| R/W | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | FSYNC_PULSE_WIDTH_LB | | | | | | | |
| Default | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| Bits | Name | Description |
|------|----------------------|---|
| 7:0 | FSYNC_PULSE_WIDTH_LB | FSYNC pulse width LB. FSYNC_PULSE_WIDTH_UB FSYNC_PULSE_WIDTH_LB provides an 11-bit field to set the duty cycle of LRCK in Hybrid-Master Mode. These combined value forms an integer number of SCLK periods within an LRCK frame that governs the LRCK high time. See Section 4.5.2 for usage details and Section 5 for a programming example. The value must be 1 less than the desired width of the LRCK pulse, measured in SCLK counts, as illustrated by the value below. FSYNC_PULSE_WIDTH_UB FSYNC_PULSE_WIDTH_LB yield the following setting value: 000 0000 0000 (Default) LRCK is one SCLK wide. |

7.3.3 FSYNC Pulse Width, Upper Byte
Address 0x1204

| | | | | | | | | |
|---------|---|---|---|---|----------------------|---|---|---|
| R/W | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | — | | | | FSYNC_PULSE_WIDTH_UB | | | |
| Default | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| Bits | Name | Description |
|------|----------------------|--|
| 7:3 | — | Reserved |
| 2:0 | FSYNC_PULSE_WIDTH_UB | FSYNC pulse width UB. See description for FSYNC_PULSE_WIDTH_LB in Section 7.3.2 . 000 (Default) |

7.3.4 FSYNC Period, Lower Byte
Address 0x1205

| | | | | | | | | |
|---------|-----------------|---|---|---|---|---|---|---|
| R/W | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | FSYNC_PERIOD_LB | | | | | | | |
| Default | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 1 |

| Bits | Name | Description |
|------|-----------------|---|
| 7:0 | FSYNC_PERIOD_LB | FSYNC period LB. FSYNC_PERIOD_UB FSYNC_PERIOD_LB controls frequency (number of SCLKs per LRCK) of LRCK for ASP. Section 4.5.2 for details on how this register is used and Section 5 for a programming example. The final SCLKs per LRCK count is +1 of the value set in the UB LB register field FSYNC_PERIOD_UB FSYNC_PERIOD_LB yield the following setting values: 0x000_1 SCLK/LRCK ... 0x0F9 (Default) 250 SCLKs/ LRCK ... 0xFFFF 4096 SCLKs/ LRCK |

7.3.5 FSYNC Period, Upper Byte
Address 0x1206

| | | | | | | | | |
|---------|-----------------|---|---|---|---|---|---|---|
| R/W | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | FSYNC_PERIOD_UB | | | | | | | |
| Default | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| Bits | Name | Description |
|------|-----------------|---|
| 7:4 | — | Reserved |
| 3:0 | FSYNC_PERIOD_UB | FSYNC period UB. See description for FSYNC_PERIOD_LB in Section 7.3.4 . 0000 (Default) |

7.3.6 ASP Clock Configuration 1
Address 0x1207

| | | | | | | | | |
|---------|---|-------------|-----------------|---|---|------------------|---------------|--------------|
| R/W | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | — | ASP_SCLK_EN | ASP_HYBRID_MODE | — | — | ASP_SCPOL_IN_DAC | ASP_LCPOL_OUT | ASP_LCPOL_IN |
| Default | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| Bits | Name | Description |
|------|------------------|--|
| 7:6 | — | Reserved |
| 5 | ASP_SCLK_EN | ASP SCLK enable. Must be set if DAI functionality is used. 0 (Default) Disabled 1 Enabled |
| 4 | ASP_HYBRID_MODE | ASP Hybrid-Master Mode. Allows the internal LRCK to be generated from SCLK. See Fig. 4-15 for details. 0 (Default) LRCK is input from external source which is synchronous to SCLK (Slave Mode). 1 LRCK is an output generated from SCLK (Hybrid Master Mode). |
| 3 | — | Reserved |
| 2 | ASP_SCPOL_IN_DAC | ASP SCLK input polarity. Determines the polarity for the DAC path. See Fig. 4-15 for details. 0 (Default) SDIN latched on falling edge 1 SDIN latched on rising edge |
| 1 | ASP_LCPOL_OUT | ASP LRCK output drive polarity. Determines the polarity for the ASP LRCK output drive. See Fig. 4-15 for details. 0 (Default) Normal 1 Inverted |
| 0 | ASP_LCPOL_IN | ASP LRCK input polarity. Determines ASP LRCK input polarity (pad to logic). See Fig. 4-15 for details. 0 (Default) Normal 1 Inverted |

7.3.7 ASP Frame Configuration
Address 0x1208

| | | | | | | | | |
|---------|---|---|---|---------|----------|---------|---|---|
| R/W | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | — | | | ASP_STP | ASP_5050 | ASP_FSD | | |
| Default | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 |

| Bits | Name | Description |
|------|----------|--|
| 7:5 | — | Reserved |
| 4 | ASP_STP | ASP start phase. Controls which LRCK/FSYNC phase starts a frame. See Section 4.5.5 for details. 0 The frame begins when LRCK/FSYNC transitions from high to low 1 (Default) The frame begins when LRCK/FSYNC transitions from low to high |
| 3 | ASP_5050 | ASP LRCK fixed 50/50 duty cycle. Determines whether the duty cycle is fixed or programmable. See Section 4.5.5 for details. 0 (Default) Programmable duty cycle. Determined by FSYNC_PULSE_WIDTH_LB (see p. 65), FSYNC_PULSE_WIDTH_UB , and FSYNC_PERIOD_xSB (see p. 66). 1 50/50 Mode. Fixed 50% duty cycle |
| 2:0 | ASP_FSD | ASP frame-start delay. Determines the delay before the start of an ASP frame in ASP_SCLK periods. See Section 4.5.2 . 000 (Default) 0 delay 001 0.5 delay 010 1.0 delay ... 101 2.5 delay 110–111 Reserved |

7.3.8 FS Rate Enable
Address 0x1209

| | | | | | | | | |
|---------|---|---|---|---|---|---|-------|---|
| R/W | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | — | | | | | | FS_EN | |
| Default | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| Bits | Name | Description |
|------|-------|---|
| 7:3 | — | Reserved |
| 2:0 | FS_EN | Fs rate enable. Provides enables for all internally generated Fs rates. 0 = disabled; 1 = enabled. Section 4.6 gives details. FS_EN[0] Enable IASRC 96K and lower rates. FS_EN[2] Enable IASRC 192, 176.4, and 176.471 K rates 00 (Default) All disabled |

7.3.9 Input ASRC Clock Select
Address 0x120A

| | | | | | | | | |
|---------|---|---|---|---|---|---|---------------|---|
| R/W | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | — | | | | | | CLK_IASRC_SEL | |
| Default | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| Bits | Name | Description |
|------|---------------|--|
| 7:2 | — | Reserved |
| 1:0 | CLK_IASRC_SEL | Input ASRC clock select. Selects input ASRC MCLK _{INT} frequency. See Section 4.6 for programming details. 00 (Default) 6 MHz 01 12 MHz 10 24 MHz 11 Reserved |

7.3.10 PLL Divide Configuration 1
Address 0x120C

| | | | | | | | | |
|---------|---|---|---|---|-------------|-------------|---|---|
| R/W | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | — | | | | PLL_REF_INV | SCLK_PREDIV | | |
| Default | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| Bits | Name | Description |
|------|-------------|--|
| 7:3 | — | Reserved |
| 2 | PLL_REF_INV | Invert PLL reference clock. See Table 4.4.3 for programming guidelines. 0 (Default) Normal 1 Inverted |
| 1:0 | SCLK_PREDIV | PLL reference divide select. See Table 4.4.3 for programming guidelines. 00 (Default) Divide by 1 01 Divide by 2 10 Divide by 4 11 Divide by 8 |

7.4 Interrupt Registers

7.4.1 Channel Overflow Interrupt Status

Address 0x1302

| | | | | | | | | |
|---------|---|---|---|---|---|---|----------|----------|
| R/O | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | — | | | | | | CHA_OVFL | CHB_OVFL |
| Default | 0 | 0 | 0 | 0 | x | x | x | x |

| Bits | Name | Description |
|------|----------|---|
| 7:2 | — | Reserved |
| 1 | CHA_OVFL | Channel overflow. Indicates the overrange status in the corresponding signal path. Rising-edge state transitions may cause an interrupt, depending on the programming of the associated interrupt mask bit. |
| 0 | CHB_OVFL | 0 No digital clipping has occurred in the data path of the respective signal source. 1 Digital clipping has occurred in the data path of the respective signal source. |

7.4.2 SRC Interrupt Status

Address 0x1303

| | | | | | | | | |
|---------|---|---|---|---|---|-----------|---|---------|
| R/O | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | — | | | | | SRC_IUNLK | — | SRC_ILK |
| Default | 0 | 0 | 0 | 0 | x | x | x | x |

| Bits | Name | Description |
|------|-----------|--|
| 7:3 | — | Reserved |
| 2 | SRC_IUNLK | SRC unlock status. Indicates SRC unlock status for the input path. Status is valid only if serial-port LRCK is toggling. 0 Locked 1 Unlocked |
| 1 | — | Reserved |
| 0 | SRC_ILK | SRC lock status. Indicates SRC lock status for the ASP input path. Status is valid only if serial-port LRCK is toggling. 0 Unlocked 1 Locked |

7.4.3 ASP RX Interrupt Status

Address 0x1304

| | | | | | | | | |
|---------|---|---|---|------------|-------------|------------|-------------|--------------|
| R/O | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | — | | | ASPRX_OVLD | ASPRX_ERROR | ASPRX_LATE | ASPRX_EARLY | ASPRX_NOLRCK |
| Default | 0 | 0 | 0 | x | x | x | x | x |

| Bits | Name | Description |
|------|--------------|---|
| 7:5 | — | Reserved |
| 4 | ASPRX_OVLD | ASP RX request overload. Set when too many input buffers request processing at once. 0 No interrupt 1 Interrupt detected. ASP RX cannot retrieve data from the internal input buffers because at least one of the following violations has occurred: —The ASP RX core clock frequency is less than SCLK/8. —The LRCK frame (non-50/50 Mode) or LRCK subframe (50/50 Mode) period is less than 16 SCLK periods (assuming the ASP RX core clock frequency is equal to SCLK/8). |
| 3 | ASPRX_ERROR | ASP RX LRCK error. Logical OR of ASPRX_LATE and ASPRX_EARLY, described below. 0 No interrupt 1 Interrupt detected |
| 2 | ASPRX_LATE | ASP RX LRCK late. Determines whether the number of SCLK periods per LRCK phase (high or low) is greater than the expected count, as determined by the FSYNC_PERIOD_xSB and FSYNC_PULSE_WIDTH_x fields. 0 No interrupt 1 Interrupt detected |
| 1 | ASPRX_EARLY | ASP RX LRCK early. Determines whether the number of SCLK periods per LRCK phase (high or low) is less than the expected count, as determined by FSYNC_PERIOD_xSB (see p. 66) and FSYNC_PULSE_WIDTH_x (see p. 65). 0 No interrupt 1 Interrupt detected |
| 0 | ASPRX_NOLRCK | ASP RX no LRCK. Determines whether the SCLK periods counted exceeds twice the value of LRCK period (FSYNC_PERIOD_xSB) without an LRCK edge. 0 No interrupt 1 Interrupt detected |

7.4.4 DAC Interrupt Status
Address 0x1308

| | | | | | | | | |
|---------|---|---|---|---|---|---|---|----------|
| R/O | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | — | | | | PDN_DONE |
| Default | 0 | 0 | 0 | 0 | 0 | 0 | 0 | x |

| Bits | Name | Description |
|------|----------|--|
| 7:1 | — | Reserved |
| 0 | PDN_DONE | Power-down done. Indicates when the DAC has powered down and MCLK can be stopped, as determined by various power-control and headset-interface register settings. 0 Not completely powered down 1 Powered down as a result of PDN_ALL having been set. |

7.4.5 Detect Interrupt Status 1
Address 0x1309

| | | | | | | | | |
|---------|---|----------------|------------------|---|---|---|---|---|
| R/O | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | — | TIP_SENSE_PLUG | TIP_SENSE_UNPLUG | | | — | | |
| Default | x | x | x | x | x | x | x | x |

| Bits | Name | Description |
|------|------------------|---|
| 7 | — | Reserved |
| 6 | TIP_SENSE_PLUG | Tip sense plug event. Indicates the undebounced status of a plug event on the TIP_SENSE pin. ¹ 0 No HP plug event 1 HP plug event |
| 5 | TIP_SENSE_UNPLUG | Tip sense unplug event. Indicates the undebounced status of an unplug event on the TIP_SENSE pin. ¹ 0 (Default) No HP unplug event 1 HP unplug event |
| 4:0 | — | Reserved |

1. It is active only if [TIP_SENSE_CTRL](#) (p. 75) is configured so the tip-sense circuit is powered up. If the system is configured for standby operation, the sticky version of this bit (that also accounts for events that occurred during standby) can be read back after a wake event.

7.4.6 SRC Partial Lock Interrupt Status
Address 0x130B

| | | | | | | | | |
|---------|---|----------|---|---|---|--------|---|---|
| R/O | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | — | DAC_UNLK | | — | | DAC_LK | | — |
| Default | x | x | x | x | x | x | x | x |

| Bits | Name | Description |
|------|----------|--|
| 7 | — | Reserved |
| 6 | DAC_UNLK | ASP input SRC unlock status. 0 Locked 1 Unlocked |
| 5:3 | — | Reserved |
| 2 | DAC_LK | ASP input partial SRC lock status. 0 Unlocked 1 Locked |
| 1:0 | — | Reserved |

7.4.7 VP Monitor Interrupt Status
Address 0x130D

| | | | | | | | | |
|---------|---|---|---|---|---|---|---|------------|
| R/O | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | — | | | | VPMON_TRIP |
| Default | 0 | 0 | 0 | 0 | 0 | 0 | 0 | x |

| Bits | Name | Description |
|------|------------|---|
| 7:1 | — | Reserved |
| 0 | VPMON_TRIP | VP monitor interrupt. If the VP power supply falls below 2.6 V, this bit is set. See Section 4.9.1 for details. 0 No interrupt 1 Interrupt detected |

7.4.8 PLL Lock Interrupt Status
Address 0x130E

| | | | | | | | | |
|---------|---|---|---|---|---|---|---|----------|
| R/O | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | — | | | | PLL_LOCK |
| Default | 0 | 0 | 0 | 0 | 0 | 0 | 0 | x |

| Bits | Name | Description |
|------|----------|--|
| 7:1 | — | Reserved |
| 0 | PLL_LOCK | PLL lock. Indicates the lock state of the PLL. 0 No interrupt 1 Interrupt detected |

7.4.9 Tip Sense Plug/Unplug Interrupt Status
Address 0x130F

| | | | | | | | | |
|---------|---|---|---|---|-----------|---------|---|---|
| R/O | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | | TS_UNPLUG | TS_PLUG | | — |
| Default | 0 | 0 | 0 | 0 | x | x | x | x |

| Bits | Name | Description |
|------|-----------|--|
| 7:4 | — | Reserved |
| 3 | TS_UNPLUG | Tip sense unplug status. See Section 4.8.3 for details. Setting TS_INV reverses the meaning of this bit. 0 Condition is not present. 1 Condition is present. |
| 2 | TS_PLUG | Tip sense plug status. See Section 4.8.3 for details. Setting TS_INV reverses the meaning of this bit. 0 Condition is not present. 1 Condition is present. |
| 1:0 | — | Reserved |

7.4.10 Mixer Interrupt Mask
Address 0x1317

| | | | | | | | | |
|---------|---|---|---|---|---|---|------------|------------|
| R/W | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | — | | | M_CHA_OVFL | M_CHB_OVFL |
| Default | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 |

| Bits | Name | Description |
|------|------------|----------------------------------|
| 7:2 | — | Reserved |
| 1 | M_CHA_OVFL | CHx_OVFL mask. |
| 0 | M_CHB_OVFL | 0 Unmasked 1 (Default) Masked |

7.4.11 SRC Interrupt Mask
Address 0x1318

| | | | | | | | | |
|---------|---|---|---|---|---|-------------|---|-----------|
| R/W | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | | | M_SRC_IUNLK | — | M_SRC_ILK |
| Default | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 |

| Bits | Name | Description |
|------|-------------|---|
| 7:3 | — | Reserved |
| 2 | M_SRC_IUNLK | SRC_IUNLK mask. 0 Unmasked 1 (Default) Masked |
| 1 | — | Reserved |
| 0 | M_SRC_ILK | SRC_ILK mask. 0 Unmasked 1 (Default) Masked |

7.4.12 ASP RX Interrupt Mask
Address 0x1319

| | | | | | | | | |
|---------|---|---|---|--------------|---------------|--------------|---------------|----------------|
| R/W | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | — | | M_ASPRX_OVLD | M_ASPRX_ERROR | M_ASPRX_LATE | M_ASPRX_EARLY | M_ASPRX_NOLRCK |
| Default | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 |

| Bits | Name | Description |
|------|----------------|--|
| 7:5 | — | Reserved |
| 4 | M_ASPRX_OVLD | ASPRX_OVFL mask. 0 Unmasked 1 (Default) Masked |
| 3 | M_ASPRX_ERROR | ASPRX_ERROR mask. 0 Unmasked 1 (Default) Masked |
| 2 | M_ASPRX_LATE | ASPRX_LATE mask. 0 Unmasked 1 (Default) Masked |
| 1 | M_ASPRX_EARLY | ASPRX_EARLY mask. 0 Unmasked 1 (Default) Masked |
| 0 | M_ASPRX_NOLRCK | ASPRX_NOLRCK mask. 0 Unmasked 1 (Default) Masked |

7.4.13 DAC Interrupt Mask
Address 0x131B

| | | | | | | | | |
|---------|---|---|---|---|---|---|---|------------|
| R/W | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | — | | | | M_PDN_DONE |
| Default | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 |

| Bits | Name | Description |
|------|------------|--|
| 7:1 | — | Reserved |
| 0 | M_PDN_DONE | PDN_DONE mask. 0 Unmasked 1 (Default) Masked |

7.4.14 SRC Partial Lock Interrupt Mask
Address 0x131C

| | | | | | | | | |
|---------|---|------------|---|---|---|----------|---|---|
| R/W | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | — | M_DAC_UNLK | | — | | M_DAC_LK | | — |
| Default | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |

| Bits | Name | Description |
|------|------------|--|
| 7 | — | Reserved |
| 6 | M_DAC_UNLK | ASP input unlock mask. 0 Unmasked 1 (Default) Masked |
| 5–3 | — | Reserved |
| 2 | M_DAC_LK | ASP input lock mask. 0 Unmasked 1 (Default) Masked |
| 1:0 | — | Reserved |

7.4.15 VP Monitor Interrupt Mask
Address 0x131E

| | | | | | | | | |
|---------|---|---|---|---|---|---|---|--------------|
| R/W | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | — | | | | | | | M_VPMON_TRIP |
| Default | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 |

| Bits | Name | Description |
|------|--------------|---|
| 7:1 | — | Reserved |
| 0 | M_VPMON_TRIP | VP monitor mask. 0 Unmasked. Unmask/enable this bit only when VP exceeds the detection voltage threshold; applicable to power-up conditions or if VP is not at its steady-state voltage. 1 (Default) Masked |

7.4.16 PLL Lock Mask
Address 0x131F

| | | | | | | | | |
|---------|---|---|---|---|---|---|---|------------|
| R/W | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | — | | | | | | | M_PLL_LOCK |
| Default | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 |

| Bits | Name | Description |
|------|------------|--|
| 7:1 | — | Reserved |
| 0 | M_PLL_LOCK | PLL lock mask. 0 Unmasked 1 (Default) Masked |

7.4.17 Tip Sense Plug/Unplug Interrupt Mask
Address 0x1320

| | | | | | | | | |
|---------|---|---|---|---|-------------|-----------|---|---|
| R/W | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | — | | | | M_TS_UNPLUG | M_TS_PLUG | | — |
| Default | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 |

| Bits | Name | Description |
|------|-------------|--|
| 7:4 | — | Reserved |
| 3 | M_TS_UNPLUG | Tip sense unplug mask. 0 Unmasked 1 (Default) Masked |
| 2 | M_TS_PLUG | Tip sense plug mask. 0 Unmasked 1 (Default) Masked |
| 1:0 | — | Reserved |

7.5 Fractional-N PLL Registers
7.5.1 PLL Control 1
Address 0x1501

| | | | | | | | | |
|---------|---|---|---|---|---|---|---|-----------|
| R/W | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | — | | | | | | | PLL_START |
| Default | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| Bits | Name | Description |
|------|-----------|--|
| 7:1 | — | Reserved |
| 0 | PLL_START | PLL start. If MCLK_SRC_SEL = 0, the PLL is bypassed and can be powered down by clearing PLL_START. See Section 4.4.3 . 0 (Default) Powered off. 1 Powered on |

7.5.2 PLL Division Fractional Bytes 0–2
Address 0x1502–0x1504

| | | | | | | | | |
|---------|---------------------|---|---|---|---|---|---|---|
| R/W | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| 0x1502 | PLL_DIV_FRAC[7:0] | | | | | | | |
| 0x1503 | PLL_DIV_FRAC[15:8] | | | | | | | |
| 0x1504 | PLL_DIV_FRAC[23:16] | | | | | | | |
| Default | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| Bits | Name | Description |
|------|---------------------|--|
| 7:0 | PLL_DIV_FRAC[7:0] | PLL fractional portion of divide ratio LSB. See Section 4.4.3 for details. There are 3 bytes of PLL feedback divider fraction portion: This is LSB byte; e.g., 0xFF means $(2^{-17} + 2^{-18} + \dots + 2^{-24})$ 0000 0000 (Default) |
| 7:0 | PLL_DIV_FRAC[15:8] | PLL fractional portion of divide ratio middle byte; e.g., 0xFF means $(2^{-9} + 2^{-10} + \dots + 2^{-16})$. See Section 4.4.3 for details. 0000 0000 (Default) |
| 7:0 | PLL_DIV_FRAC[23:16] | PLL fractional portion of divide ratio MSB; e.g., 0xFF means $(2^{-1} + 2^{-2} + \dots + 2^{-8})$. See Section 4.4.3 for details. 0000 0000 (Default) |

7.5.3 PLL Division Integer
Address 0x1505

| | | | | | | | | |
|---------|-------------|---|---|---|---|---|---|---|
| R/W | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | PLL_DIV_INT | | | | | | | |
| Default | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 |

| Bits | Name | Description |
|------|-------------|---|
| 7:0 | PLL_DIV_INT | PLL integer portion of divide ratio. Integer portion of PLL feedback divider. See Section 4.4.3 for details. 0100 0000 (Default) |

7.5.4 PLL Control 3
Address 0x1508

| | | | | | | | | |
|---------|------------|---|---|---|---|---|---|---|
| R/W | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | PLL_DIVOUT | | | | | | | |
| Default | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 |

| Bits | Name | Description |
|------|------------|--|
| 7:0 | PLL_DIVOUT | Final PLL clock output divide value. See Section 4.4.3 for configuration details. 0001 0000 (Default) |

7.5.5 PLL Calibration Ratio
Address 0x150A

| | | | | | | | | |
|---------|---------------|---|---|---|---|---|---|---|
| R/W | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | PLL_CAL_RATIO | | | | | | | |
| Default | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| Bits | Name | Description |
|------|---------------|--|
| 7:0 | PLL_CAL_RATIO | PLL calibration ratio. See Section 4.4.3 for configuration details. Target value for PLL VCO calibration. 1000 0000 (Default) |

7.5.6 PLL Control 4
Address 0x151B

| | | | | | | | | | |
|---------|---|---|---|---|---|---|---|----------|--|
| R/W | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |
| | — | | | | | | | PLL_MODE | |
| Default | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | |

| Bits | Name | Description |
|------|----------|---|
| 7:2 | — | Reserved |
| 1:0 | PLL_MODE | PLL bypass mode. Configures 500/512 and 1029/1024 factor bypasses. See Section 4.4.3 for configuration details. 00 Unsupported 10 1029/1024 only (500/512 bypassed) 01 500/512 only (1029/1024 bypassed) 11 (Default) Both bypassed |

7.6 HP Load-Detect Registers

7.6.1 Load-Detect R/C Status

Address 0x1925

| | | | | | | | | |
|---------|---|---|---|----------|---|---|---|----------|
| R/O | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | — | | CLA_STAT | | — | | RLA_STAT |
| Default | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| Bits | Name | Description |
|------|----------|---|
| 7:6 | — | Reserved |
| 4 | CLA_STAT | Capacitor load-detection result for HPA. See Section 4.2.2 for details. Note: Low capacitance results were determined with $C_L = 1$ nF; high capacitance results were determined with $C_L = 10$ nF. 0 (Default) High capacitance ($C_L \geq \sim 2$ nF) 1 Low capacitance ($C_L < \sim 2$ nF) |
| 1:0 | RLA_STAT | Resistor load-detection result for HPA. See Section 4.2.2 for details. 00 (Default) 15 Ω 10 3 k Ω 01 30 Ω 11 Reserved |

7.6.2 HP Load Detect Done

Address 0x1926

| | | | | | | | | |
|---------|---|---|---|---|---|---|---|-----------------|
| R/O | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | — | | | | HPLOAD_DET_DONE |
| Default | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| Bits | Name | Description |
|------|-----------------|--|
| 7:1 | — | Reserved |
| 0 | HPLOAD_DET_DONE | HP load detect done. Indicates whether HP load detection is finished. See Section 4.2.2 for details. 0 (Default) HP load is not finished. 1 HP load is finished. |

7.6.3 HP Load Detect Enable

Address 0x1927

| | | | | | | | | |
|---------|---|---|---|---|---|---|---|----------|
| R/O | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | — | | | | HP_LD_EN |
| Default | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| Bits | Name | Description |
|------|----------|--|
| 7:1 | — | Reserved |
| 0 | HP_LD_EN | HP load detect enable. A 0-to-1 bit transition initiates load detection. See Section 4.2.2 for details. 0 (Default) Disabled 1 Enabled |

7.7 Headset Interface Registers

7.7.1 Wake Control

Address 0x1B71

| | | | | | | | | |
|---------|---|-----------|------------|---|---|---|---|-------------|
| R/W | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | — | M_HP_WAKE | WAKEB_MODE | | — | | | WAKEB_CLEAR |
| Default | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 |

| Bits | Name | Description |
|------|------------|---|
| 7 | — | Reserved |
| 6 | M_HP_WAKE | Mask tip sense wake. ¹ Configures the mask for the tip-sense wake status. 0 Unmasked. The occurrence of a wake interrupt affects \overline{WAKE} . Before unmasking, pending wake events must be cleared via WAKEB_CLEAR. 1 (Default) Masked. The occurrence of a wake interrupt does not affect \overline{WAKE} . |
| 5 | WAKEB_MODE | WAKE output mode. ¹ Configures the mode of operation for the WAKE output 0 (Default) Output is latched low after a trigger event until WAKEB_CLEAR is toggled. 1 Output follows the combination logic directly (nonlatched). |
| 4:1 | — | Reserved |

| Bits | Name | Description |
|------|-------------|---|
| 0 | WAKEB_CLEAR | WAKE output clear. Applicable only if WAKEB_MODE = 0 and an event triggers the WAKE output to latch low. 0 (Default) WAKE output normal operation. If WAKEB_MODE = 1, WAKEB_CLEAR does not deassert WAKE, but clears TIP_SENSE_PLUG, TIP_SENSE_UNPLUG in the VP domain. 1 WAKE output deasserted (the TIP_SENSE_PLUG, TIP_SENSE_UNPLUG bits in the VP domain are also cleared). |

1. This bit can be changed only if [LATCH_TO_VP](#) is enabled (see p. 75).

7.7.2 Tip Sense Control 2

Address 0x1B73

| R/W | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|---------|----------------|---------------|---|---|---|---|--------------------|---|
| | TIP_SENSE_CTRL | TIP_SENSE_INV | — | — | — | — | TIP_SENSE_DEBOUNCE | — |
| Default | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 |

| Bits | Name | Description |
|------|--------------------|---|
| 7:6 | TIP_SENSE_CTRL | Tip sense control. Configures operation of the tip-sense circuit. Note: This bit can be updated only if LATCH_TO_VP (see p. 75) is enabled. 00 (Default) Disabled. The tip-sense circuit is powered down and does not report to the status registers (TIP_SENSE_PLUG and TIP_SENSE_UNPLUG in the VP domain are also cleared). 01 Digital input. Internal weak current source pull-up is disabled. 10 Reserved 11 Short detect. Internal weak current source pull-up is enabled. |
| 5 | TIP_SENSE_INV | Tip sense invert. Used to invert the signal from the tip-sense circuit. Updatable only if LATCH_TO_VP is enabled. 0 (Default) Not inverted 1 Inverted |
| 4:2 | — | Reserved |
| 1:0 | TIP_SENSE_DEBOUNCE | Tip sense debounce time. Sets tip sense unplug event (TIP_SENSE = 0) debounce time before status is reported. Timings are approximate and vary with MCLK _{INT} and FS _{INT} . 00 No debounce 01 200 ms 10 (Default) 500 ms 11 1000 ms |

7.7.3 Mic Detect Control 1

Address 0x1B75

| R/W | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|---------|-------------|------------------|---|---|---|---|---|---|
| | LATCH_TO_VP | EVENT_STATUS_SEL | — | — | — | — | — | — |
| Default | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 |

| Bits | Name | Description |
|------|------------------|---|
| 7 | LATCH_TO_VP | Latch to VP registers. Controls the transfer of writable control registers in the VD_FILT supply domain to duplicate registers in the VP supply domain. Can be used to enable setting sticky status bits in the VP domain. 0 (Default) Inhibits the transfer of VD_FILT registers to VP registers (latched mode). Enables the setting of VP sticky status latches. 1 Transfers VD_FILT fields to VP fields (transparent mode). Disables setting of VP sticky status latches. Affected registers: • TIP_SENSE_CTRL on p. 75 • M_HP_WAKE on p. 74 • WAKEB_MODE p. 74 • TIP_SENSE_INV on p. 75 Note: The description of PDN_ALL on p. 63 describes the interdependency between LATCH_TO_VP and PDN_ALL. |
| 6 | EVENT_STATUS_SEL | Event status selection. Selects the level of processing on readable status originating in the VP supply domain. 0 (Default) Raw (unprocessed) status events are selected. 1 Sticky processed status events are selected. Affected registers: • TIP_SENSE_PLUG on p. 69 • • TIP_SENSE_UNPLUG on p. 69 |
| 5:0 | — | Reserved |

7.7.4 Detect Status 1
Address 0x1B77

| | | | | | | | | |
|---------|-----------|---|---|---|---|---|---|---|
| R/O | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | TIP_SENSE | | — | | | | | |
| Default | x | x | 0 | x | x | x | x | x |

| Bits | Name | Description |
|------|-----------|--|
| 7 | TIP_SENSE | TIP_SENSE circuit status. The plug-to-unplug edge is debounced for the set debounce time (see TIP_SENSE_DEBOUNCE , p. 75). 0 HP not plugged in 1 HP plugged in |
| 6:0 | — | Reserved |

7.7.5 Detect Interrupt Mask 1
Address 0x1B79

| | | | | | | | | |
|---------|---|------------------|--------------------|---|---|---|---|---|
| R/W | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | — | M_TIP_SENSE_PLUG | M_TIP_SENSE_UNPLUG | — | | | | |
| Default | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 |

Interrupt mask register bits serve as a mask for the interrupt sources in the interrupt status registers. Interrupts are described in [Section 4.12](#).

| Bits | Name | Description |
|------|--------------------|---|
| 7 | — | Reserved |
| 6 | M_TIP_SENSE_PLUG | TIP_SENSE_PLUG mask 0 Unmasked 1 (Default) Masked |
| 5 | M_TIP_SENSE_UNPLUG | TIP_SENSE_UNPLUG mask 0 Unmasked 1 (Default) Masked |
| 4:0 | — | Reserved |

7.8 DAC Control Registers
7.8.1 DAC Control 1
Address 0x1F01

| | | | | | | | | |
|---------|---|---|---|---|---|---|----------|----------|
| R/W | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | — | | | | | | DACB_INV | DACA_INV |
| Default | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| Bits | Name | Description |
|------|----------|--|
| 7:2 | — | Reserved |
| 1:0 | DACx_INV | DACx invert signal polarity. Configures the polarity of the DAC channel x signal. See Section 4.2 for details. 0 (Default) Not inverted 1 Inverted |

7.8.2 DAC Control 2
Address 0x1F06

| | | | | | | | | |
|---------|----------------|---|---|---|------------|-------------|------------|---|
| R/W | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | HPOUT_PULLDOWN | | | | HPOUT_LOAD | HPOUT_CLAMP | DAC_HPF_EN | — |
| Default | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 |

| Bits | Name | Description |
|------|----------------|---|
| 7:4 | HPOUT_PULLDOWN | Although bits 2:0 are independent, the final resistance from the resistor string is dictated by the lowest resistance chosen; e.g., if HPOUT_PULLDOWN = 1011, a nominal 6-kΩ pull-down resistance results even if 9.6-kΩ resistance is also selected. 0000 (Default) 0.9 kΩ 1000 No pull-down 1010 5.8 kΩ 1100 0.9 kΩ 0001–0111 0.9 kΩ 1001 9.3 kΩ 1011 Reserved 1101–1111 Reserved |
| 3 | HPOUT_LOAD | HP output load. Sets HP amplifier capacitive load capability. Table 3-7 gives output specifications. See Section 4.2 for details. 0 (Default) 1 nF Mode 1 10 nF Mode Note: The HP path must be powered down before reconfiguring this bit and repowered afterwards. See Section 4.2.2 . |

| Bits | Name | Description |
|------|-------------|--|
| 2 | HPOUT_CLAMP | HPOUT clamp. Configures an override of the HPOUT clamp to ground when the channels are powered down. 0 (Default) Clamp to ground when channels are powered down. 1 Clamp is disabled when the channels are powered down. The pulldown to GNDA depends on the HPOUT_PULLDOWN setting. |
| 1 | DAC_HP_FEN | DAC high-pass filter enable. Configures the internal HPF before DAC. Changes to this bit must be made only if PDN_ALL = 1. See Section 4.2 for details. 0 Disabled. This must be cleared only for test purposes. 1 (Default) Enabled. The corner frequency is set to 0.935 Hz when $F_{S_{INT}} = 48$ kHz. |
| 0 | — | Reserved |

7.9 HP Control Register

7.9.1 HP Control

Address 0x2001

| R/W | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|---------|---|---|---|---|------------|------------|----------------|---|
| | | | — | | ANA_MUTE_B | ANA_MUTE_A | FULL_SCALE_VOL | — |
| Default | 0 | 0 | 0 | 0 | 1 | 1 | 0 | 1 |

| Bits | Name | Description |
|------|----------------|--|
| 7:4 | — | Reserved |
| 3 | ANA_MUTE_B | Analog mute Channel B. See Section 4.2 for details. 0 Unmuted 1 (Default) Muted |
| 2 | ANA_MUTE_A | Analog mute Channel A. See Section 4.2 for details. 0 Unmuted 1 (Default) Muted |
| 1 | FULL_SCALE_VOL | Full-scale volume. Determines the maximum volume for the headphone output. See Section 4.2 for details. 0 (Default) 0 dB 1 –6 dB. This setting is recommended if the load is approximately 15 Ω. |
| 0 | — | Reserved |

7.10 Class H Register

7.10.1 Class H Control

Address 0x2101

| R/W | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|---------|---|---|---|---|---|---|---------|---|
| | | | — | | | | ADPTPWR | |
| Default | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 |

| Bits | Name | Description |
|------|---------|--|
| 7:3 | — | Reserved |
| 2:0 | ADPTPWR | Adaptive power adjustment. Configures how power to HP output amplifiers adapts to the output signal level. Section 4.2 gives detailed descriptions of supported settings. 000 Reserved 001 Fixed, Mode 0—VP_CP Mode (±2.5V) 010 Fixed, Mode 1—VCP Mode (±VCP) 011 Fixed, Mode 2—VCP/2 Mode (±VCP/2) 100 Fixed, Mode 3—VCP/3 Mode (±VCP/3) 101–110 Reserved 111 (Default) Adapt to signal. The output signal dynamically determines the voltage level. |

7.11 Volume Control

7.11.1 Channel A Input Volume

Address 0x2301

| R/W | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|---------|---|---|---|---|---------|---|---|---|
| | | — | | | CHA_VOL | | | |
| Default | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 |

| Bits | Name | Description |
|------|---------|--|
| 7:6 | — | Reserved |
| 5:0 | CHA_VOL | Input attenuation. Sets the attenuation level to be applied to various stereo digital inputs. See Section 4.1 for details. Each input can be muted or attenuated from –62 to 0 dB in 1-dB steps. 00 0000 0 dB 00 0001 –1.0 dB ... 11 1110 –62.0 dB 11 1111 (Default) Mute. |

7.11.2 Channel B Input Volume
Address 0x2303

| | | | | | | | | |
|---------|---|---|---|---------|---|---|---|---|
| R/W | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | — | | | CHB_VOL | | | | |
| Default | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 |

| Bits | Name | Description |
|------|---------|--|
| 7:6 | — | Reserved |
| 5:0 | CHB_VOL | Input attenuation. Sets the attenuation level to be applied to various stereo digital inputs. See Section 4.1 for details. Each input can be muted or attenuated from –62 to 0 dB in 1-dB steps. 00 0000 0 dB 11 1110 –62.0 dB 00 0001 –1.0 dB ... 11 1111 (Default) Mute. |

7.12 AudioPort Interface Registers
7.12.1 Serial Port Receive Channel Select
Address 0x2501

| | | | | | | | | |
|---------|---|---|---|---|---------------|---|---------------|---|
| R/W | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | — | | | | SP_RX_CHB_SEL | | SP_RX_CHA_SEL | |
| Default | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 |

| Bits | Name | Description |
|------|---------------|---|
| 7:4 | — | Reserved |
| 3:2 | SP_RX_CHB_SEL | SP RX Channel B select for DAI0. Selects right input channel. See Section 5 for programming examples. 00 Channel 0 01 (Default) Channel 1 10 Channel 2 11 Channel 3 |
| 1:0 | SP_RX_CHA_SEL | SP RX Channel A select for DAI0. Selects right input channel. 00 (Default) Channel 0 01 Channel 1 10 Channel 2 11 Channel 3 |

7.12.2 Serial Port Receive Isochronous Control
Address 0x2502

| | | | | | | | | |
|---------|---|------------|---------------|---|---|----------------|-----------------|---|
| R/W | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | — | SP_RX_RSYN | SP_RX_NSB_POS | | — | SP_RX_NFS_NSBB | SP_RX_ISOC_MODE | |
| Default | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 |

| Bits | Name | Description |
|------|-----------------|--|
| 7 | — | Reserved |
| 6 | SP_RX_RSYN | Serial port receive synchronization. 0 (Default) Normal state 1 Recenter the FIFO. No read and writes when asserted |
| 5:3 | SP_RX_NSB_POS | Serial-port receive null-sample bit position. Selects the position of the null byte in the resultant 16-, 24-, or 32-bit sample. For all samples, if SP_RX_ISOC_MODE ≠ 00, SP_RX_NFS_NSBB = 0, the following applies: • For a 16-bit sample (8-bit audio + null byte), [23:16] is the null byte. • For a 24-bit sample (16-bit audio + null byte), [15:8] is the null byte. • For a 32-bit sample (24-bit audio + null byte), [7:0] is the null byte. Note: NSB Mode does not support 32-bit audio samples. The ASP_RXn_CHn_RES fields in Section 7.14 set the output resolution of the ASP receive channel samples. Clearing SP_RX_NSB_POS indicates that Bit 0 must be zero for the sample to be classified as a null. 000 (Default) 0 ... 111 7 |
| 2 | SP_RX_NFS_NSBB | Serial-port receive NSB/NFS Mode select. 0 NSB Mode valid only if SP_RX_ISOC_MODE ≠ 00. 1 (Default) NFS Mode |
| 1:0 | SP_RX_ISOC_MODE | Serial port receive isochronous mode. Selecting an isochronous mode allows for null removal. The ASP Rx rate bits (SP_RX_FS , see p. 79) are used only to help the device determine when to insert nulls. 00 (Default) Native mode 10 96k isochronous stream 01 48k isochronous stream 11 192k isochronous stream |

7.12.3 Serial Port Receive Sample Rate
Address 0x2503

| | | | | | | | | |
|---------|---|---|---|----------|---|---|---|---|
| R/W | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | — | | | SP_RX_FS | | | | |
| Default | 1 | 0 | 0 | 0 | 1 | 1 | 0 | 0 |

| Bits | Name | Description |
|------|----------|--|
| 7:5 | — | Reserved |
| 4:0 | SP_RX_FS | SP receive sample rate. Configures the sample rate of the SRC F_{SI} when in Isochronous Mode. This setting autoscales when configuring for an isochronous rate of 96 or 192 kHz with respect to the 48-kHz isochronous rate, e.g., 24-kHz setting in isochronous rate of 48 kHz would be scaled to a 48-kHz setting in isochronous rate of 96 kHz. 0 0000 Reserved 0 0100 12.000 kHz 0 1000 24.000 kHz 0 1100 (Default) 48.000 kHz 1 0000 176.400 kHz 0 0001 8.00 kHz 0 0101 16.000 kHz 0 1001 32.000 kHz 0 1101 88.200 kHz 1 0001 176.472 kHz 0 0010 11.025 kHz 0 0110 22.050 kHz 0 1010 44.100 kHz 0 1110 88.236 kHz 1 0010 192.000 kHz 0 0011 11.0295 kHz 0 0111 22.059 kHz 0 1011 44.118 kHz 0 1111 96.000 kHz 1 0011–1 1111 Reserved |

7.13 SRC Registers
7.13.1 SRC Input Sample Rate
Address 0x2601

| | | | | | | | | |
|---------|---|---|---|-------------|---|---|---|---|
| R/W | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | — | | | SRC_SDIN_FS | | | | |
| Default | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 |

| Bits | Name | Description |
|------|-------------|--|
| 7:5 | — | Reserved |
| 4:0 | SRC_SDIN_FS | SRC input sample rate. Must equal F_{SINT} if SRC_BYPASS_DAC = 1. 0 0000 (Default) Don't know 0 0100 12.000 kHz 0 1000 24.000 kHz 0 1100 48.000 kHz 1 0000 176.400 kHz 0 0001 8.00 kHz 0 0101 16.000 kHz 0 1001 32.000 kHz 0 1101 88.200 kHz 1 0001 176.472 kHz 0 0010 11.025 kHz 0 0110 22.050 kHz 0 1010 44.100 kHz 0 1110 88.236 kHz 1 0010 192.000 kHz 0 0011 11.0295 kHz 0 0111 22.059 kHz 0 1011 44.118 kHz 0 1111 96.000 kHz 1 0011–1 1111 Reserved |

7.14 Serial Port Receive Registers
7.14.1 ASP Receive Enable
Address 0x2A01

| | | | | | | | | |
|---------|---|---|---|----------------|---|----------------|---|-------------|
| R/W | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | — | | | ASP_RX0_CH2_EN | | ASP_RX0_CH1_EN | — | ASP_RX0_2FS |
| Default | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| Bits | Name | Description |
|------|--------------------|---|
| 7:4 | — | Reserved |
| 3:2 | ASP_RX0_CH[2:1]_EN | ASP receive DAI0 enable. Determines whether the channel buffer gets populated. ASP_RX0_CH1_EN = Channel 1 ASP_RX0_CH2_EN = Channel 2 0 (Default) The corresponding channel buffer does not get populated. 1 The corresponding channel buffer is populated |
| 1 | — | Reserved |
| 0 | ASP_RX0_2FS | ASP receive DAI0 double-rate mode. 0 (Default) Standard sample rate, F_s (not doubled) 1 Sample rate is doubled, $2 F_s$ |

7.14.2 ASP Receive DAI0 Channel 1 Phase and Resolution
Address 0x2A02

| | | | | | | | | |
|---------|---|----------------|---|---|---|---|-----------------|---|
| R/W | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | — | ASP_RX0_CH1_AP | | — | | | ASP_RX0_CH1_RES | |
| Default | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 |

| Bits | Name | Description |
|------|----------------|--|
| 7 | — | Reserved |
| 6 | ASP_RX0_CH1_AP | ASP receive DAI0 active phase. Valid only in 50/50 Mode ($ASP_{5050} = 1$ and $ASP_{RX0_2FS} = 0$). 0 (Default) Low. In 50/50 Mode, channel data is valid if LRCK/FSYNC is low. 1 High. In 50/50 Mode, channel data is valid when LRCK/FSYNC is high. |

| Bits | Name | Description |
|------|-----------------|--|
| 5:2 | — | Reserved |
| 1:0 | ASP_RX0_CH1_RES | ASP Receive DAI0 channel bit width. Sets output resolution of the ASP receive DAI0 channel x samples. 00 8 bits per sample (only for isochronous NFS and native modes) 10 24 bits per sample 01 16 bits per sample 11 (Default) 32 bits per sample |

7.14.3 ASP Receive DAI0 Channel 1 Bit Start MSB
Address 0x2A03

| R/W | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|---------|---|---|---|---|---|---|---|------------------------|
| | — | | | | | | | ASP_RX0_CH1_BIT_ST_MSB |
| Default | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| Bits | Name | Description |
|------|------------------------|--|
| 7:1 | — | Reserved |
| 0 | ASP_RX0_CH1_BIT_ST_MSB | ASP receive DAI0 Channel 1 bit start MSB. Configures the MSB location of the channel with respect to SOF (LRCK edge + phase lag) |

7.14.4 ASP Receive DAI0 Channel 1 Bit Start LSB
Address 0x2A04

| R/W | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|---------|------------------------|---|---|---|---|---|---|---|
| | ASP_RX0_CH1_BIT_ST_LSB | | | | | | | |
| Default | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| Bits | Name | Description |
|------|------------------------|--|
| 7:0 | ASP_RX0_CH1_BIT_ST_LSB | ASP receive DAI0 Channel 1 bit start LSB. Configures the LSB location of the channel with respect to SOF (LRCK edge + phase lag) |

7.14.5 ASP Receive DAI0 Channel 2 Phase and Resolution
Address 0x2A05

| R/W | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|---------|---|----------------|---|---|---|-----------------|---|---|
| | — | ASP_RX0_CH2_AP | — | | | ASP_RX0_CH2_RES | | |
| Default | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 |

| Bits | Name | Description |
|------|-----------------|---|
| 7 | — | Reserved |
| 6 | ASP_RX0_CH2_AP | ASP receive DAI0 active phase. Valid only in 50/50 Mode (ASP_5050 = 1 and ASP_RX0_2FS = 0). 0 (Default) Low. In 50/50 Mode, channel data is input when LRCK/FSYNC is low. 1 High. In 50/50 Mode, channel data is input when LRCK/FSYNC is high. |
| 5:2 | — | Reserved |
| 1:0 | ASP_RX0_CH2_RES | ASP receive DAI0 channel bit width. Sets the output resolution of the ASP receive DAI0 channel x samples. 00 8 bits per sample (valid only for isochronous NFS and native mode) 10 24 bits per sample 01 16 bits per sample 11 (Default) 32 bits per sample |

7.14.6 ASP Receive DAI0 Channel 2 Bit Start MSB
Address 0x2A06

| R/W | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|---------|---|---|---|---|---|---|---|------------------------|
| | — | | | | | | | ASP_RX0_CH2_BIT_ST_MSB |
| Default | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| Bits | Name | Description |
|------|------------------------|---|
| 7:1 | — | Reserved |
| 0 | ASP_RX0_CH2_BIT_ST_MSB | ASP receive DAI0 Channel 2 bit start MSB. Configures the MSB location of the channel with respect to SOF (LRCK edge + phase lag). |

7.14.7 ASP Receive DAI0 Channel 2 Bit Start LSB
Address 0x2A07

| R/W | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|---------|------------------------|---|---|---|---|---|---|---|
| | ASP_RX0_CH2_BIT_ST_LSB | | | | | | | |
| Default | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| Bits | Name | Description |
|------|------------------------|---|
| 7:0 | ASP_RX0_CH2_BIT_ST_LSB | ASP receive DAI0 Channel 2 bit start LSB. Configures the LSB location of the channel with respect to SOF (LRCK edge + phase lag). |

7.15 ID Registers

7.15.1 Subrevision

Address 0x3014

| | | | | | | | | |
|---------|-------------|---|---|---|---|---|---|---|
| R/O | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | SUBREVISION | | | | | | | |
| Default | x | x | x | x | x | x | x | x |

| Bits | Name | Description |
|------|-------------|---|
| 7:0 | SUBREVISION | Subrevision. Identifies the CS43L36 subrevision. The Page 0x30 read sequence in Section 5.3 must be followed to read this register. 0000 0011 Initial version. |

7.15.2 Device ID A and B

Address 0x3015

| | | | | | | | | |
|---------|--------|---|---|---|--------|---|---|---|
| R/O | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | DEVIDA | | | | DEVIDB | | | |
| Default | 0 | 1 | 0 | 0 | 0 | 0 | 1 | 1 |

7.15.3 Device ID C and D

Address 0x3016

| | | | | | | | | |
|---------|--------|---|---|---|--------|---|---|---|
| R/O | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | DEVIDC | | | | DEVIDD | | | |
| Default | 1 | 0 | 1 | 0 | 0 | 0 | 1 | 1 |

7.15.4 Device ID E

Address 0x3017

| | | | | | | | | |
|---------|--------|---|---|---|---|---|---|---|
| R/O | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | DEVIDE | | | | | | | |
| Default | 0 | 1 | 1 | 0 | x | x | x | x |

| Bits | Name | Description |
|------|----------------------------|--|
| 7:4 | DEVIDA DEVIDC DEVIDE | Device ID code. Identifies the CS43L36. The Page 0x30 read sequence in Section 5.3 must be followed to read this register. |
| 3:0 | DEVIDB DEVIDD | DEVIDA 0x4 DEVIDB 0x3 DEVIDC 0xA Represents the "L" in the CS43L36. DEVIDD 0x3 DEVIDE 0x6 |

8 PCB Layout Considerations

The following sections provide general guidelines for PCB layout to ensure the best performance of the CS43L36.

8.1 Power Supply

As with any high-resolution converter, to realize its potential, the CS43L36 requires careful attention to power supply and grounding arrangements. Fig. 2-1 shows the recommended power arrangements, with VA and VCP connected to clean supplies. VL, which powers the digital circuitry, may be run from the system logic supply. Alternatively, VL may be powered from the analog supply via a ferrite bead. In this case, no additional devices should be powered from VL.

8.2 Grounding

Note the following:

- Extensive use of power and ground planes, ground-plane fill in unused areas, and surface-mount decoupling capacitors are recommended.
- Decoupling capacitors should be as close as possible to the CS43L36 pins.
- To minimize inductance effects, the low-value ceramic capacitor must be closest to the pin and mounted on the same side of the board as the CS43L36.
- To avoid unwanted coupling into the modulators, all signals, especially clocks, must be isolated from the FILT+ pin.
- The FILT+ capacitor must be positioned to minimize the electrical path from the pin to GNDA.
- The +VCP_FILTER and -VCP_FILTER capacitors must be positioned to minimize the electrical path from each respective pin to GNDCP.

8.3 QFN Thermal Pad

The CS43L36 comes in a compact QFN package, the underside of which reveals a large metal pad that serves as a thermal relief to provide maximum heat dissipation. This pad must mate with a matching copper pad on the PCB and must be electrically connected to ground. A series of vias should be used to connect this copper pad to one or more larger ground planes on other PCB layers. For best performance in split-ground systems, connect this thermal to GNDA.

9 Plots

9.1 Digital Filter Response

9.1.1 Highpass Filter—DAC

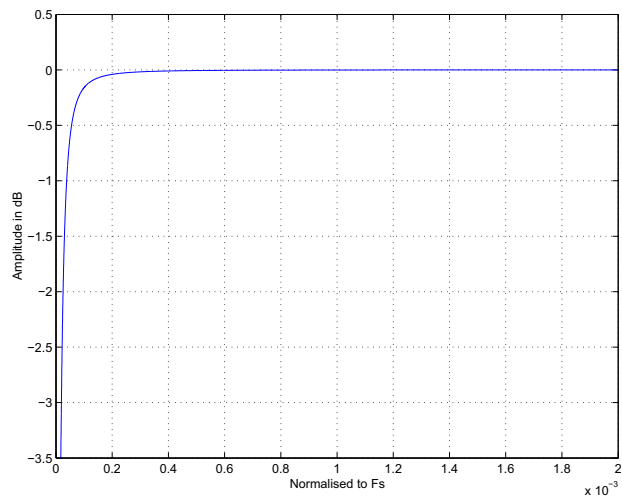
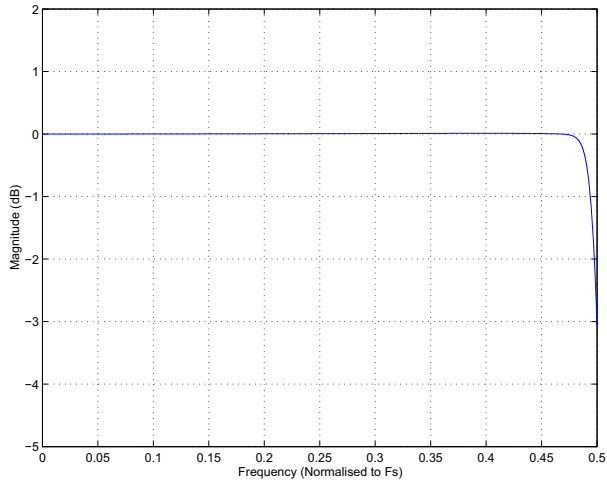
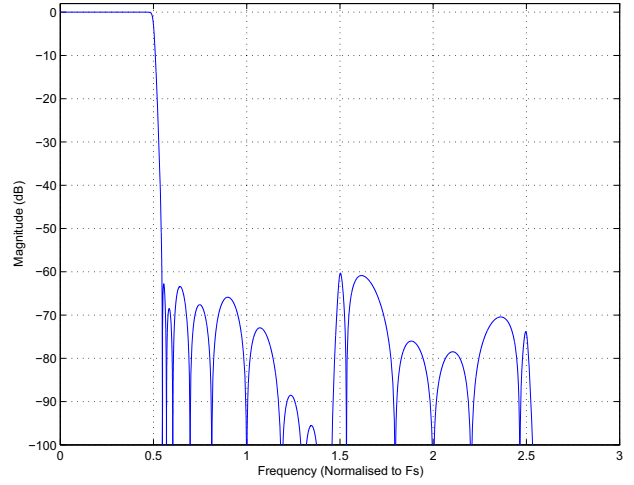
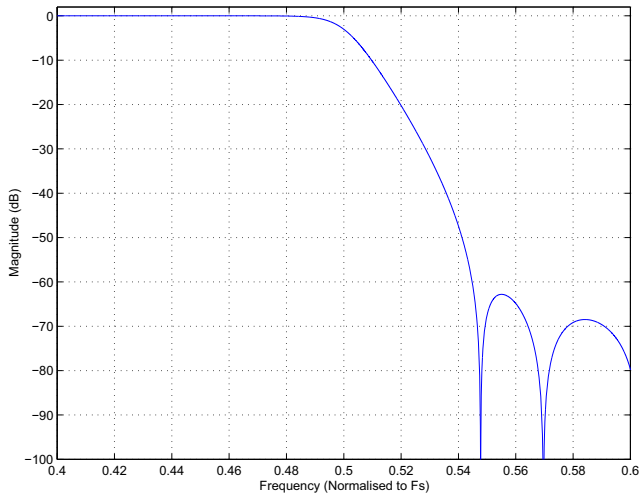
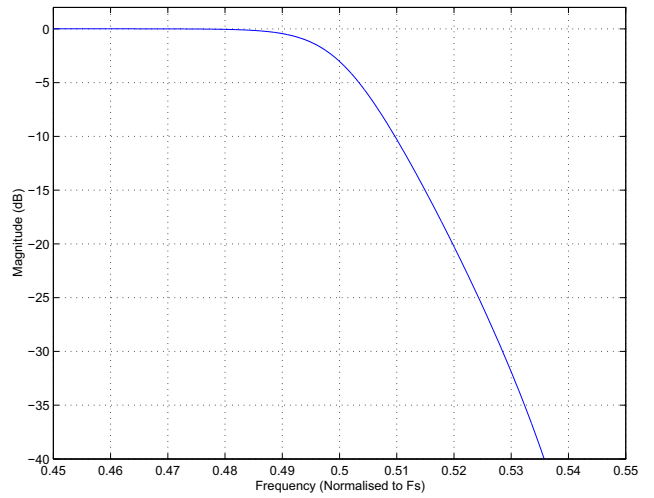
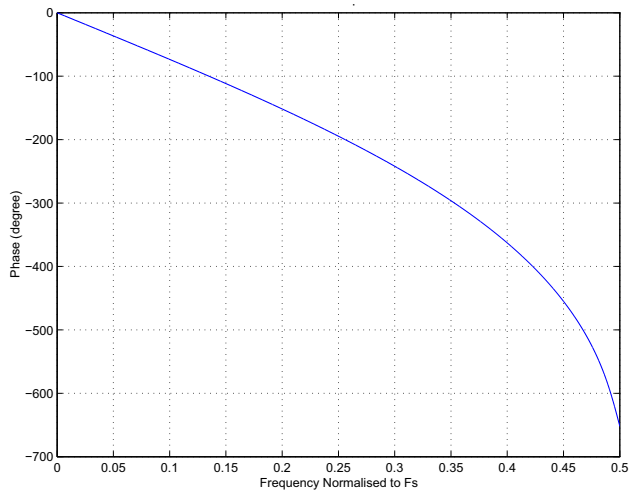
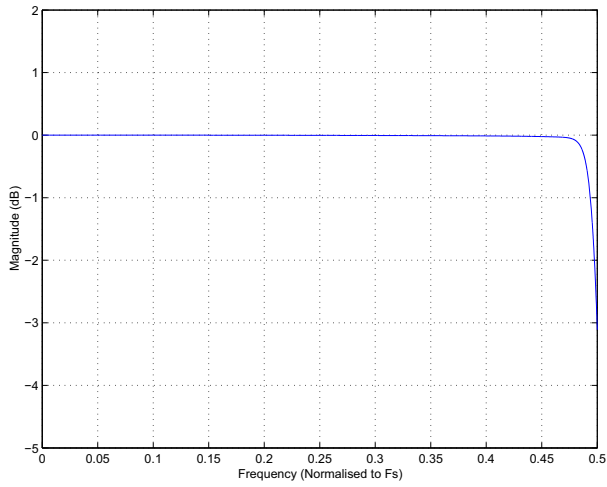
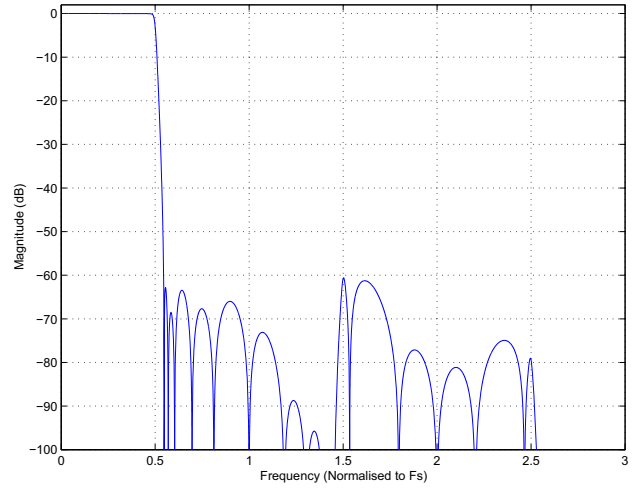
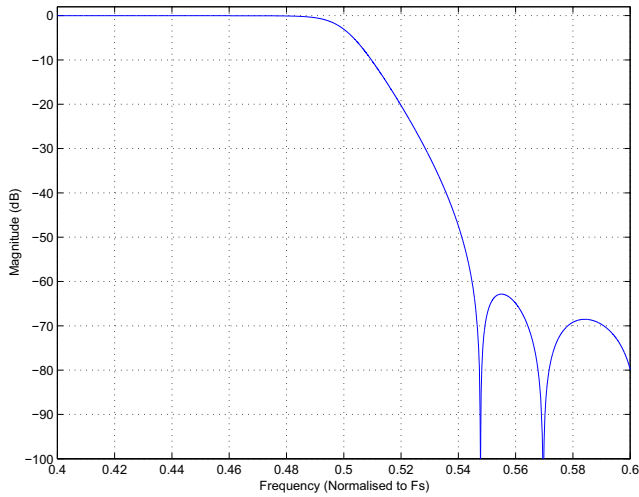
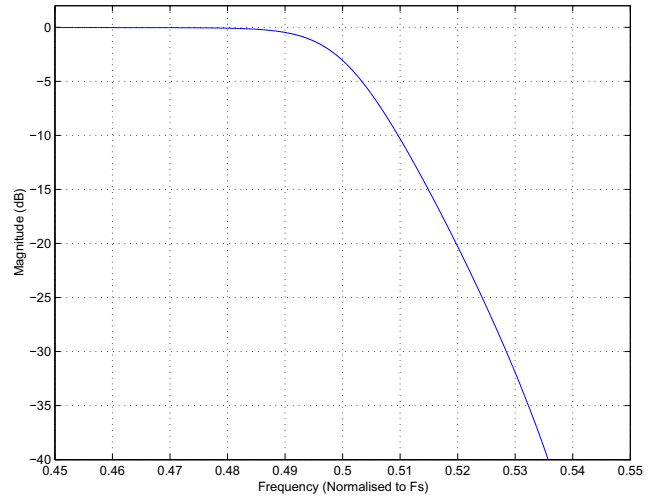
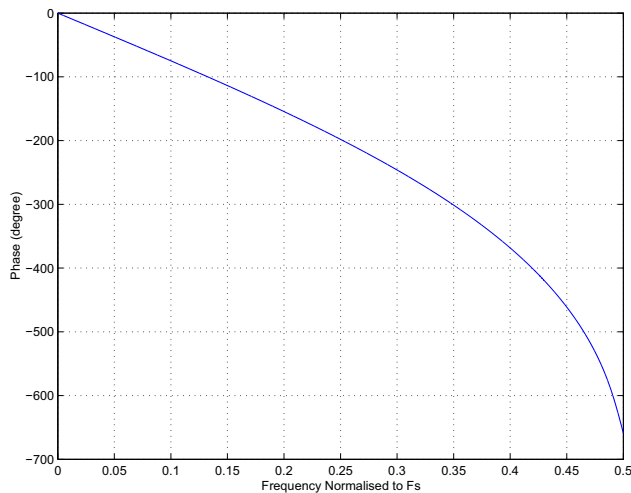
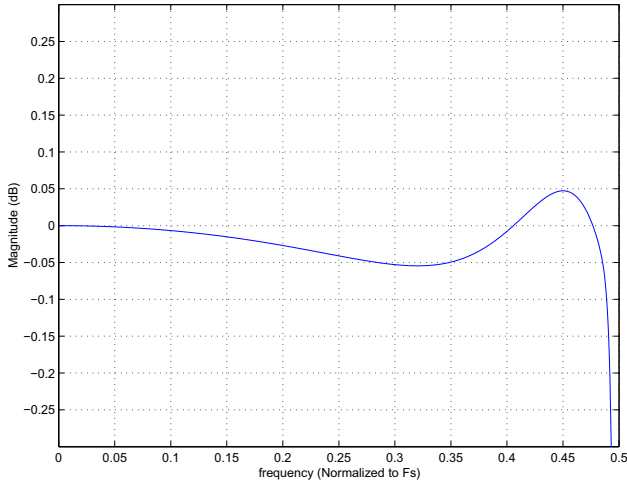
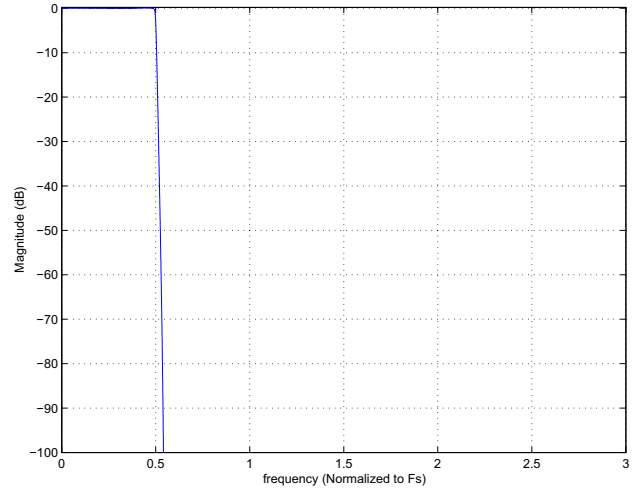
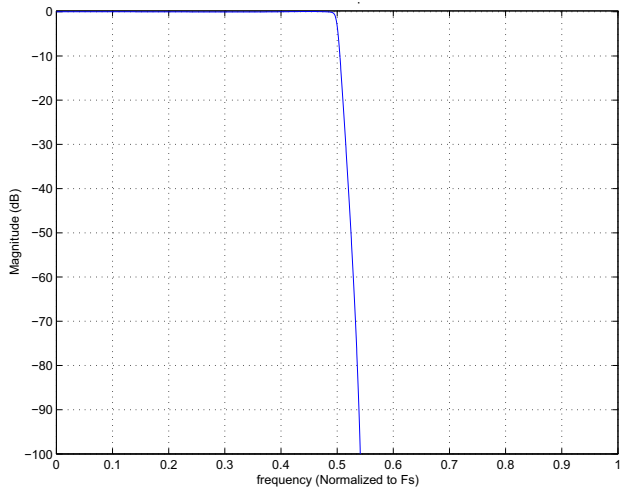
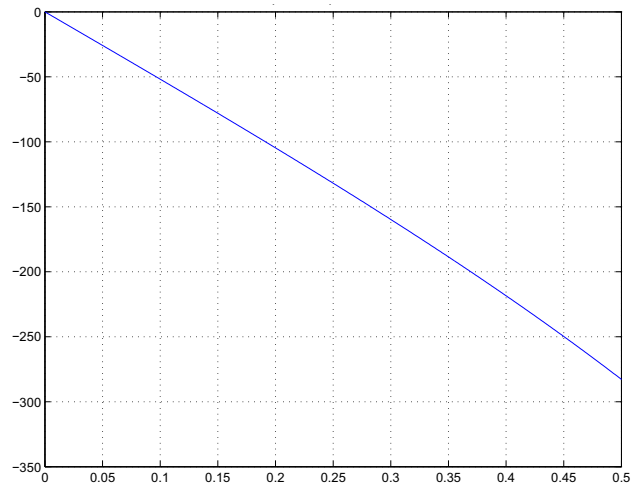


Figure 9-1. DAC HPF Response

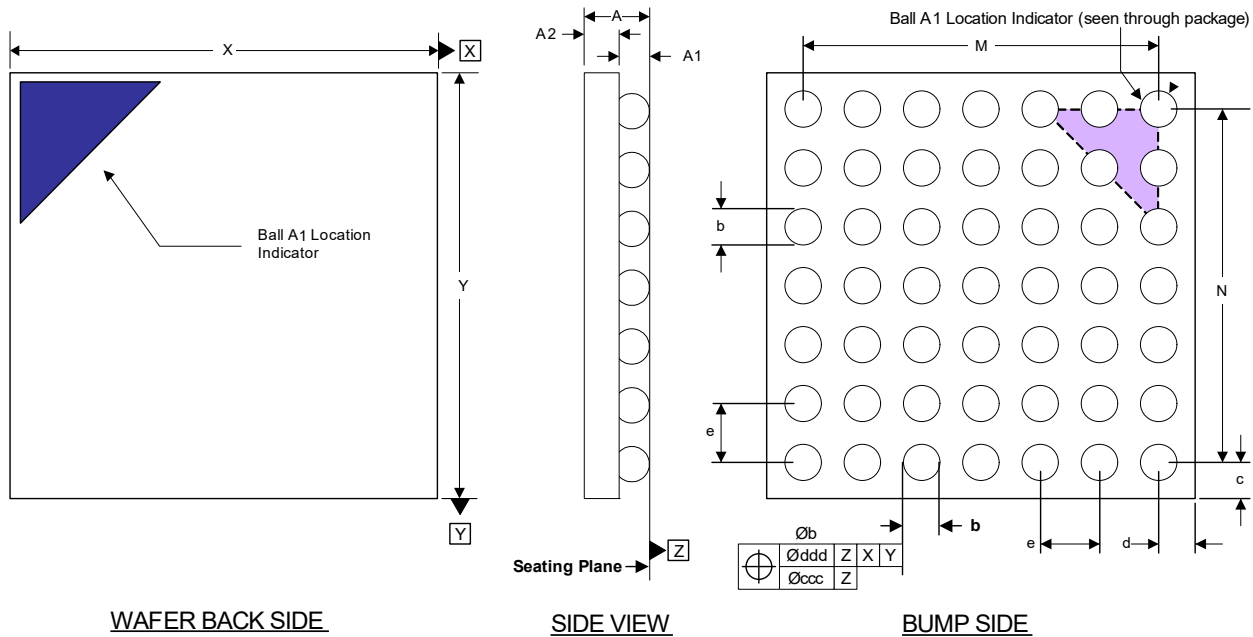
9.1.2 DAC to HP, $F_{s_{int}} = 44.118$ kHz, $MCLK = 136 \times LRCK$

Figure 9-2. Passband—DAC, $F_{s_{int}} = 44.118$ kHz

Figure 9-3. Stopband—DAC, $F_{s_{int}} = 44.118$ kHz

Figure 9-4. Transition Band—DAC, $F_{s_{int}} = 44.118$ kHz

Figure 9-5. Transition Band (Detail)—DAC, $F_{s_{int}} = 44.118$ kHz

Figure 9-6. Phase Response—DAC, $F_{s_{int}} = 44.118$ kHz

9.1.3 DAC to HP, $F_{s_{int}} = 48.000$ kHz, $MCLK = 125 \times LRCK$

Figure 9-7. Passband—DAC, $F_{s_{int}} = 48.000$ kHz

Figure 9-8. Stopband—DAC, $F_{s_{int}} = 48.000$ kHz

Figure 9-9. Transition Band—DAC, $F_{s_{int}} = 48.000$ kHz

Figure 9-10. Transition Band (Detail)—DAC, $F_{s_{int}} = 48.000$ kHz

Figure 9-11. Phase Response—DAC, $F_{s_{int}} = 48.000$ kHz

9.1.4 SDIN ASRC, $F_{SINT} = 48$ kHz

Figure 9-12. Passband—ASRC, Notch Disabled

Figure 9-13. Stopband—ASRC, Notch Disabled

Figure 9-14. Transition Band—ASRC, Notch Disabled

Figure 9-15. Phase Response—ASRC, Notch Disabled

10 Package Dimensions

10.1 WLCSP Package Dimensions



Notes:

- Dimensioning and tolerances per ASME Y 14.5M–1994.
- The Ball A1 position indicator is for illustration purposes only and may not be to scale.
- Dimension “b” applies to the solder sphere diameter and is measured at the maximum solder-ball diameter, parallel to primary Datum Z.

Table 10-1. WLCSP Package Dimensions

| Dimension | Millimeters | | |
|-------------|-------------|---------|---------|
| | Minimum | Nominal | Maximum |
| A | 0.443 | 0.474 | 0.505 |
| A1 | 0.148 | 0.174 | 0.200 |
| A2 | 0.284 | 0.300 | 0.316 |
| M | BSC | 2.100 | BSC |
| N | BSC | 2.100 | BSC |
| b | 0.225 | 0.250 | 0.300 |
| c | REF | 0.272 | REF |
| d | REF | 0.272 | REF |
| e | BSC | 0.350 | BSC |
| X | 2.614 | 2.644 | 2.674 |
| Y | 2.614 | 2.644 | 2.674 |
| ccc = 0.015 | | | |
| ddd = 0.015 | | | |

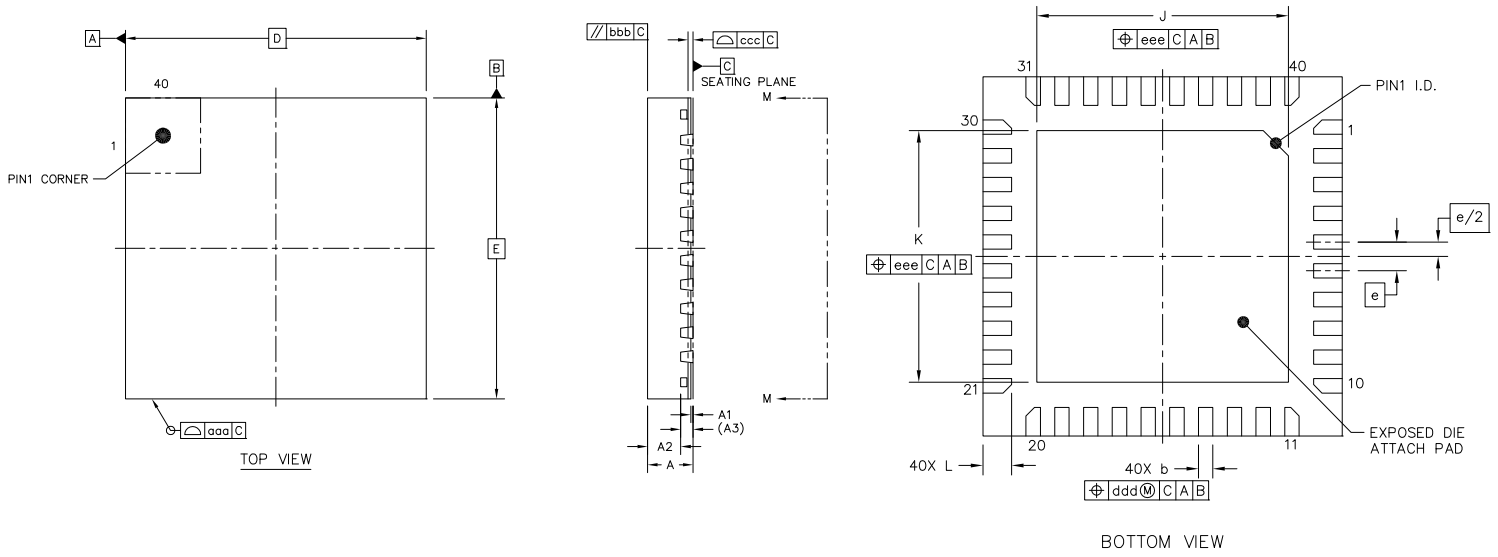Note: Controlling dimension is millimeters.

10.2 QFN Package Dimensions

Table 10-2. QFN Package Dimensions

| Dimension | mm | | |
|-----------|-----------|---------|---------|
| | Minimum | Nominal | Maximum |
| A | 0.7 | 0.75 | 0.8 |
| A1 | 0.00 | 0.035 | 0.05 |
| A2 | — | 0.55 | 0.67 |
| A3 | 0.203 REF | | |
| b | 0.15 | 0.20 | 0.25 |
| D | 5.00 BSC | | |
| K | 3.4 | 3.5 | 3.6 |
| e | 0.40 BSC | | |
| E | 5.00 BSC | | |
| J | 3.4 | 3.5 | 3.6 |
| L | 0.35 | 0.40 | 0.45 |
| aaa | 0.10 | | |
| bbb | 0.10 | | |
| ccc | 0.08 | | |
| ddd | 0.10 | | |
| eee | 0.10 | | |

11 Thermal Characteristics

Table 11-1. Typical JEDEC Four-Layer, 2s2p Board Thermal Characteristics

| Parameter ¹ | Symbol | QFN | WLCSP | Unit |
|--|---------------|------|-------|------|
| Junction-to-ambient thermal resistance | θ_{JA} | 35.0 | 52.0 | °C/W |
| Junction-to-board thermal resistance | θ_{JB} | 9.0 | 17.8 | °C/W |
| Junction-to-case thermal resistance | θ_{JC} | 0.98 | 0.15 | °C/W |
| Junction-to-board thermal-characterization parameter | Ψ_{JB} | 8.9 | 17.7 | °C/W |
| Junction-to-package-top thermal-characterization parameter | Ψ_{JT} | 0.19 | 0.04 | °C/W |

1. Thermal setup:

Still air @ maximum allowed ambient temperature

JEDEC 2s2p printed wiring board (JEDEC Standard JESD51-11, June 2001)

Size: 114.5 x 101.5 x 1.6 mm

12 Ordering Information

Table 12-1. Ordering Information

| Product | Description | Package | RoHS Compliant | Grade | Temperature Range | Container | Order # |
|---------|--|---------------|----------------|---------------------|-------------------|---------------|--------------|
| CS43L36 | Low-Power, High-Performance Audio DAC with Class H Headphone Drivers | 40-pin QFN | Yes | Extended Commercial | -40 to +85°C | Tape and reel | CS43L36-CNZR |
| | | | | | | Tray | CS43L36-CNZ |
| | | 49-ball WLCSP | Yes | Extended Commercial | -40 to +85°C | Tape and reel | CS43L36-CWZR |

13 References

- NXP Semiconductors, UM10204 Rev. 06, April 2014, *The I²C-Bus Specification and User Manual*, <http://www.nxp.com>
- JEDEC Solid State Technology Association, *Guidelines for Reporting and Using Electronic Package Thermal Information*, JEDEC Standard No. 51-12.01, November 2012, <http://www.jedec.org/>

14 Revision History

Table 14-1. Revision History

| Revision | Changes |
|---------------|---|
| F2 AUG '17 | <ul style="list-style-type: none"> • Changed references to VD to VD_FILT in Section 5.5. • Updated VL/VD_FILT ordering in Section 4.9. • Relabelled the Y axes in Fig. 4-8 and Fig. 4-10 in Section 4.3.3. |
| F3 JAN '18 | <ul style="list-style-type: none"> • Added missing text in first bullet in Section 5.5. • Updated QFN package dimensions diagram in Section 10.2 (Aesthetic only—no content change). • Added footnote 1 and updated package certification information in Table 12-1 (Nomenclature change only; no change to package). |
| F4 DEC '18 | <ul style="list-style-type: none"> • Updated headset connection in Fig. 2-1. • Updated minimum and maximum values for the external voltage applied to pin parameter in Table 3-2. • Updated Footnote 2 and 3 in Table 3-12. • Added a note about interchangeable terms in Section 4. • Minor update to Step 8 in Section 4.2.2. • Minor update to last sentence in Section 4.4.1.2. • Updated Fig. 4-18. • Clarified behavior of VP Monitor in Section 4.9.1. • Added Section 4.13, FILT+ Operation. • Added a note about setting or clearing specific enable bits before performing any power-up sequence in Section 5.1. • Updated bit field names and descriptions for ASP Receive Enable in Section 6.14 and Section 7.14.1. • Corrected bit field value for PDN_ALL in Step 4 of Ex. 5-2. • Updated description for ASP_SCPOL_IN_DAC in Section 7.3.6. • Removed Footnote 1 in Table 12-1. • Updated legal boilerplate wording. |

Important: Please check with your Cirrus Logic sales representative to confirm that you are using the latest revision of this document and to determine whether there are errata associated with this device.

Contacting Cirrus Logic Support

For all product questions and inquiries, contact a Cirrus Logic Sales Representative.
To find the one nearest you, go to www.cirrus.com.

IMPORTANT NOTICE

The products and services of Cirrus Logic International (UK) Limited; Cirrus Logic, Inc.; and other companies in the Cirrus Logic group (collectively either "Cirrus Logic" or "Cirrus") are sold subject to Cirrus Logic's terms and conditions of sale supplied at the time of order acknowledgment, including those pertaining to warranty, indemnification, and limitation of liability. Software is provided pursuant to applicable license terms. Cirrus Logic reserves the right to make changes to its products and specifications or to discontinue any product or service without notice. Customers should therefore obtain the latest version of relevant information from Cirrus Logic to verify that the information is current and complete. Testing and other quality control techniques are utilized to the extent Cirrus Logic deems necessary. Specific testing of all parameters of each device is not necessarily performed. In order to minimize risks associated with customer applications, the customer must use adequate design and operating safeguards to minimize inherent or procedural hazards. Cirrus Logic is not liable for applications assistance or customer product design. The customer is solely responsible for its product design, including the specific manner in which it uses Cirrus Logic components, and certain uses or product designs may require an intellectual property license from a third party. Features and operations described herein are for illustrative purposes only and do not constitute a suggestion or instruction to adopt a particular product design or a particular mode of operation for a Cirrus Logic component.

CERTAIN APPLICATIONS USING SEMICONDUCTOR PRODUCTS MAY INVOLVE POTENTIAL RISKS OF DEATH, PERSONAL INJURY, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE ("CRITICAL APPLICATIONS"). CIRRUS LOGIC PRODUCTS ARE NOT DESIGNED, AUTHORIZED OR WARRANTED FOR USE IN PRODUCTS SURGICALLY IMPLANTED INTO THE BODY, AUTOMOTIVE SAFETY OR SECURITY DEVICES, NUCLEAR SYSTEMS, LIFE SUPPORT PRODUCTS OR OTHER CRITICAL APPLICATIONS. INCLUSION OF CIRRUS LOGIC PRODUCTS IN SUCH APPLICATIONS IS UNDERSTOOD TO BE FULLY AT THE CUSTOMER'S RISK AND CIRRUS LOGIC DISCLAIMS AND MAKES NO WARRANTY, EXPRESS, STATUTORY OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR PARTICULAR PURPOSE, WITH REGARD TO ANY CIRRUS LOGIC PRODUCT THAT IS USED IN SUCH A MANNER. IF THE CUSTOMER OR CUSTOMER'S CUSTOMER USES OR PERMITS THE USE OF CIRRUS LOGIC PRODUCTS IN CRITICAL APPLICATIONS, CUSTOMER AGREES, BY SUCH USE, TO FULLY INDEMNIFY CIRRUS LOGIC, ITS OFFICERS, DIRECTORS, EMPLOYEES, DISTRIBUTORS AND OTHER AGENTS FROM ANY AND ALL LIABILITY, INCLUDING ATTORNEYS' FEES AND COSTS, THAT MAY RESULT FROM OR ARISE IN CONNECTION WITH THESE USES.

This document is the property of Cirrus Logic, and you may not use this document in connection with any legal analysis concerning Cirrus Logic products described herein. No license to any technology or intellectual property right of Cirrus Logic or any third party is granted herein, including but not limited to any patent right, copyright, mask work right, or other intellectual property rights. Any provision or publication of any third party's products or services does not constitute Cirrus Logic's approval, license, warranty or endorsement thereof. Cirrus Logic gives consent for copies to be made of the information contained herein only for use within your organization with respect to Cirrus Logic integrated circuits or other products of Cirrus Logic, and only if the reproduction is without alteration and is accompanied by all associated copyright, proprietary and other notices and conditions (including this notice). This consent does not extend to other copying such as copying for general distribution, advertising or promotional purposes, or for creating any work for resale. This document and its information is provided "AS IS" without warranty of any kind (express or implied). All statutory warranties and conditions are excluded to the fullest extent possible. No responsibility is assumed by Cirrus Logic for the use of information herein, including use of this information as the basis for manufacture or sale of any items, or for infringement of patents or other rights of third parties. Cirrus Logic, Cirrus, the Cirrus Logic logo design, and SoundClear are among the trademarks of Cirrus Logic. Other brand and product names may be trademarks or service marks of their respective owners.

Copyright © 2014–2018 Cirrus Logic, Inc. All rights reserved.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Cirrus Logic:](#)

[CS43L36-CWZR](#) [CS43L36-CNZR](#) [CS43L36-CNZ](#)

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9