

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 630

PIEZOCERAMIC MICROACTUATOR DRIVER WITH BOOST REGULATOR

LT3469ETS8

DESCRIPTION

Demonstration circuit 630 is a g_m amplifier circuit using the LT[®]3469ETS8 and can drive an output up to 34V at 25mA from 5V or 12V supply. An internal Boost converter of the LT3469 generates a supply voltage up to 36V for the g_m amplifier. This regulator switches at 1.5MHz, allowing the use of a tiny external inductor and capacitor. The 36V output capability of the switching regulator along with the high

supply voltage of the amplifier combine to allow the wide output voltage range needed to drive a piezoceramic microactuator.

Design files for this circuit board are available. Call the LTC factory.

LT is a trademark of Linear Technology Corporation

QUICK START PROCEDURE

Demonstration circuit 630 is easy to set up to evaluate the performance of the LT3469ETS8. Refer to Figure 1 for proper measurement equipment setup and follow the procedure below:

NOTE: When measuring the input or output voltage ripple, care must be taken to avoid a long ground lead on the oscilloscope probe. Measure the input or output voltage ripple by touching the probe tip directly across the V_{IN} or V_{OUT} and GND terminals. See Figure 2 for proper scope probe technique.

1. With power off, connect the input power source V_{IN} to the VIN and GND terminals, connect Vinput to INPUT+ and GND terminals.
2. Apply $V_{IN} = 4.75V$, Vinput=1V, and Iout=0mA (no load). Check the boost regulator output $V_{CC}=34.8V \pm 5\%$, and input current I_{IN} within the range of 21mA to 35mA.
3. Apply $V_{IN} = 4.75V$, Vinput=1V, and Iout=2mA (2mA load at V_{OUT}). Check the boost regulator output $V_{CC}=34.6V \pm 5\%$,

and the input current I_{IN} within the range of 34mA to 50mA.

4. Apply $V_{IN}=16V$, Vinput=1V, and Iout=0A (no load). Verify the boost regulator output $V_{CC}=35.2 \pm 5\%$.
5. Apply $V_{IN} = 5V$, Vinput=0.1V, check the amplifier output V_{OUT} = within the range of 0.87V to 1.12V.
6. Apply $V_{IN} = 5V$, Vinput=3V, check the amplifier output $V_{OUT} = 33V \pm 2\%$,
7. Apply $V_{IN} = 5V$ and pulsed square wave input that swings from 0.1V to 2.8V and has period of 300µs to Vinput, and apply 27nF capacitor load to the output. Verify V_{OUT} and Iout as shown in Figure 3.

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 630 PIEZOCERAMIC MICROACTUATOR DRIVER WITH BOOST REGULATOR

Linear Tech. Corp.
Demo Circuit 630 RevA

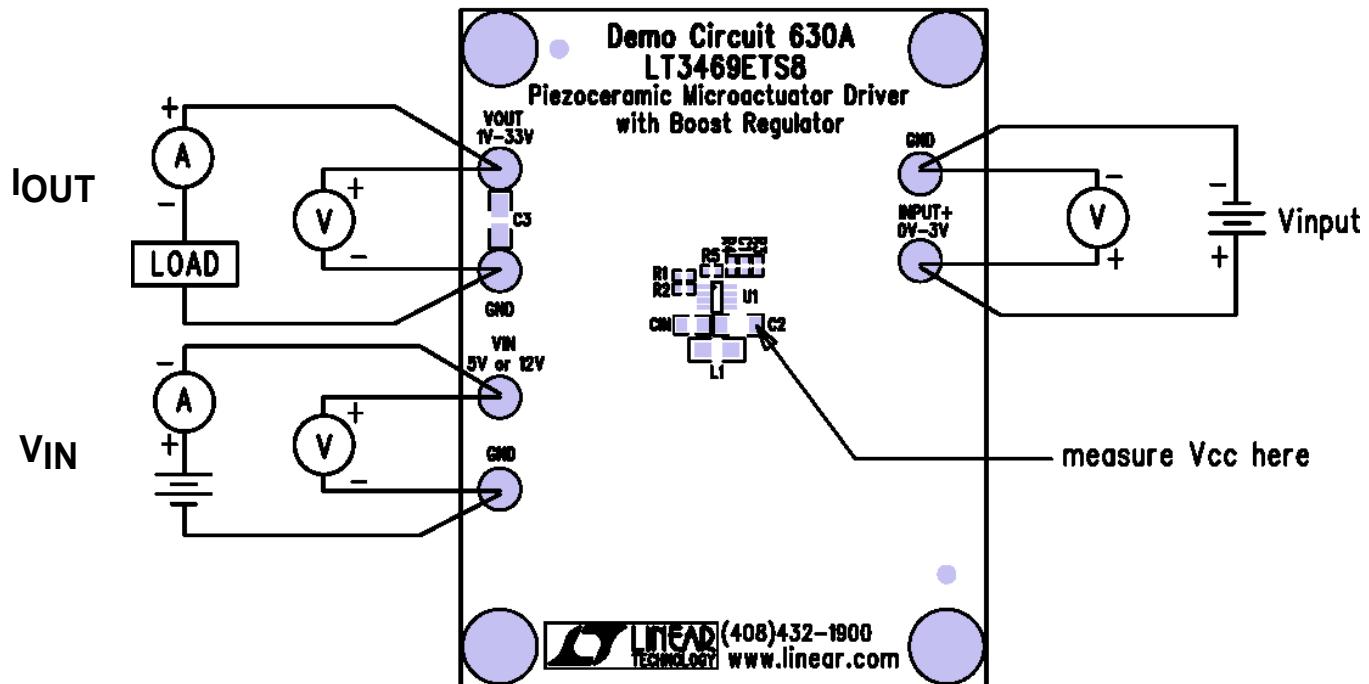


Figure 1. Proper Measurement Equipment Setup




Figure 2. Measuring Input or Output Ripple

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 630

PIEZOCERAMIC MICROACTUATOR DRIVER WITH BOOST REGULATOR


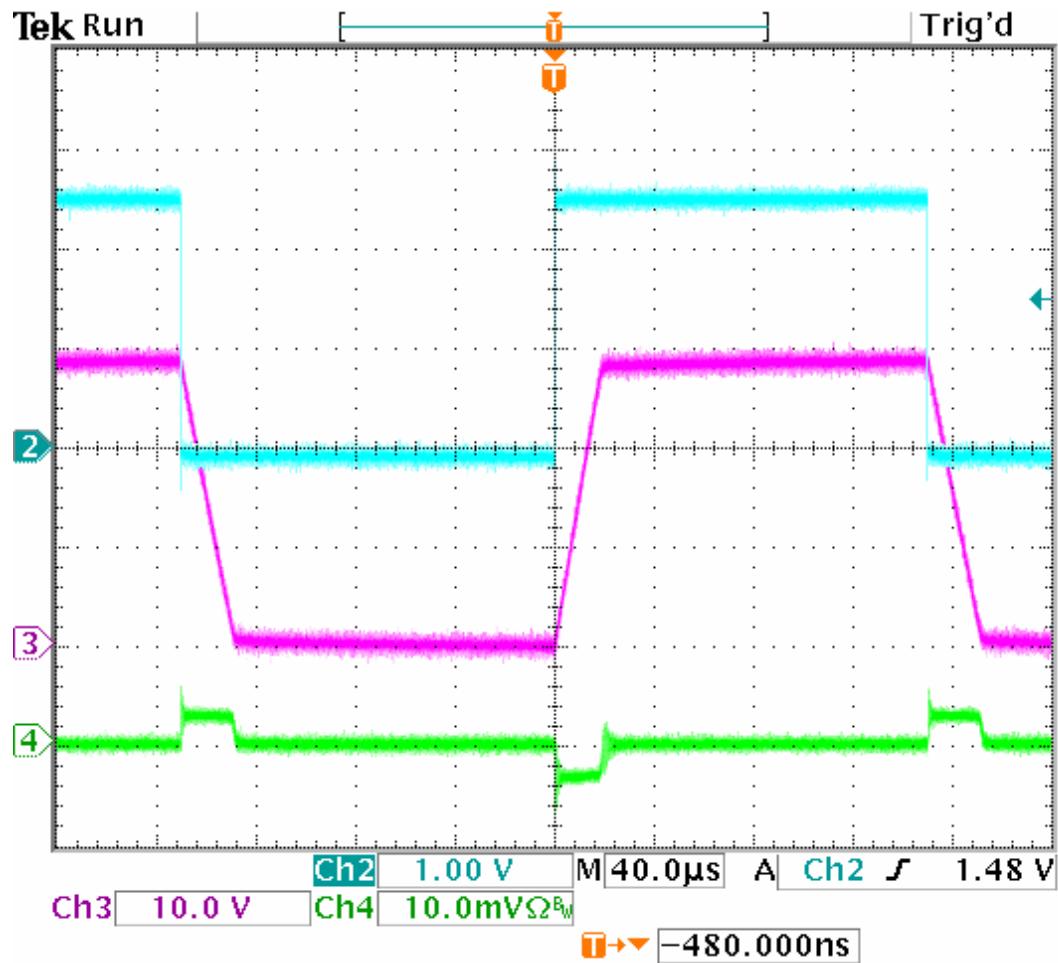


Figure 3. Ch2: Vinput. Ch3: Vout. Ch4: Iout, 100mA/Div

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 630 PIEZOCERAMIC MICROACTUATOR DRIVER WITH BOOST REGULATOR

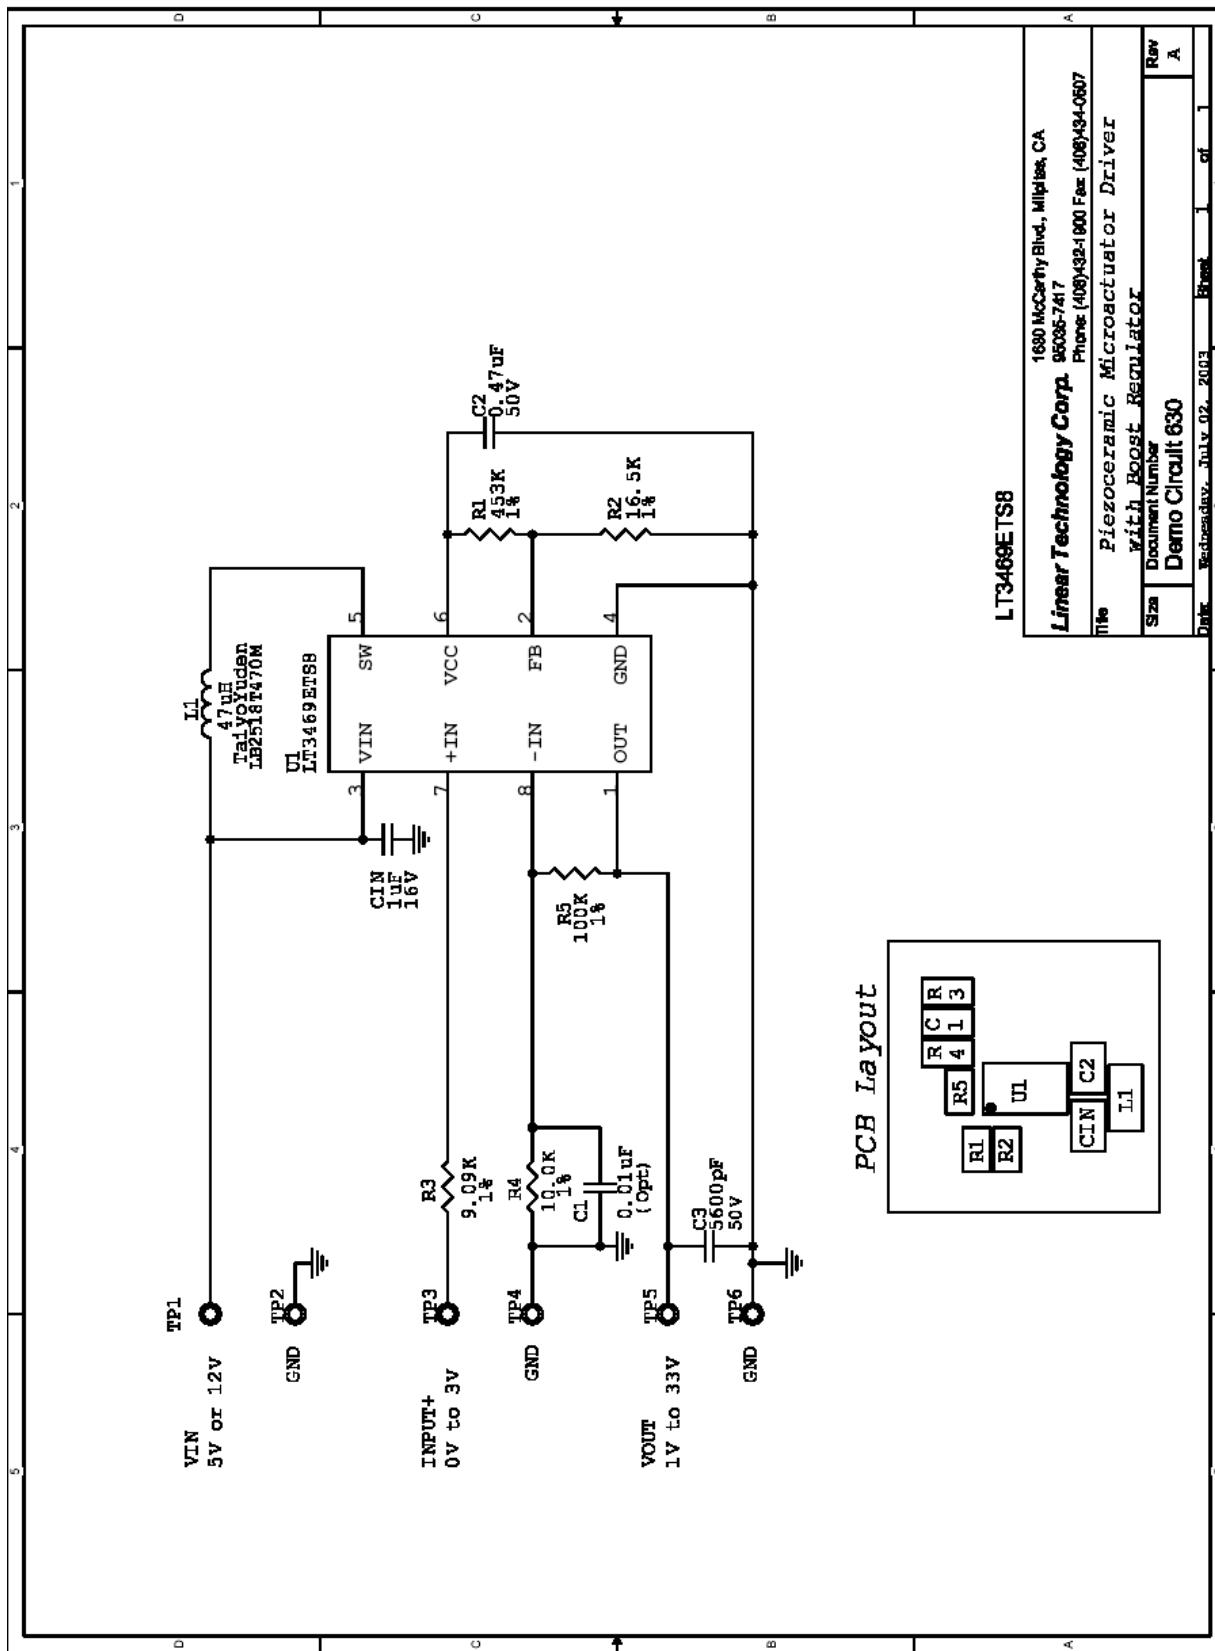

Данный компонент на территории Российской Федерации**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибуторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ Р В 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru
moschip.ru_4

moschip.ru_6
moschip.ru_9