

## General Description

The MAX17596 evaluation kit (EV kit) is a fully assembled and tested circuit board that demonstrates an isolated 20W fly-back DC-DC converter. The circuit uses the device's peak current-mode controller in a 16-pin TQFN package with an exposed pad. The EV kit demonstrates the IC's cycle-by-cycle current limit, soft-start, and EN/UVLO features.

The EV kit circuit output is configured for an isolated +24V and provides up to 833mA of output current. The EV kit is configured to operate at a 200kHz switching frequency. An optocoupler, along with the transformer, provides galvanic isolation between the input and output, up to 1500V<sub>RMS</sub>.

## Features

- 18V to 36V Input Range
- Isolated Output: 24V DC at 20W
- Cycle-by-Cycle Current Limit
- Resistor Programmable UVLO/OVI Threshold
- Low-Cost Flyback Design
- Galvanic Isolation Up to 1500V<sub>RMS</sub>
- Proven PCB Layout
- Fully Assembled and Tested

Ordering Information appears at end of data sheet.

## Quick Start

### Recommended Equipment

- One 18V–36V DC, 2A power supply
- Electronic load
- Four digital multimeters (DMM)
- MAX17596 24V EVKITB#

### Warning:

- Do not turn on the power supply until all connections are completed.
- Wear protective eye gear at all times.
- Do not touch any part of the circuit with bare hands or conductive materials when powered up.
- Make sure all high-voltage capacitors are fully discharged before handling. Allow 5 minutes after disconnecting input power source before touching circuit parts.

### Equipment Setup and Test Procedure

- 1) Set the power supply to +24VDC. Disable the power supply output.
- 2) Connect the positive terminal of the power supply to the VIN PCB pad and the negative terminal to the nearest PGND PCB pad. Connect the positive terminal of the electronic load to the VOUT PCB pad and the negative terminal to the nearest GND0 PCB pad.
- 3) Set the electronic load to constant-current mode and disable the electronic load.
- 4) Connect a DMM configured in voltmeter mode across the VOUT PCB pad and the nearest GND0 PCB pad.
- 5) Connect another DMM configured in voltmeter mode across the VOUT PCB pad and the GND0 PCB pad.
- 6) Enable the power supply.
- 7) Enable the load and adjust the current to 833mA.
- 8) Verify that the output voltmeter displays 24V
- 9) If required, vary the input voltage from 18V to 36V, the load current from 0mA to 833mA, and verify that the output voltage is 24V.

## Detailed Description





The MAX17596 EV kit provides a proven design to evaluate the high-efficiency, DC-DC, flyback converter in a space-saving, 16-pin TQFN package. The EV kit is configured for a 24V output voltage that can supply up to 840mA of current. The EV kit features a 200kHz fixed switching frequency for optimum efficiency and component size.

This EV kit uses the peak-current-mode, pulse-width-modulating (PWM) controller IC in a 16-pin TQFN package with an exposed pad. This PWM controller varies the duty cycle to compensate for the variation in input voltage ( $V_{IN}$ ) and the output load to maintain a constant output voltage. The duty cycle determines the on/off duration of the MOSFET (Q1).

The detailed description of flyback design methodology and the calculations for component value selection are described in Application Note 5504: *Designing Flyback Converters Using Peak-Current-Mode Controllers*. The details of soft-start time programming, programming output voltage, peak-current-limit setting, switching frequency setting, and the EN/UVLO,OVI settings are described in the MAX17595/MAX17596/MAX17597 IC data sheet.

**Note:** The EV kit is shipped with the frequency dithering disabled and the DITHER/SYNC pin shorted to SGND by a 0Ω resistor. To set the desired frequency dither, replace resistor R23 with a capacitor of appropriate value, as detailed in the MAX17595/MAX17596/MAX17597 IC data sheet. The DITHER/SYNC PCB pad is available for monitoring the signal at the DITHER/SYNC pin.

## EV Kit Performance Report

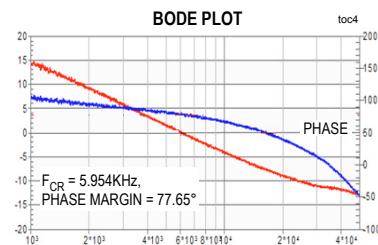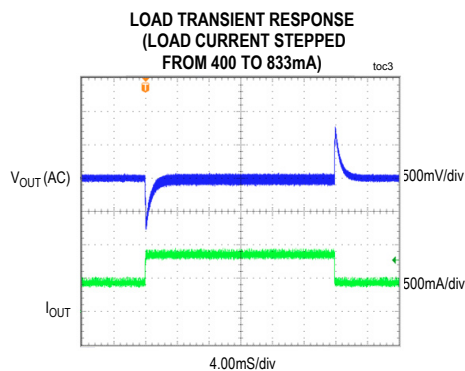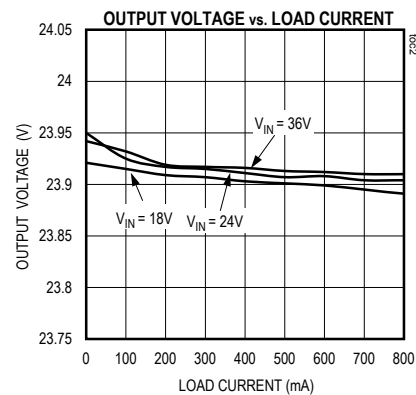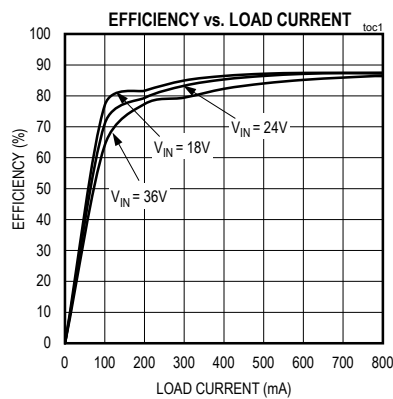

### Component List and Schematic

See the following links for the component information and schematic:

- [MAX17596 EV BOM](#)
- [MAX17596 EV Schematic](#)

### Component Suppliers

| SUPPLIER        | WEBSITE                                                  |
|-----------------|----------------------------------------------------------|
| Coilcraft, Inc. | <a href="http://www.coilcraft.com">www.coilcraft.com</a> |
| Murata Americas | <a href="http://www.murata.com">www.murata.com</a>       |
| Panasonic Corp. | <a href="http://www.panasonic.com">www.panasonic.com</a> |

**Note:** Indicate that you are using the MAX17596 when contacting these component suppliers.

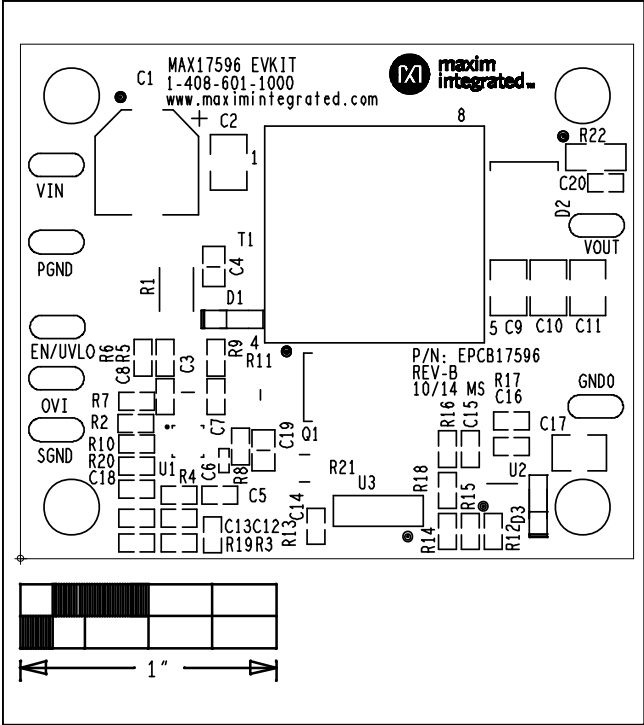


Figure 1. MAX17596 EV Kit Component Placement Guide—Component Side

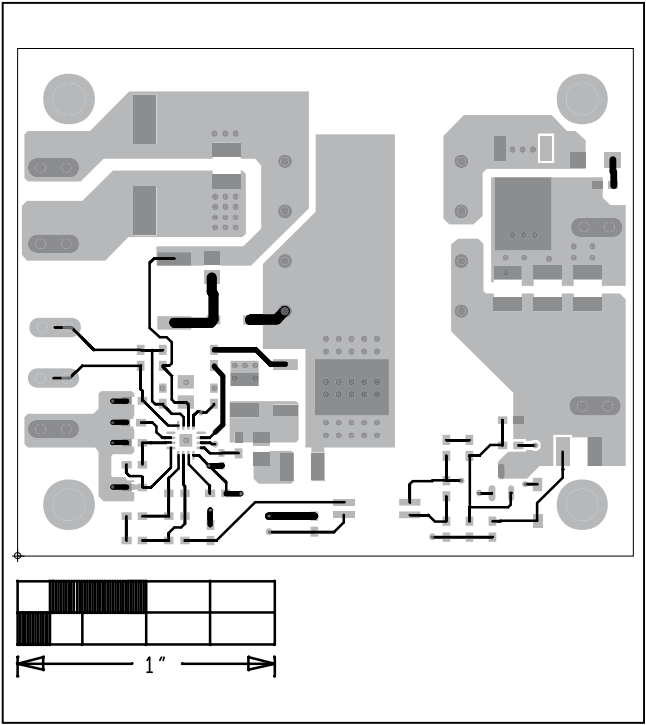


Figure 2. MAX17596 EV Kit PCB Layout—Component Side

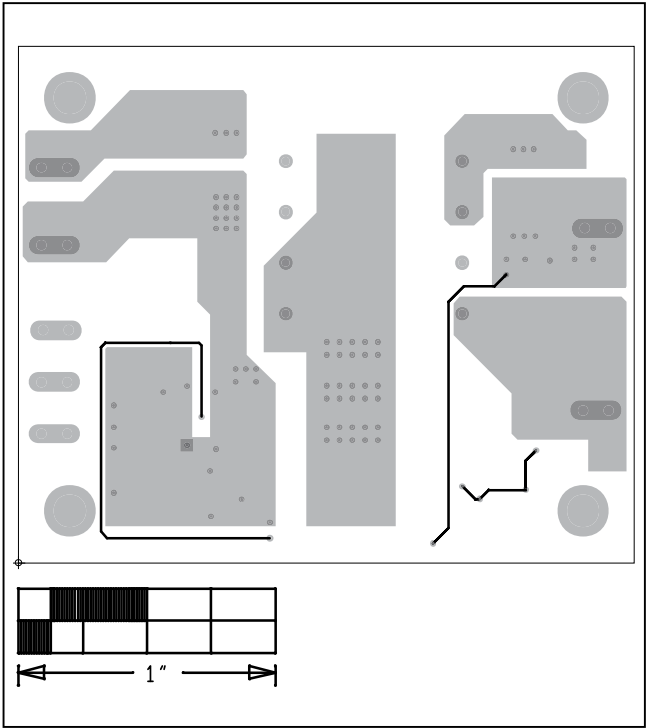


Figure 3. MAX17596 EV Kit PCB Layout—Solder Side

### Ordering Information

| PART           | TYPE   |
|----------------|--------|
| MAX17596EVKIT# | EV Kit |

*#Denotes RoHS compliant.*



## Revision History

| REVISION<br>NUMBER | REVISION<br>DATE | DESCRIPTION     | PAGES<br>CHANGED |
|--------------------|------------------|-----------------|------------------|
| 0                  | 7/15             | Initial release | —                |

For pricing, delivery, and ordering information, please contact Maxim Direct at 1-888-629-4642, or visit Maxim Integrated's website at [www.maximintegrated.com](http://www.maximintegrated.com).

*Maxim Integrated cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim Integrated product. No circuit patent licenses are implied. Maxim Integrated reserves the right to change the circuitry and specifications without notice at any time.*

| REVISIONS |     |             |      |        |
|-----------|-----|-------------|------|--------|
| ZONE      | LTR | DESCRIPTION | DATE | AUTHOR |
|           |     |             |      |        |

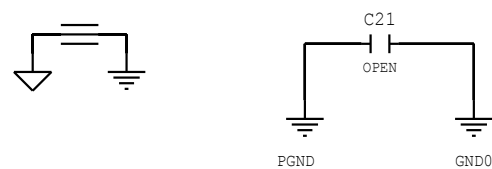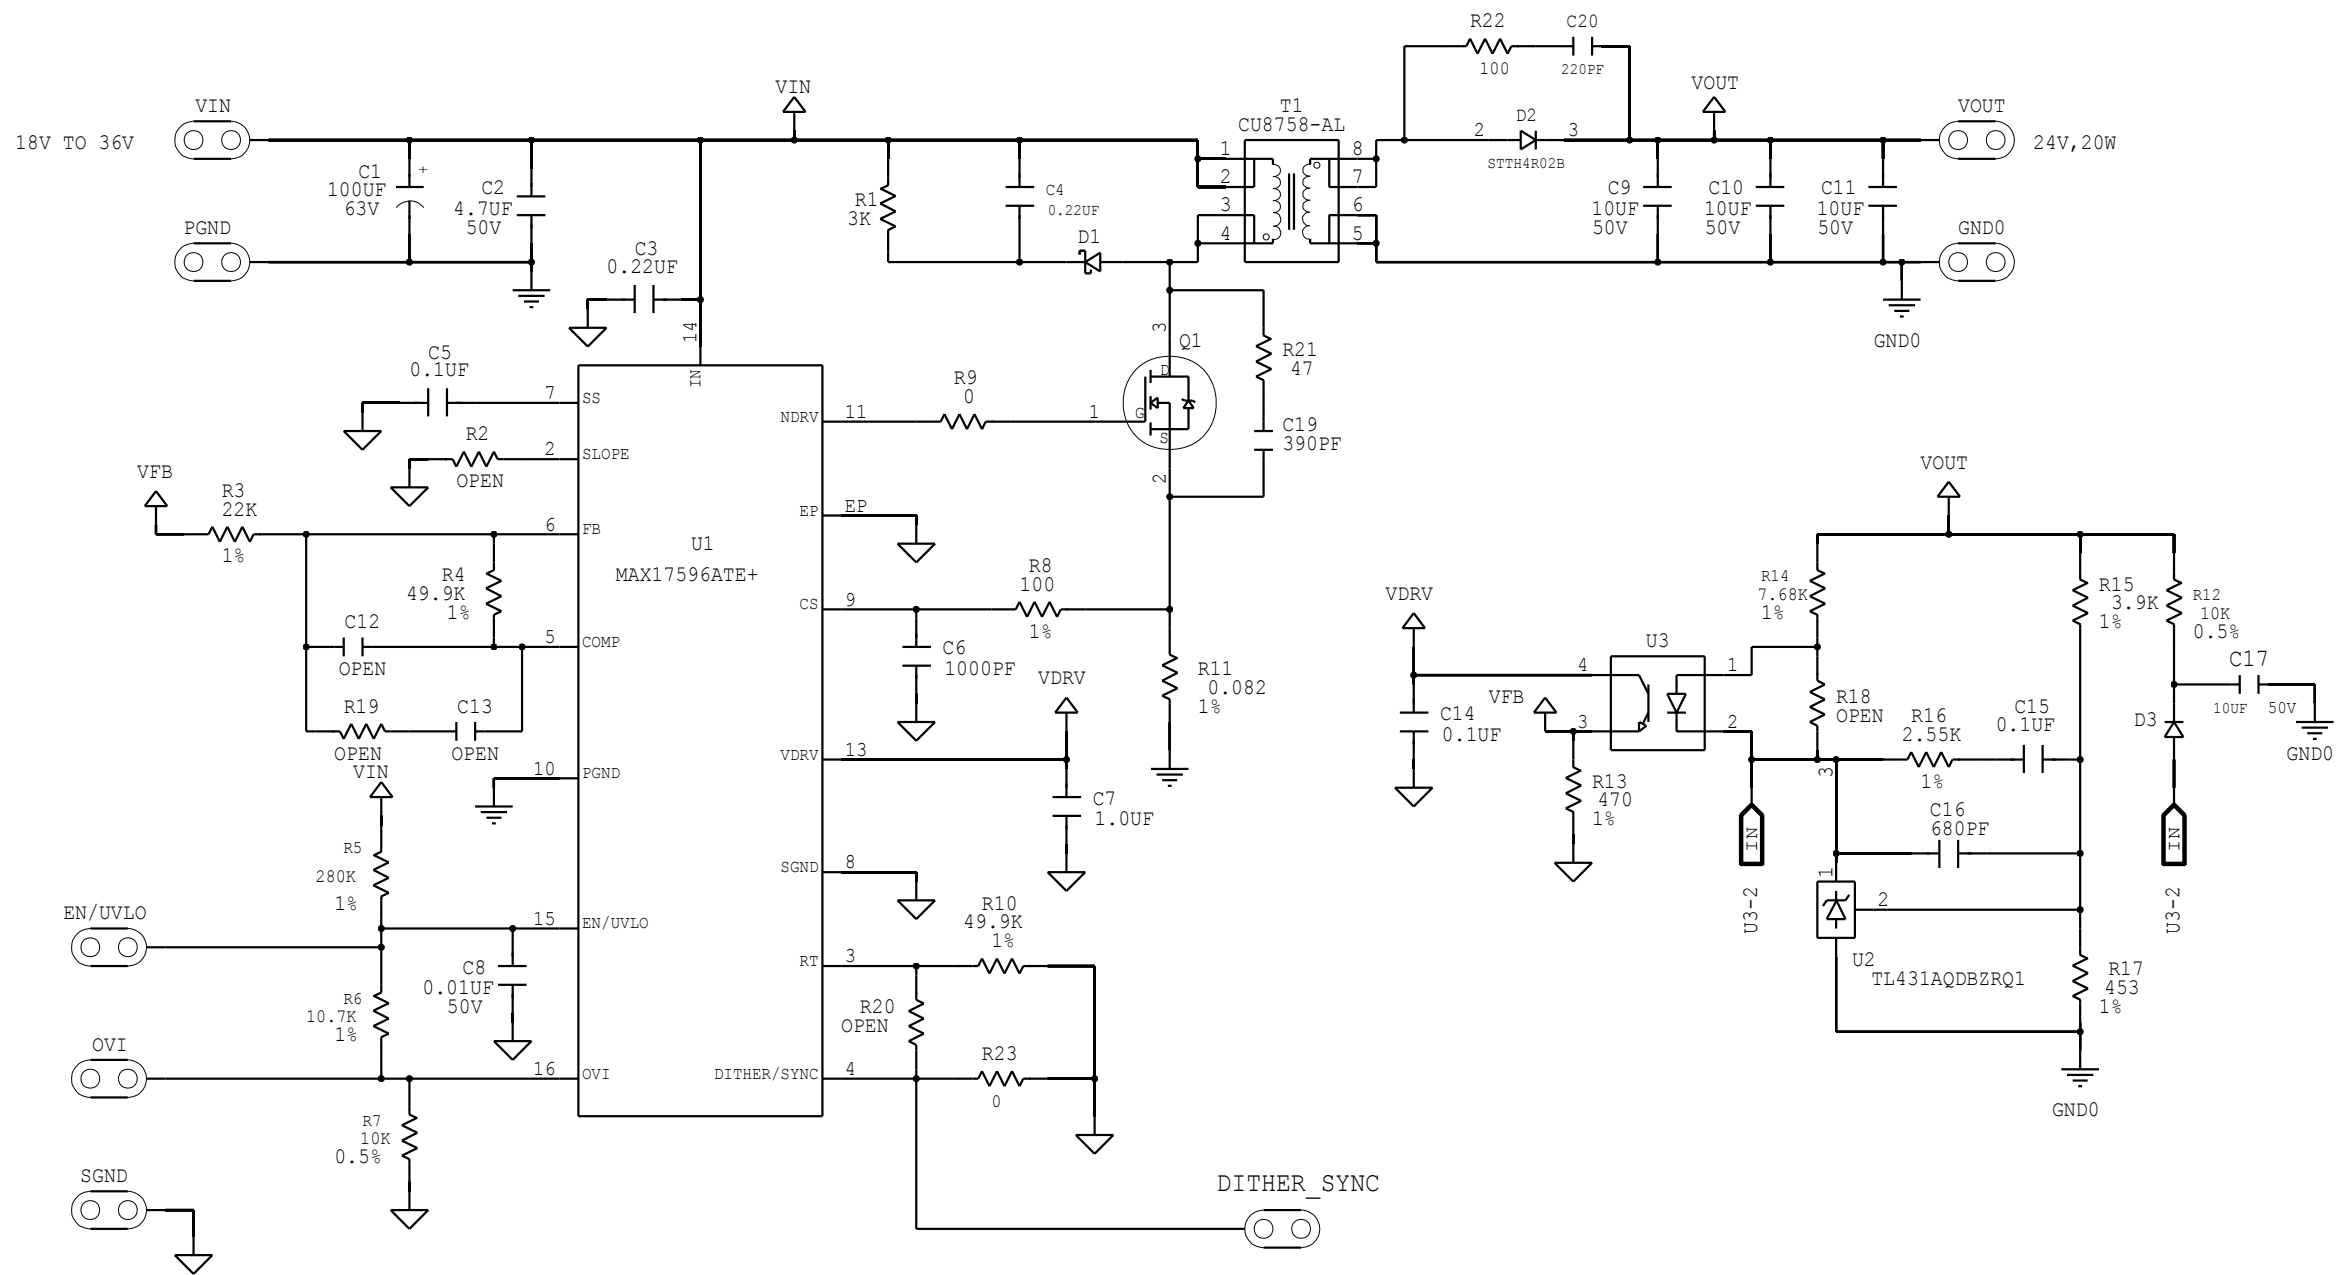

|                                                                                                                                                 |                               |                  |        |
|-------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|------------------|--------|
|                                                            | PROJECT TITLE: MAX17596 EVKIT |                  |        |
|                                                                                                                                                 | DRAWING TITLE:                |                  |        |
| THIS DOCUMENT CONTAINS INFORMATION<br>PROPRIETARY TO MAXIM USE OR DISCLOSURE<br>PERMISSION OF AN OFFICER OF MAXIM IS<br>IS EXPRESSLY FORBIDDEN. | SIZE<br><b>B</b>              | HARDWARE NUMBER: |        |
|                                                                                                                                                 | ENGINEER:                     | DRAWN BY:        | DATE:  |
|                                                                                                                                                 |                               | TEMPLATE REV: 1  | REV: B |

**BILL OF MATERIALS (BOM) Revision**

| S NO | Designation | Qty | Description                                          | Manufacturer Partnumber-1              | Manufacturer Partnumber-2 |
|------|-------------|-----|------------------------------------------------------|----------------------------------------|---------------------------|
| 1    | C1          | 1   | 100μF ±20%, 63V,ALUMINUM-ELECTROLYTIC (SMT (CASE_G)) | PANASONIC EEE-FK1J101P                 |                           |
| 2    | C2          | 1   | 4.7μF±10% 50V X7R Ceramic capacitor (1210)           | MURATA GRM32ER71H475KA88K              | KEMET C1210C475K5RAC      |
| 3    | C3          | 1   | 0.22μF±10% 50V X7R Ceramic capacitor (0805)          | MURATA GRM21BR71H224KA                 | KEMET C0805C224K5RAC      |
| 4    | C4          | 1   | 0.22μF±10% 100V X7R Ceramic capacitor (0805)         | MURATA GRM21AR72A224KAC5               | KEMET C0805C224K1RAC      |
| 5    | C5,C14      | 2   | 0.1μF±10% 16V X7R Ceramic capacitor (0603)           | MURATA GRM188R71C104K                  | KEMET C0603C104K4RA       |
| 6    | C6          | 1   | 1000pF±5%,50V,X7R ceramic capacitor (0402)           | MURATA GRM155R71H102JA01D              |                           |
| 7    | C7          | 1   | 1μF±10% 25V X7R Ceramic capacitor (0603)             | MURATA GRM188R71E105KA12D              | MURATA CGA3E1X7R1E105K    |
| 8    | C8          | 1   | 0.01μF±10% 50V X7R Ceramic capacitor (0603)          | MURATA GRM188R71H103K                  | KEMET C0603C103K5RAC      |
| 9    | C9-C11,C17  | 4   | 10μF±10% 50V X7R Ceramic capacitor (1210)            | MURATA GRM32ER71H106KA12L              | MURATA CL32B106KBJNNN     |
| 10   | C15         | 1   | 0.1μF±10% 50V X7R Ceramic capacitor (0603)           | PANASONIC ECJ-1VB1H104K                |                           |
| 11   | C16         | 1   | 680pF±10%,50V,X7R ceramic capacitor (0603)           | MURATA GRM188R71H681KA01               |                           |
| 12   | C19         | 1   | 390pF±5% 100V X7R Ceramic capacitor (0805)           | MURATA GRM2165C2A391JA01               |                           |
| 13   | C20         | 1   | 220pF±10%,250V,X7R ceramic capacitor (0603)          | MURATA GRM188R72E221K                  |                           |
| 14   | D1          | 1   | 100V/1A,SMT (SOD-123FL)                              | MICRO COMMERCIAL SMD110PL              |                           |
| 15   | D2          | 1   | 200V /4A, DPAK                                       | ST MICROELECTRONICS STTH4R02B          |                           |
| 16   | D3          | 1   | 100V/0.3A,SMT (SOD-123)                              | DIODES INCORPORATED 1N4148W-7-F        |                           |
| 17   | Q1          | 1   | 100V/63A/140W, POWER MOSFET(DPAK)                    | INTERNATIONAL RECTIFIER IRLR3110ZTRPBF |                           |
| 18   | R1          | 1   | 3kΩ ± 5 %,1.0W resistor (2512)                       | VISHAY DALE CRCW25123K00JN             |                           |
| 19   | R3          | 1   | 22kΩ ±1 %0.1W resistor (0603)                        | VISHAY DALE CRCW060322K0FK             |                           |
| 20   | R4,R10      | 2   | 49.9kΩ ± 1% 0.1W resistor (0603)                     | VISHAY DALE CRCW060349K9FK             | PANASONIC ERJ-3EKF4992V   |
| 21   | R5          | 1   | 280kΩ ± 1% 0.1W resistor (0603)                      | VISHAY DALE CRCW0603280KFK             |                           |
| 22   | R6          | 1   | 10.7kΩ ± 1% 0.1W resistor (0603)                     | VISHAY DALE CRCW060310K7FK             | PANASONIC ERJ-3EKF1072V   |
| 23   | R7,R12      | 2   | 10kΩ ± 0.5% 0.063W resistor (0603)                   | PANASONIC ERJ-3RBD1002V                |                           |
| 24   | R8          | 1   | 100Ω ± 1% 0.1W resistor (0603)                       | VISHAY DALE CRCW0603100RFK             | PANASONIC ERJ-3EKF1000V   |
| 25   | R9          | 1   | 0Ω ± 0% 0.1W resistor (0603)                         | VISHAY DALE CRCW06030000ZS             | VISHAY DALE MCR03EZPJ000  |
| 26   | R11         | 1   | 0.082Ω ± 1% 0.5W resistor (1210)                     | ROHM SEMICONDUCTOR MCR25JZHFSR082      |                           |
| 27   | R13         | 1   | 470Ω ± 1% 0.1W resistor (0603)                       | VISHAY DALE CRCW0603470RFK             |                           |
| 28   | R14         | 1   | 7.68kΩ ± 1% 0.1W resistor (0603)                     | VISHAY DALE CRCW06037K68FK             |                           |
| 29   | R15         | 1   | 3.9kΩ ± 1% 0.1W resistor (0603)                      | VISHAY DALE CRCW06033K90FK             |                           |
| 30   | R16         | 1   | 2.55kΩ ± 1% 0.1W resistor (0603)                     | VISHAY DALE CRCW06032K55FK             |                           |
| 31   | R17         | 1   | 453Ω ± 1% 0.1W resistor (0603)                       | PANASONIC ERJ-3EKF4530V                |                           |
| 32   | R21         | 1   | 470Ω ± 5% 0.5W resistor (1210)                       | PANASONIC ERJ-14YJ470U                 |                           |

|    |     |   |                                                           |                                  |                         |
|----|-----|---|-----------------------------------------------------------|----------------------------------|-------------------------|
| 33 | R22 | 1 | 100Ω ± 5% 0.66W resistor (1206)                           | PANASONIC ERJP08J101V            |                         |
| 34 | R23 | 1 | 0Ω ± 5% resistor (0603)                                   | SAMSUNG ELECTRONICS RC1608J000CS | BOURNS CR0603-J/-000ELF |
| 35 | T1  | 1 | EFD20/10/7, 8-pin PTH, 33μH, (3,4-1,2):(7,8-5,6)=0.5416:1 | COILCRAFT CU8758-AL              |                         |
| 36 | U1  | 1 | MAX17596 TQFN16-EP 3X3                                    | MAX17596ATE+                     |                         |
| 37 | U2  | 1 | 0.1A ADJUSTABLE PRECISION SHUNT REGULATOR(SOT-23)         | TEXAS INSTRUMENTS TL431AQDBZRQ1  |                         |
| 38 | U3  | 1 | 6V/0.05A,0.2W PHOTOTRANSISTOR OPTOCOUPLER (NSOIC4)        | AVAGO TECHNOLOGIES ACPL-217-56AE |                         |

|                      |            |   |     |  |  |
|----------------------|------------|---|-----|--|--|
| DO NOT PURCHASE(DNP) |            |   |     |  |  |
| 1                    | C12,C13    | 2 | N/A |  |  |
| 2                    | C21        | 1 | N/A |  |  |
| 3                    | R2,R18-R20 | 4 | N/A |  |  |

[illegible]

|                         |  |  |
|-------------------------|--|--|
|                         |  |  |
| YAGEO PH RC0603JR-070RL |  |  |
|                         |  |  |
|                         |  |  |
|                         |  |  |
|                         |  |  |

|  |  |  |
|--|--|--|
|  |  |  |
|  |  |  |
|  |  |  |
|  |  |  |

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9