


# Manual Switches

## Pushbutton Switches and Indicators

Series 4

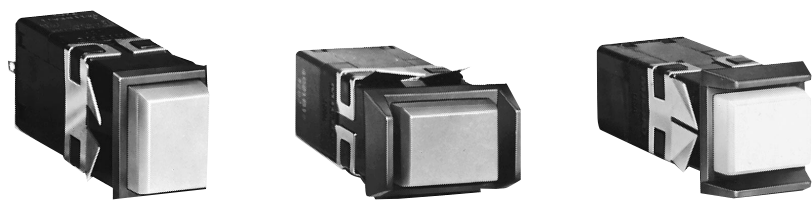


Bezel on all sides

Barriers on short sides


Barriers on long sides

### FEATURES

- Provides distinctive color display whether lighted or unlighted.
- Convenient front panel mounting and relamping, without tools.
- Matching indicators.
- Locked button option discourages tampering.
- Choice of transmitted color, projected color, or dead front display.
- UL recognized, CSA certified.



Barrier on one short side



Barriers on one long side

### MOUNTING


Snap-in mounting. Switch or indicator is easily inserted into the cutout. Mounting clips grip the panel. No tools are needed.



Housings with a full bezel can be front panel or sub-panel mounted, individually or in strips.


Barrier type housings are normally mounted top-of-panel in strips, but can also be individually mounted. Barriers can be on either the short or long housing sides.

The drawing shows how housings with a barrier on one side are used in a strip of two or more units. The first has a barrier on two sides, while all other units have a barrier on one side, and butt against each other.



Barriers on both sides.

Barriers on one side.

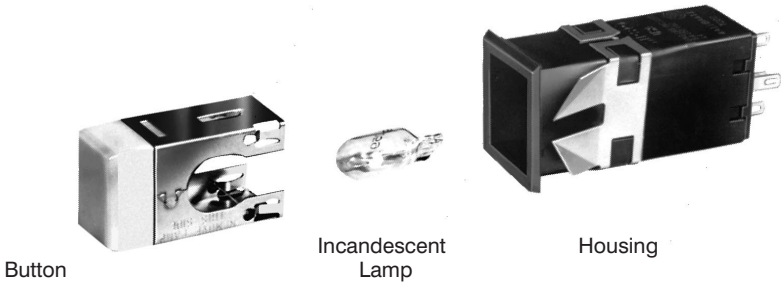

Button


Incandescent Lamp

Housing

### RELAMPING



1. Lamps and legends can be changed from panel front. When button is removed, lamp is extracted from its socket and retained in button.

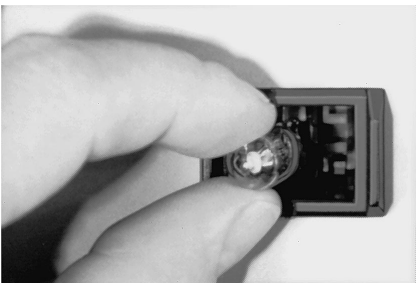

2. Ease of lamp replacement. After the inoperative lamp is automatically removed with the button, the new lamp is inserted without the use of tools.

### ELECTRICAL RATINGS

5-amp silver contacts —  
5 amps res., 3 amps ind., 30 VDC.  
UL code L-4: 5 amps, 250 VAC

10-amp silver contacts —  
UL code L-285; 10 amps, 1/8 Hp, 125 or 250 VAC.

Gold contacts —  
1 amp res., 0.5 amp, ind., 30 VDC  
UL code L-22: 1 amp, 125 VAC

Gold alloy contacts —  
0.1 amp, res., 30 VDC;  
1 amp, 125 VAC.

### LOCKED BUTTON OPTION

Series 4 can be furnished with a locked button option for use in areas accessible to the public, where tampering and vandalism are problems. The housing has a special mounting clip with built-in button retainer. This mounting clip must be removed from behind panel to allow button removal. Button movement during switch operation is unaffected by locked button feature. (These units cannot be relamped from front of panel.)

Manuals

SWITCH HOUSING ORDER GUIDE

Order buttons separately from page 109.

4A11B

Switch Housing Style (Black)

4A11B

Bezel: all sides

Mtg. clips: long sides

4A34B

Barrier: one long side

Mtg. clips: short sides

4A21B

Barriers: short sides

Mtg. clips: long sides

4A23B

Barrier: one short side

Mtg. clips: long sides

With Housing Provision for Locked Button

4A13B

Bezel: all sides

Mtg. clips: long sides

4A25B

Barriers: short sides

Mtg. clips: long sides

4A26B

Barrier: one short side

Mtg. clips: long sides

AA

Switching Element

| Electrical Data                         | Action      | Terminals |
|-----------------------------------------|-------------|-----------|
|                                         |             | .110 QC   |
| 1-Pole (SPDT),<br>5 a. silver contacts  | Momentary   | AA        |
|                                         | Alt. Action | BA        |
| 2-Pole (DPDT),<br>5 a. silver contacts  | Momentary   | EA        |
|                                         | Alt. Action | FA        |
| 2-Pole (DPDT),<br>10 a. silver contacts | Momentary   | NA        |
|                                         | Alt. Action | PA        |

11

Incandescent Illumination

11

No lamp,  
has lamp socket for T-3¼  
wedge base lamps.

21

#161 12-volt  
T-3¼ lamp.

31

#656 or 152  
28-volt  
T-3¼ lamp

91

Unlighted,  
no lamp socket.

Example:

4A11BAA11


Black switch housing with a bezel on all sides, mounting clips on long sides, 1-pole momentary-action 5-amp silver contacts, .110" quick-connect/solder terminals, and a T-3¼ lamp socket.

MOUNTING CLIP ORIENTATION


Mounting clips on the **long sides** of the housing are specified when individually mounted or when the long sides of strip mounting housings parallel the long sides of the panel cutout slot. The most secure mounting is achieved when the mounting clips are on the long sides.

Mounting clips on the **short sides** of the housing are specified when short sides of strip mounted housings parallel the long sides of the panel cutout slot.

BUTTON ORDER GUIDE

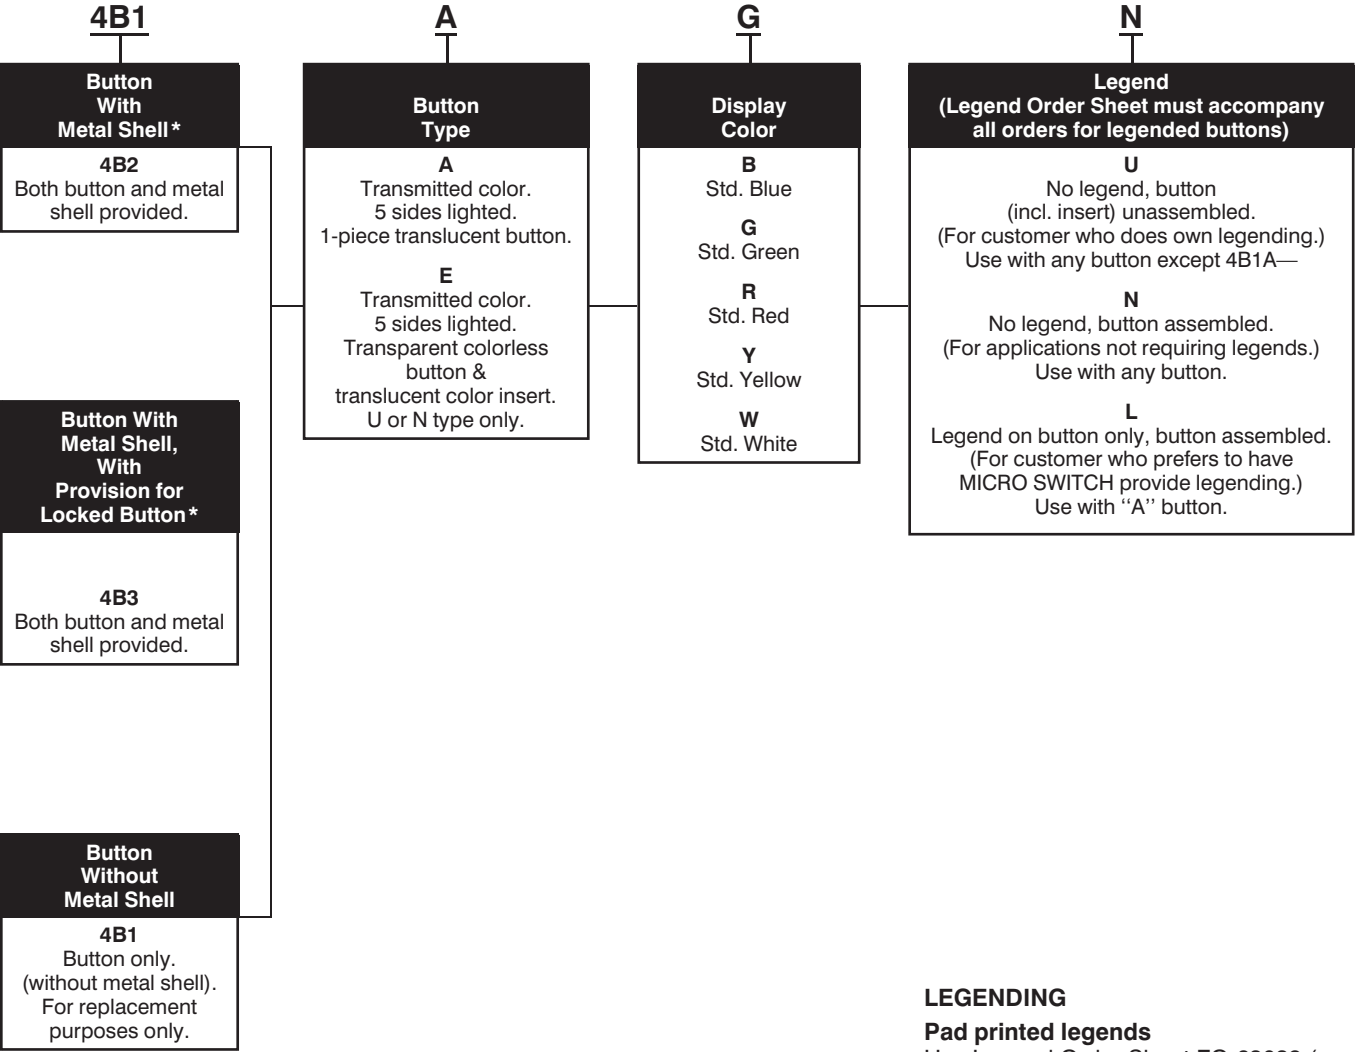

\*To be ordered with switch.

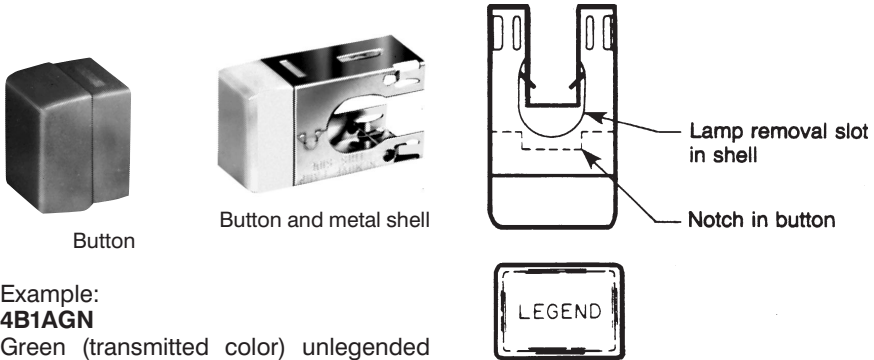

Example:  
**4B1AGN**  
Green (transmitted color) unlegended button. (If the button shell is also desired, substitute 4B2 for 4B1.)

Note: legended button should be assembled as shown above, with button notch keyed to lamp removal slot in shell. This will reduce possibility of lamp droppage when button is removed from the housing. Buttons are legended in this manner.

**LEGENDING**

**Pad printed legends**  
Use Legend Order Sheet FO-63039 (see page 110) to specify pad printed legends. Reproduce it on your office copier. Legends are oversprayed for maximum durability.

**Film legends**  
Film legends are not supplied by MICRO SWITCH. However, this service is readily available from commercial sources or may be provided through your in-house capabilities. The film should be polyester to withstand lamp heat and must be precision cut, per the dimensions shown on the next page, to insure proper alignment.

The film fits into a small undercut on the face of the button insert. The film is held securely when the outer button and insert are snapped together. (Note: It is difficult to disassemble for legend changes without damaging the parts.)

Button and insert should be snapped together prior to being assembled to the button shell.

LAMP ORDER GUIDE

| Catalog Listing | Illum. Code | Incandescent Lamp Description |
|-----------------|-------------|-------------------------------|
| 4Z231           | 31          | #656 or #152 28-volt (T-3¼)   |

LAMP DATA


Following data was compiled from manufacturers' specifications and is provided for reference only.

| Illum. Code | Industry Lamp No. | Design Volts | Incandescent Lamp Specifications |       |       |        |
|-------------|-------------------|--------------|----------------------------------|-------|-------|--------|
| 31          | 656 or 152        | 28           | Socket volts                     | 28.0  | 27.0  | 26.0   |
|             |                   |              | Amps                             | .06   | .057  | .054   |
|             |                   |              | MSCP                             | .65   | .52   | .49    |
|             |                   |              | Life (hrs. avg.)                 | 5,000 | 7,500 | 10,000 |

METAL SHELL ORDER GUIDE

| Catalog Listing | Description          |
|-----------------|----------------------|
| 4Z41            | For type 4B1 buttons |


MOUNTING CENTERS FOR STRIP MOUNT

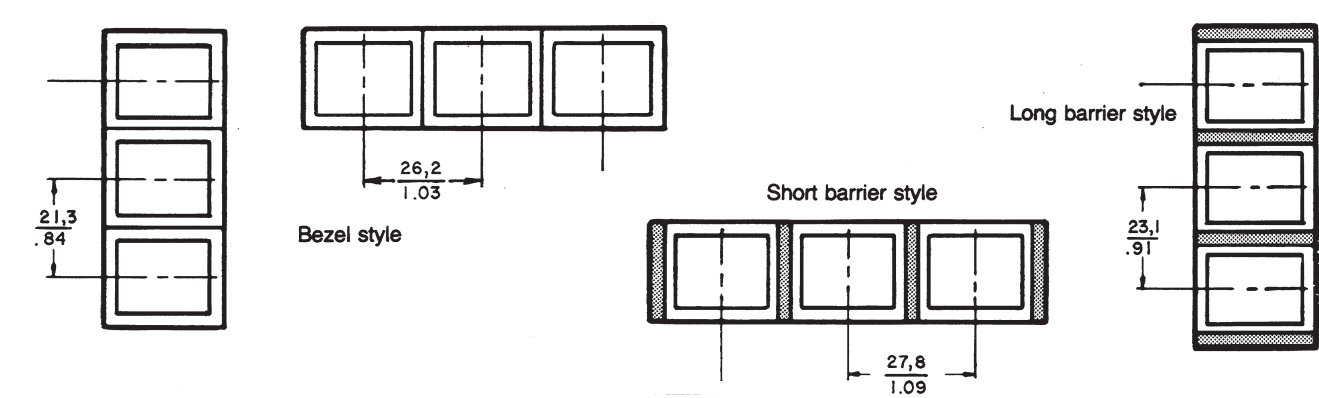

PANEL CUTOUT FOR STRIP MOUNT

|                      | Housing Style | +0,38 +.015<br>Dimensions -0,00 -.000 |                                                  |
|----------------------|---------------|---------------------------------------|--------------------------------------------------|
|                      |               | Width                                 | Length                                           |
| Short Sides Abutting | Full Bezel    | .79" (20,1 mm)                        | [No. of units x 1.03" (26,2 mm)] - .05" (1,4 mm) |
|                      | Short Barrier | .79" (20,1 mm)                        | [No. of units x 1.09" (27,8 mm)] - .12" (3,0 mm) |
| Long Sides Abutting  | Full Bezel    | .98" (24,8 mm)                        | [No. of units x .84" (21,3 mm)] - .05" (1,4 mm)  |
|                      | Long Barrier  | .98" (24,8 mm)                        | [No. of units x .91" (23,1 mm)] - .12" (3,0 mm)  |


PANEL CUTOUT FOR INDIVIDUAL MOUNT (any housing style)



Manual Switches  
Pushbutton Switches and Indicators

Series 4

MOUNTING DIMENSIONS (For reference only)

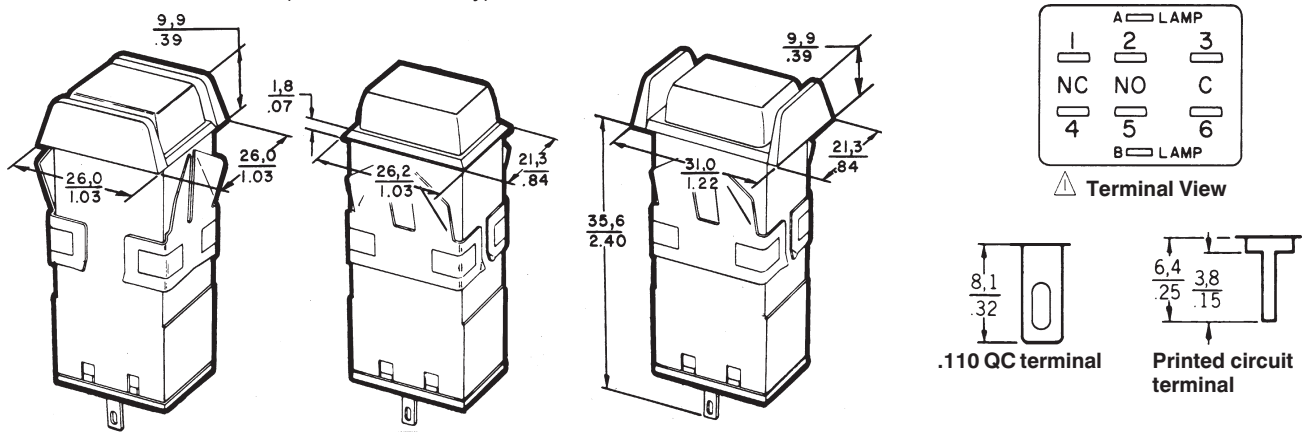

Panel thickness: .040-.200 in. (1,02-5,08 mm)

Key: 0,0 = mm  
0.00 = inches

⚠ For proper legend orientation, Series 4 switch when viewed from front of panel, should have terminals 1 and 3 up for Figures 1 & 3 and to the right for Figures 2 and 4. (Figures 1-4 on Legend Order Sheet next page.)

Quick-connect terminals are .110" (2,8 mm) wide by .020" (0,5 mm) thick. The slot is .130" (3,3 mm) long by .048" (1,2 mm). Printed circuit terminals are: Lamp — .025 (0,6 mm) by .020" (0,5 mm); Switch — .025" (0,6 mm) square.

All terminals are plated to permit soldering.

| Type A Button<br>(5 sides lighted)                                                        | Type E Button<br>(5 sides lighted)                                            |
|-------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------|
| <p>Translucent<br/>Colored Button</p>                                                     | <p>Transparent Button<br/>Colorless</p> <p>Translucent<br/>Colored Insert</p> |
| <p>±.005/0,13<br/>*Thickness: .004" to .007"/0,1 to 0,18 (Film furnished by customer)</p> |                                                                               |

Pushbuttons

Honeywell

Series 4 Legend Order Sheet

ACCOUNT NO.

- 1. Determine if legend is to be applied to outer button shell, or to button insert.
- 2. Select appropriate Fig. No. from Chart "A" or "B", and enter on legend order chart.
- 3. Place ✓ in appropriate "TYPE SIZE" column (refer to CHART "C" for examples).
- 4. Place ✓ in BLACK or WHITE legend color column.
- 5. Indicate quantity desired.
- 6. Fill in legend description. (DO NOT EXCEED MAXIMUM NUMBER OF LINES OR

Catalog Listing 4
Customer P.O. No.
Customer Dwg. No.
MICRO SWITCH Sales Order
Line Number
Schedule No.

Customer:

Address:

Buttons: Legend on Top Surface
Buttons Insert: Legend on Top Surface
Legend Area
Type Size
Fig. 1 Fig. 2 Fig. 3 Fig. 4
Without An "M" or "W" With An "M" or "W"
Max. Char. Lines /Area Max. Char. Lines /Area
Fig. 1 Fig. 2 Fig. 3 Fig. 4
5/64 7/64 9/64 13/64 5/16
7 3 6 4 1 2 1 2 1 1 1 1
2 1 2 1 3 2 2 2
4 1 3 1 3 2 2 2
5/16 2 1 2 1 2 1 1 1 1 1 1 1

Modified Gothic lettering (A thru Z), numerals (0 thru 9) and Symbols below available in 5/64, 7/64, 9/64, 13/64 and 5/16.
A3
Modified Gothic
STANDARD SYMBOLS AVAILABLE
. , : ; ! ? ' - " / ( ) \* &
\$ ¢ # % 0 + - ± ÷ × ≠ > <
→ ↗ ↘ ↙ ↚ ↛ ↜ ↝ ↞ ↠ ↡ ↢ ↣ ↤ ↥ ↦ ↧ ↨ ↩ ↪ ↫ ↬ ↭ ↮ ↯ ↰ ↱ ↲ ↳ ↴ ↵ ↶ ↷ ↸ ↹ ↺ ↻ ↼ ↽ ↾ ↿ ⇀ ⇁ ⇂ ⇃ ⇄ ⇅ ⇆ ⇇ ⇈ ⇉ ⇊ ⇋ ⇌ ⇍ ⇎ ⇏ ⇐ ⇑ ⇒ ⇓ ⇔ ⇕ ⇖ ⇗ ⇘ ⇙ ⇚ ⇛ ⇜ ⇝ ⇞ ⇟ ⇠ ⇡ ⇢ ⇣ ⇤ ⇥ ⇦ ⇧ ⇨ ⇩ ⇪ ⇫ ⇬ ⇭ ⇮ ⇯ ⇰ ⇱ ⇲ ⇳ ⇴ ⇵ ⇶ ⇷ ⇸ ⇹ ⇺ ⇻ ⇼ ⇽ ⇾ ⇿

LEGEND ORDER CHART

Table with columns: Customer Part No, Fig No, Type Size, REF: Chart A or B, Ink Color, Button Qty, Legend Description, Do Not Exceed Maximum Number of Lines or Characters, Sequence: Left-to-Right or Top-to-Bottom, 1st Line, 2nd Line, 3rd Line, 4th Line, 5th Line.

SPECIAL LEGENDS
NOTE: Use this area to show special Legend Locations or Configurations NOT shown above. NON-STANDARD legends will involve additional charges and increased delivery time.
Fig. "A"
Fig. "B"

FO-63035-B

(Signature) (Date)

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9