



| Rack Dimension |       |          |      |
|----------------|-------|----------|------|
| L              | W     | H        |      |
| 350.8          | 482.6 | 44 (1U)  | mm   |
| 13.8           | 19    | 1.73(1U) | inch |



## ■ Features

- Universal AC input / Full range
- 1U profile 19" rack shelf, fitting three 2000W modules up to 6000W with active current sharing
- Output voltage programmable
- Support hot swap (hot plug)
- Built-in PMBus protocol
- 5 years warranty

## ■ Applications


- Industrial automation
- Distributed power architecture system
- Wireless/telecommunication solution
- Redundant power system
- Electric vehicle charger system
- Constant current source system

## ■ Description


RKP-1U rack system is a power distribution solution utilizing the rack configuration with 1U low profile. Starting with a single unit of 2000W, RCP-2000 is the front end rectifier (or, power supply). With the active current sharing function, up to 6000W is able to be provided by 1 stack of the 19" rack mountable shelf RKP-1U and 18000W by 3 stacks. The design flexibility for system applications is ideally fulfilled by various built-in features, such as output programming, communication protocol PMBus, remote ON-OFF, auxiliary power, external control/monitor via the control model RCP-CMU-1, etc.

## ■ Model Encoding

### Rack Shelf: RKP-1U I -CMU1

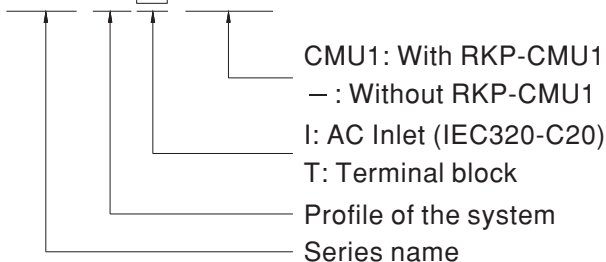

### Whole System: RKP-6K1U I -CMU1-12

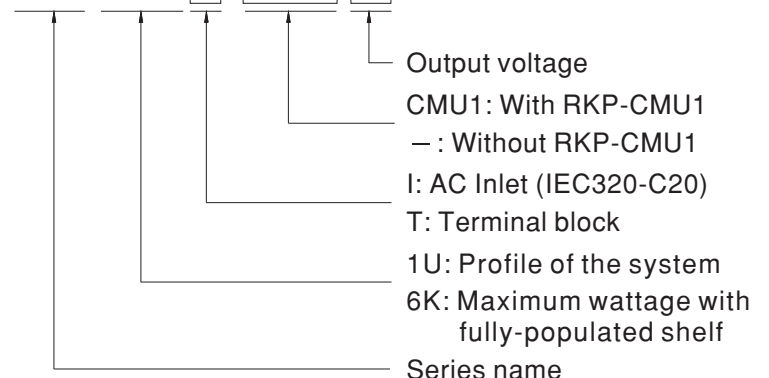



## SPECIFICATION - Power Supply System


| MODEL                          |  | RKP-6K1U□-12   | RKP-6K1U□-24                                     | RKP-6K1U□-48          |  |
|--------------------------------|--|--|--|-----------------------|--|
| OUTPUT                         | RECTIFIER  | RCP-2000-12  | RCP-2000-24                                      | RCP-2000-48           |  |
|                                | RACK SHELF   | RKP-1UI or RKP-1UT   |  |                       |  |
|                                | OUTPUT VOLTAGE   | 12V  | 24V  | 48V                   |  |
|                                | MAX. OUTPUT CURRENT  | 300A   | 240A   | 126A                  |  |
|                                | MAX. OUTPUT POWER <small>Note.7</small>  | 3600W  | 5760W  | 6048W                 |  |
| INPUT                          | VOLTAGE RANGE <small>Note.6</small>  | 90 ~ 264VAC 127 ~ 370VDC   |  |                       |  |
|                                | FREQUENCY RANGE  | 47 ~ 63Hz  |  |                       |  |
|                                | AC CURRENT (Typ.)PER MODULE  | 13A/115VAC 7A/230VAC   | 16A/115VAC 11A/230VAC                            | 16A/115VAC 11A/230VAC |  |
|                                | LEAKAGE CURRENT  | <3.5mA / 230VAC  |  |                       |  |
| FUNCTION                       | AUXILIARY POWER  | 5V @ 0.3A, 12V @ 0.8A  |  |                       |  |
|                                | REMOTE ON-OFF CONTROL  | By electrical signal or dry contact ON:short OFF:open  |  |                       |  |
|                                | REMOTE SENSE   | Compensate voltage drop on the load wiring up to 0.5V.   |  |                       |  |
|                                | OUTPUT VOLTAGE PROGRAMMABLE  | Adjustment of output voltage is allowable to 90 ~ 110% of nominal output voltage. Please refer to the Function Manual. |  |                       |  |
|                                | DC OK SIGNAL   | The isolated TTL signal out, Please refer to the Installation Manual   |  |                       |  |
|                                | AC OK SIGNAL   | The isolated TTL signal out, Please refer to the Installation Manual   |  |                       |  |
|                                | OVER TEMP WARNING  | Logic " High" for over temperature warning, Please refer to the Installation Manual, isolated signal                   |  |                       |  |
|                                | FAN FAIL SIGNAL  | The isolated TTL signal out, Please refer to the Installation Manual   |  |                       |  |
| ENVIRONMENT                    | WORKING TEMP.  | -40 ~ +70°C (Refer to "Derating Curve")  |  |                       |  |
|                                | WORKING HUMIDITY   | 20 ~ 90% RH non-condensing   |  |                       |  |
|                                | STORAGE TEMP., HUMIDITY  | -40 ~ +85°C, 10 ~ 95% RH non-condensing  |  |                       |  |
|                                | TEMP. COEFFICIENT  | ±0.03%/°C (0 ~ 50°C)   |  |                       |  |
|                                | VIBRATION  | 10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes   |  |                       |  |
| SAFETY & EMC<br>(Note 5)       | SAFETY STANDARDS   | UL60950-1, TUV EN60950-1, EAC TP TC 004 approved   |  |                       |  |
|                                | WITHSTAND VOLTAGE  | I/P-O/P:3KVAC I/P-FG:2KVAC O/P-FG:0.7KVDC  |  |                       |  |
|                                | ISOLATION RESISTANCE   | I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH   |  |                       |  |
|                                | EMC EMISSION   | Parameter  | Standard   | Test Level / Note     |  |
|                                |  | Conducted  | EN55032 (CISPR32) / EN55011 (CISPR11)            | Class A               |  |
|                                |  | Radiated   | EN55032 (CISPR32) / EN55011 (CISPR11)            | Class A               |  |
|                                |  | Harmonic Current   | EN61000-3-2                                      | -----                 |  |
|                                |  | Voltage Flicker  | EN61000-3-3                                      | -----                 |  |
|                                | EMC IMMUNITY   | EN55024, EN61204-3, EN61000-6-2  |  |                       |  |
|                                |  | Parameter  | Standard   | Test Level / Note     |  |
| ESD                            |  | EN61000-4-2  | Level 3, 8KV air ; Level 2, 4KV contact          |                       |  |
| Radiated                       |  | EN61000-4-3  | Level 3  |                       |  |
| EFT / Burst                    |  | EN61000-4-4  | Level 3  |                       |  |
| Surge                          |  | EN61000-4-5  | Level 4, 4KV/Line-Earth ; Level 3, 2KV/Line-Line |                       |  |
| Conducted                      |  | EN61000-4-6  | Level 3  |                       |  |
| Magnetic Field                 |  | EN61000-4-8  | Level 4  |                       |  |
| Voltage Dips and Interruptions | EN61000-4-11   | >95% dip 0.5 periods, 30% dip 25 periods, >95% interruptions 250 periods   |  |                       |  |
| OTHERS                         | DIMENSION  | Rack 350.8*482.6*44(L*W*H, with mounting bracket) ; 350.8*440*44(L*W*H, without mounting bracket)                      |  |                       |  |
|                                | PACKING  | 14.1Kg; 1pcs/14.1Kg/2.67CUFT   |  |                       |  |
| NOTE                           | <ol style="list-style-type: none"> <li>All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.</li> <li>Ripple &amp; noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf &amp; 47uf parallel capacitor.</li> <li>Under parallel operation of more than one rack connecting together, ripple of the output voltage may be higher than the SPEC at light load condition. It will go back to normal ripple level once the output load is more than 10%.</li> <li>Tolerance : includes set up tolerance, line regulation and load regulation.</li> <li>The power supply is considered a component which will be installed into a final equipment. All the EMC tests are been executed by mounting the unit on a 720mm*360mm metal plate with 1mm of thickness. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on <a href="http://www.meanwell.com">http://www.meanwell.com</a>)</li> <li>Derating may be needed under low input voltages. Please check the static characteristics for more details.</li> <li>Output of all the RCP-2000 modules are connected in parallel in the rack.</li> <li>Because of component tolerance, there is a possibility that some of the units connected in parallel will reach the overcurrent limit and others enter overload in turn when operating at full load condition. If overload conditions happen in parallel usage, it is suggested that derate the total output current by 10%.</li> <li>The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).</li> </ol> |  |  |                       |  |

## Function Manual

### 1. Voltage Drop Compensation


#### 1.1 Remote Sense

The remote sense compensates voltage drop on the load wiring up to 0.5V.

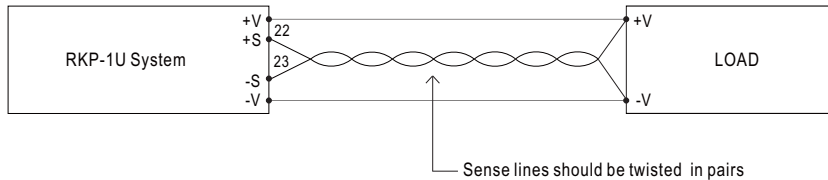

#### 1.2 Local Sense

Notice : The +S,-S on CN500 have to be connected to the +V(signal),-V(signal), respectively, in order to get the correct output voltage if the remote sensing is not used.

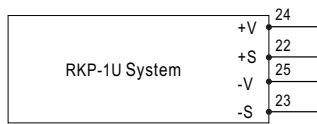

### 2. Output Voltage Programming (or, PV / remote voltage programming / remote adjust / margin programming / dynamic voltage trim)

- (1) Connecting an external DC source between PV(4,10,19) and -V(25) on CN500 that is shown in Fig. 3.1.
- (2) Adjustment of output voltage is possible between 90~110%(Typ.) of the nominal voltage which is shown in Fig. 3.2. Reducing output current is required when the output voltage is trimmed up.




Fig. 2.1 Add on 0~5V external voltage



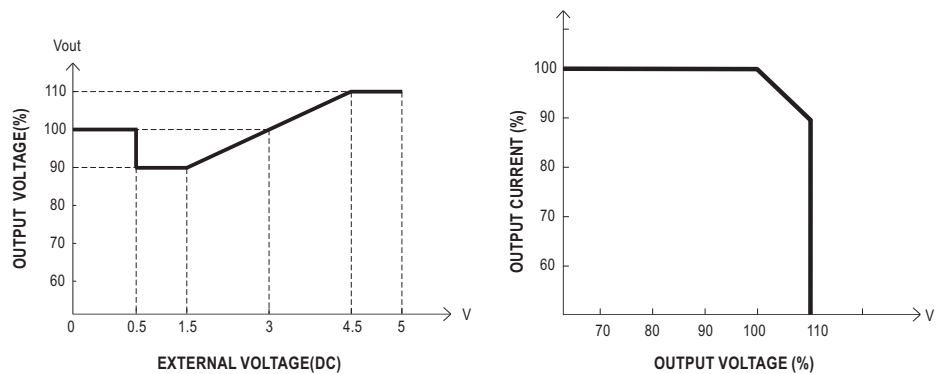


Fig. 2.2 Output voltage trimming

### 3. Remote ON-OFF Control

The power supply can be turned ON/OFF together or separately by using the "Remote ON-OFF" function.

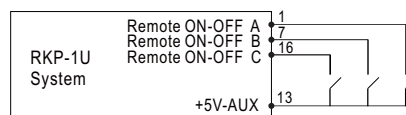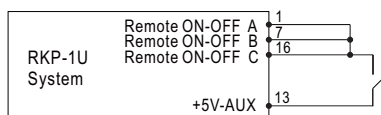



| Between Remote ON-OFF and +5V-AUX | Output |
|-----------------------------------|--------|
| Switch Open                       | OFF    |
| Switch Short                      | ON     |

### 4. PMBus Communication Interface

※ RCP-2000 supports PMBus Rev. 1.1 with maximum 100KHz bus speed, allowing information reading, status monitoring and output trimming. For details, please refer to the Installation Manual.


■ Mechanical Specification (Rack System)

Case No. 959A Unit:mm

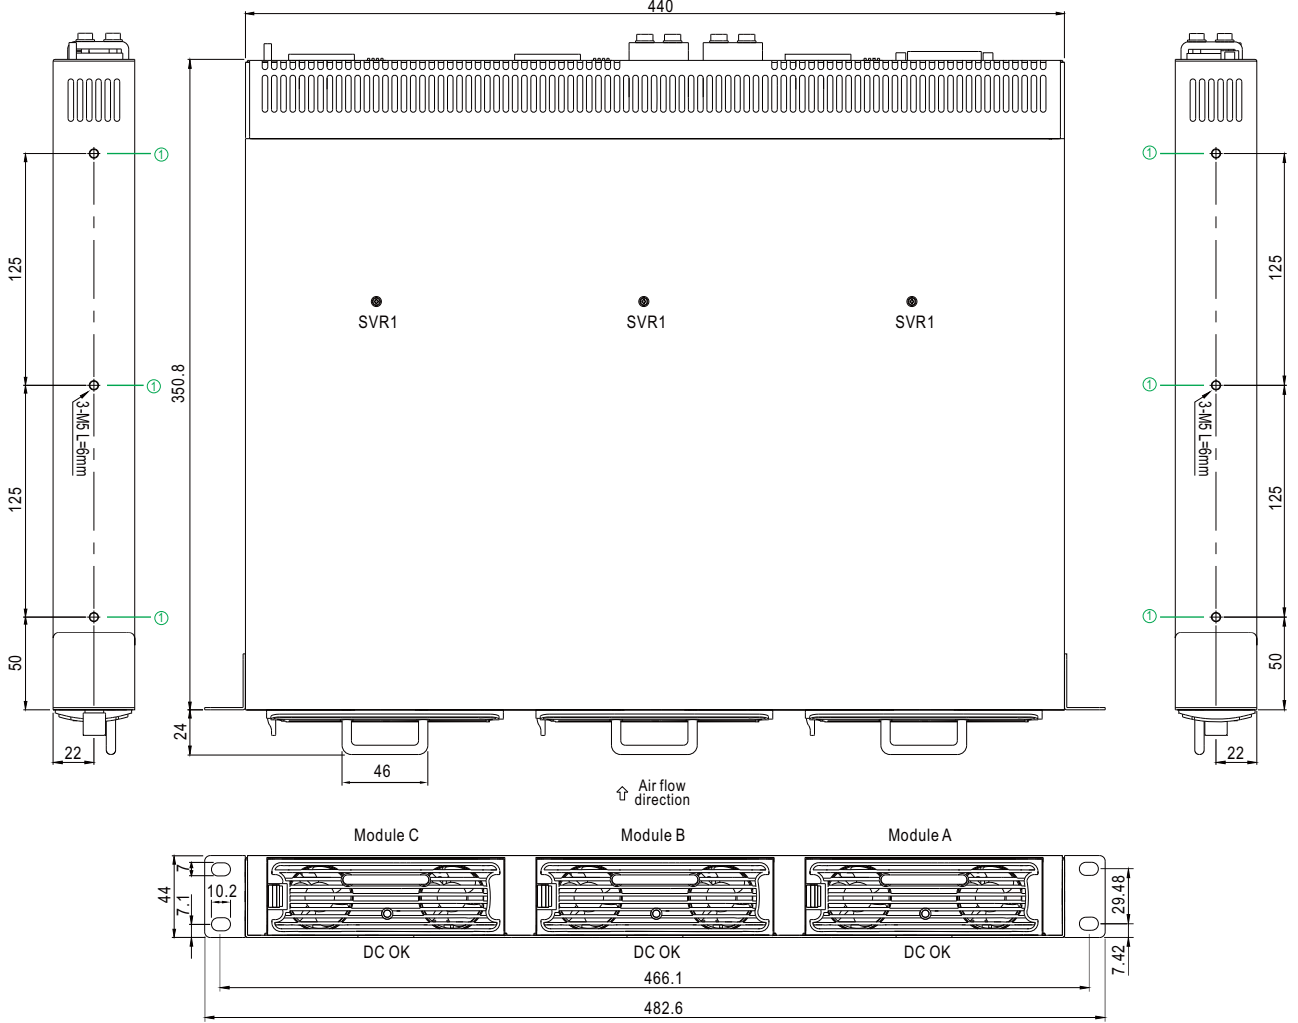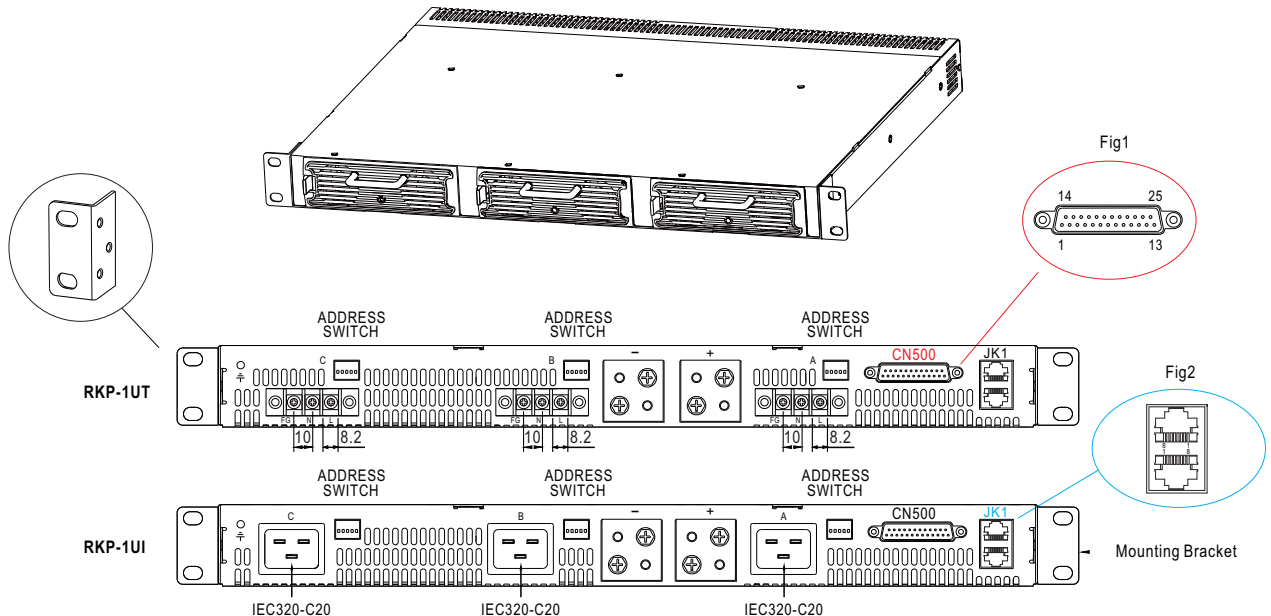

※ Mounting Instruction

| Hole No. | Recommended Screw Size | MAX. Penetration Depth L | Recommended mounting torque |
|----------|------------------------|--------------------------|-----------------------------|
| ①        | M5                     | 6mm                      | 10Kgf-cm                    |

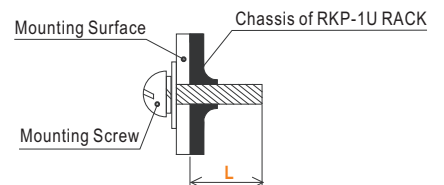


※ LED Status Indicators & Corresponding Signal at Function Pins

| Function | LED     | Description  | * Signal   | PSU Output |
|----------|---------|--|------------|------------|
| AC-OK    | ● GREEN | When input voltage $\geq 87V$  | 0 ~ 0.5V   | ON         |
| AC-NG    | ● RED   | When input voltage $\leq 75V$  | 4.5 ~ 5.5V | OFF        |
| DC-OK    | ● GREEN | When output voltage $\geq 80\% \pm 5\%$ of $V_o$ rated.                                  | 0 ~ 0.5V   | ON         |
| DC-NG    | ● RED   | When output voltage $\leq 80\% \pm 5\%$ of $V_o$ rated.                                  | 4.5 ~ 5.5V | ON         |
| T-OK     | ● GREEN | When the internal temperature (TSW1 & TSW2 short) is within safe limit                   | 0 ~ 0.5V   | ON         |
| T-ALARM  | ● RED   | When the internal temperature (TSW1 or TSW2 open) exceeds the limit of temperature alarm | 4.5 ~ 5.5V | OFF        |


\*Signal between function pin and "GND-AUX".

※ IN/OUT Connector Pin No. Assignment(CN500) : D-Type Right Angle 25 positions (female type)



| Pin No. | Function      | Description  |
|---------|---------------|--|
| 1,7,16  | REMOTE ON/OFF | Each unit can separately turn the output on and off by electrical signal or dry contact between ON/OFF A,B,C(pin 1,7,16) and +5V-AUX(pin 13). Short: ON, Open:OFF. (Note.2)                                  |
| 2,8,17  | AC-OK         | Low : When the input voltage is $\geq 87V_{rms}$ . High : when the input voltage in $\leq 75V_{rms}$ . (Note.2)  |
| 3,9,18  | DC-OK         | High : When the $V_{out} \leq 80 \pm 5\%$ . Low : When $V_{out} \geq 80 \pm 5\%$ . (Note.2)  |
| 4,10,19 | PV            | Connection for output voltage programming.   |
| 5,11,20 | T-ALARM       | High : When the internal temperature (TSW1 or TSW2 open) exceeds the limit of temperature alarm.<br>Low : When the internal temperature (TSW1 or TSW2 short) under the limit temperature. (Note.2)           |
| 6,12,21 | FAN FAIL      | High : When the internal fan fail.<br>Low : When the internal fan is normal. (Note.2)  |
| 13      | +5V-AUX       | Auxiliary voltage output, 4.5 ~ 5.5V, referenced to GND-AUX (pin 15).<br>The maximum load current is 0.3A. This output has the built-in "Oring diodes" and is not controlled by the remote ON/OFF control.   |
| 14      | +12V-AUX      | Auxiliary voltage output, 10.8 ~ 13.2V, referenced to GND-AUX (pin 15).<br>The maximum load current is 0.8A. This output has the built-in "Oring diodes" and is not controlled by the remote ON/OFF control. |
| 15      | GND-AUX       | Auxiliary voltage output GND.<br>The signal return is isolated from the output terminals (+V & -V).  |
| 22      | +S            | Positive sensing for remote sense.   |
| 23      | -S            | Negative sensing for remote sense.   |
| 24      | +V(signal)    | Positive output voltage. For local sense use only, can't be connected directly to the load.  |
| 25      | -V(signal)    | Negative output voltage. For local sense use only, can't be connected directly to the load.  |

※ IN/OUT Connector Pin No. Assignment(JK1) : RJ45 8 positions



| Pin No. | Function   | Description  |
|---------|------------|--|
| 1,2     | DA,DB      | Differential digital signal for parallel control. (Note.1)                                       |
| 3       | -V(signal) | Negative output voltage. For parallel control, can't be connected directly to the load.          |
| 4       | CONTROL    | Remote ON/OFF control pin used in the PMBus interface. (Note.2)                                  |
| 5       | NC         | Retain for future use.   |
| 6       | SDA        | Serial Data used in the PMBus interface. (Note.2)  |
| 7       | SCL        | Serial Clock used in the PMBus interface. (Note.2)   |
| 8       | GND-AUX    | Auxiliary voltage output GND. The signal return is isolated from the output terminals (+V & -V). |

Note.1: Non-isolated signal, referenced to the -V(signal).

Note.2: Isolated signal, referenced to GND-AUX.

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9