


# Garret 50C



**gumstix**<sup>®</sup>

dream, design, deliver™

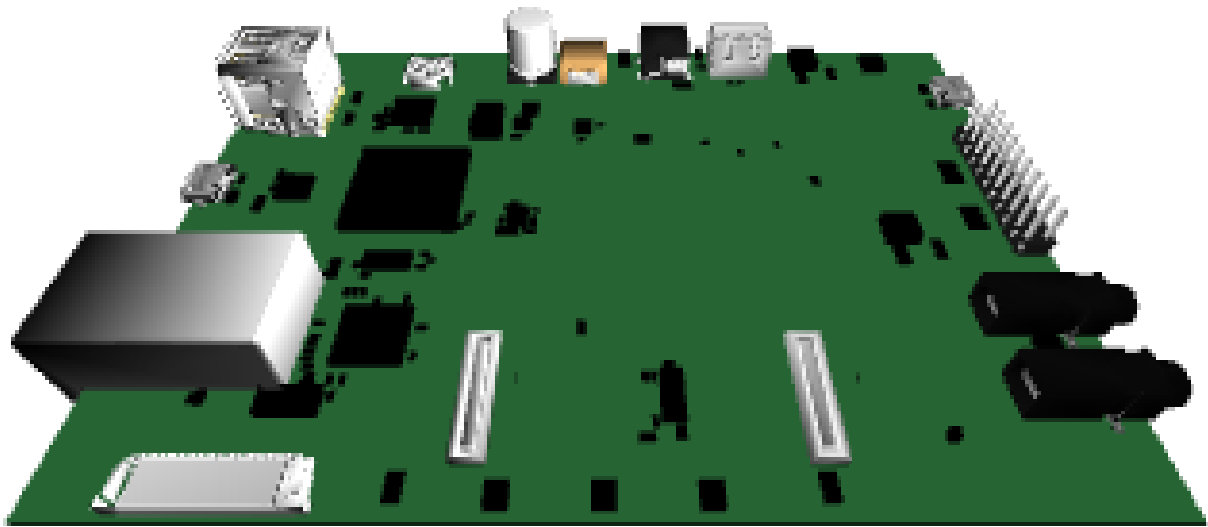

Gumstix, Inc. shall have no liability of any kind, express or implied, arising out of the use of the Information in this document, including direct, indirect, special or consequential damages.

Gumstix, Inc. may have patents, patent applications, trademarks, copyrights, trade secrets or other intellectual property rights pertaining to Gumstix products described in this document (collectively "Gumstix Intellectual Property").

Except as expressly provided in any written license or agreement from Gumstix, Inc., this document and the information contained therein does not create any license to Gumstix's Intellectual Property.

The Information contained herein is subject to change without notice. Revisions may be issued regarding changes and/or additions.

Copyright © 2016, Gumstix, Inc. All rights reserved.

## Board Description

An DuoVero COM based expansion board, with support for 5.0" Newhaven Capacitive multi-touch screen (screen sold separately) with Ethernet, USB and audio.

## Board Dimensions

12.0cm x 8.5cm



# Contents

<b>1</b>	<b>Modules on Board</b>	<b>1</b>
1.1	LCD Display . . . . .	1
1.1.1	5.0" Flip-Side Connector For Newhaven Capacitive Multi-Touch Screen (v6) (1) . . .	1
1.2	COM Connectors . . . . .	1
1.2.1	Gumstix - DuoVero COM Connector (v19) (2) . . . . .	1
1.3	Network . . . . .	3
1.3.1	10/100BASE-T (v10) (3) . . . . .	3
1.4	Power . . . . .	3
1.4.1	Battery & Barrel Power Supply (v1) (4) . . . . .	3
1.4.2	CoinCell Backup (v3) (11) . . . . .	4
1.4.3	Backlight Controller (v4) (12) . . . . .	4
1.4.4	3.3V/1.5A Regulator (v9) (13) . . . . .	4
1.4.5	3.3V/1.5A Regulator (v9) (14) . . . . .	5
1.4.6	1.8V/0.6A Regulator (v6) (21) . . . . .	5
1.5	Connectivity . . . . .	5
1.5.1	HDMI to Parallel Converter (v3) (5) . . . . .	5
1.5.2	USB-UART (v14) (17) . . . . .	5
1.6	Audio . . . . .	5
1.6.1	Dual Audio (in / out) (v9) (6) . . . . .	5
1.7	USB . . . . .	6
1.7.1	Dual Stacked USB Type A (v6) (7) . . . . .	6
1.7.2	3-Port USB Hub (v10) (10) . . . . .	6
1.7.3	Micro-B Jack (v8) (15) . . . . .	6
1.7.4	Micro-B Jack (v8) (16) . . . . .	6
1.8	Headers . . . . .	6
1.8.1	20-Pin Male Header (v8) (8) . . . . .	6
1.8.2	COM to CSI2 Connector (v6) (9) . . . . .	7
1.8.3	NC (v6) (25) . . . . .	7
1.8.4	NC (v6) (26) . . . . .	7
1.9	Sensors . . . . .	7
1.9.1	9-Axis IMU (v16) (18) . . . . .	7
1.10	IO . . . . .	8
1.10.1	Flip-side Tactile Switch (v4) (19) . . . . .	8



- 1.10.2 Flip-side Tactile Switch (v4) (20) . . . . . 8
- 1.10.3 Flip-side Green LED (v3) (22) . . . . . 8
- 1.10.4 Flip-side Blue LED (v3) (23) . . . . . 8
- 1.10.5 Flip-side Red LED (v5) (24) . . . . . 8
- 1.11 Mechanical . . . . . 8
  - 1.11.1 Mounting Hole (2.2mm) . . . . . 8
  - 1.11.2 Mounting Hole (2.2mm) . . . . . 8
  - 1.11.3 Mounting Hole (2.2mm) . . . . . 9
  - 1.11.4 Mounting Hole (2.2mm) . . . . . 9
- 2 Module Connections Graph . . . . . 10**
- 3 Module Power Graph . . . . . 11**





- VCC\_1.8 from 1.8V/0.6A Regulator (21)

The DuoVero connector provides the following outputs:

- GPMC to 10/100BASE-T (3)
- CSI21 to COM to CSI2 Connector (9)
- VBACKUP to CoinCell Backup (11)
- nRESET to 5.0" Flip-Side Connector For Newhaven Capacitive Multi-Touch Screen (1)
- PMIC\_PWM1 to 20-Pin Male Header (8)
- GPIO152 to 20-Pin Male Header (8)
- GPIO153 to 20-Pin Male Header (8)
- PMIC\_NRESWARM to Flip-side Tactile Switch (20)
- GPIO151 to 20-Pin Male Header (8)
- GPIO156 to 20-Pin Male Header (8)
- GPIO154 to 20-Pin Male Header (8)
- GPIO155 to 20-Pin Male Header (8)
- HSO to Dual Audio (in / out) (6)
- UART3 to USB-UART (17)
- GPIO134 to 20-Pin Male Header (8)
- GPIO135 to 20-Pin Male Header (8)
- GPIO136 to 20-Pin Male Header (8)
- GPIO137 to 20-Pin Male Header (8)
- GPIO112 to 20-Pin Male Header (8)
- GPIO139 to Flip-side Red LED (24)
- GPIO110 to 20-Pin Male Header (8)
- GPIO122 to Flip-side Blue LED (23)
- nIRQ to 5.0" Flip-Side Connector For Newhaven Capacitive Multi-Touch Screen (1)
- HDMI to HDMI to Parallel Converter (5)
- PMIC\_PWM2 to 20-Pin Male Header (8)
- SYS\_EN to:
  - 1.8V/0.6A Regulator (21)
  - Flip-side Green LED (22)
- FREF\_CLK1\_OUT to COM to CSI2 Connector (9)
- USB\_HOST to 3-Port USB Hub (10)



- VLOGIC to:
  - 10/100BASE-T (3)
  - 20-Pin Male Header (8)
  - USB-UART (17)
  - 9-Axis IMU (18)
  - Backlight Controller (12)
  - COM to CSI2 Connector (9)
- LINE.IN to Dual Audio (in / out) (6)
- I2C2 to 5.0" Flip-Side Connector For Newhaven Capacitive Multi-Touch Screen (1)
- I2C3 to:
  - 9-Axis IMU (18)
  - COM to CSI2 Connector (9)
- GPIO138 to HDMI to Parallel Converter (5)
- BRIGHTNESS to Backlight Controller (12)
- GPIO168 to COM to CSI2 Connector (9)
- USB\_DEVICE to Micro-B Jack (16)
- GPIO121 to Flip-side Tactile Switch (19)
- GPIO83 to 9-Axis IMU (18)
- GPIO82 to 9-Axis IMU (18)
- GPIO81 to 9-Axis IMU (18)

## 1.3 Network

### 1.3.1 10/100BASE-T (v10) (3)

This design offers a 10/100 Base-T Ethernet connection to GPMC on Gumstix - DuoVero COM Connector (2).

## 1.4 Power

### 1.4.1 Battery & Barrel Power Supply (v1) (4)

This module is able provides 5V 5A DC power to circuit board.

This power jack provides 5V to the following modules:

- Dual Stacked USB Type A (7)
- 20-Pin Male Header (8)
- 3-Port USB Hub (10)





- Backlight Controller (12)
- 3.3V/1.5A Regulator (13)
- 3.3V/1.5A Regulator (14)

#### 1.4.2 CoinCell Backup (v3) (11)

The 6.8mm coin cell battery holder offers a short-term backup power option for your design.

This battery is connected to VBACKUP on Gumstix - DuoVero COM Connector (2).

#### 1.4.3 Backlight Controller (v4) (12)

The backlight controller regulates the intensity of illumination on LCD touch displays

Converts BRIGHTNESS from Gumstix - DuoVero COM Connector (2) to BACKLIGHT on 5.0" Flip-Side Connector For Newhaven Capacitive Multi-Touch Screen (1)

#### 1.4.4 3.3V/1.5A Regulator (v9) (13)

This DC to DC step down regulator provides a 3.3V DC output at 1.5A needed by certain components on this board. It is capable of accepting an input voltage between 3.1 to 16V DC. Currently, its input is 5V from Battery & Barrel Power Supply (4).

This regulator provides 3.3V to:

- 5.0" Flip-Side Connector For Newhaven Capacitive Multi-Touch Screen (1)
- 10/100BASE-T (3)
- HDMI to Parallel Converter (5)
- 3-Port USB Hub (10)
- 9-Axis IMU (18)
- Flip-side Tactile Switch (19)
- Flip-side Tactile Switch (20)
- 1.8V/0.6A Regulator (21)
- Flip-side Green LED (22)
- Flip-side Blue LED (23)
- Flip-side Red LED (24)



### 1.4.5 3.3V/1.5A Regulator (v9) (14)

This DC to DC step down regulator provides a 3.3V DC output at 1.5A needed by certain components on this board. It is capable of accepting an input voltage between 3.1 to 16V DC. Currently, its input is 5V from Battery & Barrel Power Supply (4).

This regulator provides 3.3V to:

- Gumstix - DuoVero COM Connector (2)
- COM to CSI2 Connector (9)

### 1.4.6 1.8V/0.6A Regulator (v6) (21)

This DC-DC regulator has an integrated inductor and tiny footprint. It provides power to modules that need a 1.8V input.

It receives 3.3V from 3.3V/1.5A Regulator (13). A SYS\_EN signal is provided by .

The following modules receive 1.8V DC from this regulator:

- Gumstix - DuoVero COM Connector (2)

## 1.5 Connectivity

### 1.5.1 HDMI to Parallel Converter (v3) (5)

This module connects and converts 5.0" Flip-Side Connector For Newhaven Capacitive Multi-Touch Screen (1) to HDMI on Gumstix - DuoVero COM Connector (2)

### 1.5.2 USB-UART (v14) (17)

Also known as an FTDI, this USB to UART converter allows a USB connection to the board to behave as a virtual RS232 serial connection. It offers direct and complete access to the system from a development machine.

This USB to UART converter connects a host machine from Micro-B Jack (15) to UART3 on Gumstix - DuoVero COM Connector (2).

## 1.6 Audio

### 1.6.1 Dual Audio (in / out) (v9) (6)

These two standard 3-position 3.5mm audio jacks offer stereo line input and stereo audio output. They are connected to Gumstix - DuoVero COM Connector (2).



## 1.7 USB

### 1.7.1 Dual Stacked USB Type A (v6) (7)

A dual type-A USB host stacked vertically that allows you to connect USB devices to the board.

It is connected to:

- USBH1 on 3-Port USB Hub (10)
- USBH2 on 3-Port USB Hub (10)

### 1.7.2 3-Port USB Hub (v10) (10)

This USB hub offers three interfaces for USB ports from USB\_HOST on Gumstix - DuoVero COM Connector (2).

This hub is connected to the following USB ports:

- Dual Stacked USB Type A (7)
- Dual Stacked USB Type A (7)

### 1.7.3 Micro-B Jack (v8) (15)

A USB micro-B port allows your design to connect as a USB device to a USB host.

This module is connected to USB\_DEVICE on USB-UART (17).

### 1.7.4 Micro-B Jack (v8) (16)

A USB micro-B port allows your design to connect as a USB device to a USB host.

This module is connected to USB\_DEVICE on Gumstix - DuoVero COM Connector (2).

## 1.8 Headers

### 1.8.1 20-Pin Male Header (v8) (8)

A header offering up to 20 pins for various GPIO or PWM signals of your choice.

This module has the following connections:

- VOUT from Battery & Barrel Power Supply (4)
- GPIO154 from Gumstix - DuoVero COM Connector (2)
- GPIO153 from Gumstix - DuoVero COM Connector (2)
- GPIO156 from Gumstix - DuoVero COM Connector (2)
- GPIO155 from Gumstix - DuoVero COM Connector (2)



- GPIO152 from Gumstix - DuoVero COM Connector (2)
- GPIO151 from Gumstix - DuoVero COM Connector (2)
- NC1 from NC (26)
- NC1 from NC (25)
- GPIO112 from Gumstix - DuoVero COM Connector (2)
- VLOGIC from Gumstix - DuoVero COM Connector (2)
- GPIO134 from Gumstix - DuoVero COM Connector (2)
- PMIC\_PWM2 from Gumstix - DuoVero COM Connector (2)
- PMIC\_PWM1 from Gumstix - DuoVero COM Connector (2)
- GPIO110 from Gumstix - DuoVero COM Connector (2)
- GPIO136 from Gumstix - DuoVero COM Connector (2)
- GPIO135 from Gumstix - DuoVero COM Connector (2)
- GPIO137 from Gumstix - DuoVero COM Connector (2)

### 1.8.2 COM to CSI2 Connector (v6) (9)

The CSI connector is compatible with Raspberry Pi family cameras.

The CSI port is connected to CSI21 on Gumstix - DuoVero COM Connector (2).

I2C communication is connected to I2C3 on Gumstix - DuoVero COM Connector (2).

REF\_CLK is provided by FREF\_CLK1\_OUT on Gumstix - DuoVero COM Connector (2).

### 1.8.3 NC (v6) (25)

Implemented as a test pad.

### 1.8.4 NC (v6) (26)

Implemented as a test pad.

## 1.9 Sensors

### 1.9.1 9-Axis IMU (v16) (18)

This module provides 3-axis acceleration, 3-axis rotational rates and 3-axis magnetic field information. It is connected via a SPI bus. Data-ready pins are provided.

Its I2C bus is connected to I2C3 on Gumstix - DuoVero COM Connector (2)

It has the following data ready signals:



- ACCEL\_DRDY to GPIO81 on Gumstix - DuoVero COM Connector (2)
- GYRO\_DRDY to GPIO82 on Gumstix - DuoVero COM Connector (2)
- MAG\_DRDY to GPIO83 on Gumstix - DuoVero COM Connector (2)

## 1.10 IO

### 1.10.1 Flip-side Tactile Switch (v4) (19)

This 4.9 sq. mm light touch switch provides a user input for the signal on . It can be found on the flip-side of the board.

### 1.10.2 Flip-side Tactile Switch (v4) (20)

This 4.9 sq. mm light touch switch provides a user input for the signal on . It can be found on the flip-side of the board.

### 1.10.3 Flip-side Green LED (v3) (22)

This 1608 standard size green LED, placed on the backside, provides an indicator for the signal SYS\_EN on Gumstix - DuoVero COM Connector (2).

### 1.10.4 Flip-side Blue LED (v3) (23)

This 1608 standard size blue LED, placed on the backside, provides an indicator for the signal GPIO122 on Gumstix - DuoVero COM Connector (2).

### 1.10.5 Flip-side Red LED (v5) (24)

This 1608 standard size red LED, placed on the backside, provides an indicator for the signal GPIO139 on Gumstix - DuoVero COM Connector (2).

## 1.11 Mechanical

### 1.11.1 Mounting Hole (2.2mm)

A #0 mounting hole for securing the board with mounting pins.

### 1.11.2 Mounting Hole (2.2mm)

A #0 mounting hole for securing the board with mounting pins.



**1.11.3 Mounting Hole (2.2mm)**

A #0 mounting hole for securing the board with mounting pins.

**1.11.4 Mounting Hole (2.2mm)**

A #0 mounting hole for securing the board with mounting pins.



## 2 Module Connections Graph


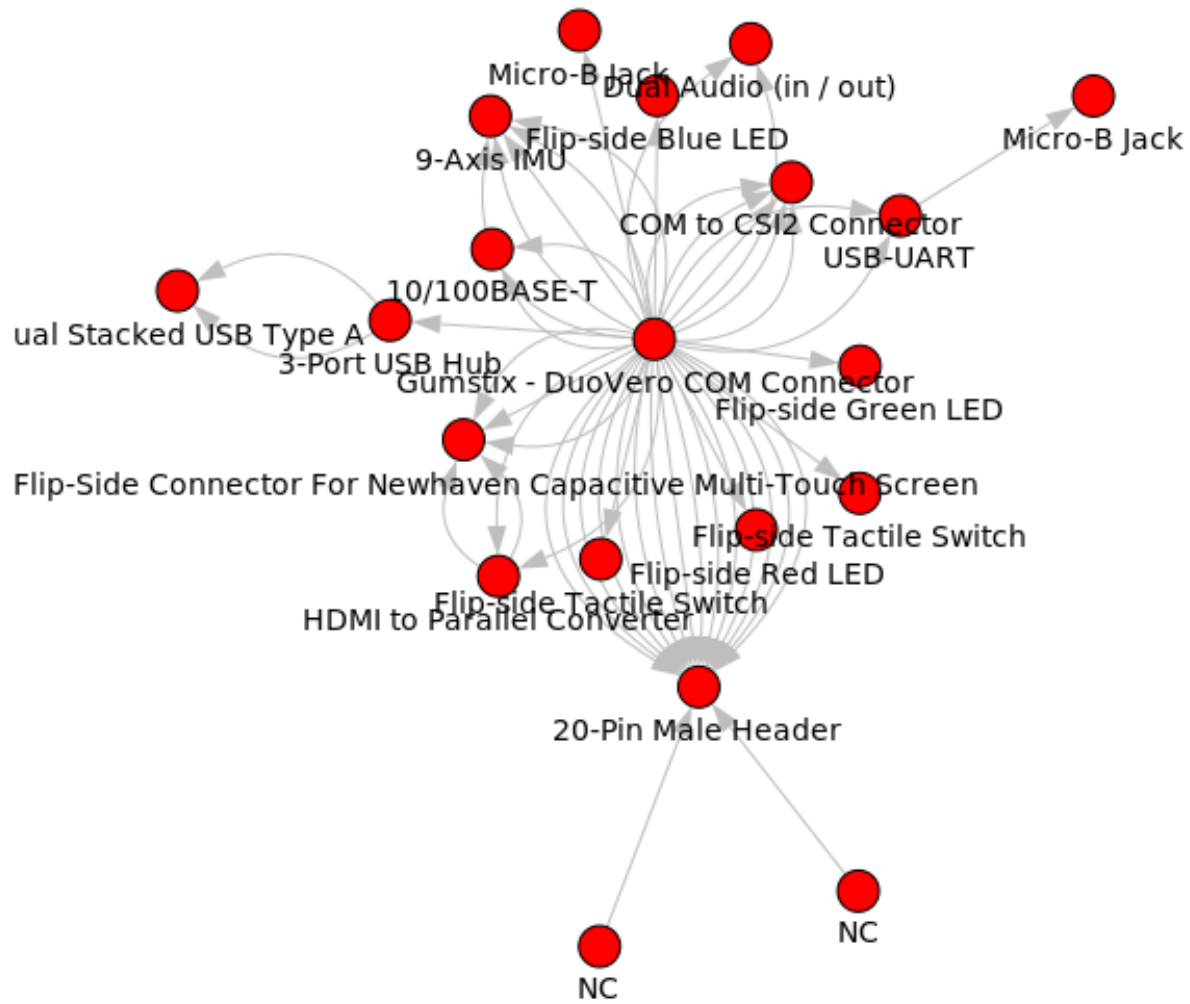


Figure 1: excludes power modules



### 3 Module Power Graph



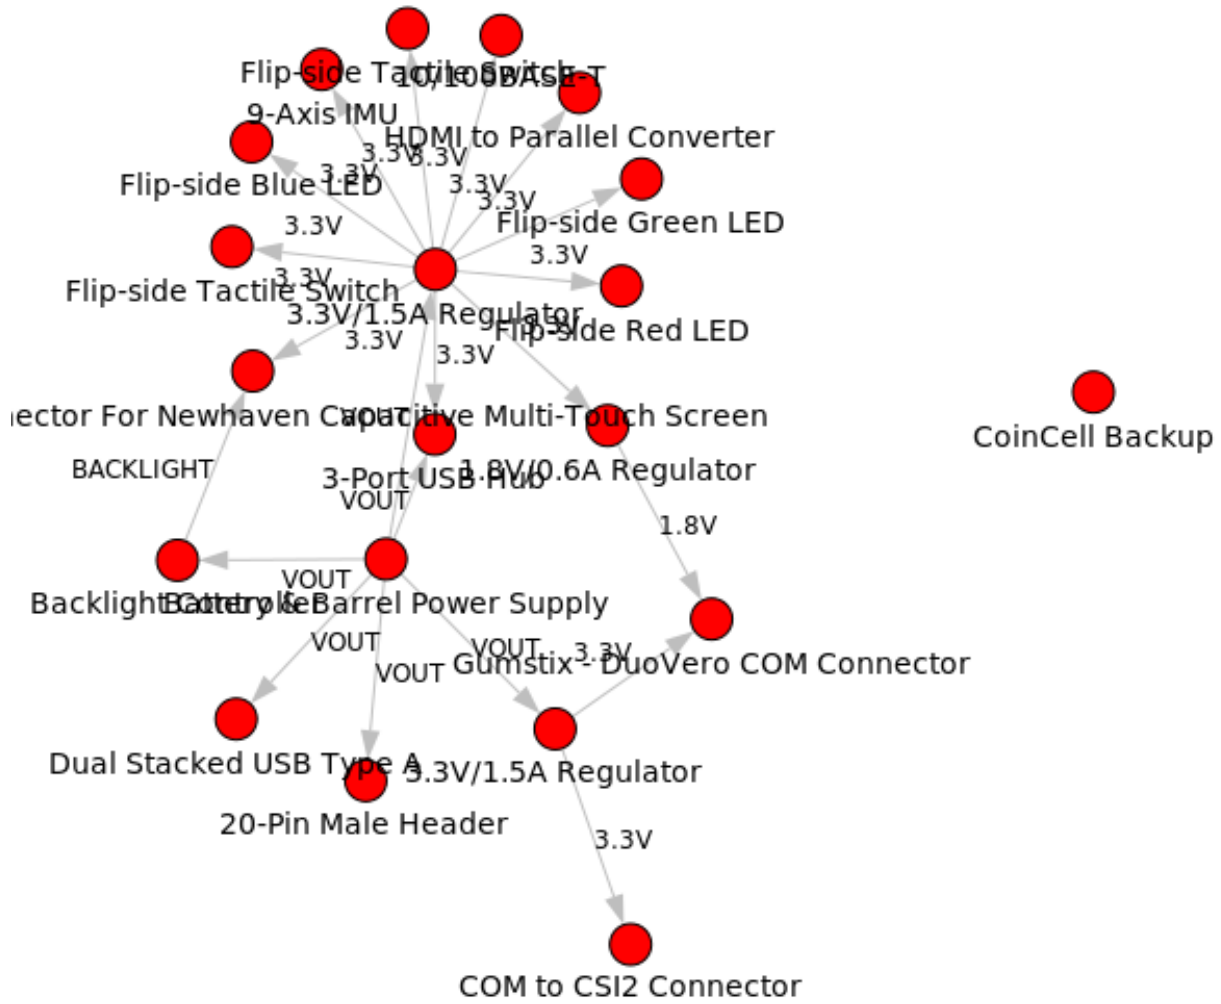

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9