

LTM8003 40V_{IN}, 3.5A Step-Down µModule Regulator

DESCRIPTION

Demonstration circuit 2416A features the [LTM®8003](#), a 40V, 3.5A step-down µModule® Regulator. This demo circuit is configured to deliver a 5.0V output from an input voltage between 6.0V to 40V at a switching frequency of 2MHz. The wide input range of the LTM8003 allows a variety of input sources such as automotive batteries and industrial supplies. Under light load conditions, the available Burst Mode® operation supports high efficiency with low output ripple.

The demo board has an EMI filter installed. The EMI performance of the board is shown in Figure 3.

The LTM8003 data sheet gives complete description of the device, operation and application information. The data sheet must be read in conjunction with this demo manual prior to working on or modifying demo circuit 2416A.

Design files for this circuit board are available at <http://www.linear.com/demo/DC2416A>


LT, LT, LTC, LTM, Linear Technology, the Linear logo, µModule and Burst Mode are registered trademarks of Linear Technology Corporation. All other trademarks are the property of their respective owners.

PERFORMANCE SUMMARY

Specifications are at T_A = 25°C

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
V _{IN}	Input Supply Range		6		40	V
V _{OUT}	Output Voltage		4.75	5	5.25	V
I _{OUT}	Output Current	V _{IN} = 12V	3.5			A
f _{SW}	Switching Frequency	V _{IN} = 12V, I _{OUT} = 3.5A		2		MHz
V _{OUT(AC)}	Output Ripple	V _{IN} = 12V, I _{OUT} = 3.5A		20		mV
η	Efficiency	V _{IN} = 12V, I _{OUT} = 3.5A		91.6		%

BOARD PHOTO

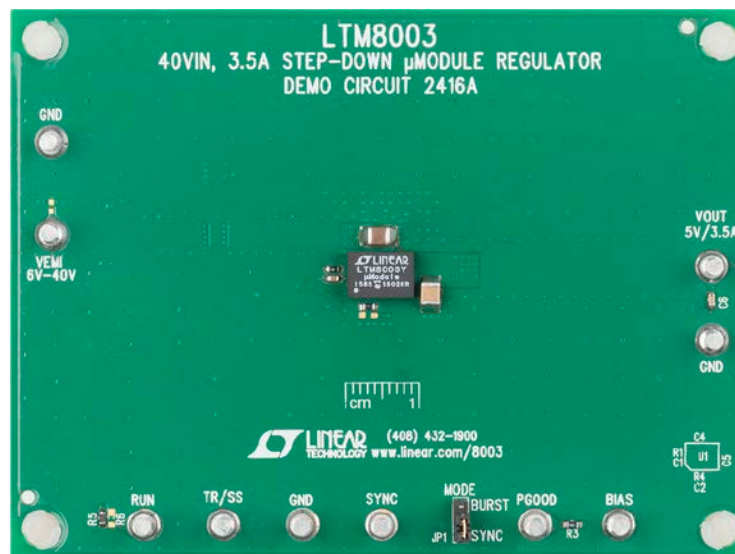

dc2416afa

QUICK START PROCEDURE

DC2416A is an easy way to evaluate the performance of the LTM8003. Refer to Figure 1 for proper measurement equipment setup and follow the procedure below:

NOTE: When measuring the input or output voltage ripple, care must be taken to avoid a long ground lead on the oscilloscope probe. Measure the input or output voltage ripple by touching the probe tip directly across the V_{IN} or V_{OUT} and GND terminals. See Figure 2 for proper scope probe technique.

1. Place JP1 in Burst position.
2. With power off, connect the input power supply to VEMI and GND.
3. Turn on the power at the input.

NOTE: Make sure that the input voltage does not exceed 40V.

4. Check for the proper output voltage between V_{OUT} and GND ($V_{OUT} = 5V$).

NOTE: If there is no output, temporarily disconnect the load to make sure that the load is not set too high.

5. Once the proper output voltage is established, adjust the load within the operating range and measure the output voltage regulation, ripple voltage, efficiency and other parameters.
6. An external clock can be added to the SYNC terminal when SYNC function is used (JP1 on the SYNC position). Make sure that R1 be chosen to set the switching frequency equal to or below the lowest SYNC frequency. JP1 can also set the regulator in pulse-skipping mode (Floating JP1) or spread spectrum mode (JP1 on SYNC, and set it high between 3.2V and 4.2V).

QUICK START PROCEDURE

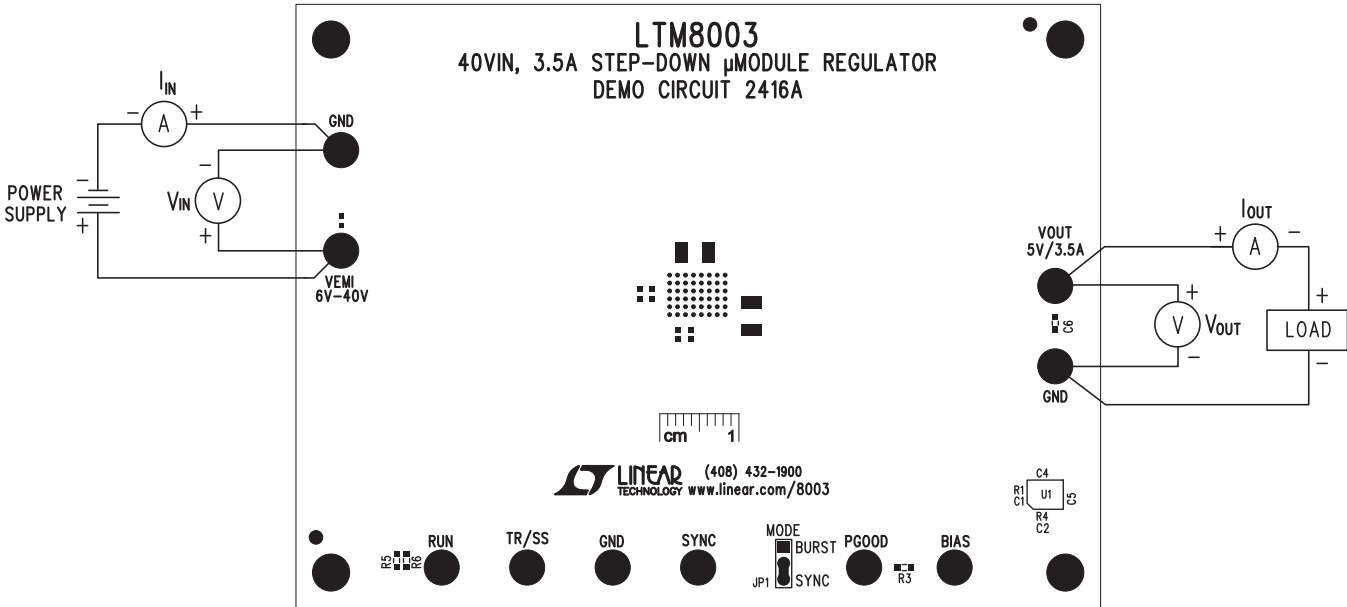


Figure 1. DC2416A Proper Equipment Setup



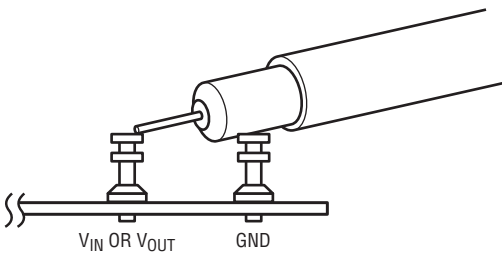


Figure 2. Measuring Input or Output Ripple


QUICK START PROCEDURE

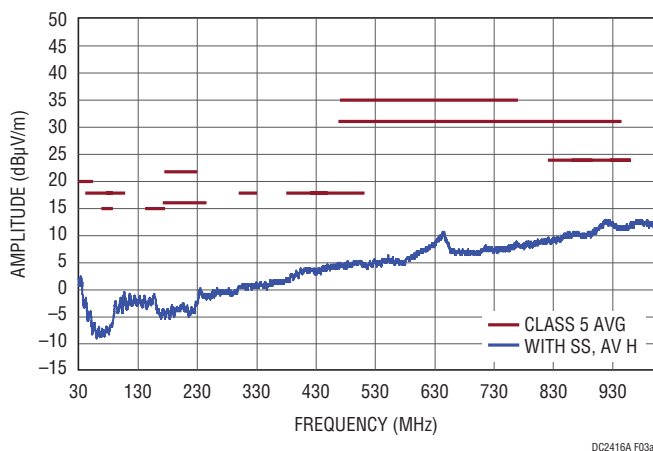


(3a) Horizontal Polarization, Average, with Spread Spectrum

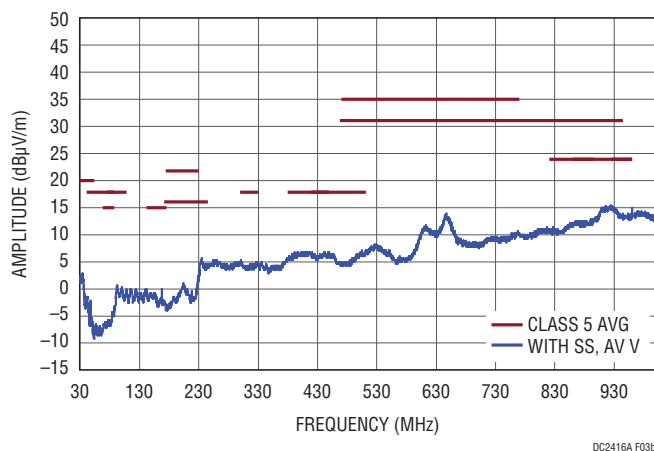

(3b) Vertical Polarization, Average, with Spread Spectrum

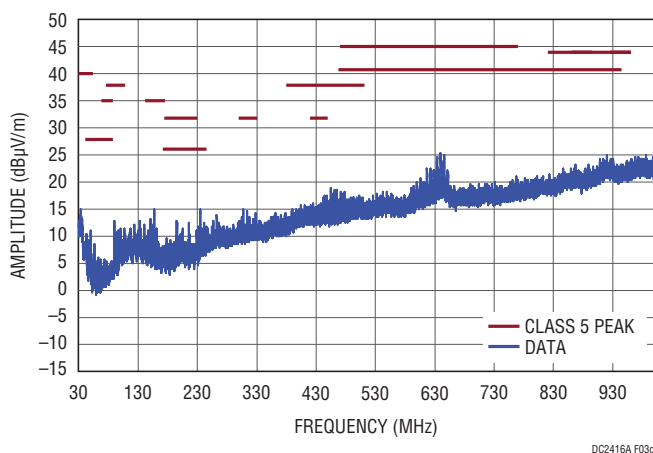


(3c) Horizontal Polarization, Peak, without Spread Spectrum

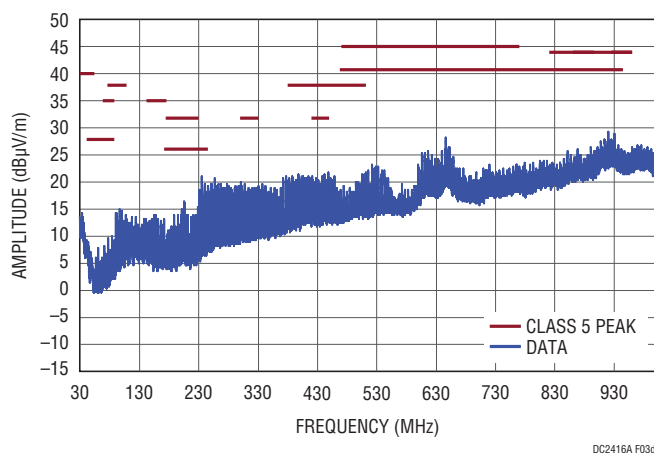


(3d) Vertical Polarization, Peak, without Spread Spectrum

Figure 3. DC2416A EMI Performance in CISPR25 Radiated Emission Test with and without Spread Spectrum ($14V_{IN}$, $I_{OUT} = 3.5A$)

QUICK START PROCEDURE

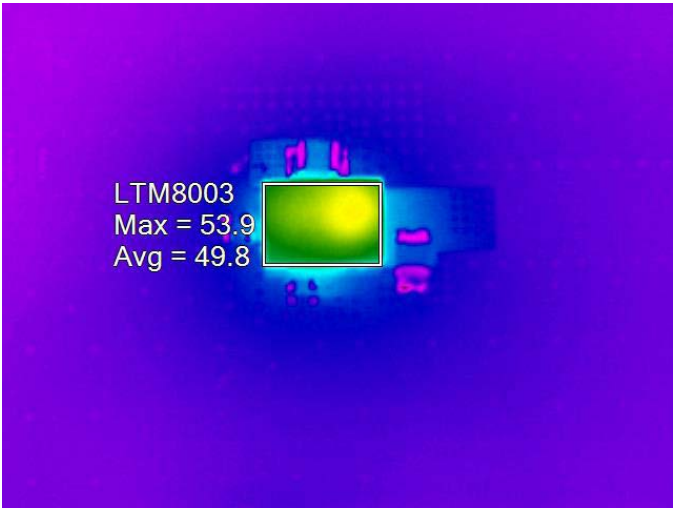

(4a) $V_{IN} = 12V$

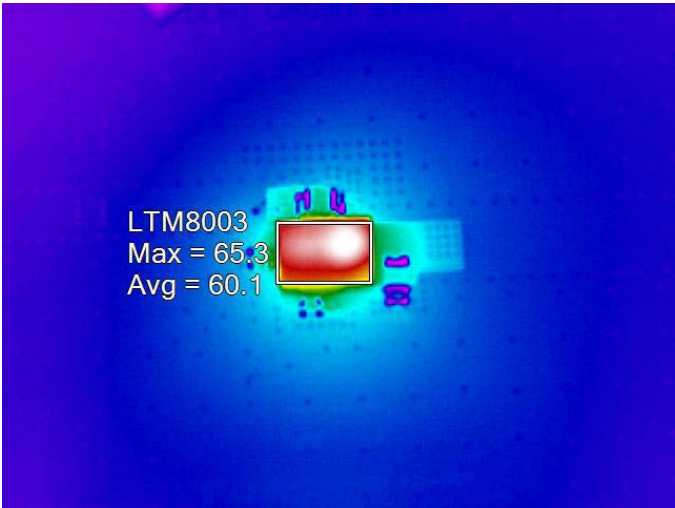

(4b) $V_{IN} = 24V$

Figure 4. DC2416A Thermal Performance ($12V_{IN}$, $I_{OUT} = 3.5A$, $T_A = 25^\circ C$)

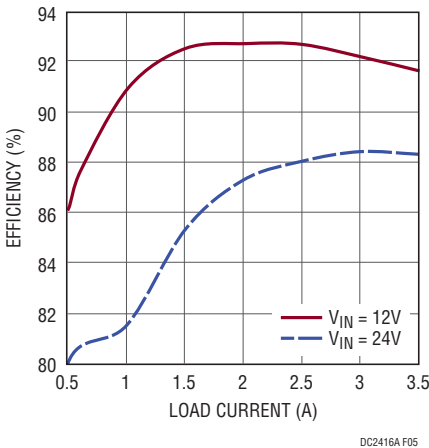


Figure 5. DC2416A Efficiency vs Load Current ($T_A = 25^\circ C$)

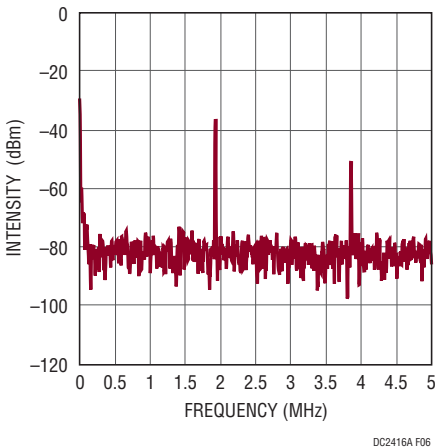



Figure 6. Output Noise Spectrum with 3.5A Load Current ($V_{IN} = 12V$)

DEMO MANUAL DC2416A

PARTS LIST

ITEM	QTY	REFERENCE	PART DESCRIPTION	MANUFACTURER/PART NUMBER
Required Circuit Components				
1	1	C1	CAP, CER., X7R, 0.1 μ F, 25V, 10% 0603	MURATA, GRM188R71E104KA01D
2	1	C3	CAP, ALUM., 56 μ F, 50V	SUN ELECTRONIC INDUSTRIES CORP., 50HVT56M
3	2	C4, C8	CAP, CER., X7R, 10 μ F, 50V, 10% 1210	MURATA, GRM32ER71H106KA12L
4	1	C5	CAP, CER., X7S, 100 μ F, 6.3V, 20% 1210	MURATA, GRM32EC70J107ME15L
5	1	C6	CAP, CER., X7R, 1 μ F, 10V, 10%, 0603	MURATA, GRM188R71A105KA61D
6	1	C7	CAP, CER., X7R, 4.7 μ F, 50V, 20% 1206	MURATA, GRM31CR71H475KA12L
7	1	C10	CAP, CER., X7R, 0.1 μ F, 50V, 10% 0402	TDK, C1005X7R1H104K050BB
8	2	C11, C12	CAP, CER., X7R, 0.1 μ F, 50V, 10% 0603	AVX, 06035C104KAT2A
9	1	R1	RES., CHIP, 18.2k, 1/10W, 1% 0603	VISHAY, CRCW060318K2FKEA
10	1	R2	RES., CHIP, 0 Ω , 1/10W, 1% 1206	VISHAY, CRCW12060000Z0EA
11	2	R3, R5	RES., CHIP, 100k, 1/10W, 1% 0603	VISHAY, CRCW0603100KFKEA
12	1	FB1	CHIP BEAD IND., 0805	TDK, MPZ2012S300AT000
13	1	R4	RES., CHIP, 24.3k, 1/10W, 1% 0603	VISHAY, CRCW060324K3FKEA
14	1	U1	IC., BGA, LTM8003, 48PIN	LINEAR TECH., LTM8003HY#PBF
Additional Demo Board Circuit Components				
1	0	C2, C9 (OPT)	CAP, 0603	
2	0	R6 (OPT)	RES., 0603	
Hardware: For Demo Board Only				
1	10	E1-E10	TESTPOINT, TURRET, .094" PBF	MILL-MAX, 2501-2-00-80-00-00-07-0
2	1	JP1	HEADER 3 PIN 0.079 SINGLE ROW	WURTH ELEKTRONIK, 62000311121
3	1	XJP1	SHUNT, .079" CENTER	WURTH ELEKTRONIK, 60800213421
4	4	MH1-MH4	STAND-OFF, NYLON 0.50"	WURTH ELEKTRONIK, 702935000

SCHEMATIC DIAGRAM

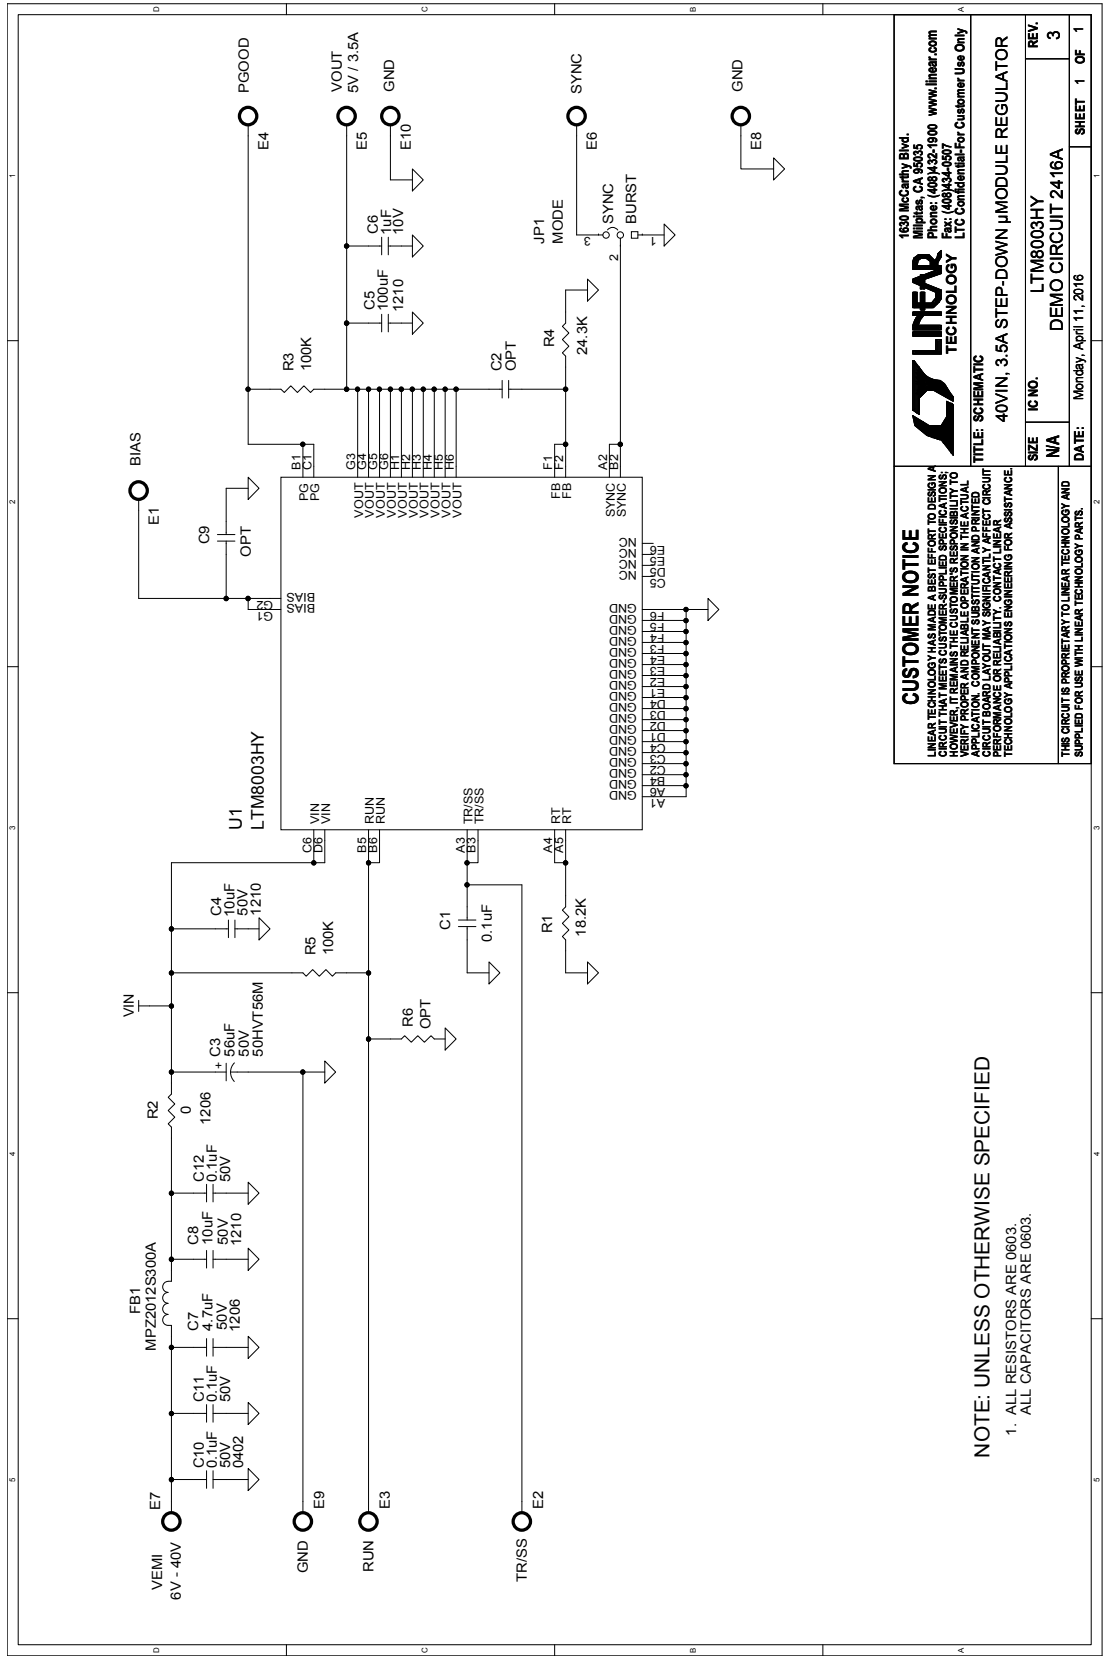

CUSTOMER NOTICE LINEAR TECHNOLOGY HAS MADE A BEST EFFORT TO DESIGN A PRODUCT THAT MEETS THE CUSTOMER'S REQUIREMENTS. HOWEVER, IT BEARS THE CUSTOMER'S RESPONSIBILITY TO VERIFY PROPER AND RELIABLE OPERATION IN THE ACTUAL APPLICATION. CUSTOMER SUBSTITUTION AND PRINTED CIRCUIT BOARD CONSTRUCTION MAY AFFECT THE CIRCUIT PERFORMANCE OR RELIABILITY. CONTACT LINEAR TECHNOLOGY APPLICATIONS ENGINEERING FOR ASSISTANCE.	
LINEAR TECHNOLOGY 1630 McCarthy Blvd. Milpitas, CA 95035 Phone: (408) 332-1900 www.linear.com Fax: (408) 332-4507 LTC Confidential-For Customer Use Only	1630 McCarthy Blvd. Milpitas, CA 95035 Phone: (408) 332-1900 www.linear.com Fax: (408) 332-4507 LTC Confidential-For Customer Use Only
TITLE: SCHEMATIC 40VIN, 3.5A STEP-DOWN μMODULE REGULATOR	IC NO. LTM8003HY REV. 3
SIZE N/A DATE: Monday, April 11, 2016	DEMO CIRCUIT 2416A SHEET 1 OF 1

DEMO MANUAL DC2416A

DEMONSTRATION BOARD IMPORTANT NOTICE

Linear Technology Corporation (LTC) provides the enclosed product(s) under the following **AS IS** conditions:

This demonstration board (DEMO BOARD) kit being sold or provided by Linear Technology is intended for use for **ENGINEERING DEVELOPMENT OR EVALUATION PURPOSES ONLY** and is not provided by LTC for commercial use. As such, the DEMO BOARD herein may not be complete in terms of required design-, marketing-, and/or manufacturing-related protective considerations, including but not limited to product safety measures typically found in finished commercial goods. As a prototype, this product does not fall within the scope of the European Union directive on electromagnetic compatibility and therefore may or may not meet the technical requirements of the directive, or other regulations.

If this evaluation kit does not meet the specifications recited in the DEMO BOARD manual the kit may be returned within 30 days from the date of delivery for a full refund. THE FOREGOING WARRANTY IS THE EXCLUSIVE WARRANTY MADE BY THE SELLER TO BUYER AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED, IMPLIED, OR STATUTORY, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE. EXCEPT TO THE EXTENT OF THIS INDEMNITY, NEITHER PARTY SHALL BE LIABLE TO THE OTHER FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.

The user assumes all responsibility and liability for proper and safe handling of the goods. Further, the user releases LTC from all claims arising from the handling or use of the goods. Due to the open construction of the product, it is the user's responsibility to take any and all appropriate precautions with regard to electrostatic discharge. Also be aware that the products herein may not be regulatory compliant or agency certified (FCC, UL, CE, etc.).

No License is granted under any patent right or other intellectual property whatsoever. **LTC assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or any other intellectual property rights of any kind.**

LTC currently services a variety of customers for products around the world, and therefore this transaction **is not exclusive**.

Please read the DEMO BOARD manual prior to handling the product. Persons handling this product must have electronics training and observe good laboratory practice standards. **Common sense is encouraged.**

This notice contains important safety information about temperatures and voltages. For further safety concerns, please contact a LTC application engineer.

Mailing Address:

Linear Technology
1630 McCarthy Blvd.
Milpitas, CA 95035

Copyright © 2004, Linear Technology Corporation

dc2416afa

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9