

VOLTAGE DETECTOR

■ GENERAL DESCRIPTION

The NJU7702/03 is a high precision and low quiescent current voltage detector.

The detection voltage is internally fixed with an accuracy of 1.0%.

The NJU7702/03 are useful for preventing malfunction of microcomputer or DSP etc. through detect a drop in voltage of battery or power supply.

NJU7702 is Nch. Open Drain and NJU7703 is a C-MOS output type.

Small packaging makes NJU7702 and NJU7703 suitable for space conscious applications.

■ PACKAGE OUTLINE




NJU7702/03F

■ FEATURES

- High Precision Detection Voltage $\pm 1.0\%$
- Low Quiescent Current $0.8\mu\text{A typ. (V}_{\text{DET}} = 3\text{V version})$
- Detection Voltage Range $1.3\sim 6.0\text{V}(0.1\text{V Step})$
- Output Configuration
NJU7702: Nch. Open Drain type
NJU7703: C-MOS Output type
- CMOS Technology
- Package Outline SOT-23-5


■ PIN CONFIGURATION

NJU7702/03F




(*1): Connect Sub terminal to GND.

■ EQUIVALENT CIRCUIT

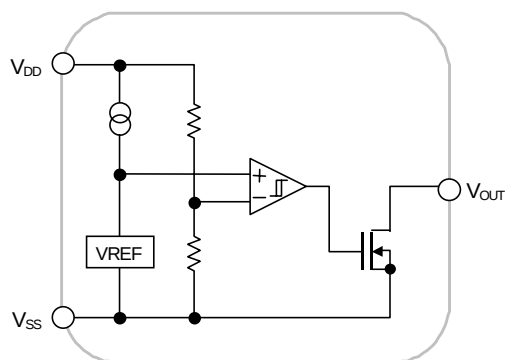

NJU7702

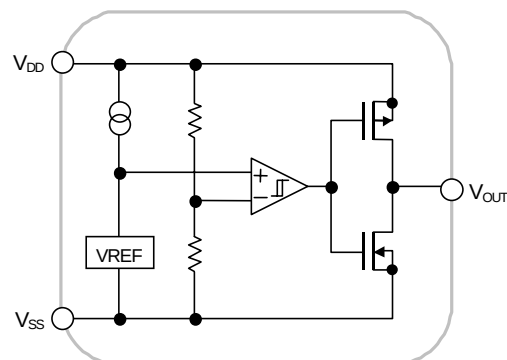

NJU7703

NJU7702/03

■ DETECTION VOLTAGE RANK LIST

3Device Name	V _{DET}
NJU7702/03F13	1.3V
NJU7702/03F27	2.7V
NJU7702/03F28	2.8V
NJU7702/03F03	3.0V
NJU7702/03F31	3.1V
NJU7702/03F42	4.2V
NJU7702/03F06	6.0V

■ NJU7702

■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Input Voltage	V _{DD}	+10	V
Output Voltage	V _{OUT}	V _{SS} -0.3~+10	V
Output Current	I _{OUT}	50	mA
Power Dissipation	P _D	200(*2)	mW
Operating Temperature	Topr	-40 ~ +85	°C
Storage Temperature	Tstg	-40 ~ +125	°C

(*2) : Device itself

■ ELECTRICAL CHARACTERISTICS


(Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION		MIN.	TYP.	MAX.	UNIT
Detection Voltage	V _{DET}			-1.0%	—	+1.0%	V
Hysteresis Voltage	V _{HYS}			V _{DET} ×0.03	V _{DET} ×0.05	V _{DET} ×0.08	V
Quiescent Current	I _{SS}	V _{DD} =V _{DET} +1V	V _{DET} =1.3V~1.7V Version	—	0.5	1.0	μA
			V _{DET} =1.8V~6.0V Version	—	0.8	1.6	μA
Output Current	I _{OUT}	Nch, V _{DS} =0.5V	V _{DD} =1.2V	0.75	2.0	—	mA
			V _{DD} =2.4V (≥2.7V Version)	4.5	7.0	—	mA
Output Leak Current	I _{LEAK}	V _{DD} =V _{OUT} =9V		—	—	0.1	μA
Detection Voltage Temperature Coefficient	Δ V _{DET} /ΔTa	Ta=0 ~ +85°C		—	±100	—	ppm/°C
Operating Voltage (*3)	V _{DD}	R _L =100kΩ		0.8	—	9	V


(*3): The minimum Operating Voltage(V_{OPL}) indicates the same value of the input voltage(V_{DD}) on condition that V_{OUT} becomes 10% or less of the input voltage(V_{DD}).

■ TEST CIRCUIT

① COMMON TEST CIRCUIT

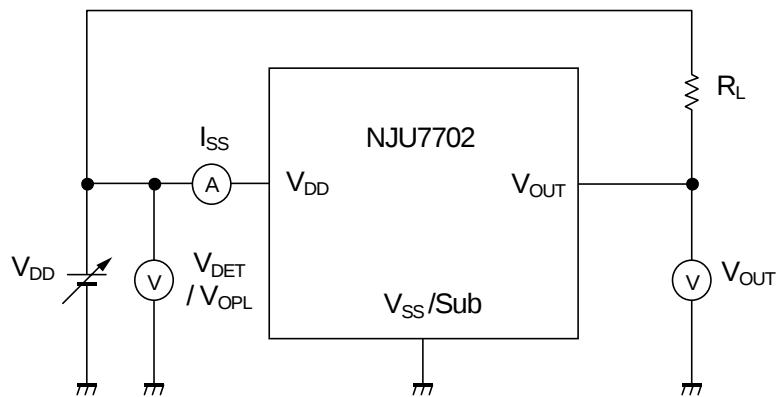


② OUTPUT CURRENT/OUTPUT LEAK CURRENT TEST CIRCUIT

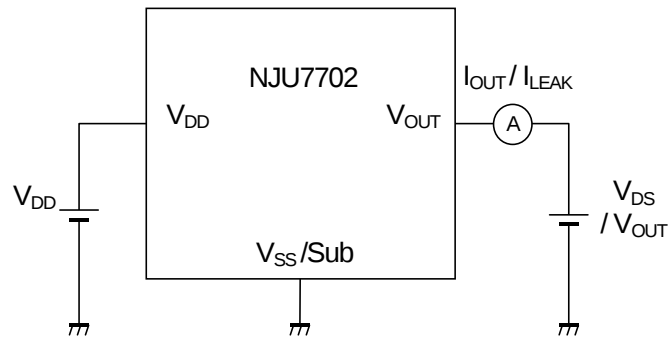


■ TYPICAL APPLICATION

① In case of using one power supply.

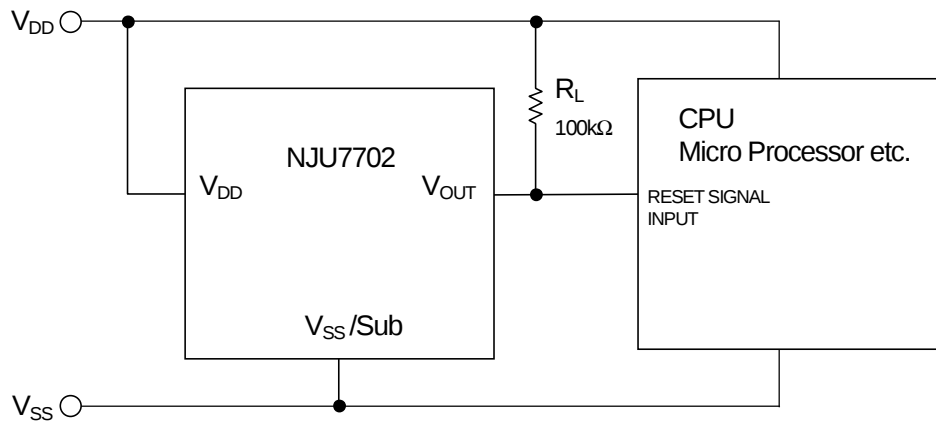

② In case of using two power supply.

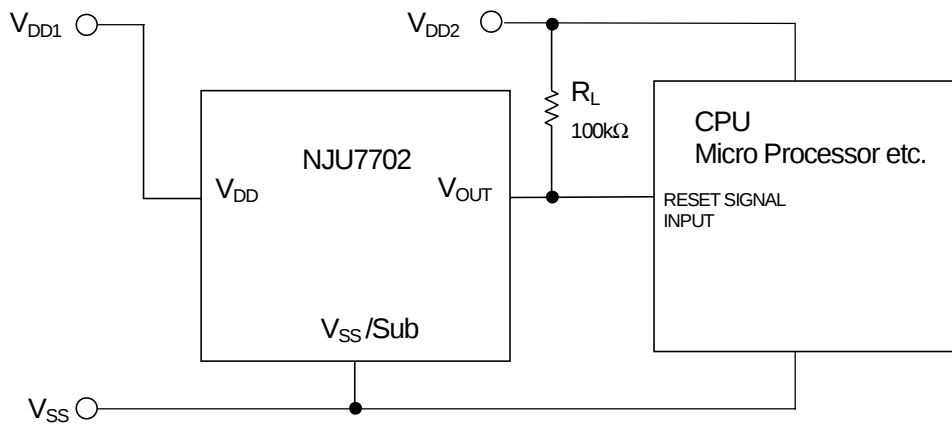

■ NJU7703

■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Input Voltage	V_{DD}	+10	V
Output Voltage	V_{OUT}	$V_{SS}-0.3 \sim V_{DD}+0.3$	V
Output Current	I_{OUT}	50	mA
Power Dissipation	P_D	200(*4)	mW
Operating Temperature	T_{opr}	-40 ~ +85	°C
Storage Temperature	T_{stg}	-40 ~ +125	°C

(*4) : Device itself

■ ELECTRICAL CHARACTERISTICS


(Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION		MIN.	TYP.	MAX.	UNIT
Detection Voltage	V _{DET}			-1.0%	—	+1.0%	V
Hysteresis Voltage	V _{HYS}			V _{DET} ×0.03	V _{DET} ×0.05	V _{DET} ×0.08	V
Quiescent Current	I _{SS}	V _{DD} =V _{DET} +1V	V _{DET} =1.3V~1.7V Version	—	0.5	1.0	μA
			V _{DET} =1.8V~6.0V Version	—	0.8	1.6	μA
Output Current	I _{OUT}	Nch, V _{DS} =0.5V	V _{DD} =1.2V	0.75	2.0	—	mA
			V _{DD} =2.4V (≥2.7V Version)	4.5	7.0	—	mA
		Pch, V _{DS} =0.5V	V _{DD} =4.8V (≤3.9V Version)	2.0	3.5	—	mA
			V _{DD} =6.0V (4.0V~5.6V Version)	2.5	4.0	—	mA
			V _{DD} =8.4V (≥5.7V Version)	3.0	5.0	—	mA
Detection Voltage Temperature Coefficient	Δ V _{DET} /ΔTa	Ta=0 ~ +85°C		—	±100	—	ppm/°C
Operating Voltage (*5)	V _{DD}	R _L =100kΩ		0.8	—	9	V


(*5): The minimum Operating Voltage(V_{OPL}) indicates the same value of the input voltage(V_{DD}) on condition that V_{OUT} becomes 10% or less of the input voltage(V_{DD}).

■ TEST CIRCUIT


① COMMON TEST CIRCUIT

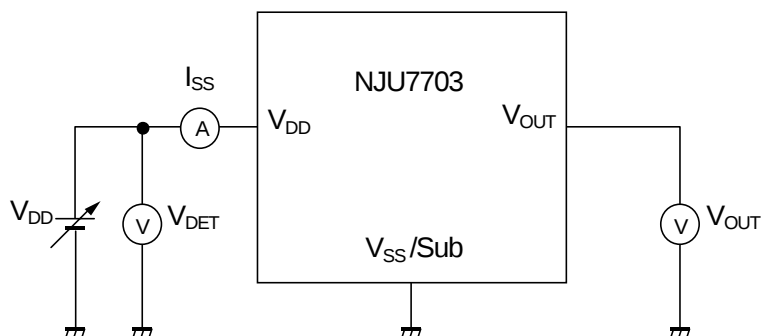


② Nch OUTPUT CURRENT TEST CIRCUIT

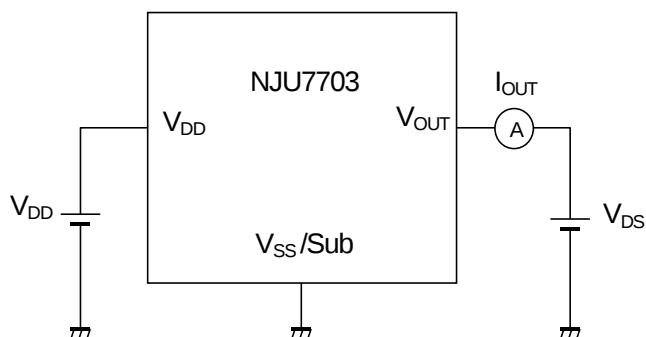


③ Pch OUTPUT CURRENT TEST CIRCUIT

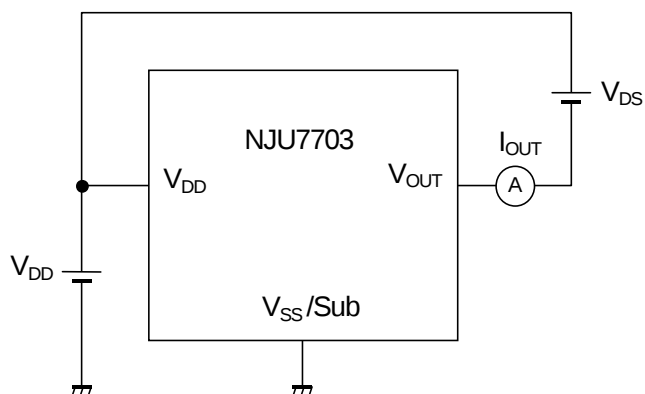

④ MINIMUM OPERATING VOLTAGE TEST CIRCUIT

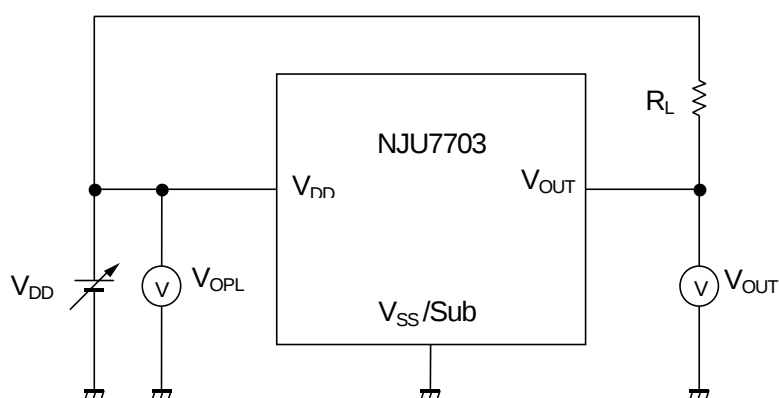


■ TYPICAL APPLICATION

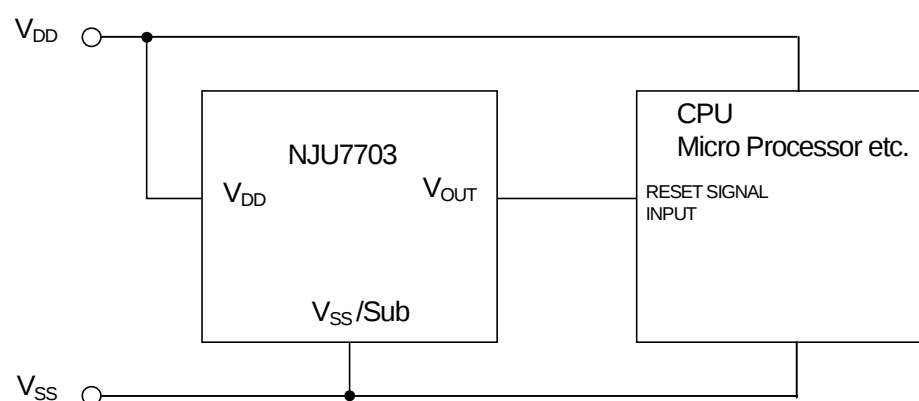

FUNCTIONAL DESCRIPTION

(1) Basic operation

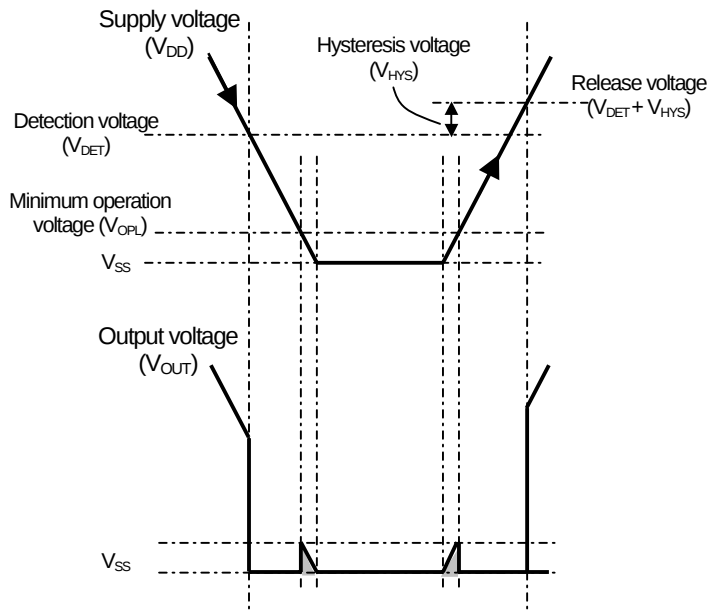

(1) When supply voltage (V_{DD}) drops below detection voltage (V_{DET}), Output voltage (V_{OUT}) changes "H" to "L" to alert reset state.

(2) The reset state is kept while V_{DD} is lower than release voltage. The release voltage is a sum of V_{DET} and Hysteresis voltage (V_{HYS}). Please refer to the (*7) below.

(3) When V_{DD} becomes higher than the release voltage, then V_{OUT} changes from "L" to "H" to resume normal state.

(*7) V_{HYS} is to avoid unstable V_{OUT} state caused by rapid voltage change at nearby V_{DET} .

(*8): C-MOS output product (NJU7703) : When V_{DD} less than V_{OPL} , V_{OUT} is free of the shaded region.

[CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[NJR:](#)

[NJU7703F27-TE1](#) [NJU7703F13-TE1](#) [NJU7703F42-TE2](#) [NJU7702F28-TE1](#) [NJU7703F06-TE1](#) [NJU7702F03-TE1](#)
[NJU7702F13-TE1](#) [NJU7702F42-TE2](#) [NJU7702F42-TE1](#) [NJU7703F03-TE1](#) [NJU7703F28-TE1](#) [NJU7702F06-TE1](#)
[NJU7702F27-TE1](#)

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9