



A New Direction in Mixed-Signal

# XR1008, XR2008

## 0.5mA, 75MHz Rail-to-Rail Amplifiers

### General Description

The XR1008 (single) and XR2008 (dual) are rail-to-rail output amplifiers that offer superior dynamic performance with 75MHz small signal bandwidth and 50V/μs slew rate. The XR1008 and XR2008 amplifiers consume only 505μA of supply current per channel and are designed to operate from a supply range of 2.5V to 5.5V (±1.25 to ±2.75).

The combination of low power, high output current drive, and rail-to-rail performance make the XR1008 and XR2008 well suited for battery-powered metering and test equipment.

The combination of low cost and high performance make these amplifiers suitable for high volume industrial applications such as ultrasonic heat meters, water meters and other applications requiring high speed and low power.

### FEATURES


- 505μA supply current
- 75MHz bandwidth
- Input voltage range with 5V supply: -0.3V to 3.8V
- Output voltage range with 5V supply: 0.07V to 4.86V
- 50V/μs slew rate
- 12nV/√Hz input voltage noise
- 15mA linear output current
- Fully specified at 2.7V and 5V supplies

### APPLICATIONS


- Portable/battery-powered applications
- Mobile communications, cell phones, pagers
- ADC buffer
- Active filters
- Portable test instruments
- Signal conditioning
- Medical equipment
- Portable medical instrumentation
- Flow meters

Ordering Information - [back page](#)

### Typical Application

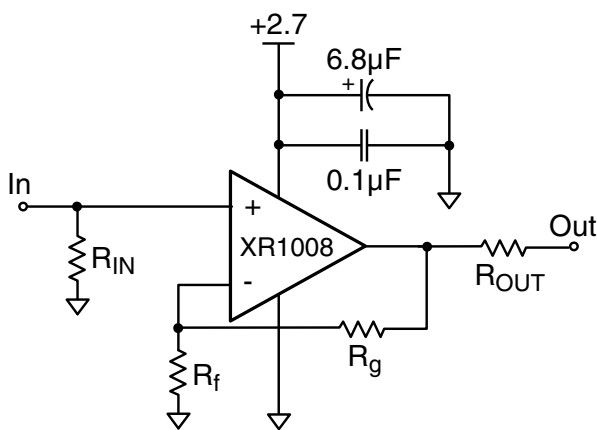

### Frequency Response vs. Temperature

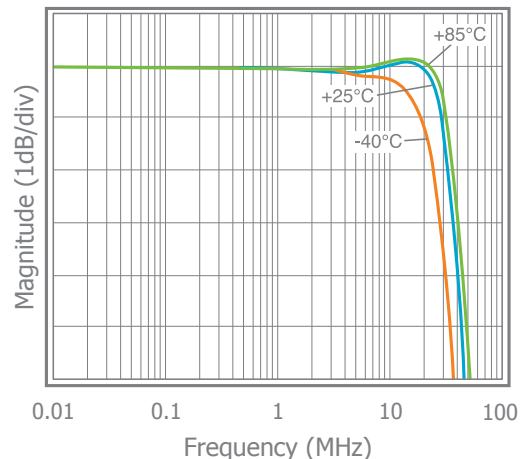

**Absolute Maximum Ratings**

Stresses beyond the limits listed below may cause permanent damage to the device. Exposure to any Absolute Maximum Rating condition for extended periods may affect device reliability and lifetime.

$V_S$  ..... 0V to 6V  
 $V_{IN}$  .....  $-V_S - 0.5V$  to  $+V_S + 0.5V$   
 Continuous Output Current ..... -30mA to +30mA

**Operating Conditions**

Supply Voltage Range .....2.5 to 5.5V  
 Operating Temperature Range .....-40°C to 125°C  
 Junction Temperature ..... 150°C  
 Storage Temperature Range.....-65°C to 150°C  
 Lead Temperature (Soldering, 10s) .....260°C

**Package Thermal Resistance**

$\theta_{JA}$  (TSOT-5) .....215°C/W  
 $\theta_{JA}$  (SOIC-8) ..... 150°C/W  
 $\theta_{JA}$  (MSOP-8) ..... 200°C/W  
 Package thermal resistance ( $\theta_{JA}$ ), JEDEC standard, multi-layer test boards, still air.

**ESD Protection**

XR1008 (HBM) .....2kV  
 XR2008 (HBM) .....2.5kV  
 ESD Rating for HBM (Human Body Model).

## Electrical Characteristics at +2.7V

$T_A = 25^\circ\text{C}$ ,  $V_S = +2.7\text{V}$ ,  $R_f = R_g = 1\text{k}\Omega$ ,  $R_L = 1\text{k}\Omega$  to  $V_S/2$ ;  $G = 2$ ; unless otherwise noted.

| Symbol                    | Parameter                    | Conditions                                      | Min | Typ          | Max | Units                        |
|---------------------------|------------------------------|---|-----|--------------|-----|------------------------------|
| Frequency Domain Response |                              |   |     |              |     |                              |
| UGBW <sub>SS</sub>        | Unity Gain -3dB Bandwidth    | $G = +1$ , $V_{OUT} = 0.05V_{pp}$ , $R_f = 0$   |     | 65           |     | MHz                          |
| BW <sub>SS</sub>          | -3dB Bandwidth               | $G = +2$ , $V_{OUT} < 0.2V_{pp}$                |     | 30           |     | MHz                          |
| BW <sub>LS</sub>          | Large Signal Bandwidth       | $G = +2$ , $V_{OUT} = 2V_{pp}$                  |     | 12           |     | MHz                          |
| GBWP                      | Gain Bandwidth Product       | $G = +11$ , $V_{OUT} = 0.2V_{pp}$               |     | 28           |     | MHz                          |
| Time Domain Response      |                              |   |     |              |     |                              |
| $t_R$ , $t_F$             | Rise and Fall Time           | $V_{OUT} = 0.2\text{V}$ step; (10% to 90%)      |     | 7.5          |     | ns                           |
| $t_S$                     | Settling Time to 0.1%        | $V_{OUT} = 1\text{V}$ step                      |     | 60           |     | ns                           |
| OS                        | Overshoot                    | $V_{OUT} = 1\text{V}$ step                      |     | 10           |     | %                            |
| SR                        | Slew Rate                    | $G = -1$ , $2\text{V}$ step                     |     | 40           |     | V/ $\mu\text{s}$             |
| Distortion/Noise Response |                              |   |     |              |     |                              |
| HD2                       | 2nd Harmonic Distortion      | 1MHz, $V_{OUT} = 1V_{pp}$                       |     | -67          |     | dBc                          |
| HD3                       | 3rd Harmonic Distortion      | 1MHz, $V_{OUT} = 1V_{pp}$                       |     | -72          |     | dBc                          |
| THD                       | Total Harmonic Distortion    | 1MHz, $V_{OUT} = 1V_{pp}$                       |     | 65           |     | dB                           |
| $e_n$                     | Input Voltage Noise          | >10kHz  |     | 12           |     | nV/ $\sqrt{\text{Hz}}$       |
| DC Performance            |                              |   |     |              |     |                              |
| $V_{IO}$                  | Input Offset Voltage         |   |     | 0            |     | mV                           |
| $d_{VIO}$                 | Average Drift                |   |     | 10           |     | $\mu\text{V}/^\circ\text{C}$ |
| $I_B$                     | Input Bias Current           |   |     | 1.2          |     | $\mu\text{A}$                |
| $dI_B$                    | Average Drift                |   |     | 3.5          |     | nA/ $^\circ\text{C}$         |
| $I_{OS}$                  | Input Offset Current         |   |     | 30           |     | nA                           |
| PSRR                      | Power Supply Rejection Ratio | DC  | 60  | 66           |     | dB                           |
| $A_{OL}$                  | Open Loop Gain               | $V_{OUT} = V_S / 2$                             |     | 98           |     | dB                           |
| $I_S$                     | Supply Current               | per channel                                     |     | 470          |     | $\mu\text{A}$                |
| Input Characteristics     |                              |   |     |              |     |                              |
| $R_{IN}$                  | Input Resistance             | Non-inverting                                   |     | 9            |     | $\text{M}\Omega$             |
| $C_{IN}$                  | Input Capacitance            |   |     | 1.5          |     | pF                           |
| CMIR                      | Common Mode Input Range      |   |     | -0.3 to 1.5  |     | V                            |
| CMRR                      | Common Mode Rejection Ratio  | DC, $V_{CM} = 0\text{V}$ to $V_S - 1.5\text{V}$ |     | 74           |     | dB                           |
| Output Characteristics    |                              |   |     |              |     |                              |
| $V_{OUT}$                 | Output Voltage Swing         | $R_L = 1\text{k}\Omega$ to $V_S / 2$            |     | 0.09 to 2.53 |     | V                            |
|                           |                              | $R_L = 10\text{k}\Omega$ to $V_S / 2$           |     | 0.05 to 2.6  |     | V                            |
| $I_{OUT}$                 | Output Current               |   |     | $\pm 15$     |     | mA                           |
| $I_{SC}$                  | Short Circuit Current        |   |     | $\pm 30$     |     | mA                           |


## Electrical Characteristics at +5V

$T_A = 25^\circ\text{C}$ ,  $V_S = +5\text{V}$ ,  $R_f = R_g = 1\text{k}\Omega$ ,  $R_L = 1\text{k}\Omega$  to  $V_S/2$ ;  $G = 2$ ; unless otherwise noted.

| Symbol                    | Parameter                    | Conditions                                      | Min         | Typ          | Max | Units                        |
|---------------------------|------------------------------|---|-------------|--------------|-----|------------------------------|
| Frequency Domain Response |                              |   |             |              |     |                              |
| UGBW <sub>SS</sub>        | Unity Gain -3dB Bandwidth    | $G = +1$ , $V_{OUT} = 0.05V_{pp}$ , $R_f = 0$   |             | 75           |     | MHz                          |
| BW <sub>SS</sub>          | -3dB Bandwidth               | $G = +2$ , $V_{OUT} < 0.2V_{pp}$                |             | 35           |     | MHz                          |
| BW <sub>LS</sub>          | Large Signal Bandwidth       | $G = +2$ , $V_{OUT} = 2V_{pp}$                  |             | 15           |     | MHz                          |
| GBWP                      | Gain Bandwidth Product       | $G = +11$ , $V_{OUT} = 0.2V_{pp}$               |             | 33           |     | MHz                          |
| Time Domain Response      |                              |   |             |              |     |                              |
| $t_R$ , $t_F$             | Rise and Fall Time           | $V_{OUT} = 0.2\text{V}$ step; (10% to 90%)      |             | 6            |     | ns                           |
| $t_S$                     | Settling Time to 0.1%        | $V_{OUT} = 1\text{V}$ step                      |             | 60           |     | ns                           |
| OS                        | Overshoot                    | $V_{OUT} = 1\text{V}$ step                      |             | 12           |     | %                            |
| SR                        | Slew Rate                    | $G = -1$ , $2\text{V}$ step                     |             | 50           |     | V/ $\mu\text{s}$             |
| Distortion/Noise Response |                              |   |             |              |     |                              |
| HD2                       | 2nd Harmonic Distortion      | 1MHz, $V_{OUT} = 2V_{pp}$                       |             | -64          |     | dBc                          |
| HD3                       | 3rd Harmonic Distortion      | 1MHz, $V_{OUT} = 2V_{pp}$                       |             | -62          |     | dBc                          |
| THD                       | Total Harmonic Distortion    | 1MHz, $V_{OUT} = 2V_{pp}$                       |             | 60           |     | dB                           |
| $e_n$                     | Input Voltage Noise          | >10kHz  |             | 12           |     | nV/ $\sqrt{\text{Hz}}$       |
| DC Performance            |                              |   |             |              |     |                              |
| $V_{IO}$                  | Input Offset Voltage         |   | -5          | -1           | 5   | mV                           |
| $d_{VIO}$                 | Average Drift                |   |             | 10           |     | $\mu\text{V}/^\circ\text{C}$ |
| $I_B$                     | Input Bias Current           |   | -3.5        | 1.2          | 3.5 | $\mu\text{A}$                |
| $dI_B$                    | Average Drift                |   |             | 3.5          |     | nA/ $^\circ\text{C}$         |
| $I_{OS}$                  | Input Offset Current         |   |             | 30           | 350 | nA                           |
| PSRR                      | Power Supply Rejection Ratio | DC  | 60          | 66           |     | dB                           |
| $A_{OL}$                  | Open Loop Gain               | $V_{OUT} = V_S / 2$                             | 65          | 80           |     | dB                           |
| $I_S$                     | Supply Current               | per channel                                     |             | 505          | 620 | $\mu\text{A}$                |
| Input Characteristics     |                              |   |             |              |     |                              |
| $R_{IN}$                  | Input Resistance             | Non-inverting                                   |             | 9            |     | M $\Omega$                   |
| $C_{IN}$                  | Input Capacitance            |   |             | 1.5          |     | pF                           |
| CMIR                      | Common Mode Input Range      |   |             | -0.3 to 3.8  |     | V                            |
| CMRR                      | Common Mode Rejection Ratio  | DC, $V_{CM} = 0\text{V}$ to $V_S - 1.5\text{V}$ | 65          | 74           |     | dB                           |
| Output Characteristics    |                              |   |             |              |     |                              |
| $V_{OUT}$                 | Output Voltage Swing         | $R_L = 1\text{k}\Omega$ to $V_S / 2$            | 0.2 to 4.65 | 0.13 to 4.73 |     | V                            |
|                           |                              | $R_L = 10\text{k}\Omega$ to $V_S / 2$           |             | 0.08 to 4.84 |     | V                            |
| $I_{OUT}$                 | Output Current               |   |             | $\pm 15$     |     | mA                           |
| $I_{SC}$                  | Short Circuit Current        |   |             | $\pm 30$     |     | mA                           |

### XR1008 Pin Configurations

#### TSOT-5

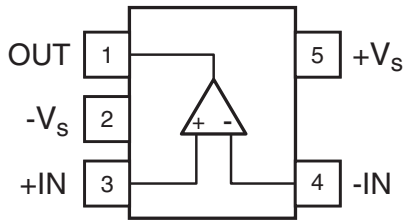


### XR1008 Pin Assignments

#### TSOT-5

| Pin No. | Pin Name | Description     |
|---------|----------|-----------------|
| 1       | OUT      | Output          |
| 2       | -Vs      | Negative supply |
| 3       | +IN      | Positive input  |
| 4       | -IN      | Negative input  |
| 5       | +Vs      | Positive supply |

#### SOIC-8

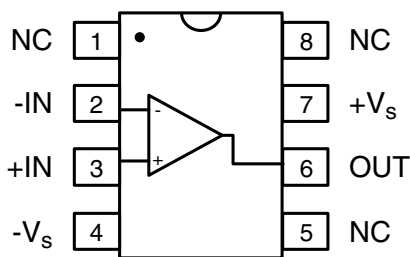


#### SOIC-8

| Pin No. | Pin Name | Description     |
|---------|----------|-----------------|
| 1       | NC       | No Connect      |
| 2       | -IN      | Negative input  |
| 3       | +IN      | Positive input  |
| 4       | -Vs      | Negative supply |
| 5       | NC       | No Connect      |
| 6       | OUT      | Output          |
| 7       | +Vs      | Positive supply |
| 8       | NC       | No Connect      |

### XR2008 Pin Configuration

#### SOIC-8 / MSOP-8

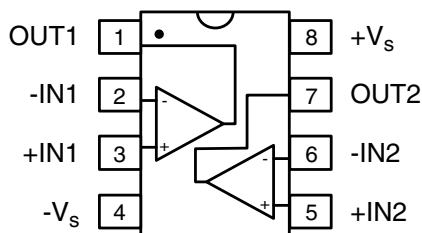

### XR2008 Pin Assignments


#### SOIC-8 / MSOP-8

| Pin No. | Pin Name | Description               |
|---------|----------|---------------------------|
| 1       | OUT1     | Output, channel 1         |
| 2       | -IN1     | Negative input, channel 1 |
| 3       | +IN1     | Positive input, channel 1 |
| 4       | -Vs      | Negative supply           |
| 5       | +IN2     | Positive input, channel 2 |
| 6       | -IN2     | Negative input, channel 2 |
| 7       | OUT2     | Output, channel 2         |
| 8       | +Vs      | Positive supply           |


**Typical Performance Characteristics**

$T_A = 25^\circ\text{C}$ ,  $V_S = +5\text{V}$ ,  $R_f = R_g = 1\text{k}\Omega$ ,  $R_L = 1\text{k}\Omega$  to  $V_S/2$ ;  $G = 2$ ; unless otherwise noted.


Non-Inverting Frequency Response at  $V_S = 5\text{V}$

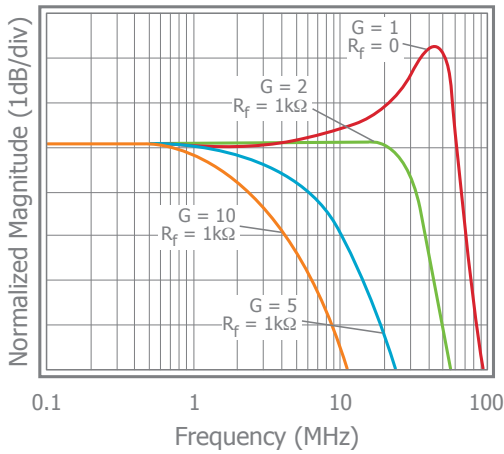


Inverting Frequency Response at  $V_S = 5\text{V}$

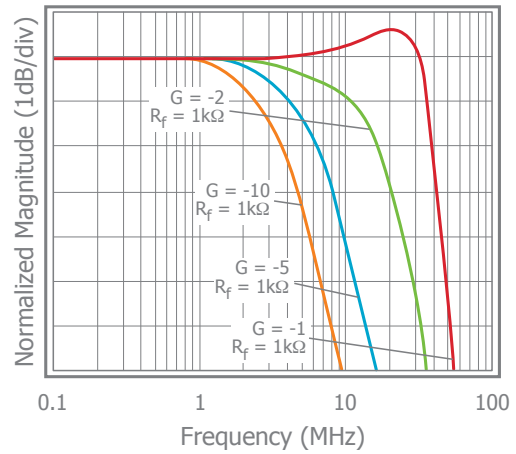


Non-Inverting Frequency Response at  $V_S = 2.7\text{V}$

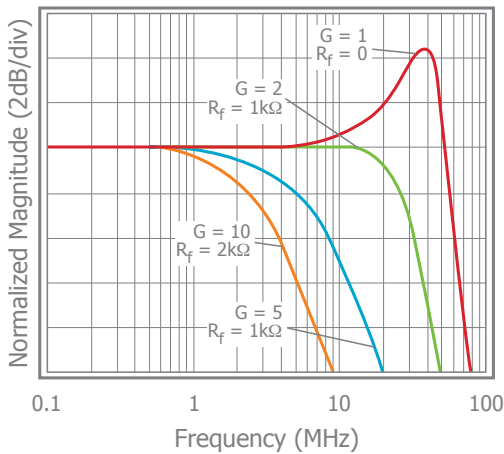


Inverting Frequency Response at  $V_S = 2.7\text{V}$

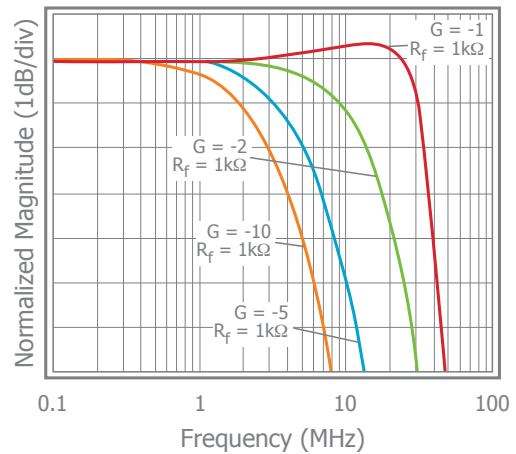

Frequency Response vs  $C_L$

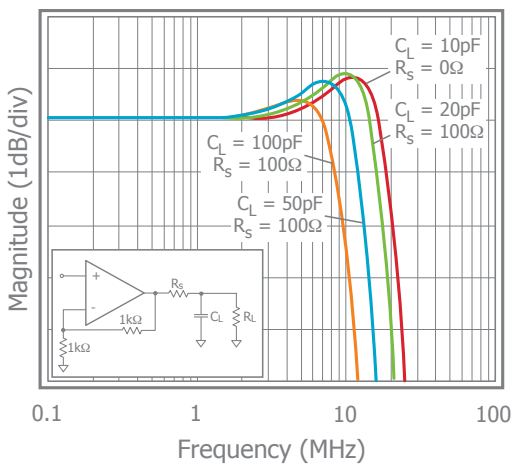


Frequency Response vs  $R_L$

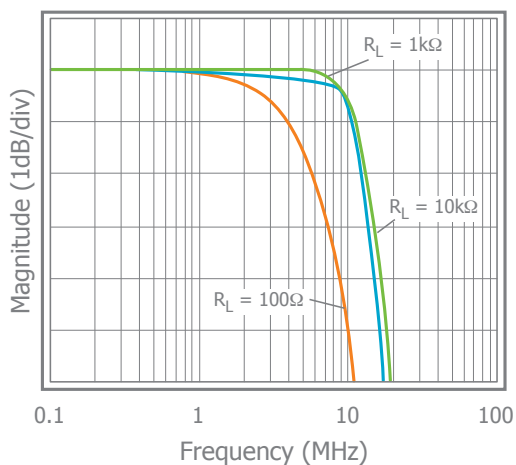


### Typical Performance Characteristics

$T_A = 25^\circ\text{C}$ ,  $V_S = +5\text{V}$ ,  $R_f = R_g = 1\text{k}\Omega$ ,  $R_L = 1\text{k}\Omega$  to  $V_S/2$ ;  $G = 2$ ; unless otherwise noted.


Frequency Response vs.  $V_{OUT}$

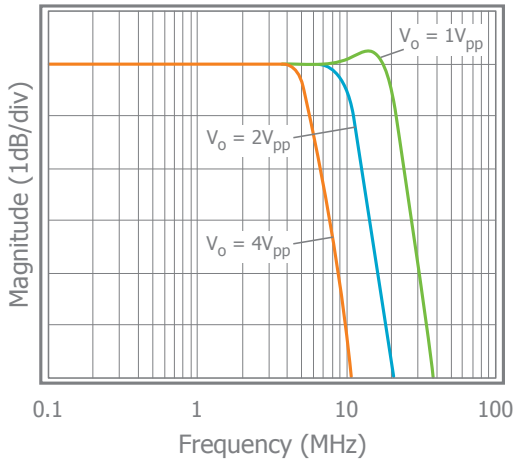


Open Loop Gain & Phase vs. Frequency

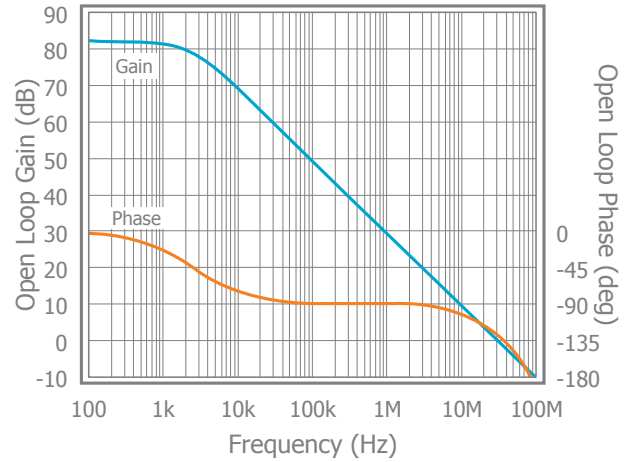


2nd Harmonic Distortion vs  $V_{OUT}$

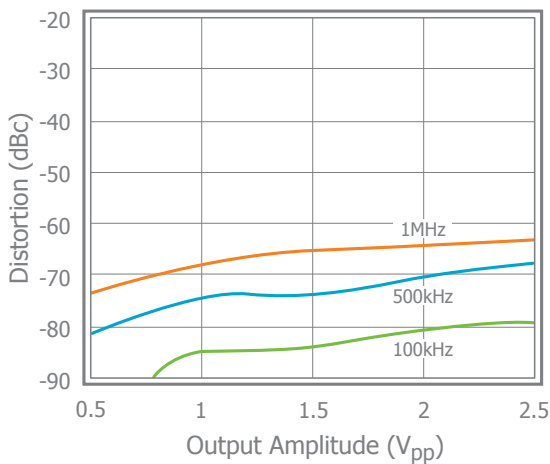


3rd Harmonic Distortion vs  $V_{OUT}$

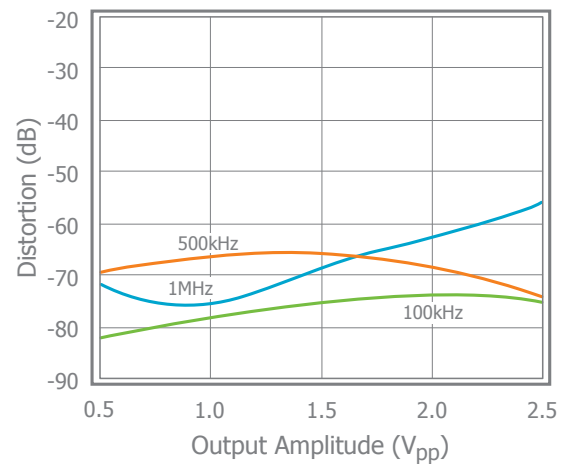

2nd & 3rd Harmonic Distortion at  $V_S = 2.7\text{V}$

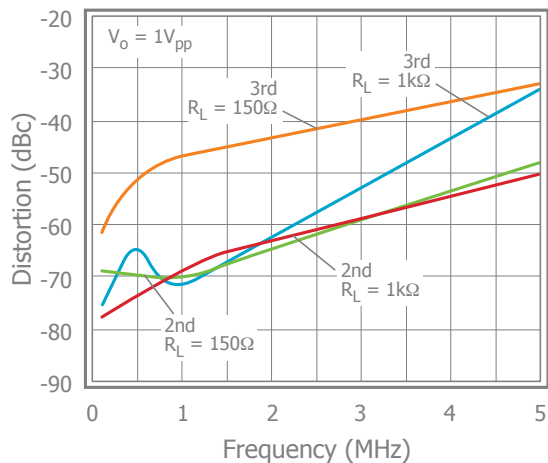


Frequency Response vs. Temperature

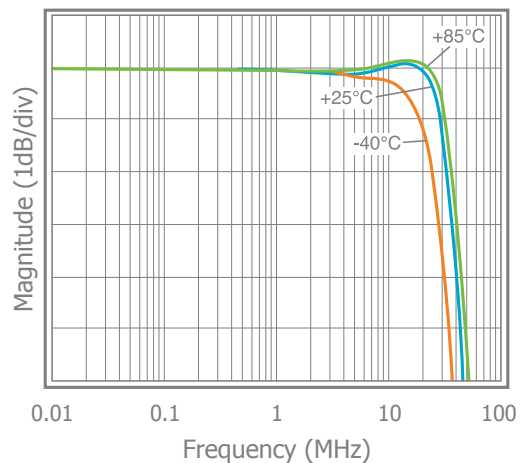


**Typical Performance Characteristics**

$T_A = 25^\circ\text{C}$ ,  $V_S = +5\text{V}$ ,  $R_f = R_g = 1\text{k}\Omega$ ,  $R_L = 1\text{k}\Omega$  to  $V_S/2$ ;  $G = 2$ ; unless otherwise noted.


CMRR

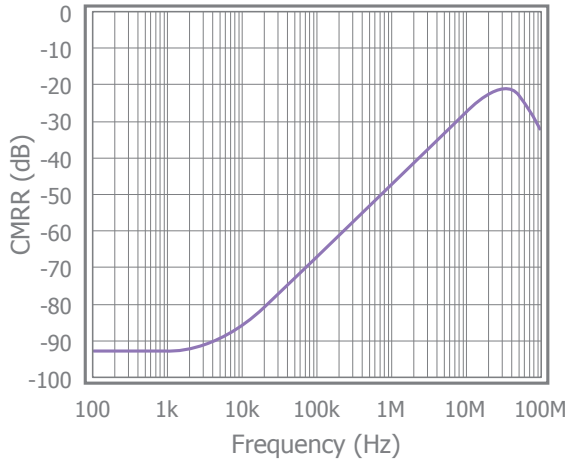


PSRR

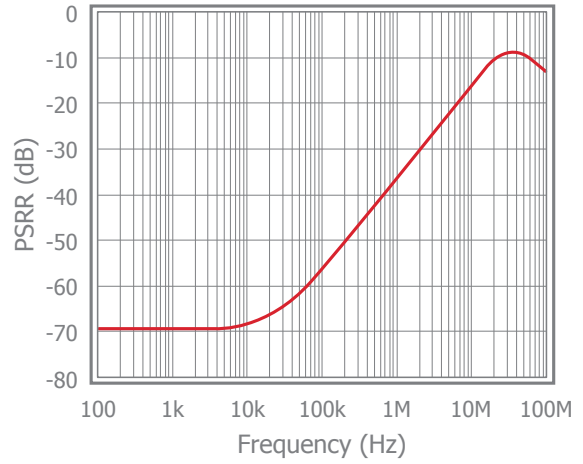


Output Swing

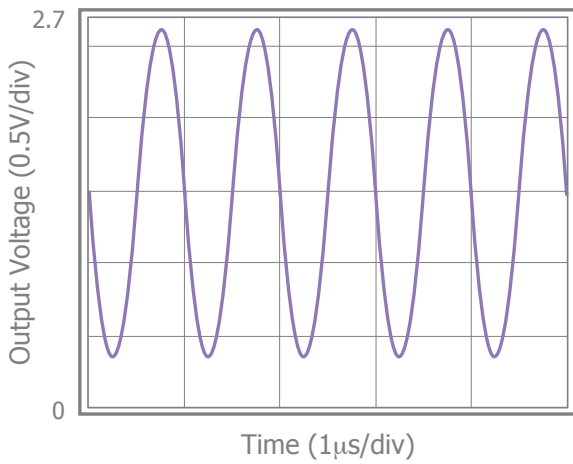


Output Voltage vs. Output Current

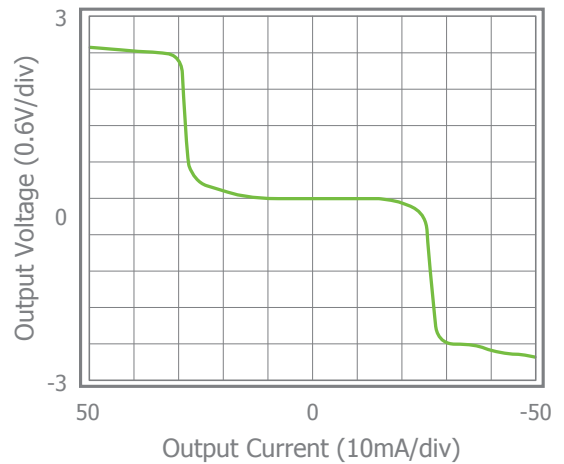

Small Signal Pulse Response at  $V_S = 2.7\text{V}$

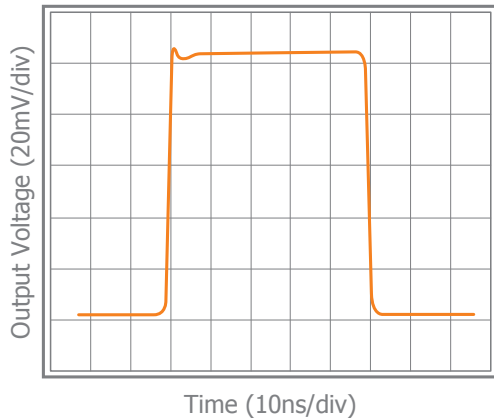

Small Signal Pulse Response at  $V_S = 5\text{V}$

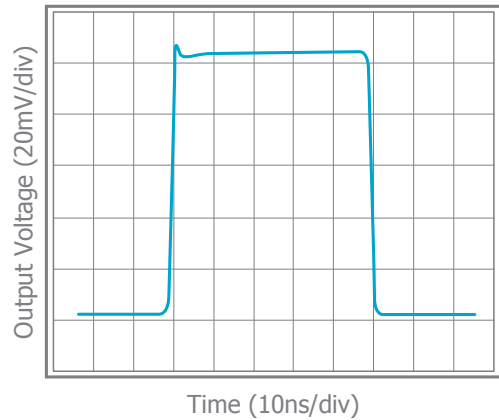





### Typical Performance Characteristics

$T_A = 25^\circ\text{C}$ ,  $V_S = +5\text{V}$ ,  $R_f = R_g = 1\text{k}\Omega$ ,  $R_L = 1\text{k}\Omega$  to  $V_S/2$ ;  $G = 2$ ; unless otherwise noted.

Large Signal Pulse Response at  $V_S = 5\text{V}$

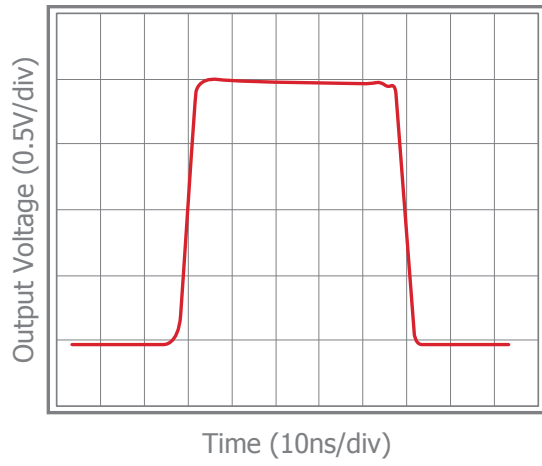

Input Voltage Noise

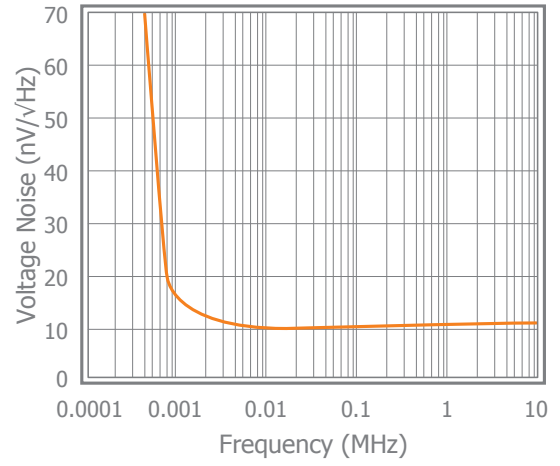

## Application Information

### General Description

The XR1008 family are a single supply, general purpose, voltage-feedback amplifiers fabricated on a complementary bipolar process. The XR1008 offers 75MHz unity gain bandwidth, 50V/μs slew rate, and only 505μA supply current. It features a rail-to-rail output stage and is unity gain stable.

Figures 1, 2, and 3 illustrate typical circuit configurations for non-inverting, inverting, and unity gain topologies for dual supply applications. They show the recommended bypass capacitor values and overall closed loop gain equations. Figure 4 shows the typical non-inverting gain circuit for single supply applications.

The common mode input range extends to 300mV below ground in single supply operation. Exceeding these values will not cause phase reversal. However, if the input voltage exceeds the rails by more than 0.5V, the input ESD devices will begin to conduct.

The design uses a Darlington output stage. The output stage is short circuit protected and offers “soft” saturation protection that improves recovery time.

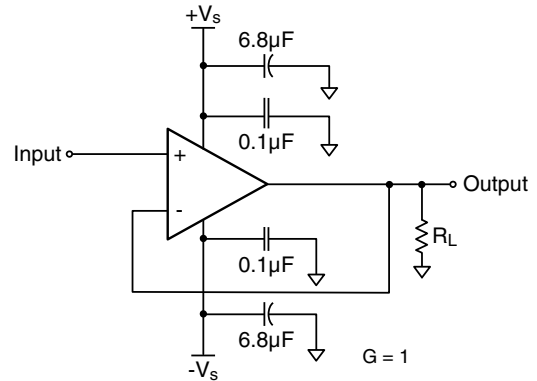


Figure 3: Unity Gain Circuit

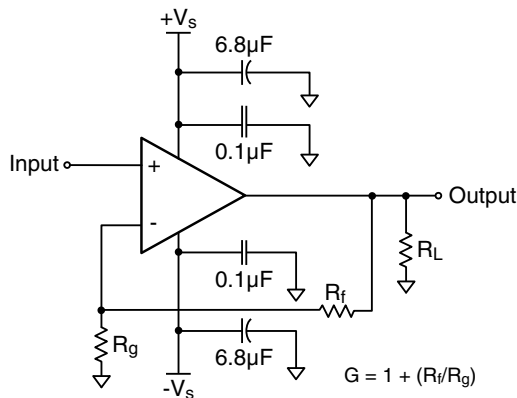


Figure 1: Typical Non-Inverting Gain Circuit

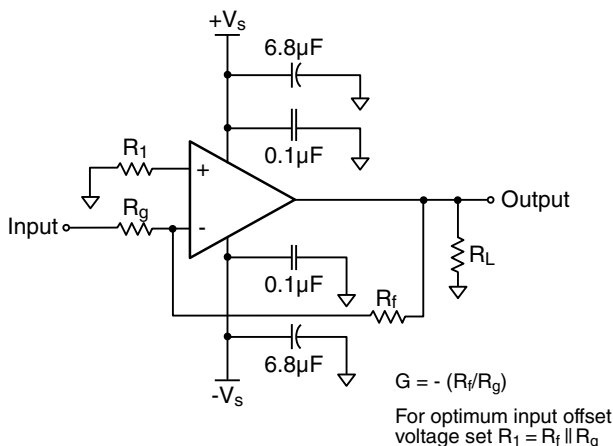


Figure 2: Typical Inverting Gain Circuit

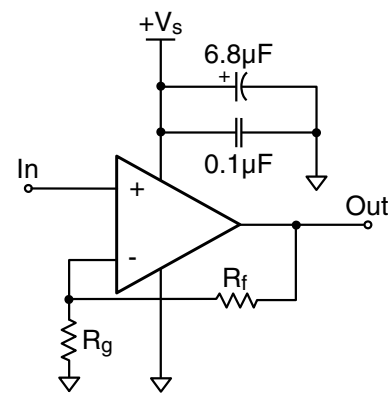


Figure 4: Single Supply Non-Inverting Gain Circuit

For optimum response at a gain of +2, a feedback resistor of 1kΩ is recommended. Figure 5 illustrates the XR1008 frequency response with both 1kΩ and 2kΩ feedback resistors.

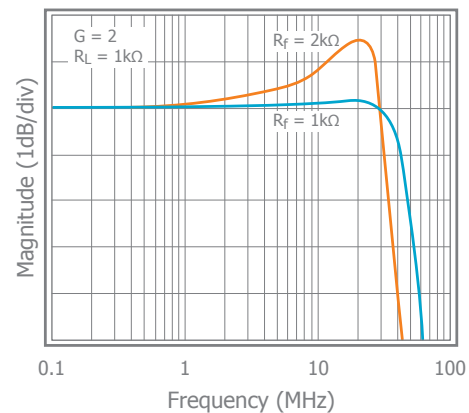


Figure 5: Frequency Response vs. R<sub>f</sub>

**Power Dissipation**

Power dissipation should not be a factor when operating under the stated 1kΩ load condition. However, applications with low impedance, DC coupled loads should be analyzed to ensure that maximum allowed junction temperature is not exceeded. Guidelines listed below can be used to verify that the particular application will not cause the device to operate beyond its intended operating range.

Maximum power levels are set by the absolute maximum junction rating of 150°C. To calculate the junction temperature, the package thermal resistance value  $\theta_{JA}$  ( $\theta_{JA}$ ) is used along with the total die power dissipation.

$$T_{\text{Junction}} = T_{\text{Ambient}} + (\theta_{JA} \times P_D)$$

Where  $T_{\text{Ambient}}$  is the temperature of the working environment.

In order to determine  $P_D$ , the power dissipated in the load needs to be subtracted from the total power delivered by the supplies.

$$P_D = P_{\text{supply}} - P_{\text{load}}$$

Supply power is calculated by the standard power equation.

$$P_{\text{supply}} = V_{\text{supply}} \times I_{\text{RMSsupply}}$$

$$V_{\text{supply}} = V_{S+} - V_{S-}$$

Power delivered to a purely resistive load is:

$$P_{\text{load}} = ((V_{\text{load}})_{\text{RMS}})^2 / R_{\text{load\_eff}}$$

The effective load resistor ( $R_{\text{load\_eff}}$ ) will need to include the effect of the feedback network. For instance,

$R_{\text{load\_eff}}$  in Figure 3 would be calculated as:

$$R_L \parallel (R_f + R_g)$$

These measurements are basic and are relatively easy to perform with standard lab equipment. For design purposes however, prior knowledge of actual signal levels and load impedance is needed to determine the dissipated power. Here,  $P_D$  can be found from

$$P_D = P_{\text{Quiescent}} + P_{\text{Dynamic}} - P_{\text{load}}$$

Quiescent power can be derived from the specified  $I_S$  values along with known supply voltage,  $V_{\text{supply}}$ . Load power can be calculated as above with the desired signal amplitudes using:

$$(V_{\text{load}})_{\text{RMS}} = V_{\text{peak}} / \sqrt{2}$$

$$(I_{\text{load}})_{\text{RMS}} = (V_{\text{load}})_{\text{RMS}} / R_{\text{load\_eff}}$$

The dynamic power is focused primarily within the output stage driving the load. This value can be calculated as:

$$P_{\text{Dynamic}} = (V_{S+} - V_{\text{load}})_{\text{RMS}} \times (I_{\text{load}})_{\text{RMS}}$$

Assuming the load is referenced in the middle of the power rails or  $V_{\text{supply}}/2$ .

The XR1008 is short circuit protected. However, this may not guarantee that the maximum junction temperature (+150°C) is not exceeded under all conditions. Figure 6 shows the maximum safe power dissipation in the package vs. the ambient temperature for the packages available.

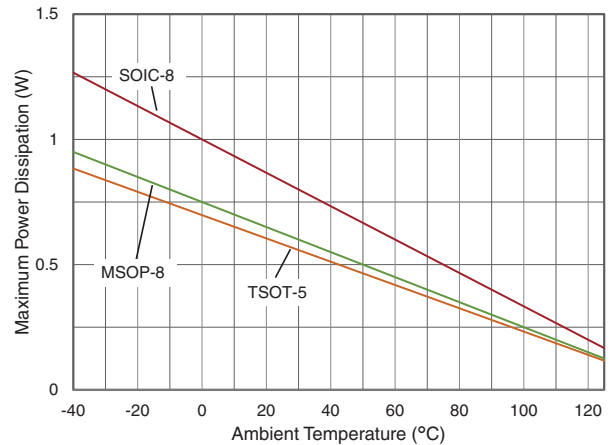


Figure 6. Maximum Power Derating

**Driving Capacitive Loads**

Increased phase delay at the output due to capacitive loading can cause ringing, peaking in the frequency response, and possible unstable behavior. Use a series resistance,  $R_S$ , between the amplifier and the load to help improve stability and settling performance. Refer to Figure 7.

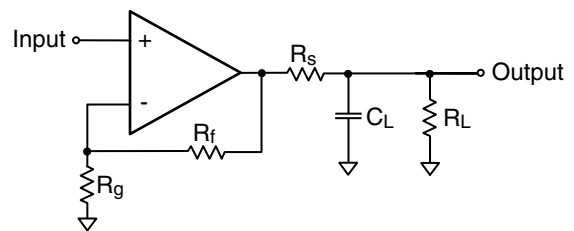


Figure 7. Addition of  $R_S$  for Driving Capacitive Loads

Table 1 provides the recommended  $R_S$  for various capacitive loads. The recommended  $R_S$  values result in approximately <1dB peaking in the frequency response.

| $C_L$ (pF) | $R_S$ ( $\Omega$ ) | -3dB BW (MHz) |
|------------|--------------------|---------------|
| 10pF       | 0                  | 22            |
| 20pF       | 100                | 19            |
| 50pF       | 100                | 12            |
| 100pF      | 100                | 10.2          |

Table 1: Recommended  $R_S$  vs.  $C_L$

For a given load capacitance, adjust  $R_S$  to optimize the tradeoff between settling time and bandwidth. In general, reducing  $R_S$  will increase bandwidth at the expense of additional overshoot and ringing.

### Overdrive Recovery

For an amplifier, an overdrive condition occurs when the output and/or input ranges are exceeded. The recovery time varies based on whether the input or output is overdriven and by how much the ranges are exceeded. The XR1008, and XR2008 will typically recover in less than 20ns from an overdrive condition. Figure 5 shows the XR1008 in an overdriven condition.

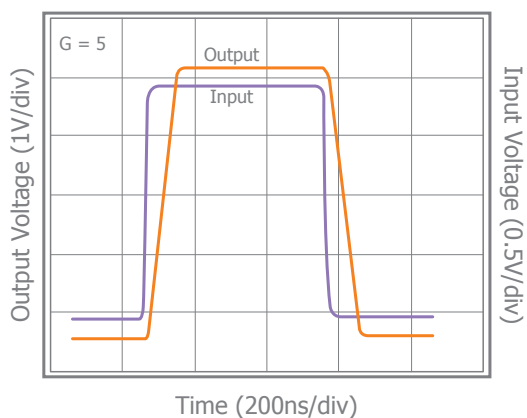


Figure 8: Overdrive Recovery

### Layout Considerations

General layout and supply bypassing play major roles in high frequency performance. Exar has evaluation boards to use as a guide for high frequency layout and as an aid in device testing and characterization. Follow the steps below as a basis for high frequency layout:

- Include 6.8 $\mu$ F and 0.1 $\mu$ F ceramic capacitors for power supply decoupling
- Place the 6.8 $\mu$ F capacitor within 0.75 inches of the power pin
- Place the 0.1 $\mu$ F capacitor within 0.1 inches of the power pin
- Remove the ground plane under and around the part, especially near the input and output pins to reduce parasitic capacitance
- Minimize all trace lengths to reduce series inductances

Refer to the evaluation board layouts below for more information.

### Evaluation Board Information

The following evaluation boards are available to aid in the testing and layout of these devices:

| Evaluation Board # | Products       |
|--------------------|----------------|
| CEB002             | XR1008 in TSOT |
| CEB003             | XR1008 in SOIC |
| CEB006             | XR2008 in SOIC |
| CEB010             | XR2008 in MSOP |

### Evaluation Board Schematics

Evaluation board schematics and layouts are shown in Figures 9-18. These evaluation boards are built for dual-supply operation. Follow these steps to use the board in a single-supply application:

1. Short  $-V_S$  to ground.
2. Use C3 and C4, if the  $-V_S$  pin of the amplifier is not directly connected to the ground plane.

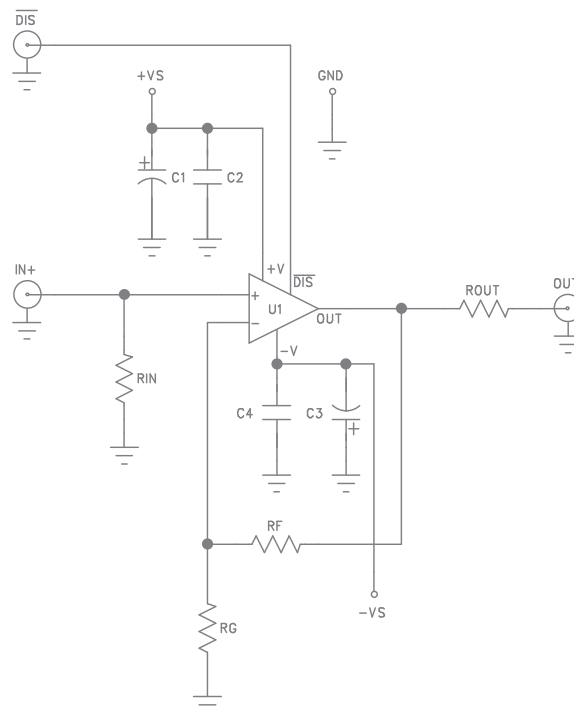


Figure 9. CEB002 & CEB003 Schematic

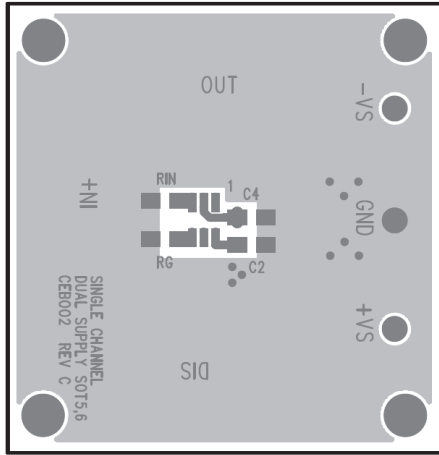


Figure 10. CEB002 Top View

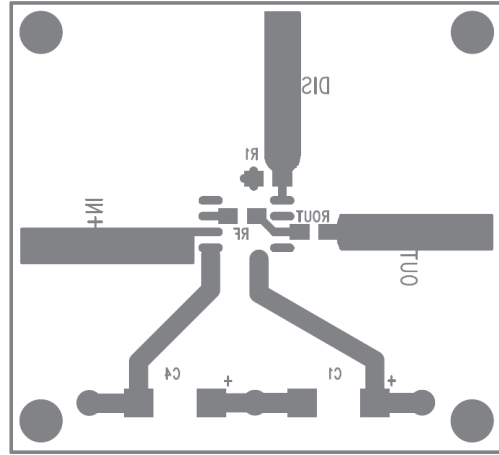


Figure 13. CEB003 Bottom View

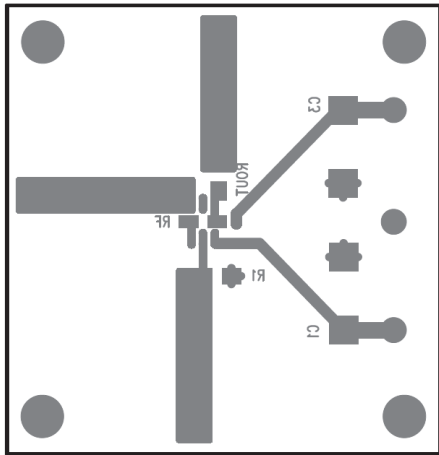


Figure 11. CEB002 Bottom View

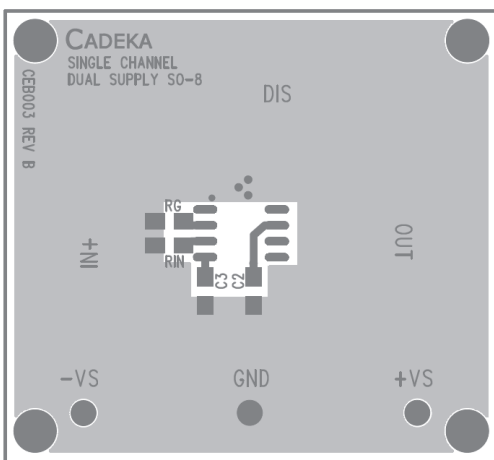


Figure 12. CEB003 Top View

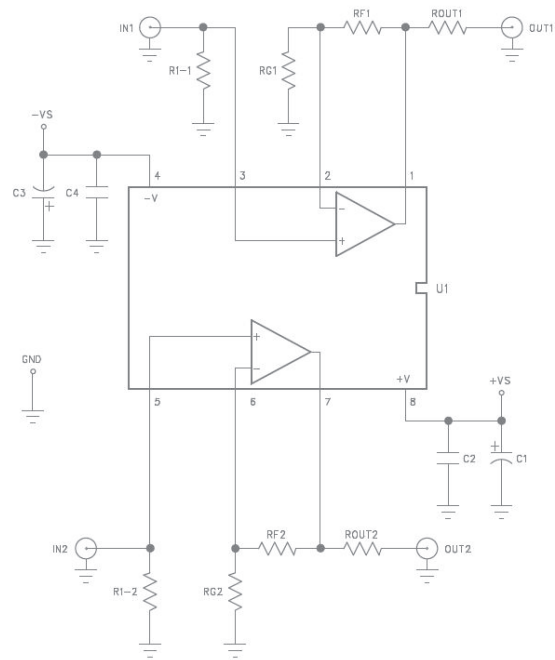


Figure 14. CEB006 & CEB010 Schematic

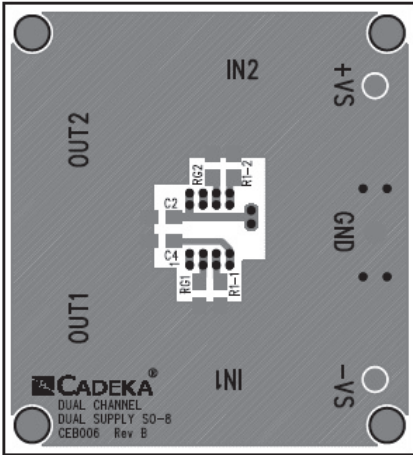


Figure 15. CEB006 Top View

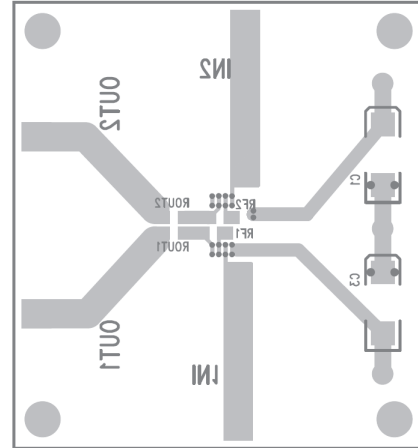


Figure 18. CEB010 Bottom View

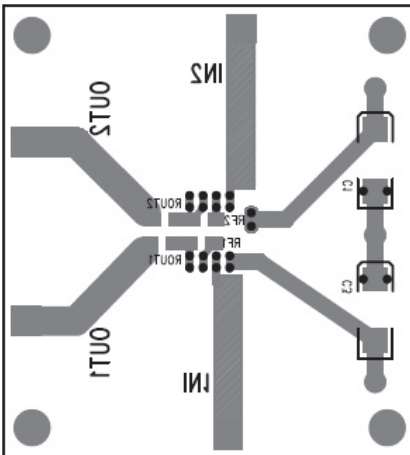


Figure 16. CEB006 Bottom View


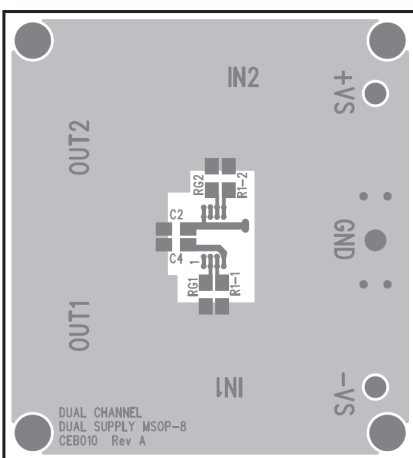


Figure 17. CEB010 Top View


## Mechanical Dimensions

### TSOT-5 Package

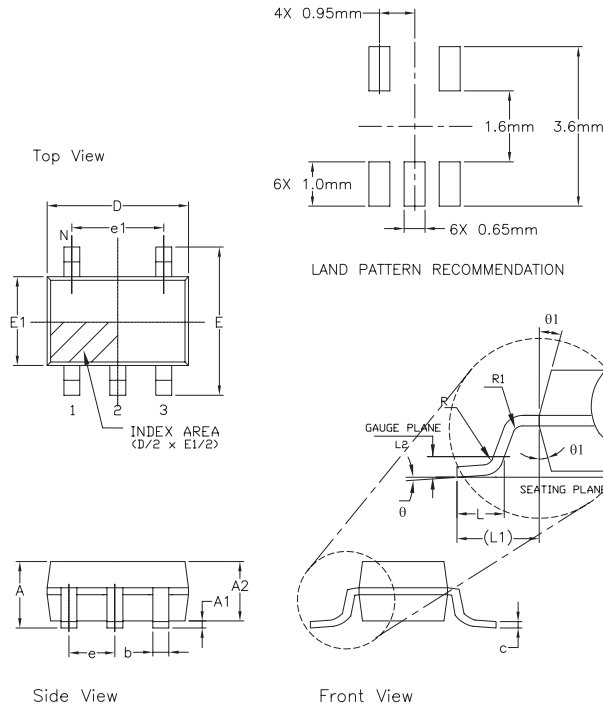


| 5 Pin TSOT (OPTION 2) |                                   |      |      |                                       |       |       |
|-----------------------|-----------------------------------|------|------|---------------------------------------|-------|-------|
| SYMBOLS               | DIMENSION IN MM<br>(Control Unit) |      |      | DIMENSION IN INCH<br>(Reference Unit) |       |       |
|                       | MIN                               | NOM  | MAX  | MIN                                   | NOM   | MAX   |
| A                     | 0.75                              | —    | 0.80 | 0.030                                 | —     | 0.031 |
| A1                    | 0.00                              | —    | 0.05 | 0.000                                 | —     | 0.002 |
| A2                    | 0.70                              | 0.75 | 0.78 | 0.028                                 | 0.030 | 0.031 |
| b                     | 0.35                              | —    | 0.50 | 0.012                                 | —     | 0.020 |
| c                     | 0.10                              | —    | 0.20 | 0.003                                 | —     | 0.008 |
| D                     | 2.90 BSC                          |      |      | 0.114 BSC                             |       |       |
| E                     | 2.80 BSC                          |      |      | 0.110 BSC                             |       |       |
| E1                    | 1.60 BSC                          |      |      | 0.063 BSC                             |       |       |
| e                     | 0.95 BSC                          |      |      | 0.038 BSC                             |       |       |
| e1                    | 1.90 BSC                          |      |      | 0.075 BSC                             |       |       |
| L                     | 0.37                              | 0.45 | 0.60 | 0.012                                 | 0.018 | 0.024 |
| L1                    | 0.60 REF                          |      |      | 0.024 REF                             |       |       |
| L2                    | 0.25 BSC                          |      |      | 0.010 BSC                             |       |       |
| R                     | 0.10                              | —    | —    | 0.004                                 | —     | —     |
| R1                    | 0.10                              | —    | 0.25 | 0.004                                 | —     | 0.010 |
| θ                     | 0°                                | 4°   | 8°   | 0°                                    | 4°    | 8°    |
| θ1                    | 4°                                | 10°  | 12°  | 4°                                    | 10°   | 12°   |
| N                     | 5                                 |      |      | 5                                     |       |       |

### MSOP-8 Package

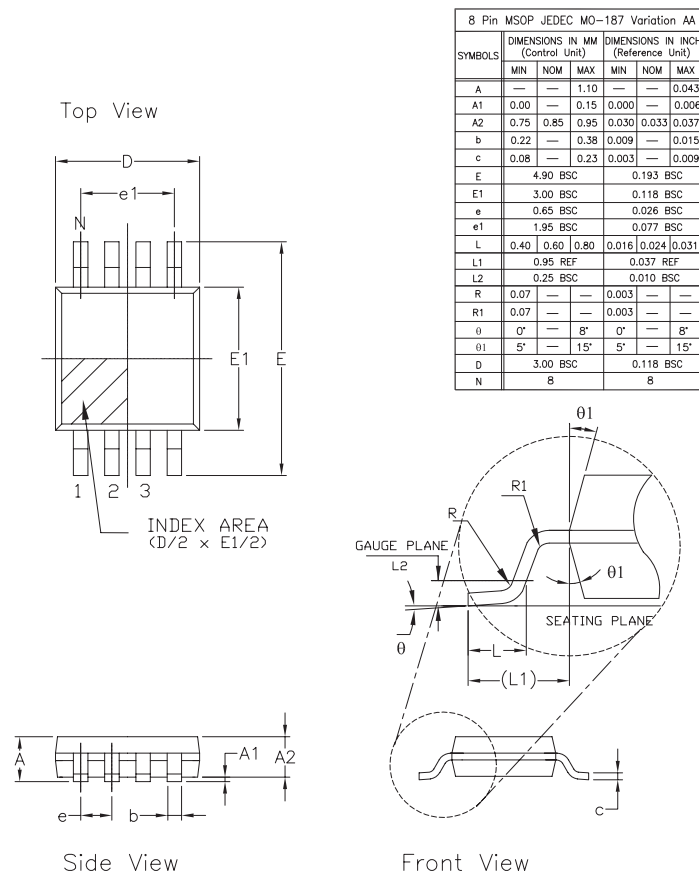


| 8 Pin MSOP JEDEC MO-187 Variation AA |                                    |      |      |  |       |       |
|--------------------------------------|------------------------------------|------|------|--|-------|-------|
| SYMBOLS                              | DIMENSIONS IN MM<br>(Control Unit) |      |      | DIMENSIONS IN INCH<br>(Reference Unit) |       |       |
|                                      | MIN                                | NOM  | MAX  | MIN                                    | NOM   | MAX   |
| A                                    | —                                  | —    | 1.10 | —                                      | —     | 0.043 |
| A1                                   | 0.00                               | —    | 0.15 | 0.000                                  | —     | 0.006 |
| A2                                   | 0.75                               | 0.85 | 0.95 | 0.030                                  | 0.033 | 0.037 |
| b                                    | 0.22                               | —    | 0.38 | 0.009                                  | —     | 0.015 |
| c                                    | 0.08                               | —    | 0.23 | 0.003                                  | —     | 0.009 |
| E                                    | 4.90 BSC                           |      |      | 0.193 BSC                              |       |       |
| E1                                   | 3.00 BSC                           |      |      | 0.118 BSC                              |       |       |
| e                                    | 0.65 BSC                           |      |      | 0.026 BSC                              |       |       |
| e1                                   | 1.95 BSC                           |      |      | 0.077 BSC                              |       |       |
| L                                    | 0.40                               | 0.60 | 0.80 | 0.016                                  | 0.024 | 0.031 |
| L1                                   | 0.95 REF                           |      |      | 0.037 REF                              |       |       |
| L2                                   | 0.25 BSC                           |      |      | 0.010 BSC                              |       |       |
| R                                    | 0.07                               | —    | —    | 0.003                                  | —     | —     |
| R1                                   | 0.07                               | —    | —    | 0.003                                  | —     | —     |
| θ                                    | 0°                                 | —    | 8°   | 0°                                     | —     | 8°    |
| θ1                                   | 5°                                 | —    | 15°  | 5°                                     | —     | 15°   |
| D                                    | 3.00 BSC                           |      |      | 0.118 BSC                              |       |       |
| N                                    | 8                                  |      |      | 8                                      |       |       |

SOIC-8 Package


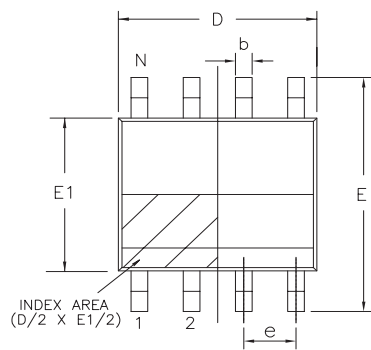


Top View



Side View

RECOMMENDED PCB LAND PATTERN

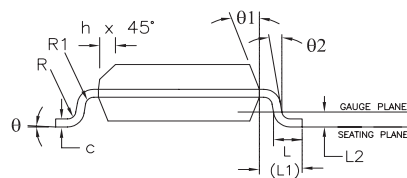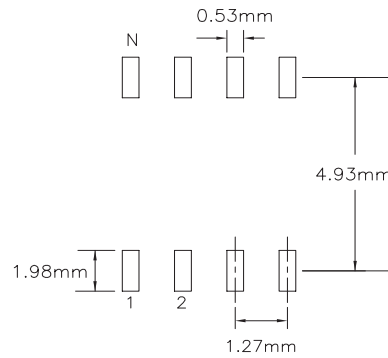

Front View

| 8 Pin SOICN JEDEC MS-012 Variation AA |                                    |     |      |  |     |       |
|---------------------------------------|------------------------------------|-----|------|--|-----|-------|
| SYMBOLS                               | DIMENSIONS IN MM<br>(Control Unit) |     |      | DIMENSIONS IN INCH<br>(Reference Unit) |     |       |
|                                       | MIN                                | NOM | MAX  | MIN                                    | NOM | MAX   |
| A                                     | 1.35                               | —   | 1.75 | 0.053                                  | —   | 0.069 |
| A1                                    | 0.10                               | —   | 0.25 | 0.004                                  | —   | 0.010 |
| A2                                    | 1.25                               | —   | 1.65 | 0.049                                  | —   | 0.065 |
| b                                     | 0.31                               | —   | 0.51 | 0.012                                  | —   | 0.020 |
| c                                     | 0.17                               | —   | 0.25 | 0.007                                  | —   | 0.010 |
| E                                     | 6.00 BSC                           |     |      | 0.236 BSC                              |     |       |
| E1                                    | 3.90 BSC                           |     |      | 0.154 BSC                              |     |       |
| e                                     | 1.27 BSC                           |     |      | 0.050 BSC                              |     |       |
| h                                     | 0.25                               | —   | 0.50 | 0.010                                  | —   | 0.020 |
| L                                     | 0.40                               | —   | 1.27 | 0.016                                  | —   | 0.050 |
| L1                                    | 1.04 REF                           |     |      | 0.041 REF                              |     |       |
| L2                                    | 0.25 BSC                           |     |      | 0.010 BSC                              |     |       |
| R                                     | 0.07                               | —   | —    | 0.003                                  | —   | —     |
| R1                                    | 0.07                               | —   | —    | 0.003                                  | —   | —     |
| θ                                     | 0°                                 | —   | 8°   | 0°                                     | —   | 8°    |
| θ1                                    | 5°                                 | —   | 15°  | 5°                                     | —   | 15°   |
| θ2                                    | 0°                                 | —   | —    | 0°                                     | —   | —     |
| D                                     | 4.90 BSC                           |     |      | 0.193 BSC                              |     |       |
| N                                     | 8                                  |     |      | 8                                      |     |       |



## Ordering Information

| Part Number                 | Package          | Green | Operating Temperature Range | Packaging Quantity | Marking |
|-----------------------------|------------------|-------|-----------------------------|--------------------|---------|
| XR1008 Ordering Information |                  |       |                             |                    |         |
| XR1008IST5X                 | TSOT-5           | Yes   | -40°C to +125°C             | 2.5k Tape & Reel   | TC      |
| XR1008IST5MTR               | TSOT-5           | Yes   | -40°C to +125°C             | 250 Tape & Reel    | TC      |
| XR1008IST5EVB               | Evaluation Board | N/A   | N/A                         | N/A                | N/A     |
| XR1008ISO8X                 | SOIC-8           | Yes   | -40°C to +125°C             | 2.5k Tape & Reel   | XR1008  |
| XR1008ISO8MTR               | SOIC-8           | Yes   | -40°C to +125°C             | 250 Tape & Reel    | XR1008  |
| XR1008ISO8EVB               | Evaluation Board | N/A   | N/A                         | N/A                | N/A     |
| XR2008 Ordering Information |                  |       |                             |                    |         |
| XR2008ISO8X                 | SOIC-8           | Yes   | -40°C to +125°C             | 2.5k Tape & Reel   | XR2008  |
| XR2008ISO8MTR               | SOIC-8           | Yes   | -40°C to +125°C             | 250 Tape & Reel    | XR2008  |
| XR2008ISO8EVB               | Evaluation Board | N/A   | N/A                         | N/A                | N/A     |
| XR2008IMP8X                 | MSOP-8           | Yes   | -40°C to +125°C             | 2.5k Tape & Reel   | 2008    |
| XR2008IMP8MTR               | MSOP-8           | Yes   | -40°C to +125°C             | 250 Tape & Reel    | 2008    |
| XR2008IMP8EVB               | Evaluation Board | N/A   | N/A                         | N/A                | N/A     |

Moisture sensitivity level for all parts is MSL-1.

## Revision History

| Revision | Date      | Description  |
|----------|-----------|--|
| 1A       | June 2014 | Initial Release [ECN1426-09   6/24/14]   |
| 1B       | Sept 2014 | Added XR1008 ESD, increased operating temperature range, updated package outline drawings, and removed Preliminary note on XR1008. [ECN1436-02   9/4/14] |

### For Further Assistance:

Email: [CustomerSupport@exar.com](mailto:CustomerSupport@exar.com) or [HPATechSupport@exar.com](mailto:HPATechSupport@exar.com)

Exar Technical Documentation: <http://www.exar.com/techdoc/>

#### Exar Corporation Headquarters and Sales Offices

48760 Kato Road  
Fremont, CA 94538 - USA

Tel.: +1 (510) 668-7000  
Fax: +1 (510) 668-7001



A New Direction in Mixed-Signal

### NOTICE

EXAR Corporation reserves the right to make changes to the products contained in this publication in order to improve design, performance or reliability. EXAR Corporation assumes no responsibility for the use of any circuits described herein, conveys no license under any patent or other right, and makes no representation that the circuits are free of patent infringement. Charts and schedules contained here in are only for illustration purposes and may vary depending upon a user's specific application. While the information in this publication has been carefully checked; no responsibility, however, is assumed for inaccuracies.

EXAR Corporation does not recommend the use of any of its products in life support applications where the failure or malfunction of the product can reasonably be expected to cause failure of the life support system or to significantly affect its safety or effectiveness. Products are not authorized for use in such applications unless EXAR Corporation receives, in writing, assurances to its satisfaction that: (a) the risk of injury or damage has been minimized; (b) the user assumes all such risks; (c) potential liability of EXAR Corporation is adequately protected under the circumstances.

Reproduction, in part or whole, without the prior written consent of EXAR Corporation is prohibited.

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9