



## Features

- RoHS compliant\* (see How to Order "Termination" option)
- Low profile provides compatibility with DIPs
- Also available in medium profile (4300S - .250 ") and high profile (4300K - .350 ")
- Marking on contrasting background

- Custom circuits available per factory

## 4300T, S, K Series - Thin Film Molded SIP

### Product Characteristics

Resistance Range  
 Bussed .....49.9 to 100K ohms  
 Isolated .....20 to 200K ohms  
 Series.....20 to 100K ohms  
 Resistance Tolerance  
 .....±0.1 %, ±0.5 %, ±1 %  
 Temperature Coefficient  
 .....±100 ppm/°C, ±50 ppm/°C,  
 ±25 ppm/°C  
 Temperature Range ....-55 °C to +125 °C  
 Insulation Resistance  
 .....10,000 megohms minimum  
 TCR Tracking .....±5 ppm/°C  
 Maximum Operating Voltage.....50 V

### Environmental Characteristics

Thermal Shock and  
 Power Conditioning ..... 0.1 %  
 Short Time Overload ..... 0.1 %  
 Terminal Strength ..... 0.25 %  
 Resistance to Soldering Heat ..... 0.1 %  
 Moisture Resistance ..... 0.1 %  
 Life ..... 0.50 %

### Physical Characteristics

Body Material Flammability  
 .....Conforms to UL94V-0  
 Lead Frame Material  
 .....Copper, solder coated  
 Body Material .....Novolac epoxy

### How To Order


**43 11 T - 101 - 2222 F A B**

Model \_\_\_\_\_  
 (43 = Molded SIP)  
 Number of Pins \_\_\_\_\_  
 Physical Config. \_\_\_\_\_  
 •T = Low Profile Thin Film  
 •S = Med. Profile Thin Film  
 •K = High Profile Thin Film  
 Electrical Configuration \_\_\_\_\_  
 •101 = Bussed  
 •102 = Isolated  
 •106 = Series  
 Resistance Code \_\_\_\_\_  
 •First 3 digits are significant  
 •Fourth digit represents the number of zeros to follow.  
 Absolute Tolerance Code \_\_\_\_\_  
 •B = ±0.1%      •F = ±1%  
 •D = ±0.5%  
 Temperature Coefficient Code \_\_\_\_\_  
 •A = ±100ppm/°C    •C = ±25ppm/°C  
 •B = ±50ppm/°C  
 Ratio Tolerance (Optional) \_\_\_\_\_  
 •A = ±0.05% to R1    •D = ±0.5% to R1  
 •B = ±0.1% to R1  
 Terminations \_\_\_\_\_  
 •L = Tin-plated (RoHS compliant version)  
 •Blank = Tin/Lead-plated

Consult factory for other available options.

### Package Power Temp. Derating Curve

(Low Profile, 4300T)

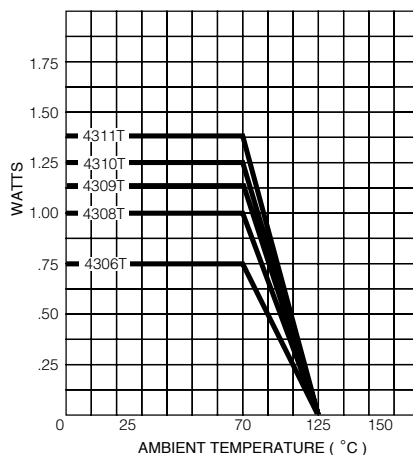


### Package Power Ratings at 70°C


	T	S	K
4304	0.60	0.80	watts
4306	0.75	0.90	1.20 watts
4308	1.00	1.20	1.60 watts
4309	1.13		watts
4310	1.25	1.50	2.00 watts
4311	1.38		watts

### Typical Part Marking

Represents total content. Layout may vary.



### Product Dimensions

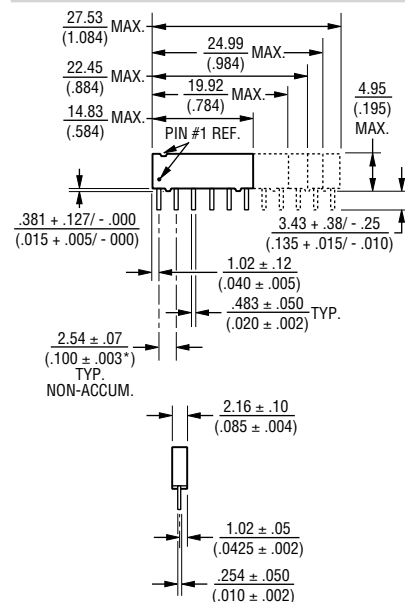

Governing dimensions are in metric. Dimensions in parentheses are inches and are approximate.

\*Terminal centerline to centerline measurements made at point of emergence of the lead from the body.


For information on thin film applications, download Bourns' Thin Film Application Note.

## 4300T, S, K Series - Thin Film Molded SIP

**BOURNS®**

### Isolated Resistors (102 Circuit)

Available in 6, 8, 10 Pin

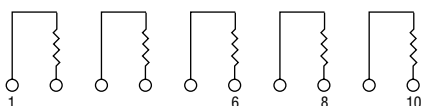


These models incorporate 3, 4, or 5 isolated thin-film resistors of equal value, each connected between a separate pin.

### Power Rating per Resistor

T .....0.18 watt  
 S .....0.20 watt  
 K .....0.25 watt  
 Resistance Range... ..20 to 200K ohms

### Bussed Resistors (101 Circuit)

Available in 6, 8, 9, 10, 11 Pin

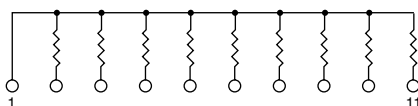


These models incorporate 5, 7, 8, 9, or 10 thin-film resistors of equal value, each connected between a separate pin.

### Power Rating per Resistor

T .....0.10 watt  
 S .....0.12 watt  
 K .....0.15 watt  
 Resistance Range...49.9 to 100K ohms

### Series Circuit (106 Circuit)

Available in 6, 8, 9, 10, 11 Pin



These models incorporate 5, 7, 8, 9, or 10 thin-film resistors of equal value, each connected in a series.

### Power Rating per Resistor

T .....0.10 watt  
 S .....0.12 watt  
 K .....0.15 watt  
 Resistance Range.....20 to 100K ohms

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9