

MOD5234

Ethernet Core Module

100 Version with RJ-45 | 200 Version with 10-pin header



DATASHEET

Key Points

- Use as a high-performance single board computer or add Ethernet connectivity to a new or existing design
- The included eTPU is essentially an independent microcontroller designed for timing control, I/O

handling, serial communications, motor control and engine control applications.

- Industrial temperature range (-40°C to 85°C)
- Customize with development kit

Device Connectivity

- 10/100Mbps Ethernet
- 3 UARTs, I²C, CAN, and SPI
- SD/MMC flash card ready

- 49 digital I/Os
- 16-bit address and data bus with 3 chip selects
- eTPU

Performance and memory

- 32-bit 147.5 MHz Processor

- 8MB SDRAM and 2MB Flash


Companion development kit

The following is available with the development kit:


- Customize any aspect of operation including web pages, data filtering, or custom network applications
- Development software: NB Eclipse IDE, Graphical debugger, deployment tools, and examples
- Communication software: TCP/IP stack, HTTP web server, FTP, E-mail, and flash file system
- System software: uC/OS RTOS, ANSI C/C++ compiler and linker

The following optional software modules are not included with kit and are sold separately:

- Embedded SSL & SSH Security Suite (Module License Version)
- SNMP

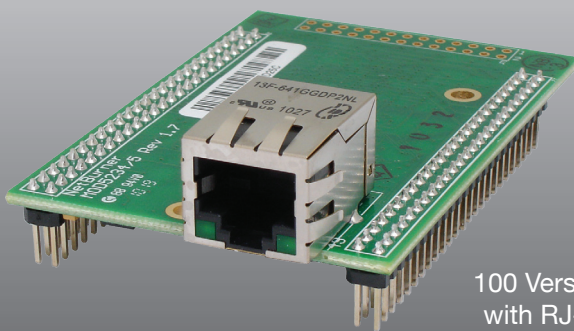

100 Version
with RJ-45

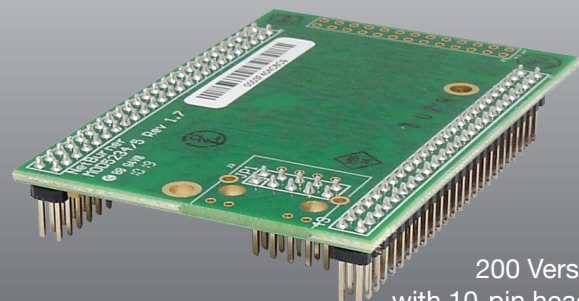

200 Version
with 10-pin header

Specifications

Processor and Memory

32-bit Freescale ColdFire 5234 running at 147.5MHz with 8MB SDRAM and 2MB Flash

Network Interface

10/100 BaseT with RJ-45 connector (100 Version)

10-pin header (200 Version)

eTPU

The programmable I/O controller has its own core and memory system, enabling it to perform complex timing and I/O management independently of the primary CPU. The eTPU is essentially an independent microcontroller designed for timing control, I/O handling, serial communications, motor control and engine control applications.

Data I/O Interface (J1 and J2)

- Up to 3 UARTs
- Up to 49 digital I/O
- Up to 2 external timer in and up to 3 timer outputs
- Up to 4 external IRQs
- I²C interface
- CAN 2.0b controller
- SPI interface
- SD/MMC flash card ready
- eTPU

Flash Card Support

FAT32 support for SD Cards up to 8GB (requires exclusive use of SPI signals). Card types include SD/MMC (up to 2GB) and SDHC.

Serial Configurations

The UARTs can be configured in the following way:

- 3 TTL ports
- Add external level shifter for RS-232
- Add external level shifter for RS-422/485 (up to three ports)

Note: UART 0/1/2 also provides RTS/CTS hardware handshaking signals.

LEDs

Link and Speed (100 Version only, on RJ-45)

Physical Characteristics

Dimensions (inches): 2.95" x 2.00"

Weight: 1 oz.

Mounting Holes: 2 x 0.125" dia.

Power

DC Input Voltage: 3.3V @ 380mA typical

Environmental Operating Temperature

-40° to 85° C

RoHS Compliance

The Restriction of Hazardous Substances guidelines ensure that electronics are manufactured with fewer environment harming materials.

Part Numbers

MOD5234 Ethernet Core Module (100 Version, with RJ-45)

Part Number: MOD5234-100IR

MOD5234 Ethernet Core Module (200 Version, with 10-pin header)

Part Number: MOD5234-200IR

MOD5234 LC Development Kit

Part Number: NNDK-MOD5234LC-KIT

Kit includes all the hardware and software you need to customize the included platform hardware. See NetBurner Store product page for package contents. Note: Includes the MOD-DEV-70 development board.

MOD5234 Development Kit

Part Number: NNDK-MOD5234-KIT

Kit includes all the hardware and software you need to customize the included platform hardware. See NetBurner Store product page for package contents. Note: Includes the MOD-DEV-100 development board.

Embedded SSL & SSH Security Suite (Module License Version)

Part Number: NBLIC-SSL-MODULE

Only required if you are using a development kit.

SNMP V1 (Module License Version)

Part Number: NBLIC-SNMP

Available as an option if you are using a development kit.

Ordering Information

E-mail: sales@netburner.com

Online Store: www.NetBurner.com

Telephone: 1-800-695-6828

MOD5234

Pinout and Signal Description

The 200 version board has a 10-pin header instead of an RJ-45 jack. This header enables you to relocate the jack to another location or to add a different jack with power over ethernet (PoE) capabilities to your module. Table 1 provides descriptions of pin function of the 10-pin header.

Table 1: Pinout and Signal Descriptions for JP2 Header ⁽¹⁾

| Pin | Signal | Description |
|-----|------------------|---------------|
| 1 | TX- | Transmit - |
| 2 | TX+ | Transmit + |
| 3 | VCC ¹ | 2.5V |
| 4 | RX+ | Receive + |
| 5 | RX- | Receive - |
| 6 | VCC ¹ | 2.5V |
| 7 | GND | Ground |
| 8 | N/C | Not Connected |
| 9 | LED | Link LED |
| 10 | LED | Speed LED |

Note:

1. Ethernet magnetics center tap voltage provided by NetBurner device

MOD5234

The module has two dual in-line 50 pin headers which enable you to connect to one of our standard NetBurner Carrier Boards, or a board you create on your own. Table 2 provides descriptions of pin function of the module header.

Table 2: Pinout and Signal Descriptions for J1 Connector ⁽¹⁾

| J1 Connector | | | | | | |
|--------------|---------|------------|------------|---------------------|--|-------------|
| Pin | CPU Pin | Function 1 | Function 2 | General Purpose I/O | Description | Max Voltage |
| 1 | | GND | | | Ground | - |
| 2 | | GND | | | Ground | - |
| 3 | | VCC3V | | | Input power 3.3 VDC | 3.3VDC |
| 4 | L16 | R/W | | | Read / NOT Write | 3.3VDC |
| 5 | B13 | CS1 | | PCS1 | Chip Select 1 ² | 3.3VDC |
| 6 | D12 | CS2 | SD_CS0 | PCS2 | Chip Select 2 ² or SDRAM Chip Select 0 | 3.3VDC |
| 7 | B12 | CS3 | SD_CS1 | PCS3 | Chip Select 3 ² or SDRAM Chip Select 1 | 3.3VDC |
| 8 | T7 | OE | | | Output Enable | 3.3VDC |
| 9 | B9 | BS2 | CAS2 | | Byte Strobe for D16 to D23 (8 bits) ¹ or Column Address Strobe 2 ¹ | 3.3VDC |
| 10 | C9 | BS3 | CAS3 | | Byte Strobe for D24 to D31 (8 bits) ¹ or Column Address Strobe 3 ¹ | 3.3VDC |
| 11 | | TIP | | | Transfer in Progress ² | 3.3VDC |
| 12 | R1 | D16 | | | Data Bus - Data 16 ² | 3.3VDC |
| 13 | K14 | TA | | PBUSCTL6 | Transfer Acknowledge | 3.3VDC |
| 14 | P2 | D18 | | | Data Bus - Data 18 ² | 3.3VDC |
| 15 | P1 | D17 | | | Data Bus - Data 17 ² | 3.3VDC |
| 16 | N2 | D20 | | | Data Bus - Data 20 ² | 3.3VDC |
| 17 | N1 | D19 | | | Data Bus - Data 19 ² | 3.3VDC |
| 18 | M2 | D22 | | | Data Bus - Data 22 ² | 3.3VDC |
| 19 | M1 | D21 | | | Data Bus - Data 21 ² | 3.3VDC |
| 20 | L1 | D24 | | | Data Bus - Data 24 ² | 3.3VDC |
| 21 | M3 | D23 | | | Data Bus - Data 23 ² | 3.3VDC |
| 22 | L3 | D26 | | | Data Bus - Data 26 ² | 3.3VDC |
| 23 | L2 | D25 | | | Data Bus - Data 25 ² | 3.3VDC |

Note:

- Active low signals, such as RESET, are indicated with an overbar.
- The TIP signal is the logical AND of *CS1, *CS2 and *CS3. TIP can be used to control an external data bus buffer for the data bus signals. An example circuit design can be found on the Module Development Board schematic. An external data bus buffer is recommended for any designs that use data bus signals D16-D31.

MOD5234

| J1 Connector (continued) | | | | | | | |
|--------------------------|---------|------------|------------|------------|---------------------|---|-------------|
| Pin | CPU Pin | Function 1 | Function 2 | Function 3 | General Purpose I/O | Description | Max Voltage |
| 24 | K1 | D28 | | | | Data Bus - Data 28 ² | 3.3VDC |
| 25 | L4 | D27 | | | | Data Bus - Data 27 ² | 3.3VDC |
| 26 | K3 | D30 | | | | Data Bus - Data 30 ² | 3.3VDC |
| 27 | K2 | D29 | | | | Data Bus - Data 29 ² | 3.3VDC |
| 28 | T15 | RESET | | | | Processor Reset Input | 3.3VDC |
| 29 | K4 | D31 | | | | Data Bus - Data 31 ² | 3.3VDC |
| 30 | T14 | RSTOUT | | | | Processor Reset Output | 3.3VDC |
| 31 | M16 | CLK_OUT | | | | Buffer Clock Out (CLKOUT-73.728 Mhz) ³ | 3.3VDC |
| 32 | H13 | A0 | | | | Data Bus - Address 0 | 3.3VDC |
| 33 | H14 | A1 | | | | Data Bus - Address 1 | 3.3VDC |
| 34 | H15 | A2 | | | | Data Bus - Address 2 | 3.3VDC |
| 35 | H16 | A3 | | | | Data Bus - Address 3 | 3.3VDC |
| 36 | G13 | A4 | | | | Data Bus - Address 4 | 3.3VDC |
| 37 | G14 | A5 | | | | Data Bus - Address 5 | 3.3VDC |
| 38 | G15 | A6 | | | | Data Bus - Address 6 | 3.3VDC |
| 39 | F13 | A7 | | | | Data Bus - Address 7 | 3.3VDC |
| 40 | F14 | A8 | | | | Data Bus - Address 8 | 3.3VDC |
| 41 | F15 | A9 | | | | Data Bus - Address 9 | 3.3VDC |
| 42 | E13 | A10 | | | | Data Bus - Address 10 | 3.3VDC |
| 43 | E14 | A11 | | | | Data Bus - Address 11 | 3.3VDC |
| 44 | E15 | A12 | | | | Data Bus - Address 12 | 3.3VDC |
| 45 | E16 | A13 | | | | Data Bus - Address 13 | 3.3VDC |
| 46 | D14 | A14 | | | | Data Bus - Address 14 | 3.3VDC |
| 47 | D15 | A15 | | | | Data Bus - Address 15 | 3.3VDC |
| 48 | | VCC3V | | | | Input power 3.3 VDC | 3.3VDC |
| 49 | | GND | | | | Ground | - |
| 50 | | GND | | | | Ground | - |

Note:

- Active low signals, such as RESET, are indicated with an overbar.
- The TIP signal is the logical AND of *CS1, *CS2 and *CS3. TIP can be used to control an external data bus buffer for the data bus signals. An example circuit design can be found on the Module Development Board schematic. An external data bus buffer is recommended for any designs that use data bus signals D16-D31.
- The CLKOUT signal is 1/2 the system frequency of 147.456 MHz.

MOD5234

Table 3: Pinout and Signal Descriptions for J2 Connector ⁽¹⁾

| J2 Connector | | | | | | | |
|--------------|---------|------------|------------|------------|---------------------|--|-------------|
| Pin | CPU Pin | Function 1 | Function 2 | Function 3 | General Purpose I/O | Description | Max Voltage |
| 1 | | GND | | | | Ground | - |
| 2 | | VCC3V | | | | Input power 3.3 VDC | 3.3VDC |
| 3 | G2 | UART0_RX | | | PUARTL0 | UART 0 Receive ² | 3.3VDC |
| 4 | H2 | UART0_TX | | | PUARTL1 | UART 0 Transmit ² | 3.3VDC |
| 5 | A6 | TPUCH1 | | | ETPU1 | eTPU Channel 1 | 3.3VDC |
| 6 | A7 | TPUCH0 | | | ETPU0 | eTPU Channel 0 | 3.3VDC |
| 7 | B4 | TPUCH3 | | | ETPU3 | eTPU Channel 3 | 3.3VDC |
| 8 | A4 | TPUCH2 | | | ETPU2 | eTPU Channel 2 | 3.3VDC |
| 9 | B3 | TPUCH5 | | | ETPU5 | eTPU Channel 5 | 3.3VDC |
| 10 | A3 | TPUCH4 | | | ETPU4 | eTPU Channel 4 | 3.3VDC |
| 11 | B2 | TPUCH7 | | | ETPU7 | eTPU Channel 7 | 3.3VDC |
| 12 | A2 | TPUCH6 | | | ETPU6 | eTPU Channel 6 | 3.3VDC |
| 13 | C2 | TPUCH9 | | | ETPU9 | eTPU Channel 9 | 3.3VDC |
| 14 | B1 | TPUCH8 | | | ETPU8 | eTPU Channel 8 | 3.3VDC |
| 15 | D2 | TPUCH11 | | | ETPU11 | eTPU Channel 11 | 3.3VDC |
| 16 | C1 | TPUCH10 | | | ETPU10 | eTPU Channel 10 | 3.3VDC |
| 17 | E2 | TPUCH13 | | | ETPU13 | eTPU Channel 13 | 3.3VDC |
| 18 | D1 | TPUCH12 | | | ETPU12 | eTPU Channel 12 | 3.3VDC |
| 19 | F2 | TPUCH15 | | | ETPU15 | eTPU Channel 15 | 3.3VDC |
| 20 | E1 | TPUCH14 | | | ETPU14 | eTPU Channel 14 | 3.3VDC |
| 21 | A11 | UART1_RX | CAN0_RX | | PUARTL4 | UART 1 Receive ² or CAN 0 Receive | 3.3VDC |
| 22 | A12 | UART1_TX | CAN0_TX | | PUARTL5 | UART 1 Transmit ² or CAN 0 Transmit | 3.3VDC |
| 23 | B11 | UART1_RTS | UART2_RTS | | PUARTL6 | UART 1 Request To Send ² or UART 2 Request to Send ² | 3.3VDC |
| 24 | C11 | UART1_CTS | UART2_CTS | | PUARTL7 | UART 1 Clear To Send ² or UART 2 Clear to Send ² | 3.3VDC |
| 25 | B8 | SPI_CLK | I2C_SCL | | PQSPI2 | SPI Clock or I ² C Serial Clock ³ | 3.3VDC |

Note:

- Active low signals, such as **RESET**, are indicated with an overbar.
- Each UART can be clocked from an internal or external source. For external clocks, each UART_n can be clocked by the corresponding DTn_IN vinput pin.
- If using I²C, the module must add pull-up resistors to SDA/SCL.

MOD5234

| J2 Connector (continued) | | | | | | | |
|--------------------------|---------|------------|------------|------------|---------------------|--|-------------|
| Pin | CPU Pin | Function 1 | Function 2 | Function 3 | General Purpose I/O | Description | Max Voltage |
| 26 | F1 | TCR_CLK | | | PETPU2 | eTPU Time Base Clock | 3.3VDC |
| 27 | C8 | SPI_DIN | I2C_SDA | | PQSPI1 | SPI Data In or I ² C Serial Data ³ | 3.3VDC |
| 28 | D8 | SPI_DOUT | | | PQSPI0 | SPI Data Out | 3.3VDC |
| 29 | G1 | UART0_CTS | | | PUARTL3 | UART 0 Clear To Send ² | 3.3VDC |
| 30 | D9 | SPI_CS0 | | | PQSPI3 | SPI Chip Select 0 | 3.3VDC |
| 31 | G4 | T0IN | DREQ0 | | PTIMER1 | Timer Input 0 or DMA Request 0 | 3.3VDC |
| 32 | J13 | UTPUODIS | | | PETPU1 | eTPU Channel Output Disable Signal (Upper) | 3.3VDC |
| 33 | R10 | T2OUT | DACK2 | | PTIMER4 | Timer Output 2 or DMA Acknowledge 2 | 3.3VDC |
| 34 | R7 | T1OUT | DACK1 | | PTIMER2 | Timer Output 1 or DMA Acknowledge 1 | 3.3VDC |
| 35 | J14 | LTPUODIS | | | PETPU0 | eTPU Channel Output Disable Signal (Lower) | 3.3VDC |
| 36 | G3 | T0OUT | DACK0 | | PTIMER0 | Timer Output 0 or DMA Acknowledge 0 | 3.3VDC |
| 37 | P7 | T1IN | DREQ1 | T1OUT | PTIMER3 | Timer Input 1 or DMA Request 1 or Timer Output 1 | 3.3VDC |
| 38 | H3 | UART0_RTS | | | PUARTL2 | UART 0 Request To Send ² | 3.3VDC |
| 39 | L15 | I2C_SDA | CAN0_RX | | PFECI2C0 | I ² C Serial Data ³ or CAN 0 Receive | 3.3VDC |
| 40 | B10 | SPI_CS1 | SD_CKE | | PQSPI4 | SPI Chip Select 1 or SDRAM Clock Enable | 3.3VDC |
| 41 | D10 | UART2_RX | | | PUARTH0 | UART 2 Receive ² | 3.3VDC |
| 42 | L14 | I2C_SCL | CAN0_TX | | PFECI2C1 | I ² C Serial Clock ³ or CAN 0 Transmit | 3.3VDC |
| 43 | N10 | IRQ1 | | | PIRQ1 | External Interrupt 1 | 3.3VDC |
| 44 | D11 | UART2_TX | | | PUARTH1 | UART 2 Transmit ² | 3.3VDC |
| 45 | R9 | IRQ3 | | | PIRQ3 | External Interrupt 3 | 3.3VDC |
| 46 | | GND | | | | Ground | - |
| 47 | N9 | IRQ5 | | | PIRQ5 | External Interrupt 5 | 3.3VDC |
| 48 | R8 | IRQ7 | | | PIRQ7 | External Interrupt 7 | 3.3VDC |
| 49 | | GND | | | | Ground | - |
| 50 | | VCC3V | | | | Input power 3.3 VDC | 3.3VDC |

Note:

- Active low signals, such as **RESET**, are indicated with an overbar
- Each UART can be clocked from an internal or external source. For external clocks, each UARTn can be clocked by the corresponding DTn_IN vinput pin.
- If using I²C, the module must add pull-up resistors to SDA/SCL.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9