

# **BAT46WJ**

# Single Schottky barrier diode Rev. 2 — 8 November 2011

**Product data sheet** 

#### 1. **Product profile**

## 1.1 General description

Single planar Schottky barrier diode with an integrated guard ring for stress protection, encapsulated in a very small and flat lead SOD323F (SC-90) Surface-Mounted Device (SMD) plastic package.

#### 1.2 Features and benefits

- Low forward voltage
- Reverse voltage V<sub>R</sub> ≤ 100 V
- Very small and flat lead SMD plastic package
- Low capacitance
- AEC-Q101 qualified

## 1.3 Applications

- High-speed switching
- Line termination

- Voltage clamping
- Reverse polarity protection

## 1.4 Quick reference data

Table 1. Quick reference data

Symbol	Parameter	Conditions	Min	Тур	Max	Unit
$V_R$	reverse voltage		-	-	100	V
$V_{F}$	forward voltage	$I_F = 250 \text{ mA}$	<u>[1]</u> _	-	850	mV
I <sub>R</sub>	reverse current	$V_{R} = 75 \text{ V}$	<u>[1]</u> _	-	4	μΑ

<sup>[1]</sup> Pulse test:  $t_p \le 300 \ \mu s; \ \delta \le 0.02.$ 

#### **Pinning information** 2.

Table 2. **Pinning** 

Pin	Description	Simplified outline	Graphic symbol
1	cathode	[1]	. [4]
2	anode		1  2
			sym001

<sup>[1]</sup> The marking bar indicates the cathode.



## Single Schottky barrier diode

# 3. Ordering information

Table 3. Ordering information

Type number	Package		
	Name	Description	Version
BAT46WJ	SC-90	plastic surface-mounted package; 2 leads	SOD323F

# 4. Marking

Table 4. Marking codes

Type number	Marking code
BAT46WJ	JK

# 5. Limiting values

Table 5. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134).

Symbol	Parameter	Conditions	Min	Max	Unit
$V_R$	reverse voltage		-	100	V
I <sub>F</sub>	forward current		-	250	mA
I <sub>FSM</sub>	non-repetitive peak forward current	square wave; t <sub>p</sub> < 10 ms	[1] -	2.5	Α
P <sub>tot</sub>	total power dissipation	$T_{amb} \le 25  ^{\circ}C$	[2][4]	400	mW
			[3][4]	715	mW
T <sub>j</sub>	junction temperature		-	150	°C
T <sub>amb</sub>	ambient temperature		-55	+150	°C
$T_{stg}$	storage temperature		-65	+150	°C

<sup>[1]</sup>  $T_i = 25$  °C before surge.

## 6. Thermal characteristics

Table 6. Thermal characteristics

Symbol	Parameter	Conditions		Min	Тур	Max	Unit
$R_{th(j-a)}$	thermal resistance from	in free air	[1][3]	-	-	310	K/W
junction to ambient	junction to ambient		[2][3]	-	-	175	K/W

<sup>[2]</sup> Device mounted on an FR4 Printed-Circuit Board (PCB), single-sided copper, tin-plated and standard footprint.

<sup>[3]</sup> Device mounted on an FR4 PCB, single-sided copper, tin-plated, mounting pad for cathode 1 cm<sup>2</sup>.


<sup>[4]</sup> Reflow soldering is the only recommended soldering method.

## Single Schottky barrier diode

Table 6. Thermal characteristics ...continued


Symbol	Parameter	Conditions	Min	Тур	Max	Unit
$R_{th(j-sp)}$	thermal resistance from junction to solder point		<u>[4]</u> _	-	35	K/W

- [1] Device mounted on an FR4 PCB, single-sided copper, tin-plated and standard footprint.
- [2] Device mounted on an FR4 PCB, single-sided copper, tin-plated, mounting pad for cathode 1 cm<sup>2</sup>.
- [3] Reflow soldering is the only recommended soldering method.
- [4] Soldering point of cathode tab.

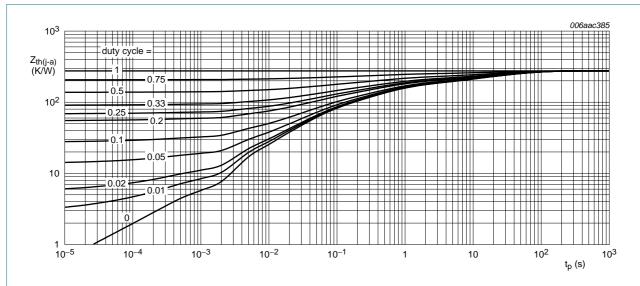

FR4 PCB, standard footprint

Fig 1. Transient thermal impedance from junction to ambient as a function of pulse duration; typical values

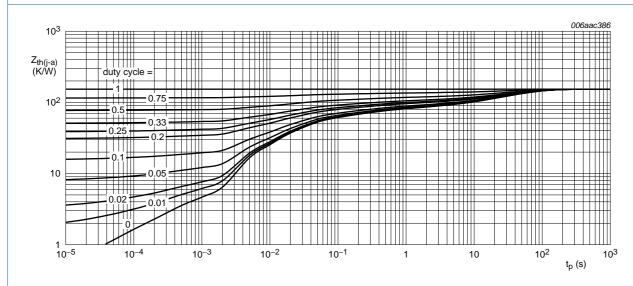

FR4 PCB, mounting pad for cathode 1 cm<sup>2</sup>

Fig 2. Transient thermal impedance from junction to ambient as a function of pulse duration; typical values

# Single Schottky barrier diode

# 7. Characteristics

Table 7. Characteristics


 $T_{amb} = 25$  °C unless otherwise specified.

Symbol	Parameter	Conditions	Min	Тур	Max	Unit
$V_{F}$	forward voltage		<u>[1]</u>			
		$I_F = 0.1 \text{ mA}$	-	175	200	mV
	I <sub>F</sub> = 10 mA	-	315	350	mV	
	$I_F = 10 \text{ mA}; T_j = -40 ^{\circ}\text{C}$	-	-	470	mV	
	$I_F = 50 \text{ mA}$	-	415	475	mV	
		$I_F = 50 \text{ mA}; T_j = -40 ^{\circ}\text{C}$	-	-	560	mV
		$I_F = 250 \text{ mA}$	-	710	850	mV
I <sub>R</sub> reverse current			[1]			
		V <sub>R</sub> = 1.5 V	-	0.2	0.5	μΑ
		$V_R = 1.5 \text{ V}; T_j = 60 ^{\circ}\text{C}$	-	-	12	μΑ
		V <sub>R</sub> = 10 V	-	0.3	0.8	μΑ
		$V_R = 10 \text{ V}; T_j = 60 ^{\circ}\text{C}$	-	-	20	μΑ
		$V_R = 50 \text{ V}$	-	0.7	2	μΑ
		$V_R = 50 \text{ V}; T_j = 60 ^{\circ}\text{C}$	-	-	44	μΑ
		$V_R = 75 \text{ V}$	-	1	4	μΑ
		$V_R = 75 \text{ V}; T_j = 60 ^{\circ}\text{C}$	-	-	80	μΑ
		V <sub>R</sub> = 100 V	-	2	9	μΑ
		$V_R = 100 \text{ V}; T_j = 60 ^{\circ}\text{C}$	-	-	120	μΑ
		$V_R = 100 \text{ V}; T_j = 85 ^{\circ}\text{C}$	-	-	600	μΑ
C <sub>d</sub>	diode capacitance	f = 1 MHz				
		$V_R = 0 V$	-	-	39	pF
		V <sub>R</sub> = 1 V	-	-	21	pF
t <sub>rr</sub>	reverse recovery time		[2] _	5.9	-	ns

<sup>[1]</sup> Pulse test:  $t_p \le 300~\mu s;~\delta \le 0.02.$ 


<sup>[2]</sup> When switched from I<sub>F</sub> = 10 mA to I<sub>R</sub> = 10 mA; R<sub>L</sub> = 100  $\Omega$ ; measured at I<sub>R</sub> = 1 mA.

## Single Schottky barrier diode

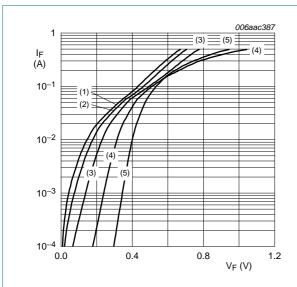


- (1)  $T_{amb} = 150 \, ^{\circ}C$
- (2)  $T_{amb} = 125 \, ^{\circ}C$
- (3)  $T_{amb} = 85 \, ^{\circ}C$
- (4)  $T_{amb} = 25 \, ^{\circ}C$
- (5)  $T_{amb} = -40 \, ^{\circ}C$

Fig 3. Forward current as a function of forward voltage; typical values

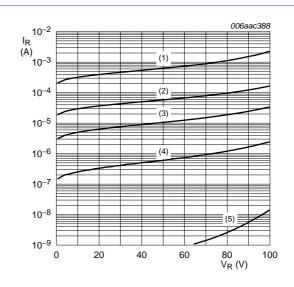

- (1)  $T_{amb} = 125 \, ^{\circ}C$
- (2)  $T_{amb} = 85 \, ^{\circ}C$
- (3)  $T_{amb} = 60 \, ^{\circ}C$
- (4)  $T_{amb} = 25 \, ^{\circ}C$
- (5)  $T_{amb} = -40 \, ^{\circ}C$


Fig 4. Reverse current as a function of reverse voltage; typical values

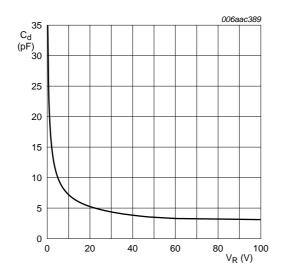

f = 1 MHz; T<sub>amb</sub> = 25 °C


Fig 5. Diode capacitance as a function of reverse voltage; typical values

#### Single Schottky barrier diode

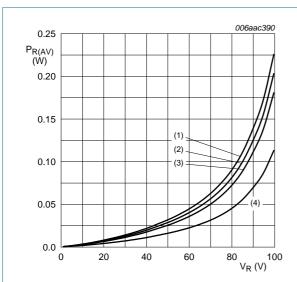

- (1)  $\delta = 1$
- (2)  $\delta = 0.9$
- (3)  $\delta = 0.8$
- (4)  $\delta = 0.5$


Fig 6. Average reverse power dissipation as a function of reverse voltage; typical values

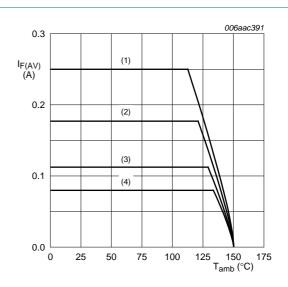

FR4 PCB, standard footprint

- (1)  $\delta = 1$ ; DC
- (2)  $\delta = 0.5$ ; f = 20 kHz
- (3)  $\delta = 0.2$ ; f = 20 kHz
- (4)  $\delta = 0.1$ ; f = 20 kHz


Fig 7. Average forward current as a function of ambient temperature; typical values

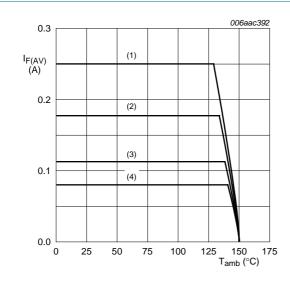

FR4 PCB, mounting pad for cathode 1 cm<sup>2</sup>

- (1)  $\delta = 1$ ; DC
- (2)  $\delta = 0.5$ ; f = 20 kHz
- (3)  $\delta = 0.2$ ; f = 20 kHz
- (4)  $\delta = 0.1$ ; f = 20 kHz

Fig 8. Average forward current as a function of ambient temperature; typical values

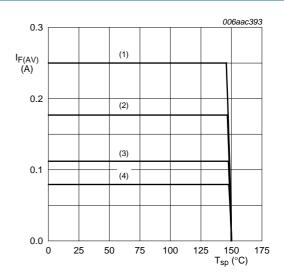


T<sub>i</sub> = 150 °C


- (1)  $\delta = 1$ ; DC
- (2)  $\delta = 0.5$ ; f = 20 kHz
- (3)  $\delta = 0.2$ ; f = 20 kHz
- (4)  $\delta = 0.1$ ; f = 20 kHz

Fig 9. Average forward current as a function of solder point temperature; typical values

Single Schottky barrier diode

## 8. Test information

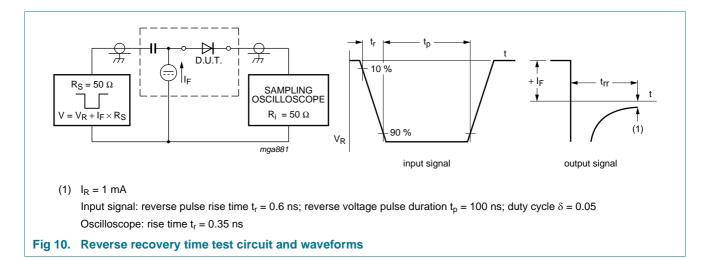

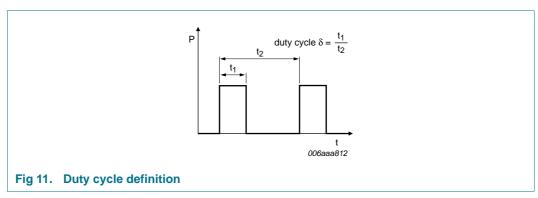


The current ratings for the typical waveforms as shown in Figure 7, 8 and 9 are calculated according to the equations:  $I_{F(AV)} = I_M \times \delta$  with  $I_M$  defined as peak current,  $I_{RMS} = I_{F(AV)}$  at DC, and  $I_{RMS} = I_M \times \sqrt{\delta}$  with  $I_{RMS}$  defined as RMS current.

## 8.1 Quality information

This product has been qualified in accordance with the Automotive Electronics Council (AEC) standard *Q101 - Stress test qualification for discrete semiconductors*, and is suitable for use in automotive applications.

Single Schottky barrier diode

# 9. Package outline

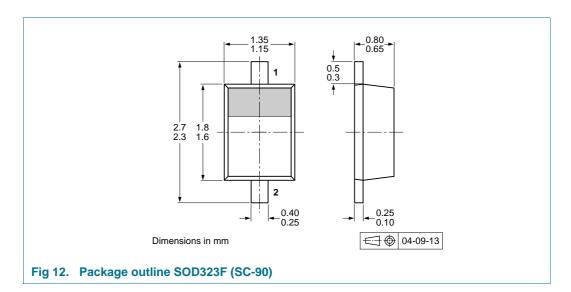

# 10. Packing information


Table 8. Packing methods

The indicated -xxx are the last three digits of the 12NC ordering code.[1]

Type number	Package	Description	Packing o	<b>Juantity</b>
			3000	10000
BAT46WJ	SOD323F	4 mm pitch, 8 mm tape and reel	-115	-135

<sup>[1]</sup> For further information and the availability of packing methods, see Section 14.

# 11. Soldering

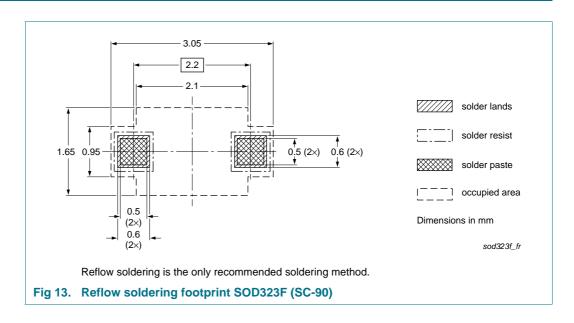

BAT46WJ

# Single Schottky barrier diode

# 12. Revision history

## Table 9. Revision history

Document ID	Release date	Data sheet status	Change notice	Supersedes
BAT46WJ v.2	20111108	Product data sheet	-	BAT46WJ v.1
Modifications:	<ul> <li>Table 7: unit for reverse current I<sub>R</sub> at V<sub>R</sub> = 50 V corrected to μA</li> <li>Table 7: conditions of reverse voltage V<sub>R</sub> corrected</li> <li>Section 13 "Legal information": updated</li> </ul>			
BAT46WJ v.1	20100728	Product data sheet	-	-

#### Single Schottky barrier diode

## 13. Legal information

#### 13.1 Data sheet status

Document status[1][2]	Product status[3]	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

- [1] Please consult the most recently issued document before initiating or completing a design
- [2] The term 'short data sheet' is explained in section "Definitions"
- [3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL http://www.nexperia.com.

#### 13.2 Definitions

Draft — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. Nexperia does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local Nexperia sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

Product specification — The information and data provided in a Product data sheet shall define the specification of the product as agreed between Nexperia and its customer, unless Nexperia and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the Nexperia product is deemed to offer functions and qualities beyond those described in the Product data sheet.

#### 13.3 Disclaimers

Limited warranty and liability — Information in this document is believed to be accurate and reliable. However, Nexperia does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

In no event shall Nexperia be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, Nexperia's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the *Terms and conditions of commercial sale* of Nexperia.

Right to make changes — Nexperia reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — Nexperia products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or

malfunction of a Nexperia product can reasonably be expected to result in personal injury, death or severe property or environmental damage. Nexperia accepts no liability for inclusion and/or use of Nexperia products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

**Applications** — Applications that are described herein for any of these products are for illustrative purposes only. Nexperia makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using Nexperia products, and Nexperia accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the Nexperia product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

Nexperia does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using Nexperia products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). Nexperia does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and conditions of commercial sale — Nexperia products are sold subject to the general terms and conditions of commercial sale, as published at <a href="http://www.nexperia.com/profile/terms">http://www.nexperia.com/profile/terms</a>, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Nexperia hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of Nexperia products by customer.

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

**Export control** — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

BAT46WJ

## Single Schottky barrier diode

**Quick reference data** — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

## 13.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

## 14. Contact information

For more information, please visit: http://www.nexperia.com

For sales office addresses, please send an email to: <a href="mailto:salesaddresses@nexperia.com">salesaddresses@nexperia.com</a>

## Single Schottky barrier diode

# 15. Contents

1	Product profile
1.1	General description
1.2	Features and benefits
1.3	Applications
1.4	Quick reference data 1
2	Pinning information 1
3	Ordering information 2
4	Marking 2
5	Limiting values 2
6	Thermal characteristics 2
7	Characteristics 4
8	Test information 7
8.1	Quality information
9	Package outline 8
10	Packing information 8
11	Soldering 8
12	Revision history 9
13	Legal information
13.1	Data sheet status
13.2	Definitions
13.3	Disclaimers
13.4	Trademarks11
14	Contact information 11
15	Contents

## **ПОСТАВКА** ЭЛЕКТРОННЫХ КОМПОНЕНТОВ

Общество с ограниченной ответственностью «МосЧип» ИНН 7719860671 / КПП 771901001 Адрес: 105318, г.Москва, ул.Щербаковская д.3, офис 1107

# Данный компонент на территории Российской Федерации Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

## http://moschip.ru/get-element

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

## Офис по работе с юридическими лицами:

105318, г. Москва, ул. Щербаковская д. 3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru moschip.ru\_6 moschip.ru\_4 moschip.ru\_9