

# A Series

- **Multi-pole and multi-position**
- **Positive detent**
- **Shorting & non-shorting contacts**
- **Panel and PCB mounting**
- **RoHS Compliant**



- **Automotive**
- **Major and small appliances**
- **Industrial equipment**



CONTACT RATING: Q contact material: Switch - 2.5 AMPS @ 125 V AC; 350 mA @ 125 V DC (UL/CSA). Carry - 5 AMPS continuous. See page K-6 for additional ratings.

ELECTRICAL LIFE: 15,000 make-and-break cycles at full load up to 300,000 detent operations.

CONTACT RESISTANCE: Below 20 m  $\Omega$  typ. initial @ 2-4 V DC, 100 mA, for both silver and gold plated contacts.

INSULATION RESISTANCE: 10<sup>9</sup>  $\Omega$  min.


DIELECTRIC STRENGTH: 1,000 Vrms min. @ sea level.

OPERATING & STORAGE TEMPERATURE: -30°C to 85°C

**NOTE:** Specifications and materials listed above are for switches with standard options. For information on specific and custom switches, consult Customer Service Center.

HOUSING & BUSHING: Glass filled 6/6 nylon (UL 94V-0).  
 ACTUATOR: Glass filled 6/6 nylon (UL 94V-0).  
 MOVABLE CONTACTS: Q contact material: Coin silver, silver plated.  
 See page K-6 for additional contact materials.  
 STATIONARY CONTACTS & TERMINALS: Q contact material: Brass,  
 silver plated. See page K-6 for additional contact materials.  
 HARDWARE: Nut - zinc, nickel plated. Lockwasher — steel, bright  
 zinc plated. Stop Ring - brass, nickel plated.  
 TERMINAL SEAL: Epoxy.

To order, simply select desired option from each category and place in the appropriate box. Available options are shown and described on pages K-4 through K-7. For additional options not shown in catalog, consult Customer Service Center.

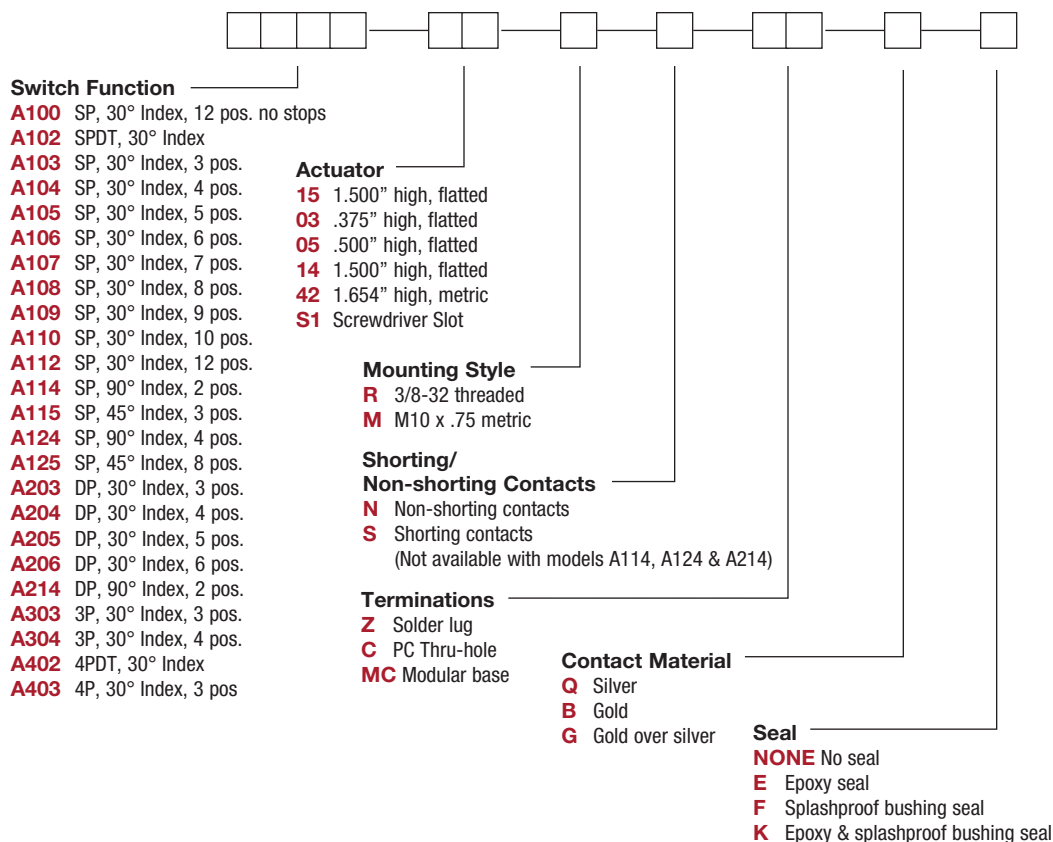


# A Series 1-4 Pole Rotary Switches

## SWITCH FUNCTION




| 30° INDEXING |             |                      |                    |
|--------------|-------------|----------------------|--------------------|
| NO. POLES    | MODEL NO.   | SWITCH FUNCTION      | TERMINALS          |
| SP           | <b>A100</b> | 12 Position No Stops | A,1-12             |
|              | <b>A102</b> | SPDT                 | A,1,2*             |
|              | <b>A103</b> | 3 Position           | A,1-3*             |
|              | <b>A104</b> | 4 Position           | A,1-4*             |
|              | <b>A105</b> | 5 Position           | A,1-5*             |
|              | <b>A106</b> | 6 Position           | A,1-6*             |
|              | <b>A107</b> | 7 Position           | A,1-7              |
|              | <b>A108</b> | 8 Position           | A,1-8              |
|              | <b>A109</b> | 9 Position           | A,1-9              |
|              | <b>A110</b> | 10 Position          | A,1-10             |
|              | <b>A112</b> | 12 Position          | A,1-12             |
| DP           | <b>A203</b> | 3 Position           | A,C,1-3,7-9        |
|              | <b>A204</b> | 4 Position           | A,C,1-4,7-10       |
|              | <b>A205</b> | 5 Position           | A,C,1-5,7-11       |
|              | <b>A206</b> | 6 Position           | A,C,1-12           |
| 3P           | <b>A303</b> | 3 Position           | A,B,C,1-3,5-7 9-11 |
|              | <b>A304</b> | 4 Position           | A,B,C,1-12         |


SP MODELS SCHEMATIC




DP MODELS SCHEMATIC



3P MODELS SCHEMATIC



4P MODELS SCHEMATIC



| 30° INDEXING |             |                 |                            |
|--------------|-------------|-----------------|----------------------------|
| NO. POLES    | MODEL NO.   | SWITCH FUNCTION | TERMINALS                  |
| 4P           | <b>A402</b> | 4PDT            | A,B,C,D,1,2,4,5,7, 8,10,11 |
|              | <b>A403</b> | 3 Position      | All Terminals              |


| 45° INDEXING |             |                 |                     |
|--------------|-------------|-----------------|---------------------|
| NO. POLES    | MODEL NO.   | SWITCH FUNCTION | TERMINALS           |
| SP           | <b>A115</b> | 3 Position      | A,1,2,4*            |
|              | <b>A125</b> | 8 Position      | A,1,2,4,5,7,8,10,11 |

| 90° INDEXING |             |                 |              |
|--------------|-------------|-----------------|--------------|
| NO. POLES    | MODEL NO.   | SWITCH FUNCTION | TERMINALS    |
| SP           | <b>A114</b> | 2 Position      | A,1,4*       |
|              | <b>A124</b> | 4 Position      | A,1,4,7,10   |
| DP           | <b>A214</b> | 2 Position      | A,C,1,4,7,10 |


**NOTE:** \* These models with 'C' or 'MC' terminations have additional terminal no. 9 as switch support only. This terminal is not connected electrically inside switch.

All models **C&K** with all options when ordered with 'G' or 'Q' contact material, see page K-6.



TERMINAL NUMBERS



4P MODELS  
SP MODELS (omit terminals B, C & D)  
DP MODELS (omit terminals B & D)



3P MODELS



TERM. NOS.  
MOLDED ON HOUSING



Dimensions are shown: Inch (mm)

Specifications and dimensions subject to change



17 jun 19



K

Rotary

# A Series 1-4 Pole Rotary Switches

## ACTUATOR



**15** 1.500" HIGH













**03** .375" HIGH

**05** .500" HIGH

**14** 1.500" HIGH

**42** 1.654" METRIC

**S1** SCREWDRIVER SLOT





**NOTE:** Actuators shown in position 1, fully CCW.

## MOUNTING STYLE




**R** 3/8-32 THREAD

**M** M10 x .75 METRIC




### PANEL MOUNTING



3/8 IN. BUSHING


### PANEL MOUNTING



METRIC BUSHING

### TYPICAL INSTALLATION

Maximum force to push on knob should not exceed 10 lbs.



Install switch with stop ring (if used) and lockwasher in back of panel. Tighten hex nut from front of panel.

On PC mounted switches, use hex nut and lockwasher to hold stop ring in place.

**Actuation torque: 8-16 oz./in.**  
**Maximum torque: 30 oz./in.**

## SHORTING/NON-SHORTING CONTACTS



**N** NON-SHORTING CONTACTS (break-before-make)

**S** SHORTING CONTACTS (make-before-break)

**NOTE:** 'S' shorting contacts are not available with A114, A124 and A214 models.



Third Angle  
Projection


Dimensions are shown: Inch (mm)  
Specifications and dimensions subject to change

# A Series


## 1-4 Pole Rotary Switches

### TERMINATIONS


**Z** SOLDER LUG



**C** PC THRU-HOLE




**MC** MODULAR BASE (for wave soldering)

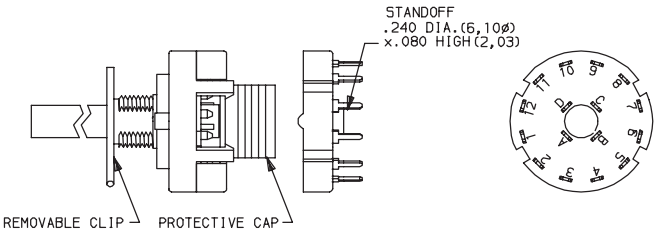


**NOTE:** Switch models A102 through A106, A114 and A1115 with 'C' or 'MC' terminations have additional terminal no. 9 as switch support only. This terminal is not connected electrically inside switch. Solder and clean switch base on PC board with other components, then snap on housing/actuator assembly. See page K-7 for installation instructions.

### PC MOUNTING



4P MODEL  
SP MODEL (omit terminals B, C & D)  
DP MODEL (omit terminals B & D)



3P MODEL

### CONTACT MATERIAL

| OPTION CODE | CONTACT AND TERMINAL MATERIAL | RATING                         |                                                                                                                      |
|-------------|-------------------------------|--------------------------------|----------------------------------------------------------------------------------------------------------------------|
|             |                               |                                |                                                                                                                      |
| <b>Q</b>    | SILVER <sup>2</sup>           | POWER                          | SWITCH-2.5 AMPS @ 125 V AC; 350 mA @ 125V DC (UL/CSA).<br>CARRY-5 AMPS CONTINUOUS.                                   |
| <b>B</b>    | GOLD <sup>1</sup>             | LOW LEVEL/DRY CIRCUIT          | 0.4 VA MAX. @ 20 V AC or DC MAX                                                                                      |
| <b>G</b>    | GOLD OVER SILVER <sup>3</sup> | LOW LEVEL/DRY CIRCUIT OR POWER | 0.4 VA MAX. @ 20 V AC or DC MAX. or SWITCH-2.5 AMPS @ 125 V AC; 350 mA @ 125 V DC (UL/CSA). CARRY-5 AMPS CONTINUOUS. |

\* Note: See Technical Data section of this catalog for RoHS compliant and compatible definition and specifications.

<sup>1</sup> MOVABLE CONTACTS: Copper alloy, with gold plate over nickel plate.  
STATIONARY CONTACTS & TERMINALS: Brass, with gold plate over nickel plate.  
<sup>2</sup> MOVABLE CONTACTS: Coin silver, silver plated.  
STATIONARY CONTACTS & TERMINALS: Brass, silver plated (standard with all termination options).  
<sup>3</sup> MOVABLE CONTACTS: Coin silver, with gold plate over nickel plate over silver plate.  
STATIONARY CONTACTS & TERMINALS: Brass, with gold plate over nickel plate over silver plate.

**NOTE:** Any models supplied with Q, B or G contact material are RoHS compliant.

All models **C&K** with all options when ordered with 'G' or 'Q' contact material.

**NOTE:** 'G' contact material is equivalent to both 'B' and 'Q' contact materials.



Dimensions are shown: Inch (mm)  
Specifications and dimensions subject to change

# A Series 1-4 Pole Rotary Switches


## FUNCTION

**NONE** NO SEAL

**E** EPOXY SEAL

**F** SPLASHPROOF BUSHING SEAL

**K** EPOXY & SPLASHPROOF BUSHING SEAL

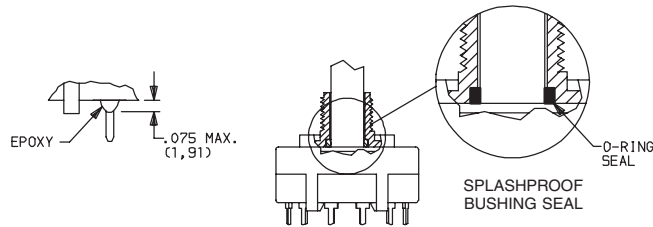

### Setting Stops on A112 and A125 Models

The number of switch positions is adjustable on A112 and A125 models only by means of a stop ring provided with each switch. The number of positions is pre-set on all other models and the stop ring is factory installed.

To set stops: Turn shaft fully counter-clockwise and insert stop ring tab in desired hole. Install lockwasher and nut to retain stop ring for both PC and panel mounting. Switch without stop ring has 12 positions.

### Soldering, Cleaning and Assembly Instructions for 'MC' Termination Option

#### Soldering


1. Insert switch base only into PC board.
2. Do not bend terminals.
3. Wave soldering recommended at 500F solder temperature.
4. Hand solder at 500F, 10 sec. max./terminal.

#### Cleaning

1. Flux clean using vapor degreaser and forced rinse or triple bath method.
2. Do not allow switch base to 'trap' fluids.
3. Freon TMC, TF or Methylene Chloride give excellent results.


#### Switch Assembly

1. Hold housing/shaft assembly by housing. Remove protective cap by squeezing tabs and discard. (FIG. 1)
2. Do not push on switch shaft. Detent mechanism will come apart.
3. While holding switch housing, align locating tab on base with notch on housing and engage 4 housing latches in slots on base. (FIG. 2)
4. Push firmly on housing until latches snap in place.
5. Remove clip from shaft and discard. Assembly is complete. (FIG. 3)

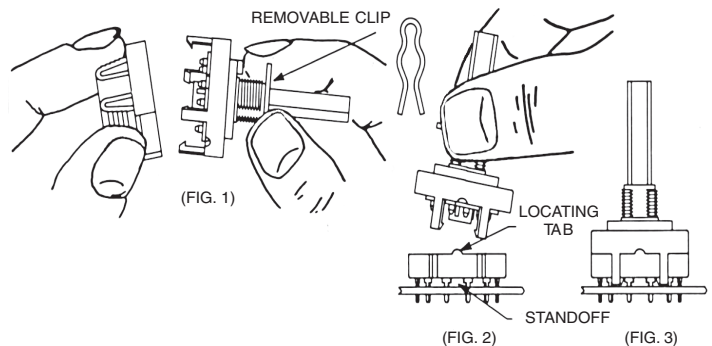

## AVAILABLE HARDWARE

### Stop ring

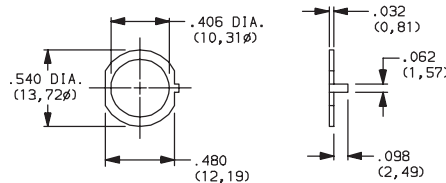

PART NO.  
**767B00201**

Material: Brass  
Finish: Nickel plated



Dimensions are shown: Inch (mm)  
Specifications and dimensions subject to change



17 jun 19



K

Rotary

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9