

**WILMAR™ Protective Relays – 1800 Series**


**Function: 25**

- ANSI/IEEE C37.90-1978
- UL file No. E58048
- CSA file No. LR61158




**Application:**

These relays are designed for automatic paralleling (synchronizing) of generators. The relays sense the phase angle displacement and the amplitude difference between two voltages and permit paralleling only when both voltages are equal and in phase. A short time delay is provided to assure that the frequencies are essentially the same at the moment of paralleling. The basic series is designed to parallel two or more energized AC generators. The "Dead Bus" type provides paralleling of AC generators to the main bus. They permit electrical connection of an energized generator to an un-energized line (Dead Bus). If the bus is energized, connection of the generator to the bus is permitted only when both are synchronized.

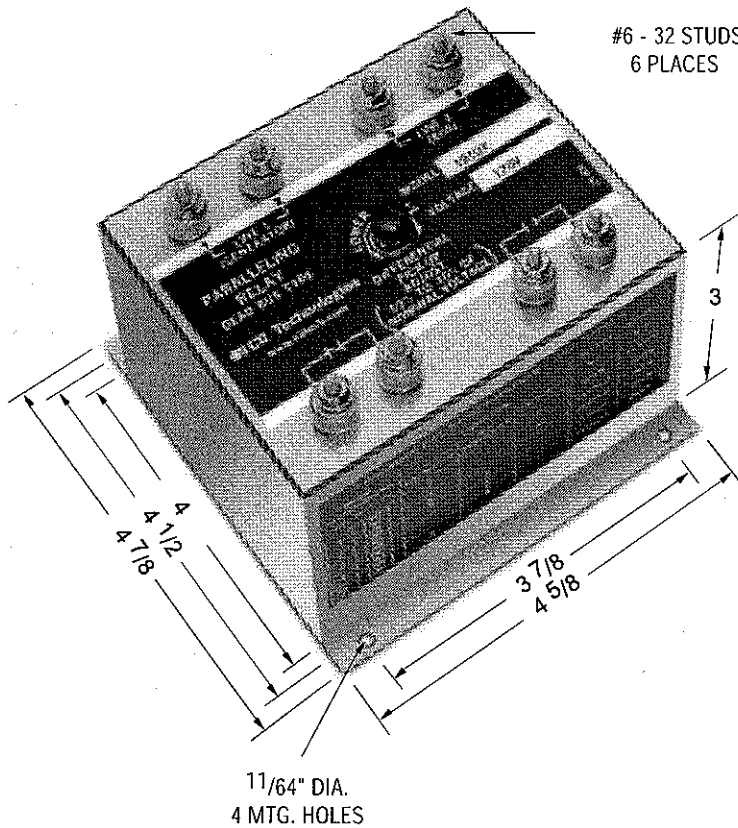

Note: Dimensions in inches. Multiply values by 25.4 for dimensions in mm.

**CONNECTIONS**

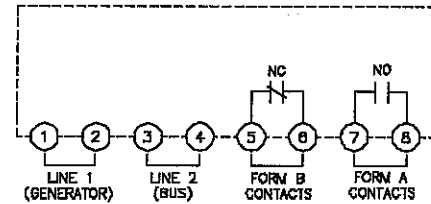

PRODUCT SPECIFICATIONS	
Part Number	1800 Series
Sensing Voltage .....	120 V, 230 V, 277 V, 380 V, 460 V, 575 V, & 415 V
Line Frequency .....	50-500 Hz
Pick-Up Adjustment .....	External adjustment for field sensing of 10-30% of nominal input voltage. (Vertical voltage differential of 6 to 18 electrical degrees).
Time Delay .....	Fixed @ 60 milliseconds is provided to assure that the frequencies of both input lines are sufficiently close to permit paralleling within the preset window.
Output Contacts .....	One set N.O., one set N.C. 5 amp resistive at 120 VAC or 28 VDC

**A. 3 Phase, 4 Wire System**

- Connect phase "A" of LINE 1 to terminal 1
- Connect phase "A" of LINE 2 to terminal 3
- Connect the neutrals to terminals 2 & 4

**B. 3 Phase, 3 Wire or 1 Phase, 2 Wire System**

- Connect phase "A" of LINE 1 to terminal 1
- Connect phase "B" of LINE 1 to terminal 2
- Connect phase "A" of LINE 2 to terminal 3
- Connect phase "B" of LINE 2 to terminal 4

Consult factory for additional models and options.

**Selection Guide**  
(Typical Applications)

Sensing Voltage	Series 1800 Generator to Generator	Series 1800DB Generator to Bus	Series 1800DDB Bus to Bus
	Permits paralleling of two generators only when they are "on-line" and their voltages are equal and in phase (synchronized)	Normally used to permit paralleling of a generator to a bus when: (a) both line voltages are equal and in phase, or: (b) when the generator is "on-line" and the bus is "dead"	Permits paralleling of two power lines (buses) when: (a) both line voltages are equal and in phase, or: (b) when either bus is "hot" and the other bus is "dead"
120 Volts	1810X	1810DBX	1810DDBX
230 Volts	1820X	1820DBX	1820DDBX
380 Volts	1830X	1830DBX	1830DDBX
460 Volts	1840X	1840DBX	1840DDBX
575 Volts	1850X	1850DBX	1850DDBX
415 Volts	1860X	1860DBX	1860DDBX
277 Volts	1870X	1870DBX	1870DDBX

	Condition	Series 1800 Contacts			Series 1800DB Contacts		Series 1800DDB Contacts			
		Energized	Not Energized	Synch.	N.C.	N.O.	N.C.	N.O.	N.C.	N.O.
1	Line 1	X			Open	Close	Open	Close	Open	Close
	Line 2	X		Yes						
2	Line 1	X		No	Close	Open	Close	Open	Close	Open
	Line 2	X		No						
3	Line 1	X			Close	Open	Open	Close	Open	Close
	Line 2		X							
4	Line 1		X		Close	Open	Close	Open	Close	Open
	Line 2		X							
5	Line 1		X		Close	Open	Close	Open	Open	Close
	Line 2	X								

**Output Contact Options:** 1. Two Form A. (Add -A to Model Number)  
2. Two Form B. (Add -B to Model Number)

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9