Powerex, Inc., 200 E. Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

Intellimod™ Module

Single-In-Line Intelligent Power Module

3 Amperes/600 Volts

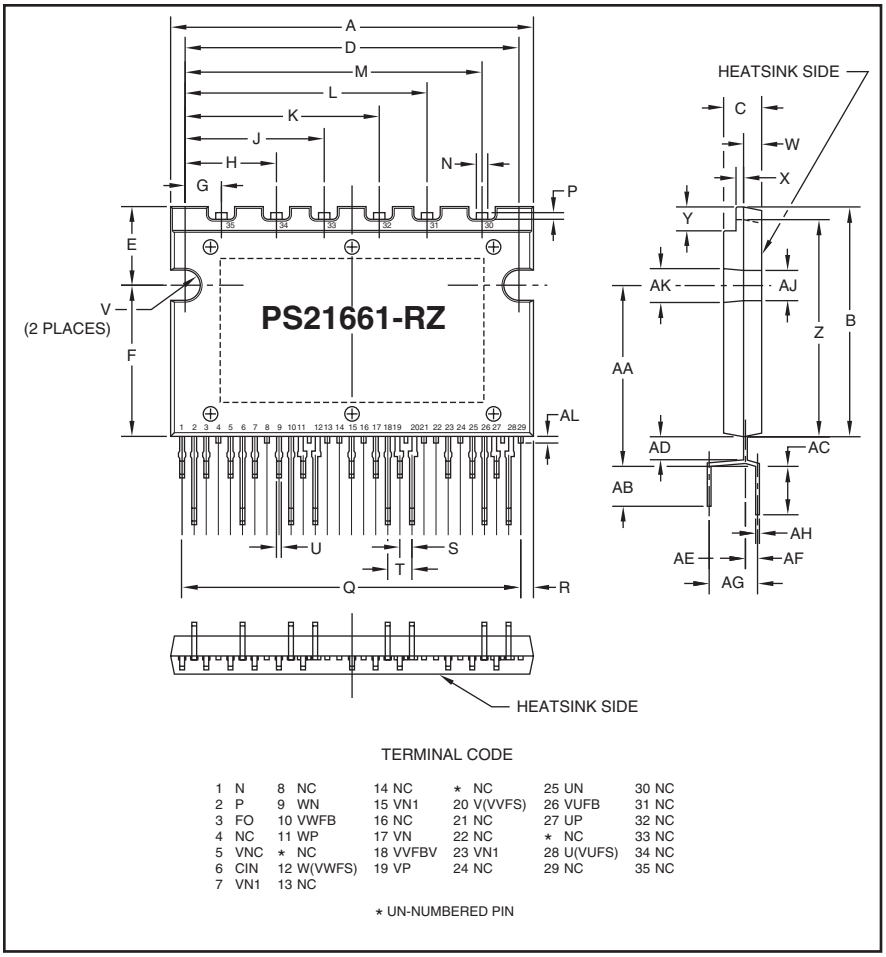

TERMINAL CODE

1	N	8	NC	14	NC	*	NC	25	UN	30	NC
2	P	9	WN	15	VN1	20	V(VVFS)	26	VUFB	31	NC
3	FO	10	VWFB	16	NC	21	NC	27	UP	32	NC
4	NC	11	WP	17	VN	22	NC	*	NC	33	NC
5	VNC	*	NC	18	VVFBV	23	VN1	28	U(VUFS)	34	NC
6	CIN	12	W(VWFS)	19	VP	24	NC	29	NC	35	NC
7	VN1	13	NC								

* UN-NUMBERED PIN

Outline Drawing and Circuit Diagram

Dimensions	Inches	Millimeters
A	1.50	38.0
B	0.94	24.0
C	0.16	4.0
D	1.38	35.0
E	0.33	8.5
F	0.61	15.5
G	0.15	3.8
H	0.38	9.6
J	0.57	14.6
K	0.80	20.4
L	1.00	25.4
M	1.23	31.2
N	0.047	1.2
P	0.028	0.7
Q	1.39	35.28
R	0.048	1.22
S	0.05	1.27
T	0.10	2.54

Dimensions	Inches	Millimeters
U	0.02	0.5
V	0.06	1.6
W	0.07	1.9
X	0.03	0.8
Y	0.11	2.7
Z	0.90	22.8
AA	0.75	19.0
AB	0.17	4.2
AC	0.20	5.2
AD	0.09	2.4
AE	0.15	3.81
AF	0.05	1.27
AG	0.20	5.08
AH	0.016	0.4
AJ	0.13	3.3
AK	0.14	3.6
AL	0.28	0.7

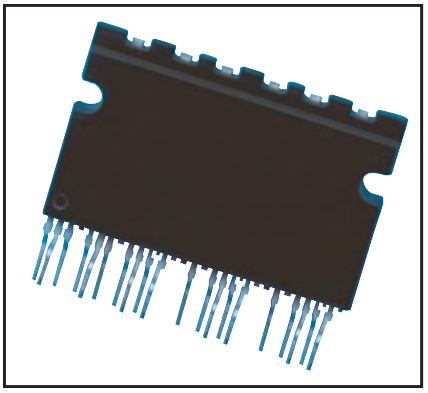

Description:

SIP-IPMs are intelligent power modules that integrate power devices, drivers, and protection circuitry in an ultra compact single-in-line transfer-mold package for use in driving small three phase motors. Use of 5th generation IGBTs, SIP packaging, and application specific HVICs allow the designer to reduce inverter size and overall design time.

Features:

- ☐ Compact Packages
- ☐ Single Power Supply
- ☐ Integrated HVICs
- ☐ Direct Connection to CPU

Applications:

- ☐ Washing Machines
- ☐ Refrigerators
- ☐ Air Conditioners
- ☐ Small Servo Motors
- ☐ Small Motor Control

Ordering Information:

PS21661-RZ is a 600V, 3 Ampere SIP Intelligent Power Module.

Powerex, Inc., 200 E. Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

PS21661-RZ/-FR
Intellimod™ Module
Single-In-Line Intelligent Power Module
3 Amperes/600 Volts

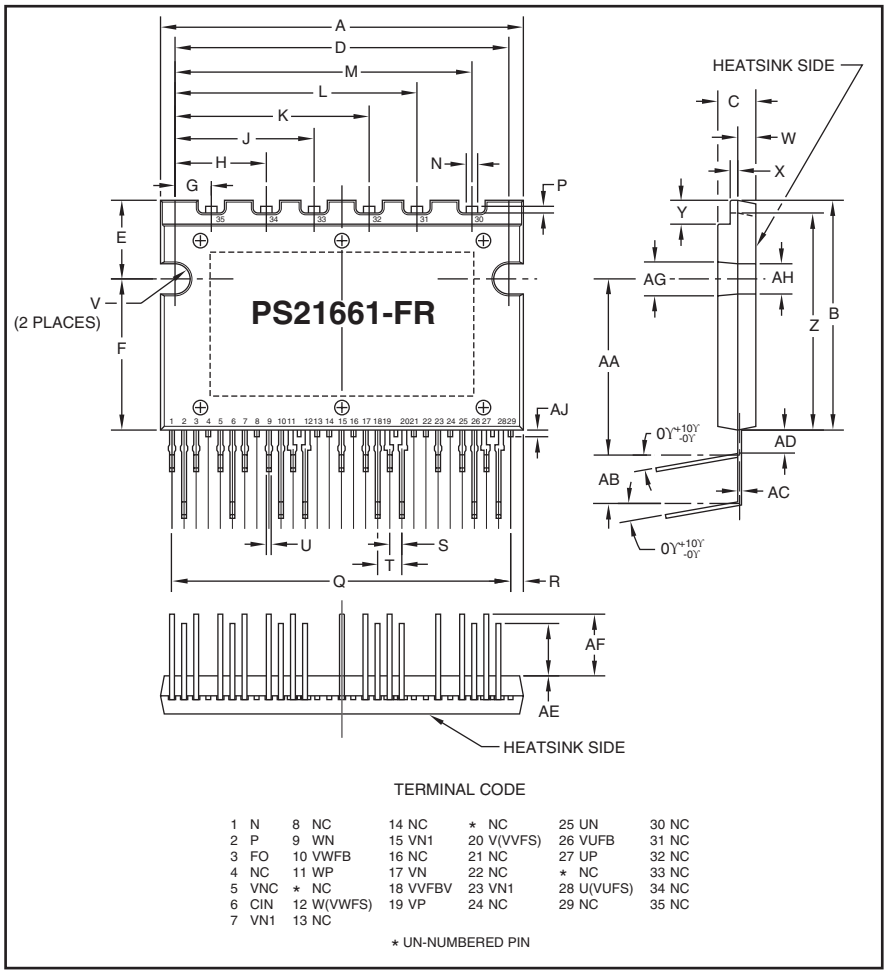

Outline Drawing and Circuit Diagram

Dimensions	Inches	Millimeters
A	1.50	38.0
B	0.94	24.0
C	0.16	4.0
D	1.38	35.0
E	0.33	8.5
F	0.61	15.5
G	0.15	3.8
H	0.38	9.6
J	0.57	14.6
K	0.80	20.4
L	1.00	25.4
M	1.23	31.2
N	0.047	1.2
P	0.028	0.7
Q	1.39	35.28
R	0.048	1.22
S	0.05	1.27

Dimensions	Inches	Millimeters
T	0.10	2.54
U	0.02	0.5
V	0.06	1.6
W	0.07	1.9
X	0.03	0.8
Y	0.11	2.7
Z	0.90	22.8
AA	0.71	18.1
AB	0.20	5.08
AC	0.016	0.4
AD	0.09	2.4
AE	0.22	5.5
AF	0.26	6.5
AG	0.14	3.6
AH	0.13	3.3
AJ	0.028	0.7

PS21661-RZ/-FR
Intellimod™ Module
Single-In-Line Intelligent Power Module
3 Amperes/600 Volts

Absolute Maximum Ratings, T_j = 25°C unless otherwise specified

Characteristics	Symbol	PS21661-RZ/-FR	Units
Power Device Junction Temperature*	T_j	-20 to 125	°C
Heatsink Operation Temperature (See T_f Measurement Point Illustration)	T_f	-20 to 100	°C
Storage Temperature	T_{stg}	-40 to 125	°C
Mounting Torque, M3 Mounting Screws	—	7	in-lb
Module Weight (Typical)	—	10	Grams
Self-protection Supply Voltage Limit (Short Circuit Protection Capability)**	$V_{CC(prot.)}$	400	Volts
Isolation Voltage, AC 1 minute, 60Hz Sinusoidal, Connection Pins to Heatsink Plate	V_{ISO}	2500	Volts

*The maximum junction temperature rating of the power chips integrated within the SIP-IPM is 150°C (@$T_f \leq 100$°C). However, to ensure safe operation of the SIP-IPM, the average junction temperature should be limited to $T_{j(avg)} \leq 125$°C (@$T_f \leq 100$°C).
**V_D = 13.5 ~ 16.5V, Inverter Part, T_j = 125°C, Non-repetitive, Less than 2µs

IGBT Inverter Sector

Collector-Emitter Voltage	V_{CES}	600	Volts
Collector Current (T_f = 25°C)	$\pm I_C$	3	Amperes
Peak Collector Current (T_f = 25°C, $t_w \leq$ 1ms)	$\pm I_{CP}$	6	Amperes
Supply Voltage (Applied between P - N)	V_{CC}	450	Volts
Supply Voltage, Surge (Applied between P - N)	$V_{CC(surge)}$	500	Volts
Collector Dissipation (T_f = 25°C, per 1 Chip)	P_C	11.1	Watts

Control Sector

Supply Voltage (Applied between V_{N1}-V_{NC})	V_D	20	Volts
Supply Voltage (Applied between V_{UFB}-U(V_{UFS}), V_{VFB}-V(V_{VFS}), V_{WFB}-W(V_{WFS}))	V_{DB}	20	Volts
Input Voltage (Applied between U_P, V_P, W_P-V_{NC}, U_N, V_N, W_N-V_{NC})	V_{IN}	-0.5 ~ V_D	Volts
Fault Output Supply Voltage (Applied between F_O-V_{NC})	V_{FO}	-0.5 ~ V_D	Volts
Fault Output Current (Sink Current at F_O Terminal)	I_{FO}	10	mA
Current Sensing Input Voltage (Applied between C_{IN}-V_{NC})	V_{SC}	-0.5 ~ V_D	Volts

T_f Measurement Point

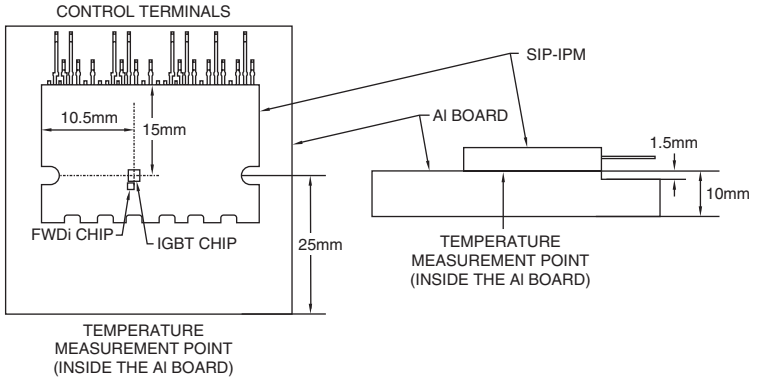

Electrical and Mechanical Characteristics, T_j = 25°C unless otherwise specified

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
IGBT Inverter Sector						
Collector Cutoff Current	I_{CES}	$V_{CE} = V_{CES}$, T_j = 25°C	—	—	1.0	mA
		$V_{CE} = V_{CES}$, T_j = 125°C	—	—	10	mA
Diode Forward Voltage	V_{EC}	T_j = 25°C, $-I_C$ = 3A, V_{IN} = 0V	—	1.55	2.00	Volts
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	I_C = 3A, T_j = 25°C, $V_D = V_{DB}$ = 15V, V_{IN} = 5V	—	1.60	2.15	Volts
		I_C = 3A, T_j = 125°C, $V_D = V_{DB}$ = 15V, V_{IN} = 5V	—	1.70	2.30	Volts
Inductive Load Switching Times	t_{on}	V_{CC} = 300V, $V_D = V_{DB}$ = 15V, I_C = 3A, T_j = 125°C, V_{IN} = 0 ⇔ 5V, Inductive Load (Upper-Lower Arm)	0.50	0.85	1.25	µs
	t_{rr}		—	0.20	—	µs
	$t_{C(on)}$		—	0.35	0.55	µs
	t_{off}		—	1.00	1.50	µs
	$t_{C(off)}$		—	0.55	1.10	µs
Control Sector						
Supply Voltage	V_D	Applied between V_{N1}-V_{NC}	13.5	15.0	16.5	Volts
	V_{DB}	Applied between V_{UFB}-V_{UFS}, V_{VFB}-V_{VFS}, V_{WFB}-V_{WFS}	13.0	15.0	18.5	Volts
Circuit Current	I_D	V_D = 15V, V_{IN} = 0V, Total of V_{N1}-V_{NC} (U, V, W)	—	—	3.60	mA
		V_D = 15V, V_{IN} = 5V, Total of V_{N1}-V_{NC} (U, V, W)	—	—	3.60	mA
	I_{DB}	V_{DB} = 15V, V_{IN} = 0V, V_{UFB}-U(V_{UFS}), V_{VFB}-V(V_{VFS}), V_{WFB}-W(V_{WFS})	—	—	0.35	mA
		V_{DB} = 15V, V_{IN} = 5V, V_{UFB}-U(V_{UFS}), V_{VFB}-V(V_{VFS}), V_{WFB}-W(V_{WFS})	—	—	0.35	mA
Fault Output Voltage	V_{FOH}	V_{SC} = 0V, F_O Circuit: 1k Ω to 5V Pull-up	4.9	—	—	Volts
	V_{FOL}	V_{SC} = 1V, I_{FO} = -10mA	—	—	0.95	Volts
Input Current	I_{IN}	V_{IN} = 5V	0.70	1.06	1.50	mA
Short-Circuit Trip Level*	$V_{SC(ref)}$	T_j = 25°C, V_D = 15V	0.43	0.48	0.53	Volts
Supply Circuit Undervoltage	UV_{DBt}	Trip Level, $T_j \leq$ 125°C	10.0	—	12.0	Volts
	UV_{DBr}	Reset Level, $T_j \leq$ 125°C	10.5	—	12.5	Volts
	UV_{Dt}	Trip Level, $T_j \leq$ 125°C	10.3	—	12.5	Volts
	UV_{Dr}	Reset Level, $T_j \leq$ 125°C	10.8	—	13.0	Volts
Fault Output Pulse Width**	t_{FO}		20	40	—	µs
ON Threshold Voltage	$V_{th(on)}$	Applied between U_P, V_P, W_P-V_{NC}, U_N, V_N, W_N-V_{NC}	2.10	2.35	2.60	Volts
OFF Threshold Voltage	$V_{th(off)}$		1.10	1.40	1.80	Volts

Thermal Characteristics

Characteristic	Symbol	Condition	Min.	Typ.	Max.	Units
Junction to Fin	$R_{th(j-f)Q}$	IGBT Part (Per 1/6 Module)	—	—	9.0	°C/Watt
Thermal Resistance	$R_{th(j-f)D}$	FWDi Part (Per 1/6 Module)	—	—	9.0	°C/Watt

* Short-Circuit protection is functioning only at the lower-arms. Please select the value of the external shunt resistor such that the SC trip level is less than 5.1A.
**FO signal is only asserted when the SC or UV protection is activated on the low side.

PS21661-RZ/-FR
Intellimod™ Module
Single-In-Line Intelligent Power Module
3 Amperes/600 Volts

Recommended Conditions for Use

Characteristic	Symbol	Condition	Min.	Typ.	Value	Units
Supply Voltage	V_{CC}	Applied between P-N Terminals	0	300	400	Volts
Control Supply Voltage	V_D	Applied between V_{N1}-V_{NC}	13.5	15.0	16.5	Volts
	V_{DB}	Applied between V_{UFB}-U(V_{UFS}), V_{VFB}-V(V_{VFS}), V_{WFB}-W(V_{WFS})	13.0	15.0	18.5	Volts
Control Supply Variation	ΔV_D, ΔV_{DB}		-1	—	1	V/µs
PWM Input Frequency	f_{PWM}	$T_f \leq 100°C$, $T_j \leq 125°C$	—	15	—	kHz
Allowable RMS Current*	I_O	V_{CC} = 300V, V_D = 15V, f_c = 5kHz, P_F = 0.8 Sinusoidal, $T_j \leq 125°C$, $T_f \leq 100°C$	—	—	3.0	Arms
		V_{CC} = 300V, V_D = 15V, f_c = 15kHz, P_F = 0.8 Sinusoidal, $T_j \leq 125°C$, $T_f \leq 100°C$	—	—	2.1	Arms
V_{NC} Terminal Voltage	V_{NC}	Applied between V_{NC}-N (Include Surge Voltage)	-5	—	5	Volts
Minimum Input Pulse Width**	PWIN	ON/OFF	0.3	—	—	µs
Arm Shoot-through Blocking Time	t_{DEAD}	For Each Input Signal	2.0	—	—	µs

* The allowable RMS current value depends on the actual application conditions.
**There might be no output when the input signal width is less than PWIN.

COLLECTOR-EMITTER SATURATION VOLTAGE CHARACTERISTICS (TYPICAL)

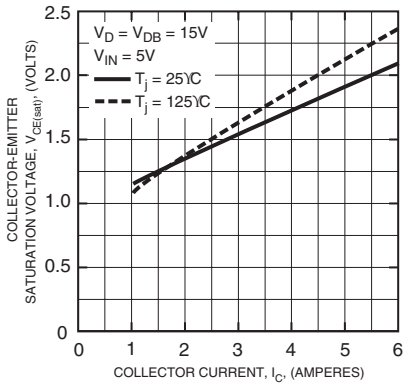

FREE-WHEEL DIODE FORWARD CHARACTERISTICS (TYPICAL)

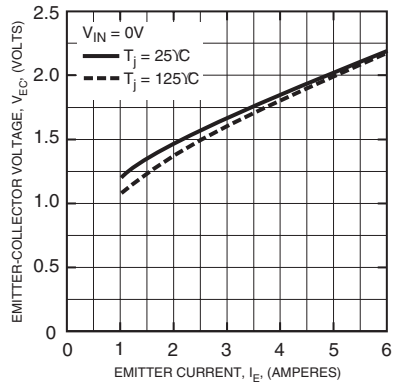

REVERSE RECOVERY CHARACTERISTICS (TYPICAL)

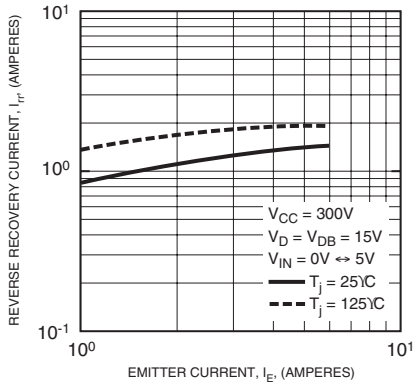

REVERSE RECOVERY CHARACTERISTICS (TYPICAL)

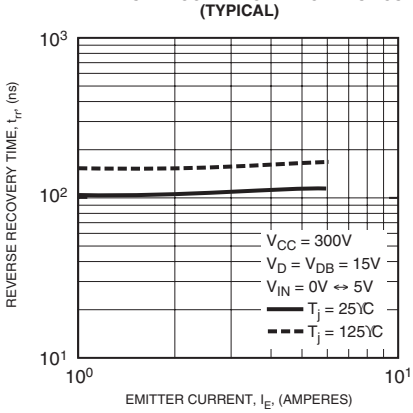

SWITCHING LOSS (ON) VS. COLLECTOR CURRENT (TYPICAL)

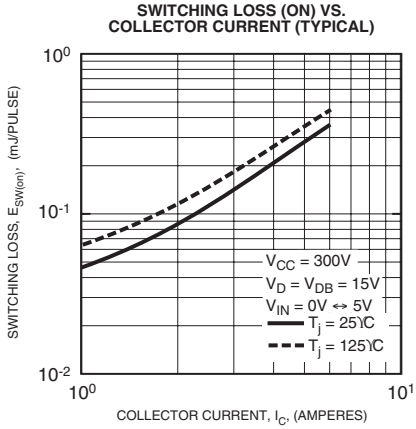

SWITCHING LOSS (OFF) VS. COLLECTOR CURRENT (TYPICAL)

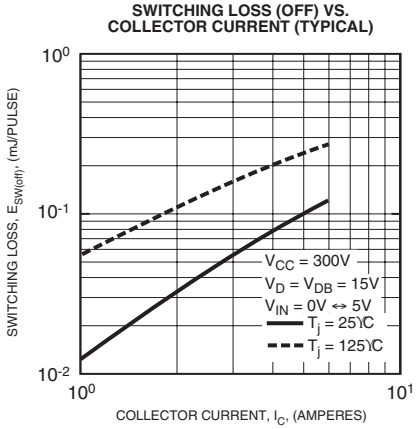

PS21661-RZ/-FR
Intellimod™ Module
Single-In-Line Intelligent Power Module
3 Amperes/600 Volts

SIP-IPM Application Circuit

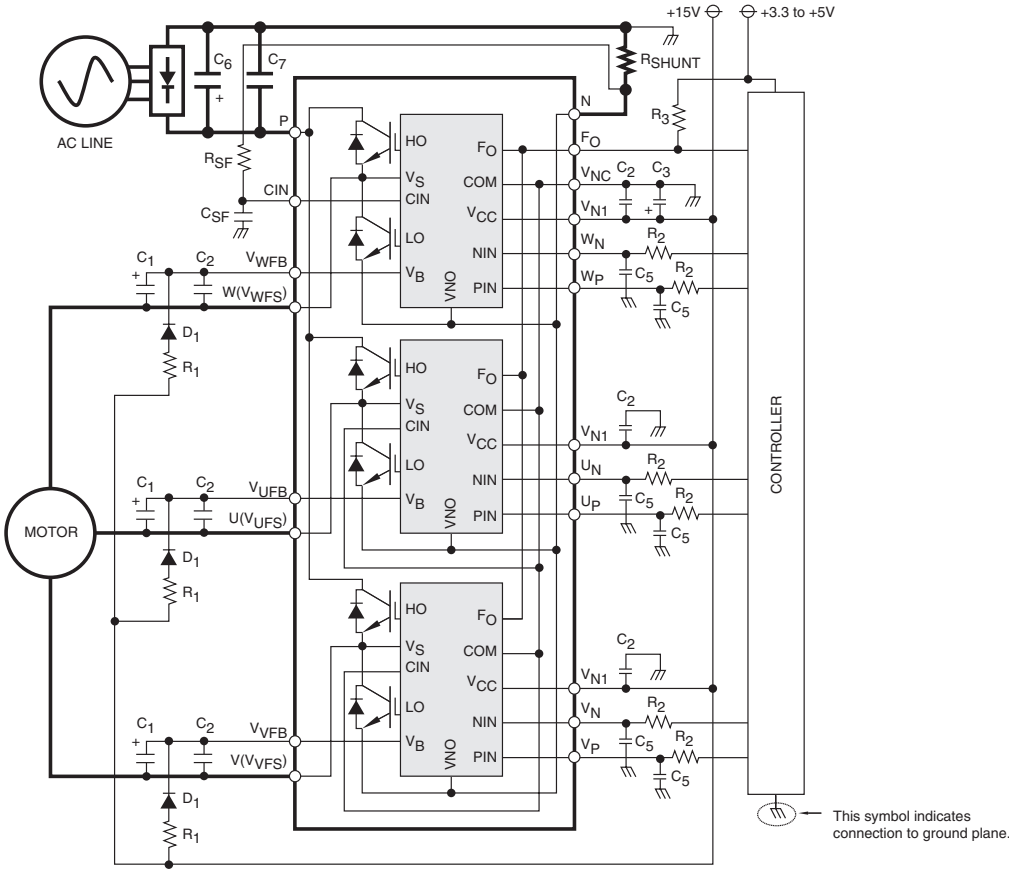

Component Selection:

Dsgn.	Typ. Value	Description
D_1	1A, 600V	Boot strap supply diode – Ultra fast recovery
C_1	10-100uF, 50V	Boot strap supply reservoir – Electrolytic, long life, low Impedance, 105°C (Note 5)
C_2	0.22-2.0uF, 50V	Local decoupling/High frequency noise filters – Multilayer ceramic (Note 8)
C_3	10-100uF, 50V	Control power supply filter – Electrolytic, long life, low Impedance, 105°C
C_5	100pF, 50V	Optional Input signal noise filter – Multilayer ceramic (Note 1)
C_6	200-2000uF, 450V	Main DC bus filter capacitor – Electrolytic, long life, high ripple current, 105°C
C_7	0.1-0.22uF, 450V	Surge voltage suppression capacitor – Polyester/Polypropylene film (Note 9)
C_{SF}	1000pF, 50V	Short circuit detection filter capacitor – Multilayer Ceramic (Note 6, Note 7)
R_{SF}	1.8k ohm	Short circuit detection filter resistor (Note 6, Note 7)
R_{SHUNT}	5-100 mohm	Current sensing resistor - Non-inductive, temperature stable, tight tolerance (Note 10)
R_1	10 ohm	Boot strap supply inrush limiting resistor (Note 5)
R_2	330 ohm	Optional control input pull-up resistor (Note 1, Note 2)
R_3	1k ohm	Fault output signal pull-up resistor (Note 3)

Notes:

1) To prevent input signal oscillations minimize wiring length to controller (~2cm). Additional RC filtering (C5 etc.) may be required. If filtering is added be careful to maintain proper dead time and voltage levels. See application notes for details.
2) Internal HVIC provides high voltage level shifting allowing direct connection of all six driving signals to the controller.
3) F_O output is an open collector type. Pull-up resistor (R3) should be adjusted to current sink capability of the module.
5) Boot strap supply component values must be adjusted depending on the PWM frequency and technique.
6) Wiring length associated with R_{SHUNT}, R_{SF}, C_{SF} must be minimized to avoid improper operation of the SC function.
7) R_{SF}, C_{SF} set short circuit protection trip time. Recommend time constant is 1.5us-2.0us. See application notes.
8) Local decoupling/high frequency filter capacitors must be connected as close as possible to the modules pins.
9) The length of the DC link wiring between C6, C7, the DIP's P terminal and the shunt must be minimized to prevent excessive transient voltages. In particular C7 should be mounted as close to the DIP as possible.
10) Use high quality, tight tolorance current sensing resistor. Connect resistor as close as possible to the DIP's N terminal. Be careful to check for proper power rating. See application notes for calculation of resistance value.

Общество с ограниченной ответственностью «МосЧип» ИНН 7719860671 / КПП 771901001
Адрес: 105318, г.Москва, ул.Щербаковская д.3, офис 1107

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

http://moschip.ru/get-element

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:
moschip.ru
moschip.ru_4
moschip.ru_6
moschip.ru_9