

## Force Sensors

FSA Series, Compensated/Amplified

32311096

Issue B

Datasheet



### DESCRIPTION

The FSA Series are piezoresistive-based force sensors offering a ratiometric analog or digital output for reading force over the specified full scale force span and temperature range. They are fully calibrated and temperature compensated for sensor offset, sensitivity, temperature effects, and nonlinearity using an on-board Application Specific Integrated Circuit (ASIC). Direct mechanical coupling allows for easy interface with the sensor, coupling with tubing, membrane or a plunger, providing repeatable performance and a reliable mechanical interface to the application. The package also provides excellent corrosion resistance and isolation to external package stress. All products are designed and manufactured according to ISO 9001 standards.

### VALUE TO CUSTOMERS

The FSA Series are designed to meet the customers' need for a compensated, amplified force sensor that provides analog and digital outputs, a variety of force sensing ranges, and enhanced durability and accuracy. Their flexible design provides multiple standard configurations over a wide operating temperature range.

### DIFFERENTIATION

- Multiple force ranges allow the customer to choose the force range to maximize sensitivity and improve system resolution/performance
- Overforce provides enhanced durability in applications where overforce may exist
- Enhanced accuracy includes all errors due to force non-linearity, force hysteresis, and non-repeatability
- Total Error Band enhances system performance
- Digital output enhances performance through reduced conversion requirements and the convenience of direct interface to microprocessors
- Diagnostics functions allow the user to determine if the sensor is working correctly by detecting if the electrical paths are broken or shorted inside the sensor
- Supply voltage provides customers flexibility of design within the application

### FEATURES

- Wide variety of force ranges
  - Newton (N): 5, 7.5, 10, 15, 20, 25
  - pound (lb): 1, 1.5, 2, 3, 5
  - gram (g): 500, 750
  - kilogram (kg): 1, 2
- Total Error Band:  $\pm 5\%$ FSS
- Accuracy:  $\pm 3\%$ FSS
- Ratiometric analog or SPI- or I<sup>2</sup>C-compatible digital output
- Fully calibrated and temperature compensated over a temperature range of 5°C to 50°C [41°F to 122°F]
- Overforce: 6804 g [15 lb]
- Supply voltage: 3.3 Vdc typ. or 5.0 Vdc typ.
- Low power consumption: 13 mW (analog) or 20 mW (digital)
- Excellent part-to-part repeatability
- Enhanced reliability
- Stable interface plunger
- Internal diagnostic functions available
- REACH and RoHS compliant

### POTENTIAL APPLICATIONS

Medical:

- Ambulatory non-invasive pump pressure
- Infusion pumps
- Kidney dialysis machines
- Occlusion detection

Industrial:

- Load and compression sensing

### PORTFOLIO

The FSA Series joins the FSG Series, FSS Series, FSS-SMT Series, TBF Series, and 1865 Series.

# Force Sensors, FSA Series Compensated/Amplified

**Table 1. Operating Specifications**

| Characteristic   | Analog      |            |             | Digital     |            |             | Unit                   |
|--|-------------|------------|-------------|-------------|------------|-------------|------------------------|
|  | Min.        | Typ.       | Max.        | Min.        | Typ.       | Max.        |                        |
| Supply voltage ( $V_{\text{supply}}$ ): <sup>1,2,3</sup><br>3.3 Vdc<br>5.0 Vdc | 3.0<br>4.75 | 3.3<br>5.0 | 3.6<br>5.25 | 3.0<br>4.75 | 3.3<br>5.0 | 3.6<br>5.25 | Vdc                    |
| Supply current:<br>3.3 Vdc<br>5.0 Vdc  | —<br>—      | 2.0<br>2.6 | —<br>—      | —<br>—      | 2.8<br>3.9 | 3.9<br>4.6  | mA                     |
| Power input  | 13          |            |             | 20          |            |             | mW                     |
| Operating temperature range <sup>4</sup>                                       | 0 [32]      | —          | 70 [158]    | 0 [32]      | —          | 70 [158]    | °C [°F]                |
| Compensated temperature range <sup>5</sup>                                     | 5 [41]      | —          | 50 [122]    | 5 [41]      | —          | 50 [122]    | °C [°F]                |
| Storage temperature range  | -40 [-40]   | —          | 85 [185]    | -40 [-40]   | —          | 85 [185]    | °C [°F]                |
| Startup time (power up to data ready)  | —           | —          | 5           | —           | —          | 3           | ms                     |
| Response time  | —           | 1          | —           | —           | 0.42       | 0.84        | ms                     |
| Clipping limit:<br>upper<br>lower  | —<br>2.5    | —<br>—     | 97.5<br>—   | —<br>—      | —<br>—     | —<br>—      | % $V_{\text{supply}}$  |
| SPI/I <sup>2</sup> C voltage level:<br>low<br>high                             | —<br>—      | —<br>—     | —<br>—      | —<br>80     | —<br>—     | 20<br>—     | % $V_{\text{supply}}$  |
| Pull up on SDA/MISO, SCL/SCLK, SS  | —           | —          | —           | 1           | —          | —           | kOhm                   |
| Accuracy <sup>6</sup>  | —           | —          | ±3          | —           | —          | ±3          | %FSS <sup>7</sup> BFSL |
| Total Error Band <sup>8</sup>  | —           | —          | ±5          | —           | —          | ±5          | %FSS                   |
| Output resolution  | —           | —          | —           | 12          | —          | —           | bits                   |
| Long term stability <sup>9</sup>   | —           | ±1.3       | —           | —           | ±1.3       | —           | %FSS                   |

<sup>1</sup>Sensors are either 3.3 Vdc or 5.0 Vdc based on the catalog listing selected.

<sup>2</sup>Ratiometricity of the sensor (the ability of the device output to scale to the supply voltage) is achieved within the specified operating voltage.

<sup>3</sup>The sensor is not reverse polarity protected. Incorrect application of supply voltage or ground to the wrong pin may cause electrical failure.

<sup>4</sup>Operating temperature range: The temperature range over which the sensor will produce an output proportional to force.

<sup>5</sup>Compensated temperature range: The temperature range over which the sensor will produce an output proportional to force within the specified performance limits.

<sup>6</sup>Accuracy: The maximum deviation in output from a Best Fit Straight Line (BFSL) fitted to the output measured over the force range at 25°C [77°F]. Includes all errors due to force non-linearity, force hysteresis, and non-repeatability.

<sup>7</sup>Full Scale Span (FSS): The algebraic difference between the output voltage at full scale force and the output at zero force.

<sup>8</sup>Total Error Band (TEB): Combined error from calibration, accuracy and temperature effects over the compensated temperature range at 5.0V from 15 %FSS to 95 %FSS.

<sup>9</sup>Long-term stability after 1000 hr of operation at 25°C [77°F].

## Force Sensors, FSA Series Compensated/Amplified

**Table 2. Environmental Specifications**

| Characteristic    | Parameter                                      |
|-------------------|--|
| Humidity          | 0% to 95% RH, non-condensing                   |
| Vibration         | MIL-STD-202, Method 214, Condition 1E (16.9 G) |
| Shock             | MIL-STD-202, Method 213, Condition F (1500 G)  |
| Life <sup>1</sup> | 1 million full scale force cycles minimum      |

<sup>1</sup>Life may vary depending on specific application in which the sensor is utilized.

**Table 3. Materials<sup>1</sup>**

| Component             | Material                       |
|-----------------------|--------------------------------|
| Covers                | high temperature polyamide     |
| Plunger               | stainless steel 316            |
| Substrate             | alumina, ceramic               |
| Adhesives             | epoxy, silicone                |
| Electronic components | ceramic silicon, glass, solder |

<sup>1</sup>Contact Honeywell customer service for detailed material information.

**Table 4. Absolute Maximum Specifications**

| Characteristic                        | Min.                      | Max.                      | Unit    |
|---------------------------------------|---------------------------|---------------------------|---------|
| Supply voltage                        | -0.3                      | 6.0                       | Vdc     |
| Voltage on any pin                    | -0.3                      | $V_{\text{supply}} + 0.3$ | V       |
| Digital interface clock frequency:    |                           |                           |         |
| SPI                                   | 50                        | 800                       | kHz     |
| I <sup>2</sup> C                      | 100                       | 400                       |         |
| ESD susceptibility (human body model) | 2                         | —                         | kV      |
| Storage temperature range             | -40 [-40]                 | 85 [185]                  | °C [°F] |
| Overforce limit                       | —                         | 6804 [15]                 | g [lb]  |
| Minimum operating voltage             | 2.8 Vdc                   |                           |         |
| Lead soldering time and temperature   | 4 s max. at 220°C [428°F] |                           |         |

# Force Sensors, FSA Series Compensated/Amplified

Figure 1. Nomenclature and Order Guide

For example, **FSAGPNXX001LCAA3** defines an FSA Series Force Sensor, gel coupling, plunger contact element, no diagnostics, 2 lb force range, force unit in pounds, compression force type, analog output, 10% to 90% transfer function, 3.3 Vdc supply voltage



<sup>1</sup>Custom designations available upon request.

<sup>2</sup>Consult with factory.

<sup>3</sup>For other available transfer functions, contact Honeywell customer service.

## COMMON CATALOG LISTINGS

FSAGPDXX010WCAA5  
 FSAGPDXX001RCAB5  
 FSAGPNXX1.5LCAC5  
 FSAGPNXX003LCAC5  
 FSAGPNXX010WC2C3  
 FSAGPNXX001RC4C5  
 FSAGPDXX005LCSB5  
 FSAGPDXX1.5LC5B5

# Force Sensors, FSA Series Compensated/Amplified

Figure 2. Transfer Function Limits<sup>1</sup>

## Analog Version



$$\text{Output (V)} = \frac{0.8 \times V_{\text{supply}}}{\text{Force}_{\text{range}}} \times (\text{Force}_{\text{applied}}) + 0.10 \times V_{\text{supply}}$$

## Digital Version



$$\text{Output (\% of } 2^{14} \text{ counts)} = \frac{80\%}{\text{Force}_{\text{range}}} \times (\text{Force}_{\text{applied}}) + 10\%$$

<sup>1</sup>Transfer Function "A" is shown. See Figure 1 for other available transfer function options.

# Force Sensors, FSA Series Compensated/Amplified


Figure 3. Mounting Dimensions (For reference only: mm/in.)

## Analog version



| Function | Pin 1               | Pin 2            | Pin 3 |
|----------|---------------------|------------------|-------|
| analog   | V <sub>supply</sub> | V <sub>out</sub> | GND   |

## Digital version

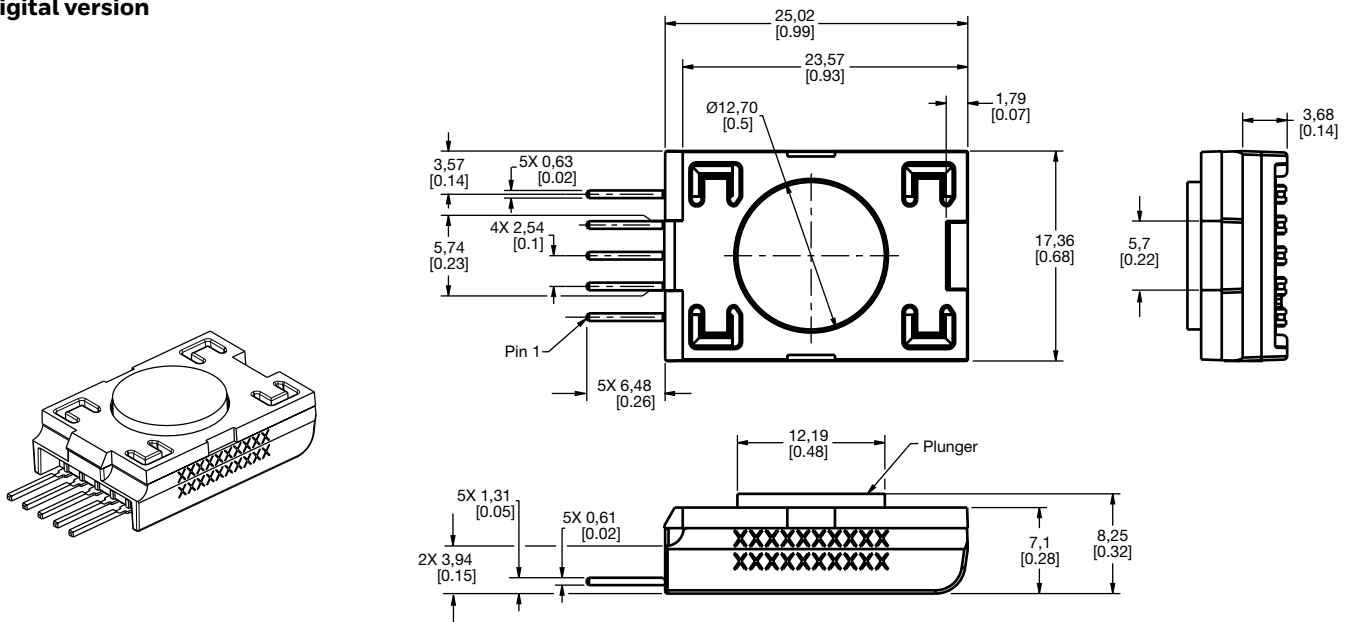

| Function         | Pin 1 | Pin 2               | Pin 3 | Pin 4 | Pin 5 |
|------------------|-------|---------------------|-------|-------|-------|
| SPI              | GND   | V <sub>supply</sub> | SS    | MISO  | SCLK  |
| I <sup>2</sup> C | GND   | V <sub>supply</sub> | N/C   | SDA   | SCL   |

## ADDITIONAL INFORMATION

The following associated literature is available on the Honeywell web site at [sensing.honeywell.com](http://sensing.honeywell.com):

- Product Range Guide
- Product Line Guide
- Product Installation Instructions
- Technical Information:
  - SPI Communications with Honeywell Digital Output Force Sensors
  - I<sup>2</sup>C Communications with Honeywell Digital Output Force Sensors

### Find out more

Honeywell serves its customers through a worldwide network of sales offices and distributors. For application assistance, current specifications, pricing or name of the nearest Authorized Distributor, contact your local sales office.

To learn more about Honeywell's sensing and switching products, call **+1-815-235-6847** or **1-800-537-6945**, visit **[sensing.honeywell.com](http://sensing.honeywell.com)**, or e-mail inquiries to **[info.sc@honeywell.com](mailto:info.sc@honeywell.com)**

### Honeywell Sensing and Internet of Things

9680 Old Bailes Road  
Fort Mill, SC 29707  
[honeywell.com](http://honeywell.com)

## **⚠ WARNING** **PERSONAL INJURY**

DO NOT USE these products as safety or emergency stop devices or in any other application where failure of the product could result in personal injury.

**Failure to comply with these instructions could result in death or serious injury.**

## **⚠ WARNING** **MISUSE OF DOCUMENTATION**

- The information presented in this datasheet is for reference only. Do not use this document as a product installation guide.
- Complete installation, operation, and maintenance information is provided in the instructions supplied with each product.

**Failure to comply with these instructions could result in death or serious injury.**

### Warranty/Remedy

Honeywell warrants goods of its manufacture as being free of defective materials and faulty workmanship during the applicable warranty period. Honeywell's standard product warranty applies unless agreed to otherwise by Honeywell in writing; please refer to your order acknowledgment or consult your local sales office for specific warranty details. If warranted goods are returned to Honeywell during the period of coverage, Honeywell will repair or replace, at its option, without charge those items that Honeywell, in its sole discretion, finds defective. **The foregoing is buyer's sole remedy and is in lieu of all other warranties, expressed or implied, including those of merchantability and fitness for a particular purpose. In no event shall Honeywell be liable for consequential, special, or indirect damages.**

While Honeywell may provide application assistance personally, through our literature and the Honeywell web site, it is buyer's sole responsibility to determine the suitability of the product in the application.

Specifications may change without notice. The information we supply is believed to be accurate and reliable as of this writing. However, Honeywell assumes no responsibility for its use.

# Honeywell

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9