

Panel feed-through terminal block - HDFK 50-DP - 0708713

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Panel feed-through terminal block, Connection method: Screw connection, Load current : 150 A, Cross section: 16 mm² - 50 mm², AWG 6 - 1/0, Width: 18.8 mm, Color: gray

The illustration shows version HDFK 50



Key commercial data

| | |
|--------------------------------------|------------|
| Packing unit | 1 1 |
| Weight per Piece (excluding packing) | 125.99 GRM |
| Custom tariff number | 85369010 |
| Country of origin | Germany |

Technical data

General

| | |
|---|---------------|
| Number of levels | 1 |
| Number of connections | 2 |
| Color | gray |
| Insulating material | PA |
| Inflammability class according to UL 94 | V2 |
| Rated surge voltage | 8 kV |
| Pollution degree | 3 |
| Surge voltage category | III |
| Insulating material group | I |
| Connection in acc. with standard | IEC 60947-7-1 |
| Nominal current I _N | 150 A |
| Nominal voltage U _N | 690 V |
| Open side panel | nein |
| Number of positions | 1 |

Panel feed-through terminal block - HDFK 50-DP - 0708713

Technical data

Dimensions

| | |
|-------|---------|
| Width | 18.8 mm |
|-------|---------|

Connection data

| Note | Terminal sleeve |
|---|--------------------|
| Connection side | Level 1 ext. 1 |
| Connection method | Screw connection |
| Conductor cross section solid min. | 16 mm ² |
| Conductor cross section solid max. | 50 mm ² |
| Conductor cross section stranded min. | 16 mm ² |
| Conductor cross section stranded max. | 50 mm ² |
| Conductor cross section AWG/kcmil min. | 6 |
| Conductor cross section AWG/kcmil max | 1/0 |
| Conductor cross section stranded, with ferrule without plastic sleeve min. | 10 mm ² |
| Conductor cross section stranded, with ferrule without plastic sleeve max. | 50 mm ² |
| Conductor cross section stranded, with ferrule with plastic sleeve min. | 10 mm ² |
| Conductor cross section stranded, with ferrule with plastic sleeve max. | 50 mm ² |
| 2 conductors with same cross section, solid min. | 6 mm ² |
| 2 conductors with same cross section, solid max. | 16 mm ² |
| 2 conductors with same cross section, stranded min. | 10 mm ² |
| 2 conductors with same cross section, stranded max. | 16 mm ² |
| 2 conductors with same cross section, stranded, ferrules without plastic sleeve, min. | 6 mm ² |
| 2 conductors with same cross section, stranded, ferrules without plastic sleeve, max. | 16 mm ² |
| 2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, min. | 6 mm ² |
| 2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, max. | 10 mm ² |
| Stripping length | 24 mm |
| Internal cylindrical gage | B10 |
| Screw thread | M6 |
| Tightening torque, min | 6 Nm |
| Tightening torque max | 8 Nm |

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 27141131 |
| eCl@ss 4.1 | 27141131 |

Panel feed-through terminal block - HDFK 50-DP - 0708713

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 5.0 | 27141134 |
| eCl@ss 5.1 | 27141134 |
| eCl@ss 6.0 | 27141134 |
| eCl@ss 7.0 | 27141134 |
| eCl@ss 8.0 | 27141134 |

ETIM

| | |
|----------|----------|
| ETIM 2.0 | EC001283 |
| ETIM 3.0 | EC001283 |
| ETIM 4.0 | EC001283 |
| ETIM 5.0 | EC001283 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 30211811 |
| UNSPSC 7.0901 | 39121410 |
| UNSPSC 11 | 39121410 |
| UNSPSC 12.01 | 39121410 |
| UNSPSC 13.2 | 39121410 |

Approvals

Approvals

Approvals

CSA / UL Recognized / KEMA-KEUR / PRS / IECCEB Scheme


Ex Approvals


Approvals submitted


Approval details

Panel feed-through terminal block - HDFK 50-DP - 0708713


Approvals

| | | | |
|---|-------|-------|-------|
| CSA  | | | |
| | | B | C |
| mm ² /AWG/kcmil | 6 | 6 | |
| Nominal current I _N | 125 A | 125 A | 125 A |
| Nominal voltage U _N | 600 V | 600 V | 600 V |

| | | |
|---|-------|-------|
| UL Recognized  | | |
| | B | C |
| mm ² /AWG/kcmil | 6 | 6 |
| Nominal current I _N | 150 A | 150 A |
| Nominal voltage U _N | 600 V | 600 V |

| | |
|---|-------|
| KEMA-KEUR  | |
| | |
| mm ² /AWG/kcmil | 50 |
| Nominal current I _N | 150 A |
| Nominal voltage U _N | 690 V |


| |
|-----|
| PRS |
|-----|

| | |
|---|-------|
| IECEE CB Scheme  | |
| | |
| mm ² /AWG/kcmil | 50 |
| Nominal current I _N | 150 A |
| Nominal voltage U _N | 690 V |


Drawings

Panel feed-through terminal block - HDFK 50-DP - 0708713

Dimensioned drawing

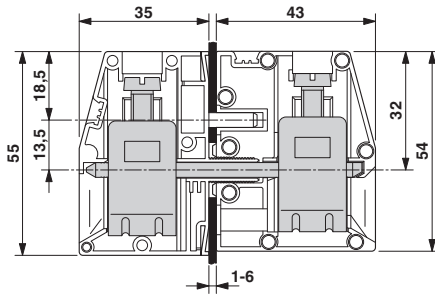

Dimensioned drawing

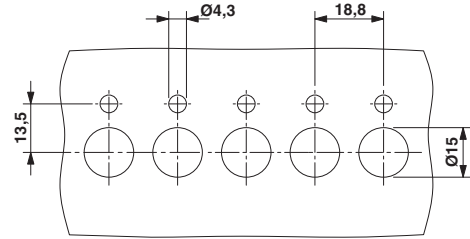

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9