

AZ8222

SUBMINIATURE ULTRA-SENSITIVE DIP RELAY

FEATURES

- Low profile for compact board spacing
- DC coils to 48 VDC
- Bifurcated crossbar contacts
- Ultra-sensitivity, 84 mW pickup
- Life expectancy to 10 million operations
- High switching capacity, 60 W, 125 VA
- Fits standard 16 pin IC socket
- Epoxy sealed for automatic wave soldering and cleaning
- Meets FCC Part 68.302 1500 V lightning surge
- Meets FCC Part 68.304 1000 V dielectric
- UL, CUR file E43203



CONTACTS

Arrangement	DPDT (2 Form C)
Ratings	Resistive load: Max. switched power: 60 W or 125 VA Max. switched current: 2 A Max. switched voltage: 120 VDC or 240 VAC
Rated Load UL	2.0 A at 30 VDC 1.0 A at 125 VAC
Material	Silver nickel, gold plated
Resistance	< 50 milliohms initially

COIL

Power At Pickup Voltage (typical)	180 mW standard 100 mW sensitive 84 mW ultra-sensitive
Max. Continuous Dissipation	1.2 W at 20°C (68°F)
Temperature Rise	34°C (61°F) standard 23°C (41°F) sensitive 19°C (34°F) ultra-sensitive
Temperature	Max. 105°C (221°F)

NOTES

1. All values at 20°C (68°F).
2. Relay may pull in with less than "Must Operate" value.
3. Other coil resistances and sensitivities available upon request.
4. Specifications subject to change without notice.

GENERAL DATA

Life Expectancy Mechanical Electrical	Minimum operations 1 x 10 ⁷ 1 x 10 ⁵ at 2.0 A 30 VDC Res.
Operate Time (typical)	6 ms at nominal coil voltage
Release Time (typical)	4 ms at nominal coil voltage (with no coil suppression)
Dielectric Strength (at sea level for 1 min.)	1500 Vrms contact to coil 1000 Vrms between open contacts 1500 Vrms contact set to contact set
Insulation Resistance	1000 megohms min. at 20°C, 500 VDC, 50% RH
Dropout	Greater than 10% of nominal coil voltage
Ambient Temperature Operating	At nominal coil voltage -40°C (-40°F) to 70°C (158°F) standard -40°C (-40°F) to 80°C (176°F) sensitive -40°C (-40°F) to 85°C (185°F) ultra-sensitive
Storage	-40°C (-40°F) to 105°C (221°F)
Vibration	1.5 mm DA at 10–55 Hz
Shock	50 g 11 ms 1/2 sine
Enclosure	P.B.T. polyester
Terminals	Tinned copper alloy
Max. Solder Temp.	270°C (518°F)
Max. Solder Time	5 seconds
Max. Solvent Temp.	80°C (176°F)
Max. Immersion Time	30 seconds
Weight	5 grams



AMERICAN ZETTLER, INC.

www.azettler.com

75 COLUMBIA • ALISO VIEJO, CA 92656 • PHONE: (949) 831-5000 • FAX: (949) 831-8642 • E-MAIL: SALES@AZETTLER.COM

12/17/03W


AZ8222

RELAY ORDERING DATA

STANDARD COIL SPECIFICATIONS				
Nominal Coil VDC	Max. Continuous VDC	Coil Resistance $\pm 10\%$	Must Operate VDC	ORDER NUMBER
3	4.5	30	2.3	AZ8222-2C-3DME
4.5	6.0	63	3.2	AZ8222-2C-4.5DME
5	8.0	90	3.8	AZ8222-2C-5DME
6	10.0	130	4.5	AZ8222-2C-6DME
9	14.5	280	6.8	AZ8222-2C-9DME
12	18.5	450	9.0	AZ8222-2C-12DME
15	22.0	625	11.3	AZ8222-2C-15DME
24	35.5	1600	18.0	AZ8222-2C-24DME
48	56.0	4000	36.0	AZ8222-2C-48DME
SENSITIVE COIL SPECIFICATIONS				
Nominal Coil VDC	Max. Continuous VDC	Coil Resistance $\pm 10\%$	Must Operate VDC	ORDER NUMBER
3	6.0	45	2.3	AZ8222-2C-3DSE
4.5	9.0	101	3.2	AZ8222-2C-4.5DSE
5	10.0	125	3.8	AZ8222-2C-5DSE
6	12.0	180	4.5	AZ8222-2C-6DSE
9	18.0	405	6.8	AZ8222-2C-9DSE
12	24.0	720	9.0	AZ8222-2C-12DSE
15	30.0	1125	11.3	AZ8222-2C-15DSE
24	48.0	2880	18.0	AZ8222-2C-24DSE
ULTRA-SENSITIVE COIL SPECIFICATIONS*				
Nominal Coil VDC	Max. Continuous VDC	Coil Resistance $\pm 10\%$	Must Operate VDC	ORDER NUMBER
3	7.0	60	2.3	AZ8222-2C-3DSSE
4.5	10.4	135	3.2	AZ8222-2C-4.5DSSE
5	11.5	167	3.8	AZ8222-2C-5DSSE
6	13.8	240	4.5	AZ8222-2C-6DSSE
9	20.8	540	6.8	AZ8222-2C-9DSSE
12	27.7	960	9.0	AZ8222-2C-12DSSE
15	34.6	1500	11.3	AZ8222-2C-15DSSE

* Contact to contact dielectric strength is 500 Vrms.

MECHANICAL DATA

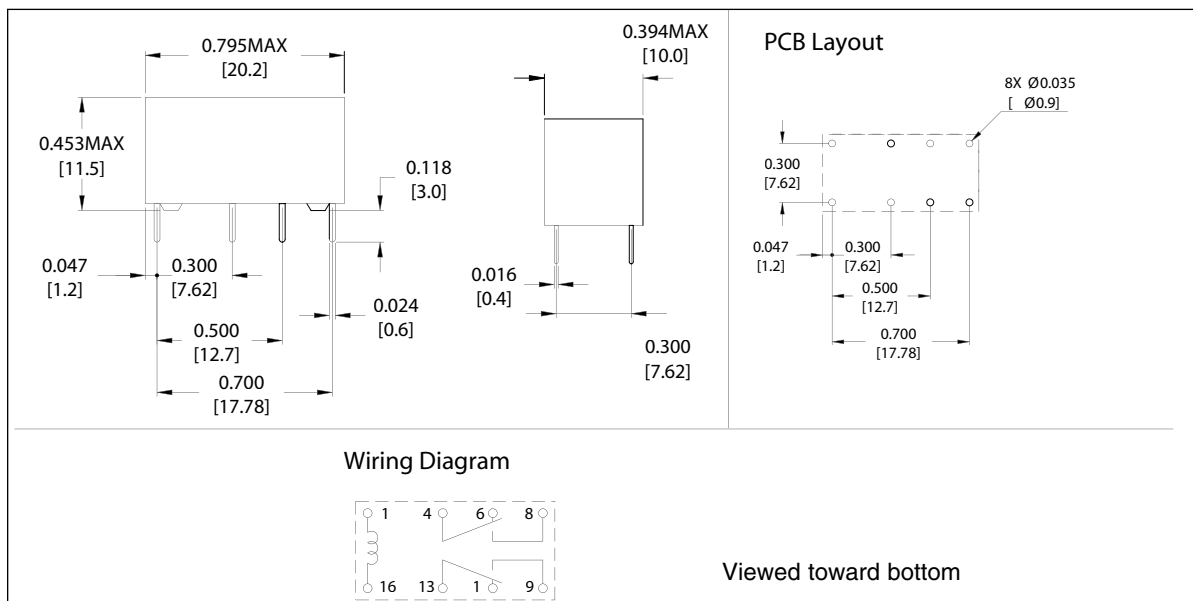

Dimensions in inches with metric equivalents in parentheses. Tolerance: $\pm .010$ "



AMERICAN ZETTLER, INC.

www.azettler.com

75 COLUMBIA • ALISO VIEJO, CA 92656 • PHONE: (949) 831-5000 • FAX: (949) 831-8642 • E-MAIL: SALES@AZETTLER.COM

12/17/03W

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Распределительные склады, находящиеся в России, Европе и в Китае, позволяют нам оперативно поставить необходимые компоненты в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям ISO 9001:2011

Офис по работе с юридическими лицами:

107023, г.Москва, Семеновский переулок, д.6, Бизнес-центр «АВС»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru_3	moschip.ru_6
moschip.ru_4	moschip.ru_7
moschip.ru_11	moschip.ru_8
moschip.ru_12	moschip.ru_9