



# HMC536MS8G / 536MS8GE

v04.0320

## GaAs MMIC POSITIVE CONTROL T/R SWITCH, DC - 6 GHz

### Typical Applications

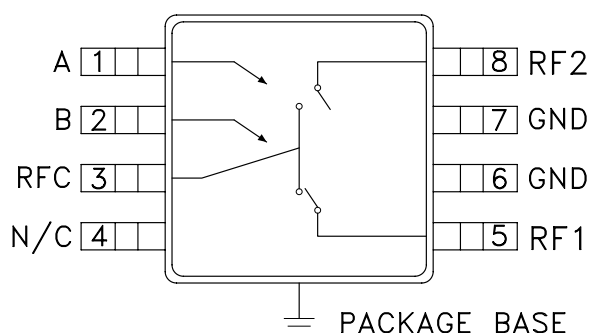
The HMC536MS8G / HMC536MS8GE is ideal for:

- Cellular/PCS/3G Infrastructure
- ISM/MMDS/WiMAX
- CATV/CMTS
- Test Instrumentation

### Features

- Input P0.1dB: +34 dBm @ +5V
- Insertion Loss: 0.5 dB
- Positive Control: +3V or +5V
- MS8G SMT Package, 14.8 mm<sup>2</sup>
- Isolation: 27 dB
- Very Fast Switching Speed
- Included in the HMC-DK005 Designer's Kit

### Functional Diagram



### General Description

The HMC536MS8G & HMC536MS8GE are DC to 6 GHz GaAs MMIC T/R switches in 8 lead MSOP8G surface mount packages with an exposed ground paddle. The switch is ideal for cellular/PCS/3G basestation applications featuring low 0.5 dB insertion loss and +55 dBm input IP3. Power handling is excellent up through 6 GHz with the switch offering a P0.1dB compression point of +29 dBm at +3 volts control. On-chip circuitry allows positive voltage control of 0/+3 volts or 0/+5 volts at very low DC currents.

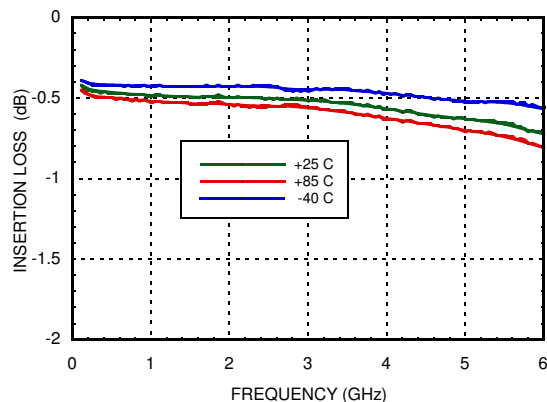
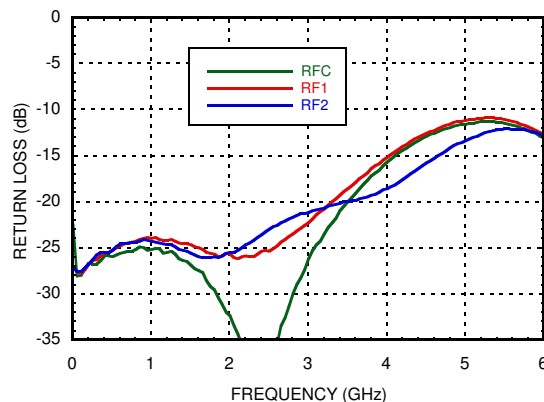
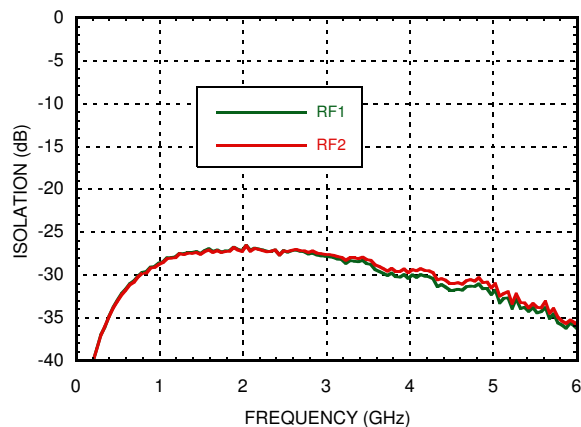
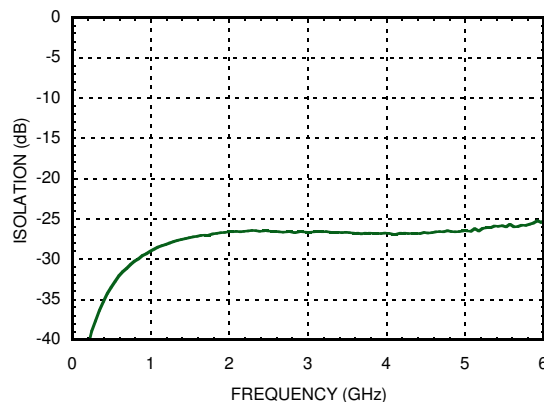
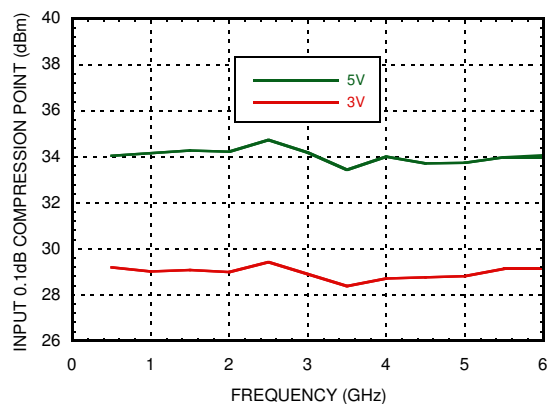
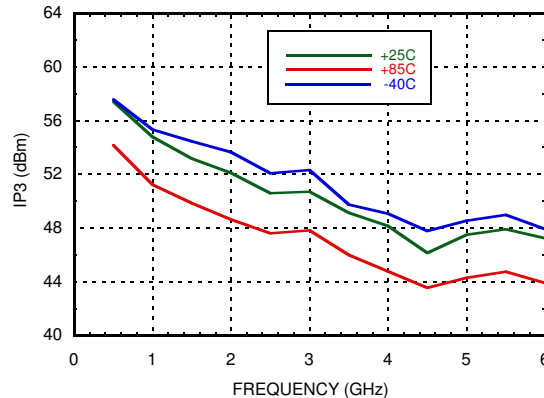
### Electrical Specifications, $T_A = +25^\circ\text{C}$ , $V_{ctl} = 0/+3\text{ Vdc}$ to $+5\text{ Vdc}$ , 50 Ohm System

| Parameter                                                                                                        | Frequency     | Min. | Typ. | Max. | Units |
|------------------------------------------------------------------------------------------------------------------|---------------|------|------|------|-------|
| Insertion Loss                                                                                                   | DC - 3.0 GHz  |      | 0.5  | 0.8  | dB    |
|                                                                                                                  | DC - 4.5 GHz  |      | 0.6  | 0.9  | dB    |
|                                                                                                                  | DC - 6.0 GHz  |      | 0.7  | 1.0  | dB    |
| Isolation (RFC to RF1/RF2)                                                                                       | DC - 4.0 GHz  | 23   | 27   |      | dB    |
|                                                                                                                  | 4.0 - 5.0 GHz | 26   | 30   |      | dB    |
|                                                                                                                  | 5.0 - 6.0 GHz | 27   | 32   |      | dB    |
| Return Loss                                                                                                      | DC - 3.0 GHz  |      | 25   |      | dB    |
|                                                                                                                  | 3.0 - 4.0 GHz |      | 20   |      | dB    |
|                                                                                                                  | 4.0 - 6.0 GHz |      | 12   |      | dB    |
| Input Power for 0.1 dB Compression<br>( $V_{ctl} = 3\text{V}$ )<br>( $V_{ctl} = 5\text{V}$ )                     | 0.5 - 6.0 GHz | 27   | 29   |      | dBm   |
|                                                                                                                  | 0.5 - 6.0 GHz | 32   | 34   |      | dBm   |
| Input Third Order Intercept<br>( $V_{ctl} = 3\text{V}, 5\text{V}$ )<br>(Two-Tone Input Power = +7 dBm Each Tone) | 0.5 - 1.0 GHz |      | 56   |      | dBm   |
|                                                                                                                  | 1.0 - 3.0 GHz |      | 52   |      | dBm   |
|                                                                                                                  | 3.0 - 6.0 GHz |      | 48   |      | dBm   |
| Switching Speed<br>tRISE, tFALL (10/90% RF)<br>tON, tOFF (50% CTL to 10/90% RF)                                  | DC - 6.0 GHz  |      | 15   |      | ns    |
|                                                                                                                  |               |      | 30   |      | ns    |

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

For price, delivery, and to place orders: Analog Devices, Inc., One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106  
Phone: 781-329-4700 • Order online at [www.analog.com](http://www.analog.com)  
Application Support: Phone: 1-800-ANALOG-D

## GaAs MMIC POSITIVE CONTROL T/R SWITCH, DC - 6 GHz

**Insertion Loss**

**Return Loss**

**Isolation Between  
Ports RFC and RF1 / RF2**

**Isolation Between Ports RF1 and RF2**

**Input 0.1 dB Compression Point**

**Input Third Order  
Intercept Point, Vctl = 3v**


## GaAs MMIC POSITIVE CONTROL T/R SWITCH, DC - 6 GHz

### Absolute Maximum Ratings

|                                                               |                  |
|---------------------------------------------------------------|------------------|
| Control Voltage Range                                         | -0.5 to +7.5 Vdc |
| Hot Switch Power Level<br>(Vctl = +3V)                        | +29 dBm          |
| Channel Temperature                                           | 150 °C           |
| Continuous Pdiss (T = 85 °C)<br>(derate 13 mW/°C above 85 °C) | 0.867 W          |
| Thermal Resistance                                            | 75 °C/W          |
| Storage Temperature                                           | -65 to +150 °C   |
| Operating Temperature                                         | -40 to +85 °C    |
| ESD Sensitivity (HBM)                                         | Class 1A         |

### Control Voltages

\*Control Input Tolerances are  $\pm 0.2$  Vdc

| State | Bias Condition*                       |
|-------|---------------------------------------|
| Low   | 0 Vdc @ 25 $\mu$ A Typical            |
| High  | +3 Vdc to +5 Vdc @ 25 $\mu$ A Typical |

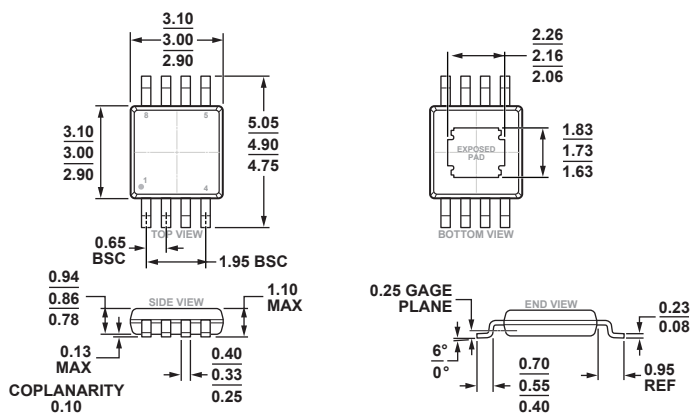
### Truth Table

| Control Input |      | Signal Path State |
|---------------|------|-------------------|
| A             | B    | RFC to:           |
| Low           | High | RF1               |
| High          | Low  | RF2               |

DC blocks are required at ports RFC, RF1, RF2.

Choose value for lowest frequency of operation.

### Outline Drawing



COMPLIANT TO JEDEC STANDARDS MO-187-AA-T

8-Lead Mini Small Outline Package with Exposed Pad [MINI\_SO\_EP]  
(RH-8-1)

Dimensions shown in millimeters

### Package Information


| Part Number   | Package Body Material                              | Lead Finish   | MSL Rating <sup>[1]</sup> | Package Marking <sup>[2]</sup> |
|---------------|----------------------------------------------------|---------------|---------------------------|--------------------------------|
| HMC536MS8GE   | RoHS-compliant Low Stress Injection Molded Plastic | 100% matte Sn | MSL3                      | H536<br>XXXX                   |
| HMC536MS8GETR | RoHS-compliant Low Stress Injection Molded Plastic | 100% matte Sn | MSL3                      | H536<br>XXXX                   |

[1] Max peak reflow temperature of 260 °C


[2] 4-Digit lot number XXXX

## GaAs MMIC POSITIVE CONTROL T/R SWITCH, DC - 6 GHz

### Pin Descriptions

| Pin Number | Function      | Description                                                                                     | Interface Schematic                                                                 |
|------------|---------------|-------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| 1          | A             | See truth and control voltage tables.                                                           |  |
| 2          | B             | See truth and control voltage tables.                                                           |                                                                                     |
| 3, 5, 8    | RFC, RF1, RF2 | These pins are DC coupled and matched to 50 Ohms. Blocking capacitors are required.             |                                                                                     |
| 4          | N/C           | No connection required. This pin may be connected to RF/DC ground without affecting performance |                                                                                     |
| 6, 7       | GND           | Package bottom has exposed metal paddle that must also be connected to RF/DC ground.            |  |

### Evaluation PCB

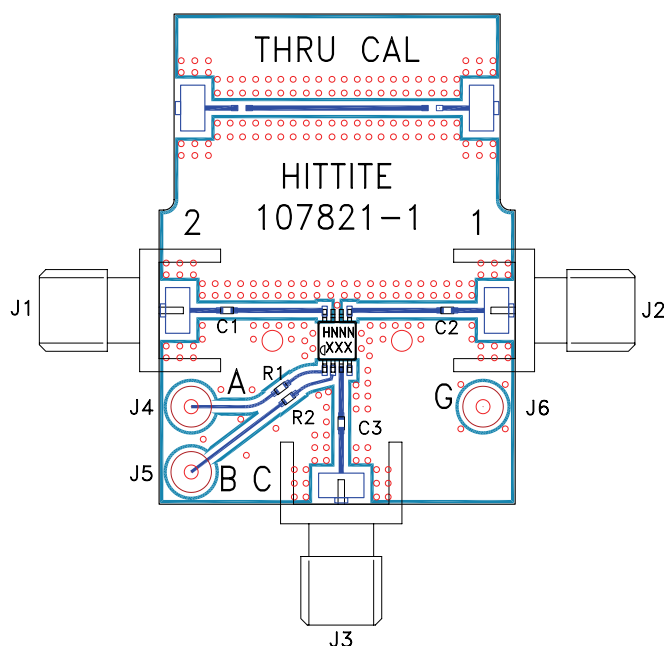

### List of Materials for Evaluation PCB 105143 [1]

| Item    | Description                          |
|---------|--------------------------------------|
| J1 - J3 | PCB Mount SMA RF Connector           |
| J4 - J6 | DC Pin                               |
| C1 - C3 | 100 pF Capacitor, 0402 Pkg.          |
| R1 - R2 | 100 Ohm Resistor, 0402 Pkg.          |
| U1      | HMC536MS8G / HMC536MS8GE SPDT Switch |
| PCB [2] | 107821 Evaluation PCB                |

[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Rogers 4350

The circuit board used in the application should be generated with proper RF circuit design techniques. Signal lines at the RF port should have 50 Ohm impedance and the package ground leads and exposed paddle should be connected directly to the ground plane similar to that shown above. The evaluation circuit board shown above is available from Analog Devices upon request.

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9