

## Features

- 1.4 dB Noise Figure
- 35 dBm Output IP<sub>3</sub>
- Single +3 V Bias
- Lead-Free SC70 6-Lead (SOT-363) Package
- Halogen-Free “Green” Mold Compound
- RoHS\* Compliant and 260°C Reflow Compatible

## Description

The MAAL-009053 broadband gain block is a GaAs MMIC amplifier in a lead-free SC70-6LD (SOT-363) surface mount plastic package. The topology is a monolithic single stage self-biased design featuring a convenient 50 Ω input / output impedance that minimizes the number of external components.


The MAAL-009053 is fabricated using a pHEMT process to help realize the complementary high IP<sub>3</sub> and low NF. This process features full passivation for performance and reliability.

## Ordering Information<sup>1</sup>

Part Number	Package
MAAL-009053-000000	Bulk Packaging
MAAL-009053-TR3000	3000 piece reel

1. Reference Application Note M513 for reel size information.

## Functional Schematic

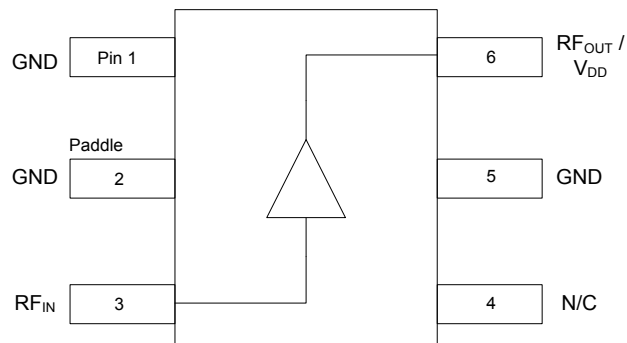

## Pin Configuration<sup>2</sup>

Pin No.	Function	Description
1	GND	Ground
2	GND	Ground
3	RF <sub>IN</sub>	RF Input
4	N/C	No Connection
5	GND	Ground
6 <sup>3</sup>	RF <sub>OUT</sub> /V <sub>DD</sub>	RF Output / Drain Voltage

2. MACOM recommends connecting unused package pins to ground.
3. Series inductor and decoupling capacitor recommended on pin 6.

\* Restrictions on Hazardous Substances, European Union Directive 2011/65/EU.

**Electrical Specifications:  $T_A = +25^\circ\text{C}$ ,  $V_{DD} = +3\text{ V}$ ,  $Z_0 = 50\ \Omega$**

Parameter	Test Conditions	Units	Bias Voltage			
			3 Volts			5 Volts <sup>8</sup>
			Min.	Typ.	Max.	Typ.
Gain	0.9 GHz 1.9 GHz	dB	— 10.4	14.0 11.0	— 13.0	14.5 11.2
Noise Figure	0.9 GHz 1.9 GHz	dB	—	1.4 1.4	— 1.8	1.5 1.5
Input Return Loss	0.9 GHz 1.9 GHz	dB	—	7 11	—	7 11
Output Return Loss	0.9 GHz 1.9 GHz	dB	—	22 20	—	26.0 18.5
Output P1dB	900 - 1900 MHz	dBm	—	18.5	—	—
Output IP <sub>3</sub>	900 - 1900 MHz	dBm	—	35	—	35
Current	—	mA	60	80	100	95

### Absolute Maximum Ratings<sup>4,5</sup>

Parameter	Absolute Maximum
Gain Compression	6 dB
Voltage	5.5 V
Junction Temperature <sup>6,7</sup>	+150°C
Operating Temperature	-40°C to +85°C
Storage Temperature	-65°C to +150°C

4. Exceeding any one or combination of these limits may cause permanent damage to this device.
5. MACOM does not recommend sustained operation near these survivability limits.
6. Operating at nominal conditions with  $T_J \leq 150^\circ\text{C}$  will ensure  $\text{MTTF} > 1 \times 10^6$  hours.
7. Junction Temperature ( $T_J$ ) = Case Temperature ( $T_C$ ) +  $\Theta_{jc} \cdot (V \cdot I)$   
 Typical thermal resistance ( $\Theta_{jc}$ ) = 131°C/W
  - a) For  $T_C = +25^\circ\text{C}$ ,  
 $T_J = 53^\circ\text{C}$  @ 3 V, 80 mA
  - b) For  $T_C = +85^\circ\text{C}$ ,  
 $T_J = 113^\circ\text{C}$  @ 3 V, 80 mA

### Handling Procedures

Please observe the following precautions to avoid damage:


### Static Sensitivity

These electronic devices are sensitive to electrostatic discharge (ESD) and can be damaged by static electricity. Proper ESD control techniques should be used when handling these devices.


## Satellite TV Amplifier 800 - 3000 MHz

Rev. V5

### 800 - 3000 MHz, Recommended PCB Configuration

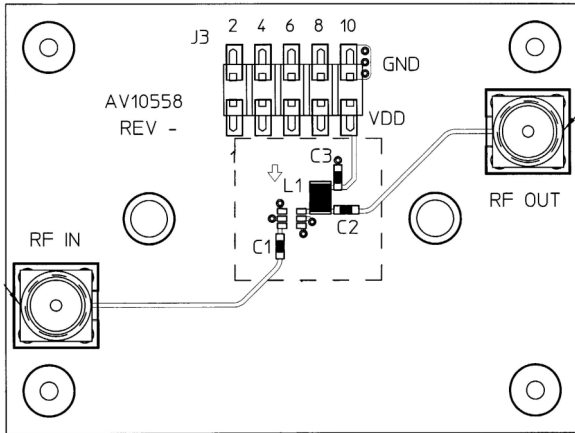


### 800 - 3000 MHz, Application Schematic

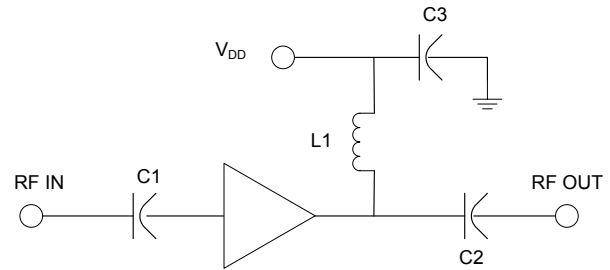

### 800 - 3000 MHz, Component List

Part	Value	Case Style	Purpose
C1	39 pF	0402	Input DC Block
C2	39 pF	0402	Output DC Block
C3	470 pF	0402	RF Bypass
L1	12 nH	0805	RF Choke/Tuning


### Lead-Free SC-70 6-Lead (SOT-363)<sup>†</sup>

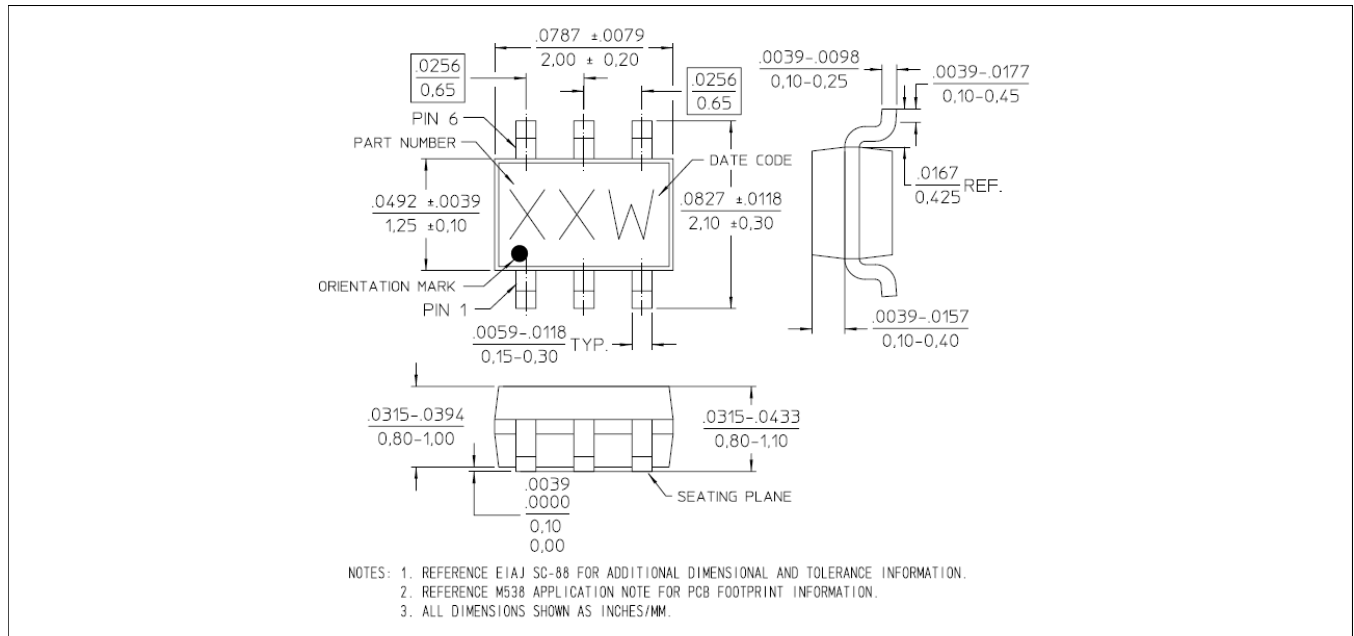


<sup>†</sup> Reference Application Note M538 for lead-free solder reflow recommendations.  
Meets JEDEC moisture sensitivity level 1 requirements.  
Plating is matte tin over copper.

**Typical Performance Curves:  $V_{DD} = 3\text{ V}$**


**Gain**

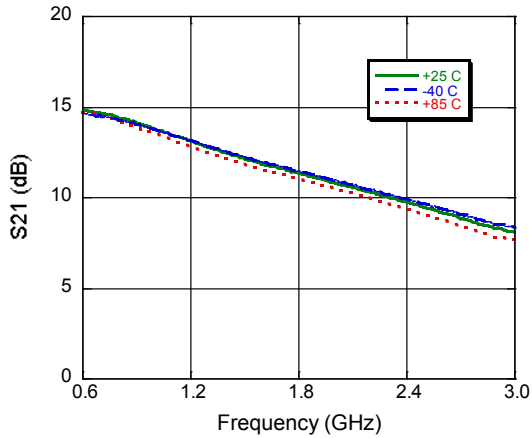


**Input Return Loss**

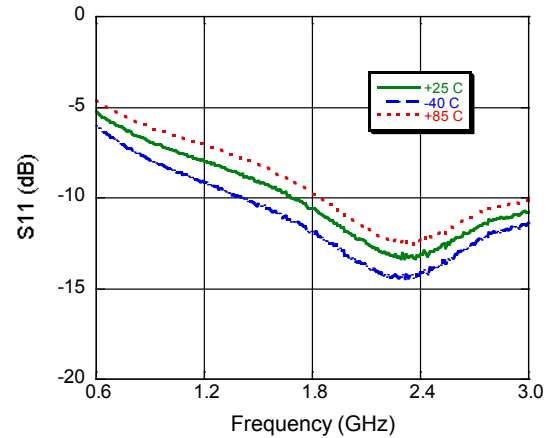


**Output Return Loss**

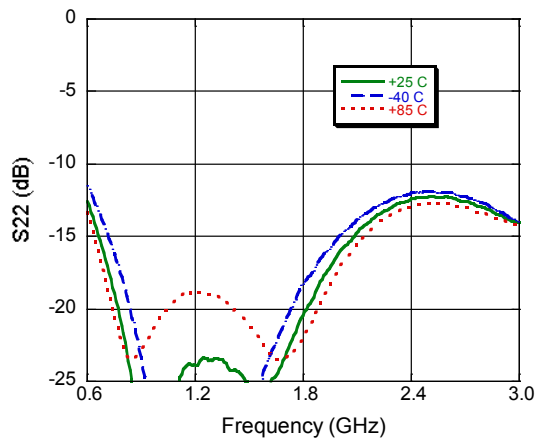


**Noise Figure**

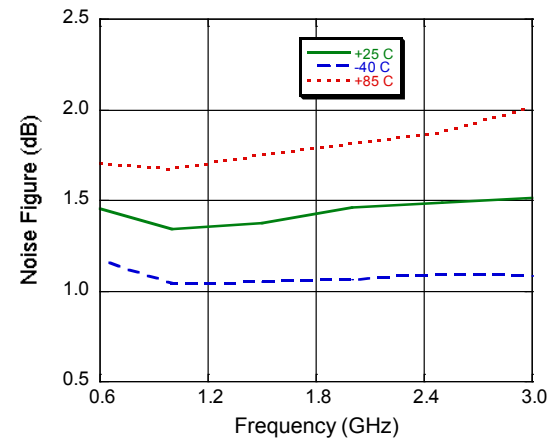

**Output IP3, Input Power @ -12 dBm**

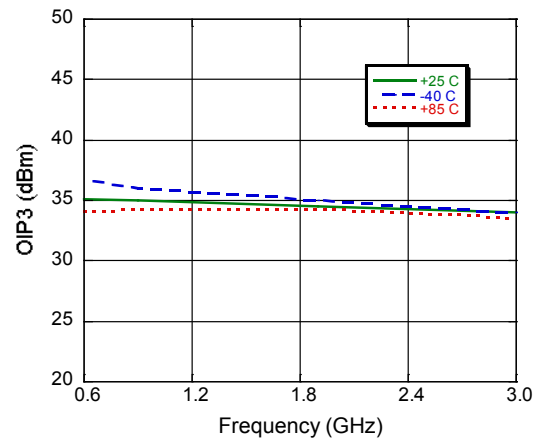


**P1dB**

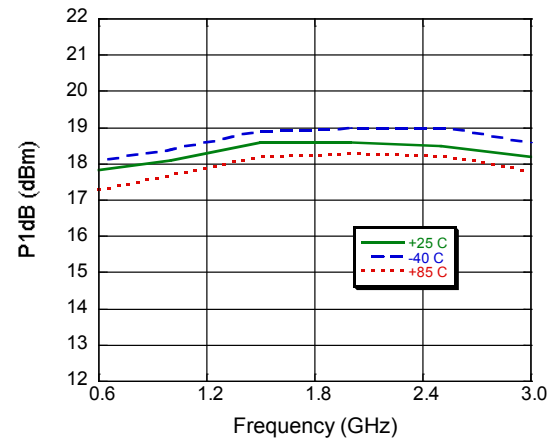


## 5 Volt Application Section for operation above 10 dBm output power

### Application Layout Schematic @ 5 V<sup>8</sup>

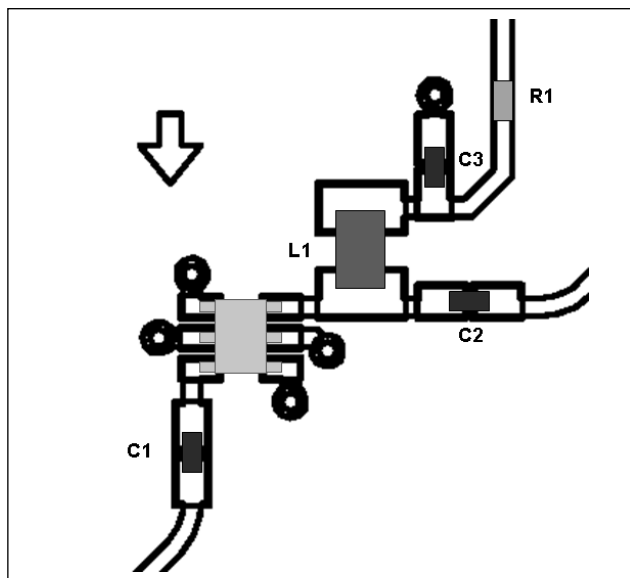

8. The addition of a 24.9  $\Omega$  series resistor on the drain line allows for 5 volt operation above 10 dBm output power, but no greater than 22 dBm of output power.

### Application Schematic @ 5 V

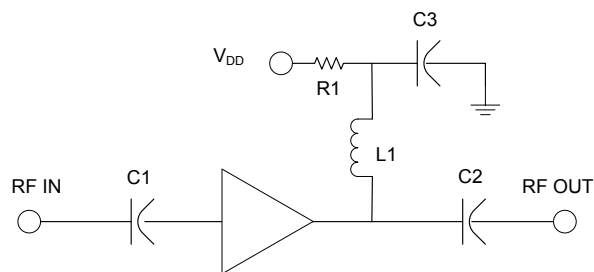


### Component List @ 5 V

Part	Value	Case Style	Purpose
C1	39 pF	0402	Input DC Block
C2	39 pF	0402	Output DC Block
C3	470 pF	0402	RF Bypass
L1	12 nH	0805	RF Choke/Tuning
R1	24.9 $\Omega$	0402	Voltage Drop


## 5 Volt Application Section for operation above 10 dBm output power

### Typical Performance Curves: $V_{DD} = 5\text{ V}$


**Gain**

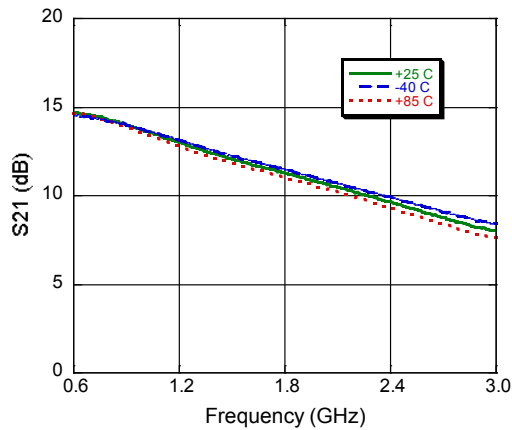


**Input Return Loss**

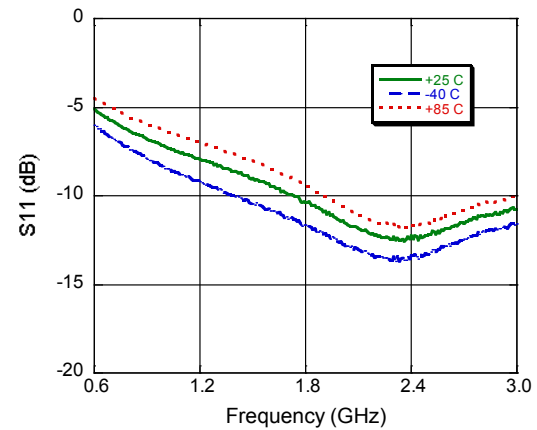


**Output Return Loss**

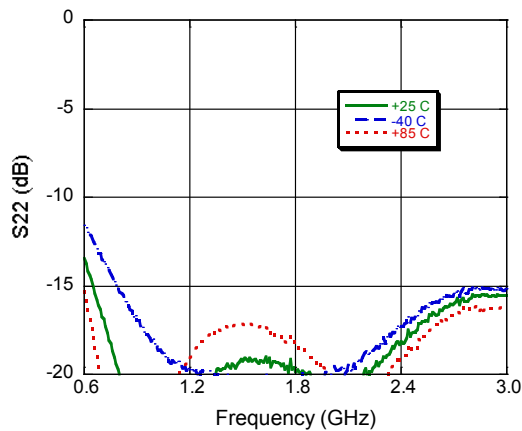

**P1dB**

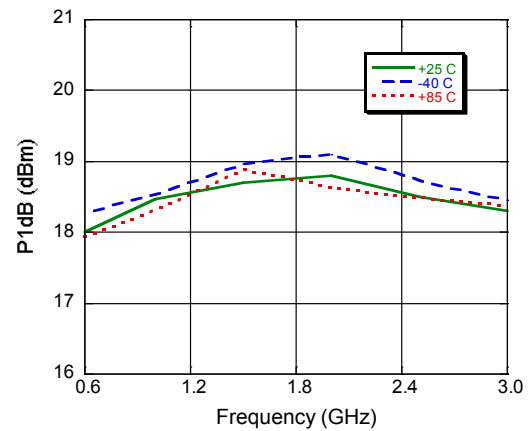


**Output IP3**

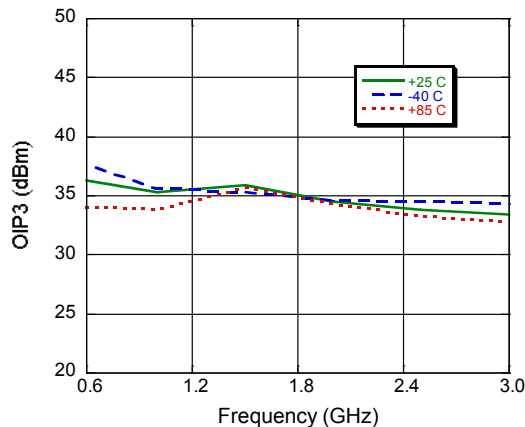


## 3 Volt Application Section 75 $\Omega$ Input - 50 $\Omega$ Output, 950 - 2150 MHz

### 950 - 2150 MHz, Recommended PCB Configuration

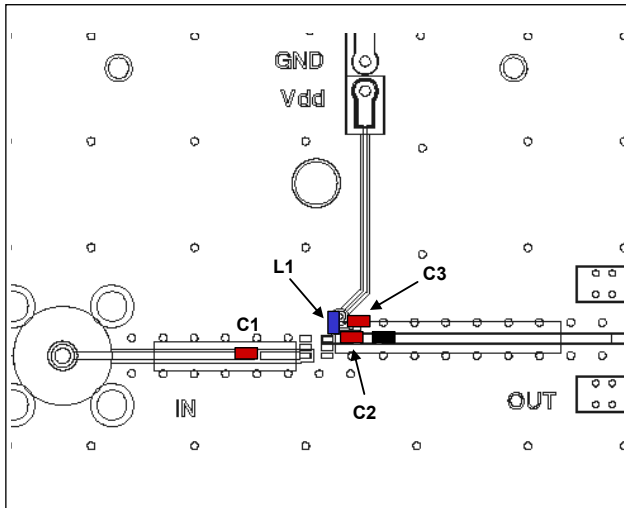

### 950 - 2150 MHz, Application Schematic

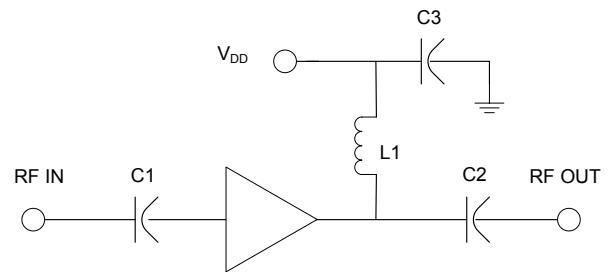


### 950 - 2150 MHz, Component List

Part	Value	Case Style	Purpose
C1	39 pF	0402	Input DC Block
C2	6 pF	0402	Output DC Block
C3	1000 pF	0402	RF Bypass
L1	19 nH	0402	RF Choke/Tuning


## 3 Volt Application Section 75 $\Omega$ Input - 50 $\Omega$ Output, 950 - 2150 MHz

### Typical Performance Curves:


**S-Parameters**

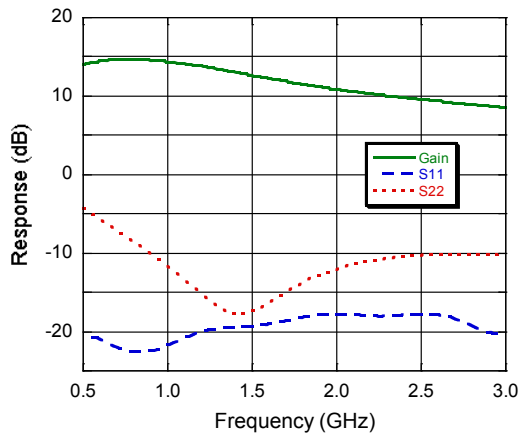


**Noise**

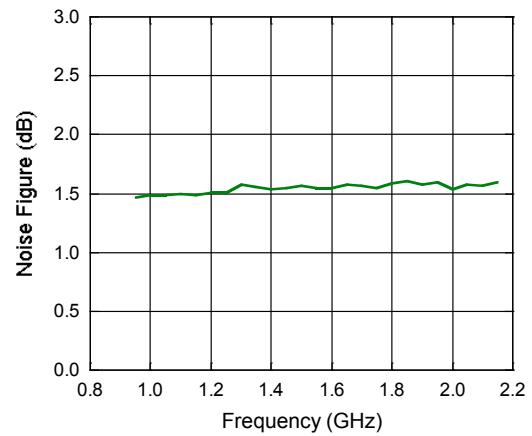

**Output IP3**

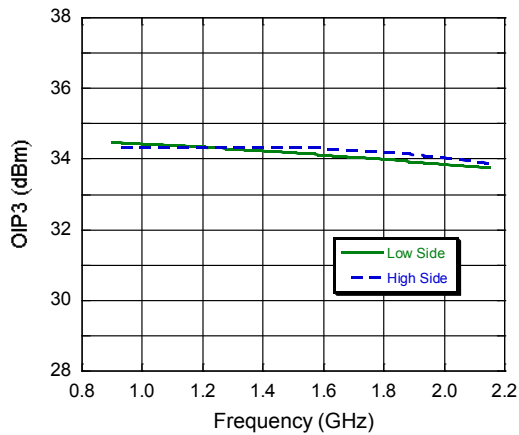

**P1dB**

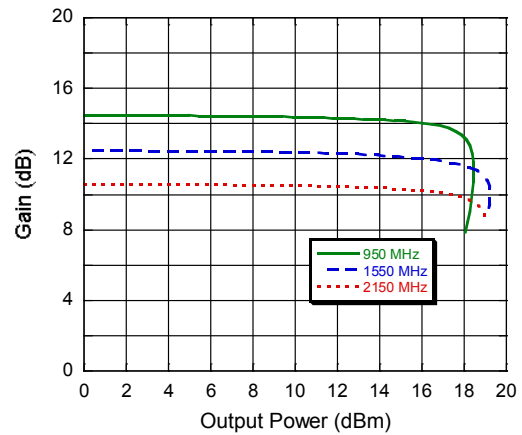



## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9