

Rev. V2

Features

- Low Voltage Operation: 2.5 V
- Low Harmonics: < -66 dBc at +34 dBm & 1 GHz
- Low Insertion Loss: 0.7 dB at 1 GHz
- High Isolation: 25 dB at 2 GHz
- 0.5 micron GaAs pHEMT Process
- Low Profile, Lead-Free 3 mm PQFN Package
- Halogen-Free "Green" Mold Compound
- RoHS* Compliant and 260°C Re-flow Compatible

Description

M/A-COM's MASW-007813 is a GaAs pHEMT MMIC single pole four throw (SP4T) high power switch in a low cost, low profile, lead-free 3 mm PQFN 16-lead package. The MASW-007813 is ideally suited for applications where high power, low control voltage, low insertion loss, high isolation, small size and low cost are required.

Typical applications are for GSM and DCS handset systems that connect separate transmit and receive functions to a common antenna, as well as CDMA handset and other related applications. The MASW-007813 can be used in all systems operating up to 3 GHz requiring high power at low control voltage.


The MASW-007813 is fabricated using a 0.5 micron gate length GaAs pHEMT process. The process features full passivation for performance and reliability.

Ordering Information 1,2

| Part Number | Package |
|--------------------|-----------------|
| MASW-007813-TR3000 | 3000 piece reel |
| MASW-007813-001SMB | Sample Board |

- 1. Reference Application Note M513 for reel size information.
- 2. All sample boards include 5 loose parts.

Functional Schematic



Pin Configuration

| Pin No. | Pin Name | Description | |
|---------|---------------------------|--------------|--|
| 1 | RF1 | RF Port 1 | |
| 2 | GND | RF Ground | |
| 3 | GND | RF Ground | |
| 4 | RF2 | RF Port 2 | |
| 5 | V2 | Control 2 | |
| 6 | V1 | Control 1 | |
| 7 | V4 | Control 4 | |
| 8 | V3 | Control 3 | |
| 9 | RF3 | RF Port 3 | |
| 10 | GND | RF Ground | |
| 11 | GND | RF Ground | |
| 12 | RF4 | RF Port 4 | |
| 13 | GND | RF Ground | |
| 14 | ANT | Antenna Port | |
| 15 | GND | RF Ground | |
| 16 | GND | RF Ground | |
| 17 | GND (paddle) ³ | RF Ground | |

3. The exposed pad centered on the package bottom must be connected to RF and DC ground.

^{*} Restrictions on Hazardous Substances, European Union Directive 2002/95/EC.

North America Tel: 800.366.2266 / Fax: 978.366.2266

[•] Europe Tel: 44.1908.574.200 / Fax: 44.1908.574.300

Asia/Pacific Tel: 81.44.844.8296 / Fax: 81.44.844.8298
 Visit www.macomtech.com for additional data sheets and product information.



Rev. V2

Electrical Specifications: $T_A = 25$ °C, $V_C = 0$ V / 2.75 V, $P_{IN} = 34$ dBm, $Z_0 = 50$ Ω

| Parameter | Test Conditions | Units | Min. | Тур. | Max. |
|-----------------------------|---|-------|--------------|-------------------|----------------|
| Insertion Loss ⁵ | DC - 1 GHz 1 - 2 GHz 2 - 3 GHz | dB | _ _ _ | 0.7 0.8 1.0 | 0.85 — — |
| Isolation | DC - 1 GHz 1 - 2 GHz 2 - 3 GHz | dB | 25 — — | 33 27 23 | |
| Return Loss | DC - 3 GHz | dB | _ | 20 | _ |
| P0.1dB | 1 GHz | dBm | _ | 38 | _ |
| IP2 | Two Tone, +26 dBm/Tone, 5 MHz spacing, > 50 MHz | dBm | _ | 96 | _ |
| IP3 | Two Tone, +26 dBm/Tone, 5 MHz spacing, > 50 MHz | dBm | _ | 58 | _ |
| 2nd Harmonic | 1 GHz, Pin = +34 dBm | dBc | _ | -76 | -68 |
| 3rd Harmonic | 1 GHz, Pin = +34 dBm | dBc | _ | -68 | -66 |
| Trise, Tfall | 10% to 90% RF, 90% to 10% RF | ns | _ | 40 | _ |
| Ton, Toff | 50% Control to 90% RF, 50% Control to 10% RF | ns | _ | 110 | _ |
| Transients | | mV | _ | 40 | _ |
| Control Current | V _C = 2.75 V | μΑ | _ | 20 | 80 |

^{4.} For positive voltage control, external DC blocking capacitors are required on all RF ports.

Truth Table 6,7

| V1 | V2 | V3 | V4 | ANT - RF1 | ANT - RF2 | ANT - RF3 | ANT - RF4 |
|----|----|----|----|--------------|--------------|--------------|--------------|
| 1 | 0 | 0 | 0 | On | Off | Off | Off |
| 0 | 1 | 0 | 0 | Off | On | Off | Off |
| 0 | 0 | 1 | 0 | Off | Off | On | Off |
| 0 | 0 | 0 | 1 | Off | Off | Off | On |

^{6.} Differential voltage, V (state 1) - V (state 0), must be +2.5 V minimum and must not exceed 8.5 V.

7. 0 = -8.5 V to 0 V, 1 = -6 V to 8.5 V

Absolute Maximum Ratings 8

| Parameter | Absolute Maximum | | |
|--|------------------|--|--|
| Max Input Power (0.5 - 3 GHz, 2.75 V Control) | +38 dBm | | |
| Operating Voltage | +8.5 volts | | |
| Operating Temperature | -40°C to +85°C | | |
| Storage Temperature | -65°C to +150°C | | |

Exceeding any one or combination of these limits may cause permanent damage to this device.

^{5.} Insertion loss can be optimized by varying the DC blocking capacitor value, e.g. 1000 pF for 100 MHz - 1 GHz, 39 pF for 0.5 GHz - 3 GHz.

[•] Europe Tel: 44.1908.574.200 / Fax: 44.1908.574.300


Asia/Pacific Tel: 81.44.844.8296 / Fax: 81.44.844.8298
 Visit www.macomtech.com for additional data sheets and product information.




Rev. V2

Typical Performance Curves


Insertion Loss




Return Loss



Isolation



Harmonics vs. Control Voltage, 1 GHz




[•] Europe Tel: 44.1908.574.200 / Fax: 44.1908.574.300

Asia/Pacific Tel: 81.44.844.8296 / Fax: 81.44.844.8298
 Visit www.macomtech.com for additional data sheets and product information.



Rev. V2

Low Profile, Lead-Free 3 mm 16-lead PQFN †

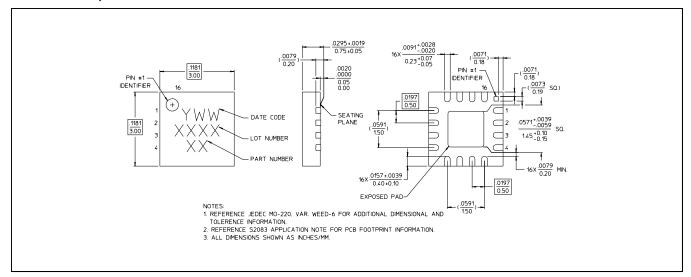

[†] Reference Application Note M538 for lead-free solder reflow recommendations. Meets JEDEC moisture sensitivity level 1 requirements. Plating is 100% matte tin over copper.

Qualification

Qualified to M/A-COM specification REL-201, Process Flow –2.

Handling Procedures

The following precautions should be observed to avoid damage:

Static Sensitivity

Gallium Arsenide Integrated Circuits are sensitive to electrostatic discharge (ESD) and can be damaged by static electricity. Proper ESD control techniques should be used when handling these devices.

[•] North America Tel: 800.366.2266 / Fax: 978.366.2266

[•] Europe Tel: 44.1908.574.200 / Fax: 44.1908.574.300

Asia/Pacific Tel: 81.44.844.8296 / Fax: 81.44.844.8298
 Visit www.macomtech.com for additional data sheets and product information.

ПОСТАВКА ЭЛЕКТРОННЫХ КОМПОНЕНТОВ

Общество с ограниченной ответственностью «МосЧип» ИНН 7719860671 / КПП 771901001 Адрес: 105318, г.Москва, ул.Щербаковская д.3, офис 1107

Данный компонент на территории Российской Федерации Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

http://moschip.ru/get-element

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г. Москва, ул. Щербаковская д. 3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru moschip.ru_6 moschip.ru_4 moschip.ru_9