

## Low forward voltage TVS Transky™

### Features

- High peak pulse power:
  - 600 W (10/1000  $\mu$ s)
  - 4000 W (8/20  $\mu$ s)
- Stand-off voltage 5 or 12 V
- Low forward voltage: 0.48 V @ 0.85 A @ 25 °C
- Low clamping factor  $V_{CL}/V_{BR}$
- Fast response time
- Very thin package (1.0 mm overall component height)
- ECOPACK2® halogen-free package


### Complies with the following standards:

- IEC 61000-4-2 level 4:
  - 15 kV (air discharge)
  - 8 kV (contact discharge)
- MIL STD 883E- Method 3015-7: class 3C
  - Human body model

### Description

The Transky is designed specifically for portable equipment and miniaturized electronic devices subject to ESD transient overvoltages.

The Transky combines the performance of a Transil™ or TVS (transient voltage supressor) and low forward voltage Schottky diode in a monolithic structure.

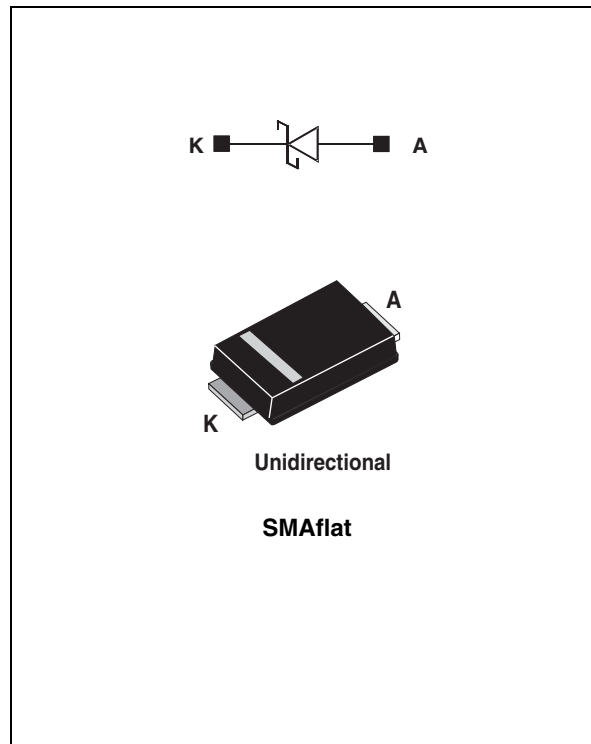

**TM:** Transky is a trademark of STMicroelectronics.

**TM:** Transil is a trademark of STMicroelectronics.

# 1 Characteristics

**Table 1. Absolute ratings (limiting values at 25 °C, unless otherwise specified)**

Symbol	Parameter		Value	Unit
V <sub>PP</sub>	IEC 61000-4-2 standard	Air discharge Contact discharge	15 8	kV
P <sub>PP</sub>	Peak pulse power dissipation <sup>(1)</sup>	T <sub>j initial</sub> = T <sub>amb</sub>	600	W
I <sub>FSM</sub>	Non repetitive surge peak forward current	t <sub>p</sub> = 10 ms T <sub>j</sub> = T <sub>initial</sub> = T <sub>amb</sub>	25	A
T <sub>stg</sub>	Storage temperature range		-65 to +175	°C
T <sub>j</sub>	Operating junction temperature range		-40 to +175	°C

1. 10/1000 μs pulse waveform

**Table 2. Thermal resistance**

Symbol	Parameter	Value	Unit
R <sub>th(j-l)</sub>	Junction to leads	20	°C/W

**Table 3. Electrical characteristics - parameters (T<sub>amb</sub> = 25 °C)**

Symbol	Parameter
V <sub>BR</sub>	Breakdown voltage
I <sub>RM</sub>	Leakage current @ V <sub>RM</sub>
V <sub>RM</sub>	Stand-off voltage
V <sub>CL</sub>	Clamping voltage
R <sub>d</sub>	Dynamic resistance
I <sub>PP</sub>	Peak pulse current
C	Capacitance

**Table 4. Electrical characteristics - values (T<sub>amb</sub> = 25 °C)**

Type	V <sub>F</sub> max (I <sub>F</sub> = 0.85 A)	I <sub>RM</sub> max@V <sub>RM</sub>		V <sub>BR</sub> @I <sub>R</sub> <sup>(1)</sup>			V <sub>CL</sub> @I <sub>PP</sub> 10/1000 μs		R <sub>D</sub> <sup>(2)</sup> 10/1000 μs		V <sub>CL</sub> @I <sub>PP</sub> 8/20 μs		R <sub>D</sub> <sup>(2)</sup> 8/20 μs		αT <sup>(3)</sup>
		25 °C	85 °C	min	typ	max	max		max		max		max		
	V	μA (max)	V	V			mA	V	A	Ω	V	A	Ω	10-4/°C	
SMTYF5.0A	0.48	10	500	5	6.40	6.74	7.07	10	9.2	68	0.029	13.4	298	0.021	5.7
SMTYF12A	0.48	20	1200	12	13.2	13.7	14.3	1	18.5	31	0.129	22.9	157	0.055	7.8

1. Pulse test: t<sub>p</sub> <50ms.

2. To calculate maximum clamping voltage at other surge currents, use the following formula

$$V_{CLmax} = R_D \times I_{PP} + V_{BRmax}$$

3. To calculate V<sub>BR</sub> versus junction temperature, use the following formula:

$$V_{BR} @ T_j = V_{BR} @ 25 \text{ °C} \times (1 + \alpha T \times (T_j - 25))$$

Figure 1. Definition of Ipp pulse

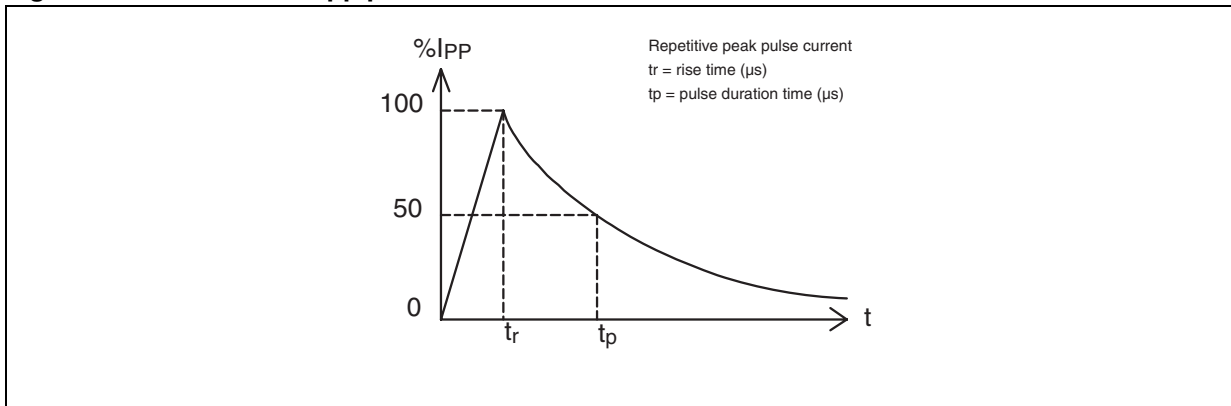


Figure 2. Relative peak power dissipation versus initial junction temperature

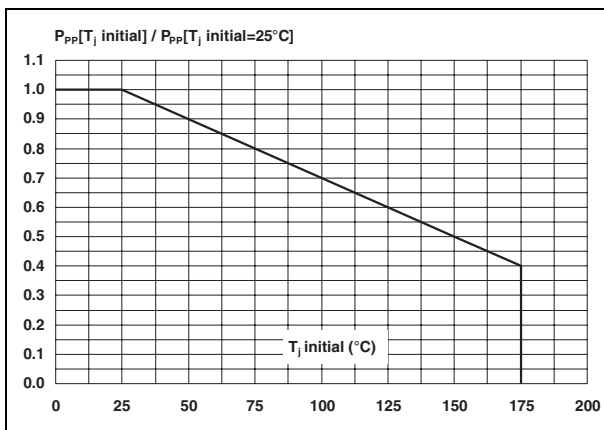


Figure 3. Peak pulse power versus exponential pulse duration ( $T_j$  initial = 25 °C)

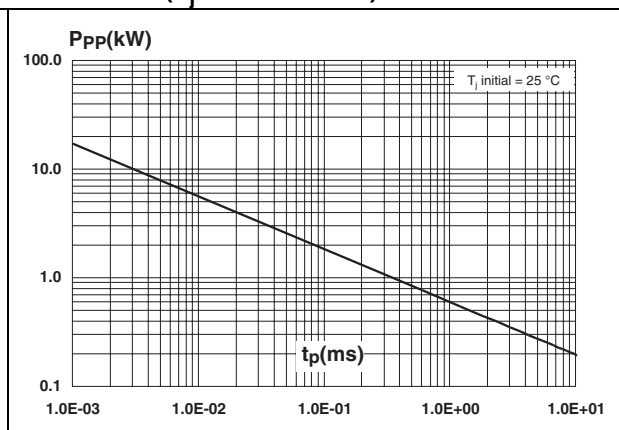


Figure 4. Clamping voltage versus peak pulse current (exponential waveform, maximum values)

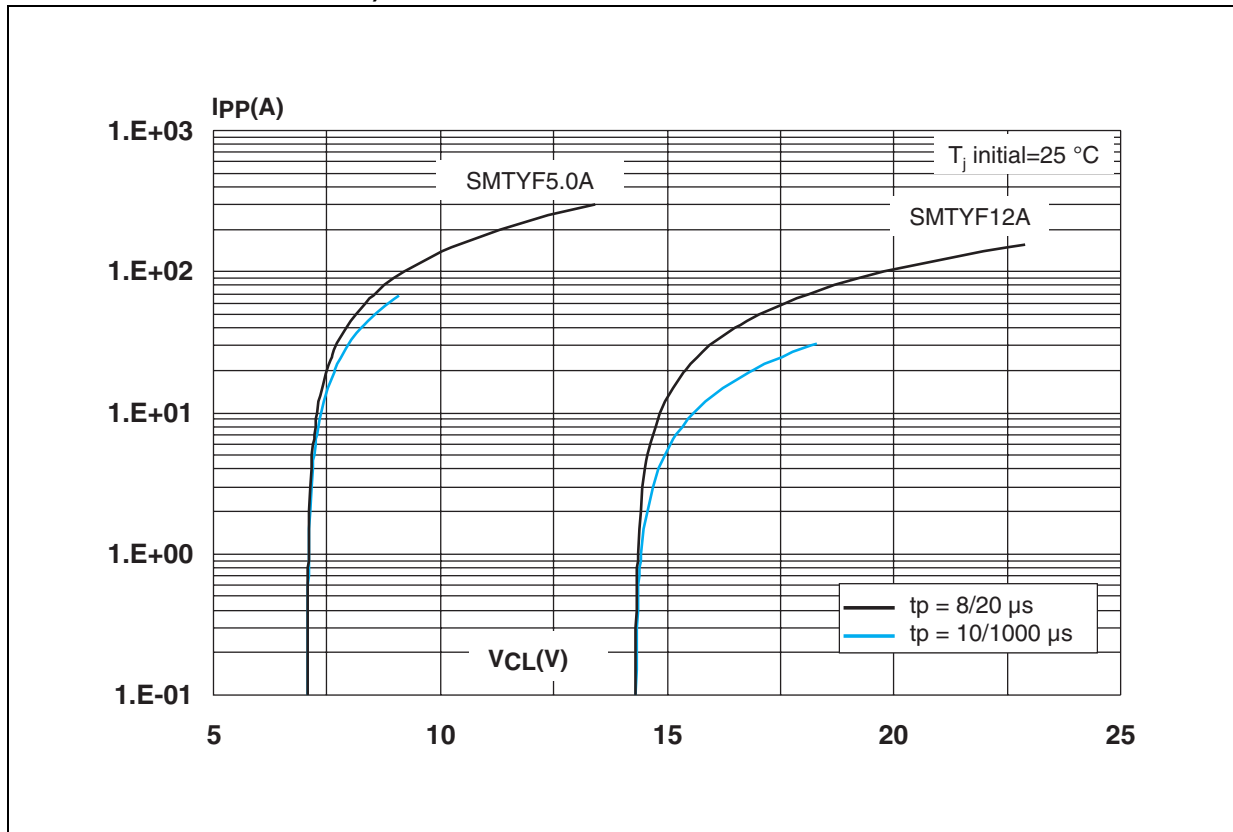


Figure 5. Junction capacitance versus reverse applied voltage (typical values)



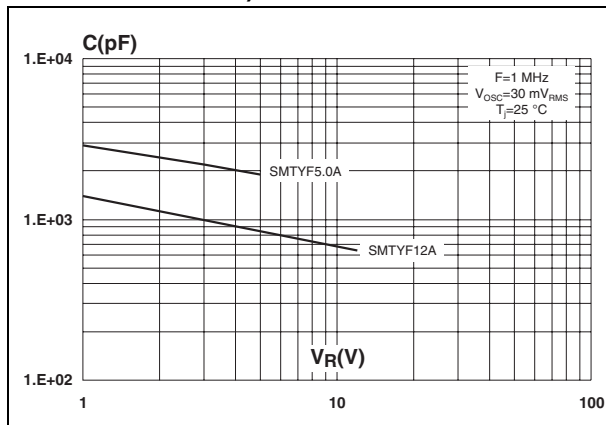



Figure 6. Forward voltage drop versus forward current (typical values)

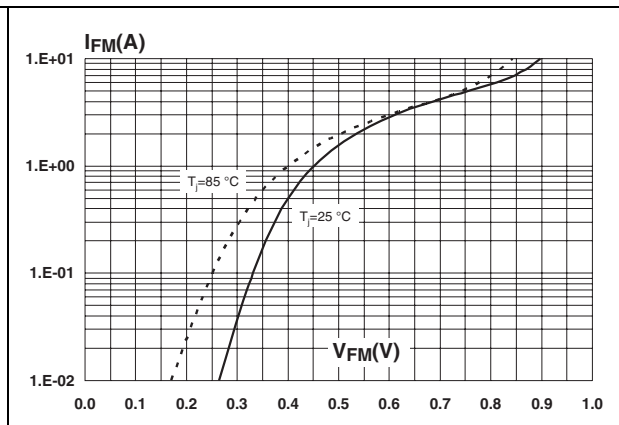


**Figure 7. Average power dissipation versus ambient temperature**

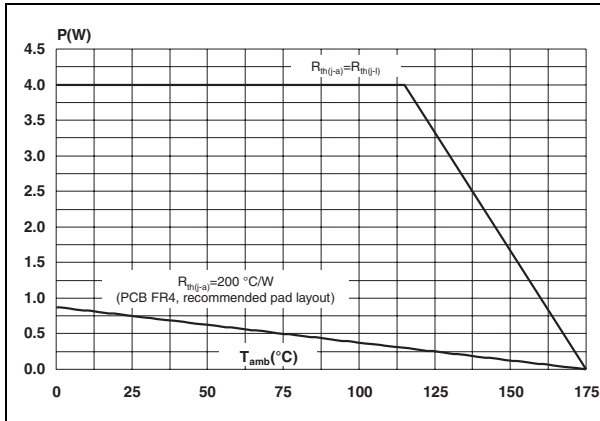


**Figure 8. Relative variation of thermal impedance junction to ambient versus pulse duration (printed circuit board FR4,  $S_{Cu} = 1$  cm<sup>2</sup>)**

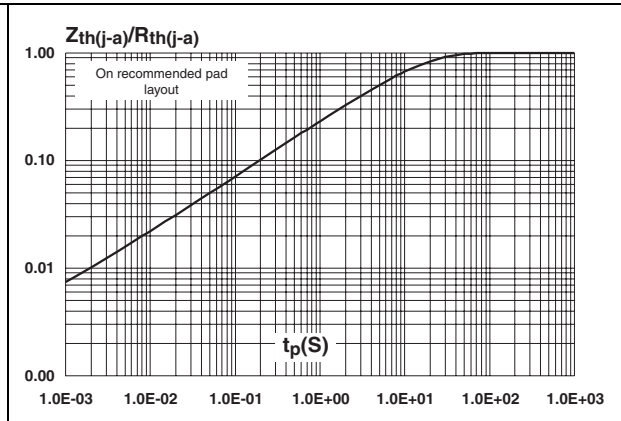

**Figure 9. Thermal resistance junction to ambient versus copper surface under each lead (printed circuit board FR4, copper thickness = 35 μm)**

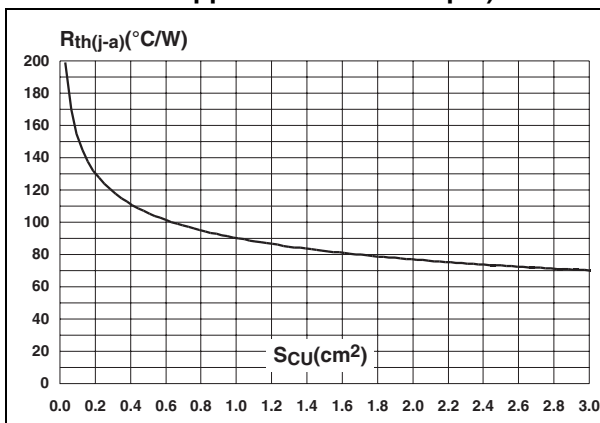

**Figure 10. Leakage current versus junction temperature (typical values)**

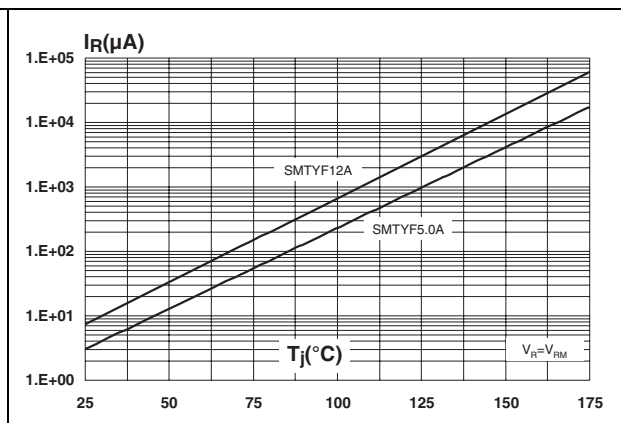

## 2 Package information


- Case: JEDEC DO-221AC molded plastic over Planar junction
- Terminals: Solder plated, solderable per MIL-STD-750, Method 2026
- Polarity: Band indicates cathode
- Flammability: Epoxy rated UL94V-0
- RoHS package

In order to meet environmental requirements, ST offers these devices in ECOPACK® packages. These packages have a lead-free second level interconnect. The category of second level interconnect is marked on the package and on the inner box label, in compliance with JEDEC Standard JESD97. The maximum ratings related to soldering conditions are also marked on the inner box label. ECOPACK is an ST trademark. ECOPACK specifications are available at [www.st.com](http://www.st.com).

**Table 5. SMAflat dimensions**

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	0.90		1.10	0.035		0.043
b	1.25		1.65	0.049		0.065
c	0.15		0.40	0.006		0.016
D	2.25		2.95	0.088		0.116
E	4.80		5.60	0.189		0.220
E1	3.95		4.60	0.156		0.181
L	0.75		1.50	0.030		0.059
L1		0.50			0.019	
L2		0.50			0.019	

**Figure 11. SMAflat footprint dimensions** **Figure 12. Marking information optimized for SMAflat<sup>(1)</sup>**

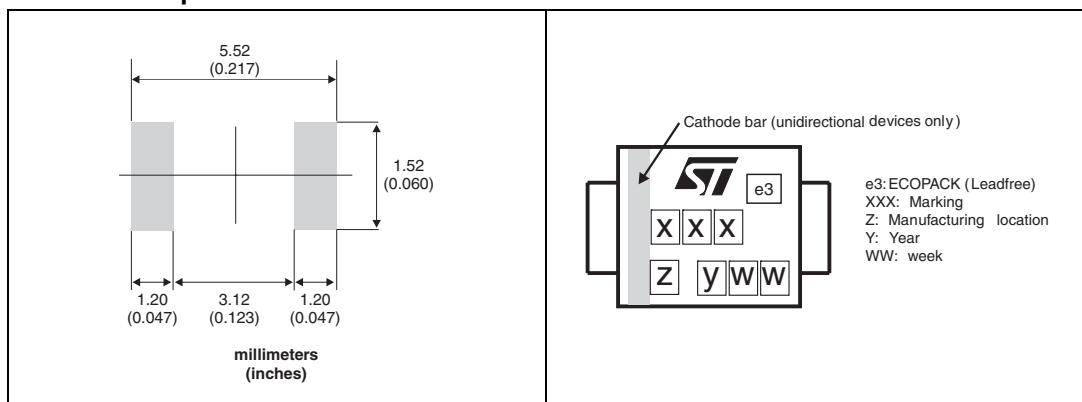

1. SMA footprint may also be used.

### 3 Ordering information

Table 6. Ordering information

Order code	Marking	Package	Weight	Base qty	Delivery mode
SMTYF5.0A	YF5.0	SMAflat	0.035 g	10 000	Tape and reel
SMTYF12A	YF12				

### 4 Revision history

Table 7. Document revision history

Date	Revision	Description of changes
04-Sep-2008	1	First issue

**Please Read Carefully:**

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

**UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.**

**UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.**

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2008 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

[www.st.com](http://www.st.com)



## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9