

# DATA SHEET

www.DataSheet4U.com

**5063JD series (space miser)  
0.25 to 0.40 W; 1% and 5%  
Metal film resistors**

Product specification  
File under BCcomponents, BC08

2000 Aug 08

**Metal film resistors****5063JD series (space miser)  
0.25 to 0.40 W; 1% and 5%****DESCRIPTION**

A homogeneous film of metal alloy is deposited on a high grade BALOX ceramic body. After a helical groove has been cut in the resistive layer, tinned connecting wires of electrolytic copper are welded to the end-caps. The resistors are coated with a blue lacquer which provides electrical, mechanical, and climatic protection. The encapsulation is resistant to all cleaning solvents in accordance with "MIL-STD-202E, method 215", and "IEC 60068-2-45".

**QUICK REFERENCE DATA**

| DESCRIPTION                                                                        | VALUE                                        |                                     |
|------------------------------------------------------------------------------------|----------------------------------------------|-------------------------------------|
| Resistance range                                                                   | 0.22 $\Omega$ to 10 M $\Omega$ ; see Table 1 |                                     |
| Resistance tolerance and series                                                    | $\pm 5\%$ , (E24); $\pm 1\%$ , (E24/E96)     |                                     |
| Temperature coefficient                                                            | $\pm 100 \times 10^{-6}/K$                   |                                     |
| Operation mode                                                                     | <b>normal</b>                                | <b>long term</b>                    |
| Climatic category (LCT/UCT/days)                                                   | 55/155/56                                    | 55/125/56                           |
| Max. dissipation, $P_{70}$                                                         | 0.40 W                                       | 0.25 W                              |
| Thermal resistance, $R_{th}$                                                       | 200 $^{\circ}C/W$                            |                                     |
| Max. continuous operating voltage, $U_{max}$                                       | 200 V (DC or RMS)                            |                                     |
| Noise $R \leq 1 M\Omega$                                                           | max. 0.1 V/V                                 |                                     |
| Surface temperature                                                                | 155 $^{\circ}C$                              | 125 $^{\circ}C$                     |
| Operating temperature range                                                        | -55 $^{\circ}C$ to +155 $^{\circ}C$          | -55 $^{\circ}C$ to +125 $^{\circ}C$ |
| Max. resistance change at $P_{70}$ for resistance range, $\Delta R/R$ max., after: |                                              |                                     |
| 1 000 h                                                                            | 0.50%                                        | 0.25%                               |
| 8 000 h                                                                            | 1.0%                                         | 0.50%                               |
| 225 000 h                                                                          | —                                            | 1.5%                                |
| Permissible voltage against ambient:                                               |                                              |                                     |
| 1 minute                                                                           | 300 V                                        |                                     |
| continuous                                                                         | 75 V                                         |                                     |
| Stability ( $\Delta R/R$ max.) after:                                              |                                              |                                     |
| load (1000 hours)                                                                  | $\pm 0.50\% + 0.05 \Omega$                   | $\pm 0.25\% + 0.05 \Omega$          |
| climatic test                                                                      | $\pm 1.0\% + 0.05 \Omega$                    |                                     |
| resistance to soldering heat                                                       | $\pm 0.25\% + 0.05 \Omega$                   |                                     |
| short time overload (400 V max.)                                                   | $\pm 0.25\% + 0.05 \Omega$                   |                                     |

**Metal film resistors****5063JD series (space miser)  
0.25 to 0.40 W; 1% and 5%****ORDERING INFORMATION****Table 1** Ordering code indicating resistor type and packaging

| TYPE   | TC<br>( $\times 10^{-6}/K$ ) | TOL.<br>(%) | RESISTANCE RANGE            | PART NUMBER       | SPQ<br>(units)     |
|--------|------------------------------|-------------|-----------------------------|-------------------|--------------------|
| 5063JD | $\pm 100$                    | –           | jumper <sup>(1)</sup>       | 5063JD0R000J12AFS | 5 000; tape & reel |
|        |                              | –           | jumper <sup>(1)</sup>       | 5063JD0R000J18AFS | 5 000; ammpack     |
|        |                              | $\pm 5$     | 0.22 to 0.91 $\Omega$       | 5063JDxxxxxJ12AFS | 5 000; tape & reel |
|        |                              | $\pm 5$     | 0.22 to 0.91 $\Omega$       | 5063JDxxxxxJ18AFS | 5 000; ammpack     |
|        |                              | $\pm 1$     | 1 $\Omega$ to 10 M $\Omega$ | 5063JDxxxxxF12AF5 | 5 000; tape & reel |
|        |                              | $\pm 1$     | 1 $\Omega$ to 10 M $\Omega$ | 5063JDxxxxxF18AF5 | 5 000; ammpack     |

**Note**

1. A 0  $\Omega$  jumper is available with a maximum resistance  $R_{\max} \leq 10 \text{ m}\Omega$  at 3 A.

**Composition of the clear text code (NAFTA P/N)**

- The resistors have an ordering code starting with 50
- The subsequent digits indicate the resistor type, temperature coefficient, ohmic value, tolerance and packaging; see Table 1
- The ohmic value is represented by 5-digits; see Table 2
- For temperature coefficient and tolerance, see Table 3.

**ORDERING EXAMPLE: CLEAR TEXT CODE**

The ordering code of a 5063JD resistor, value 5 600  $\Omega \pm 1\%$ , taped on a bandolier of 5 000 units in tape on reel is:  
5063JD5K600F12AF5.

**Table 2** Examples of the ohmic value

| OHMIC<br>VALUE | 5-DIGIT<br>VALUE |
|----------------|------------------|
| 0.22 $\Omega$  | 0R220            |
| 1 $\Omega$     | 1R000            |
| 10 $\Omega$    | 10R00            |
| 100 $\Omega$   | 100R0            |
| 1 k $\Omega$   | 1K000            |
| 10 k $\Omega$  | 10K00            |
| 100 k $\Omega$ | 100K0            |
| 1 M $\Omega$   | 1M000            |

**Table 3** Letter coding for temperature coefficient and tolerance

| TC<br>( $\times 10^{-6}/K$ ) | LETTER<br>CODE | TOL.<br>(%) | LETTER<br>CODE |
|------------------------------|----------------|-------------|----------------|
| 100                          | D              | $\pm 5$     | J              |
| –                            | –              | $\pm 1$     | F              |

Metal film resistors

5063JD series (space miser)  
0.25 to 0.40 W; 1% and 5%

FUNCTIONAL DESCRIPTION

Product characterization

Standard values of nominal resistance are taken from the E24 or E96 series for resistors with a tolerance of  $\pm 5\%$  or  $\pm 1\%$ .  
The values of the E24 series are in accordance with “IEC publication 60063”.

Limiting values



| TYPE   | LIMITING VOLTAGE <sup>(1)</sup><br>(V) | LIMITING POWER<br>(W) |
|--------|----------------------------------------|-----------------------|
| 5063JD | 200                                    | 0.40                  |

Note

1. The maximum voltage that may be continuously applied to the resistor element, see “IEC publication 60115-1”.


DERATING

The power that the resistor can dissipate depends on the operating temperature; see Figs 1 and 2.

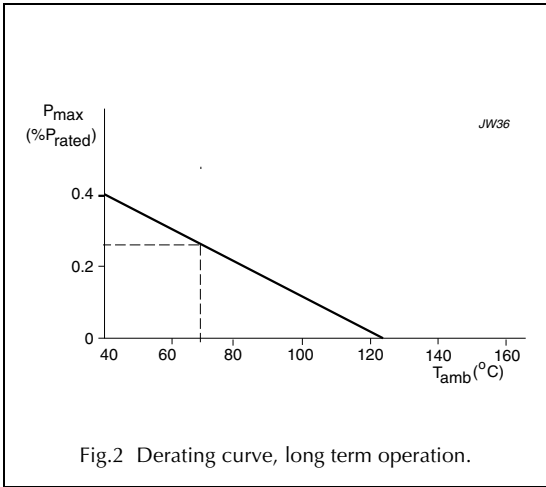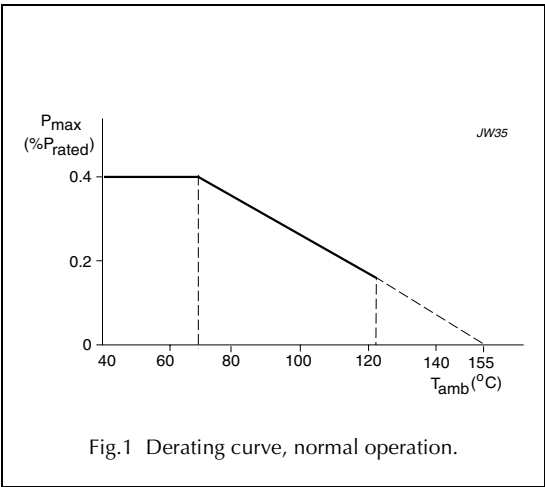

NOISE

The current noise is measured in accordance with “DIN 44049 Part 1 and IEC 600195”. Maximum values are for 99.8% of all resistors; see Fig 3.

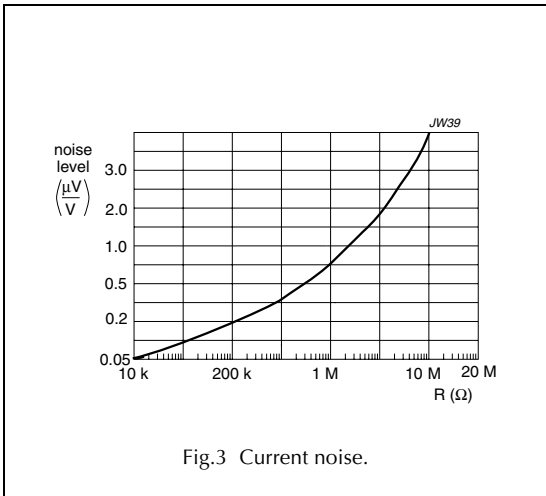

Metal film resistors

5063JD series (space miser)  
0.25 to 0.40 W; 1% and 5%

Pulse-load behaviour

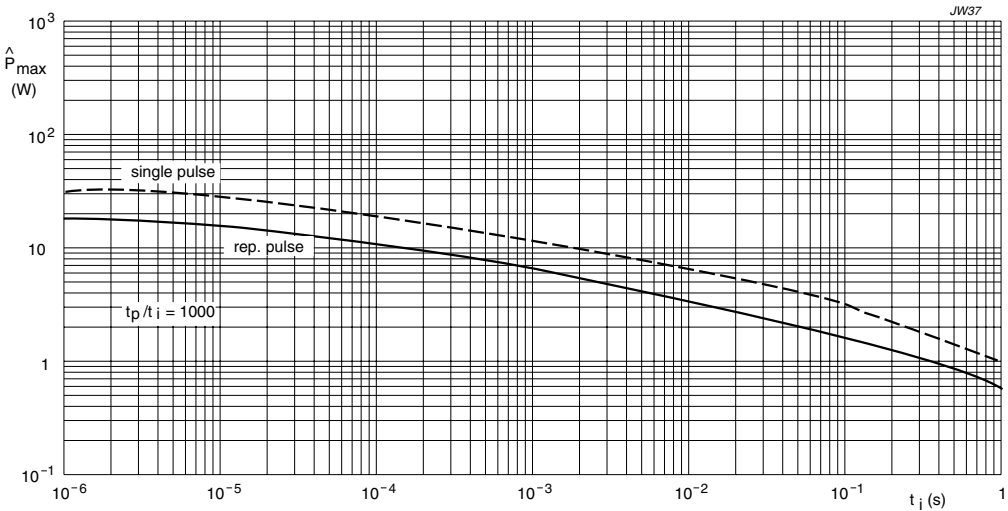


Fig.4 Pulse on a regular basis; maximum permissible peak pulse power ( $\hat{P}_{max}$ ) as a function of pulse duration ( $t_i$ ).

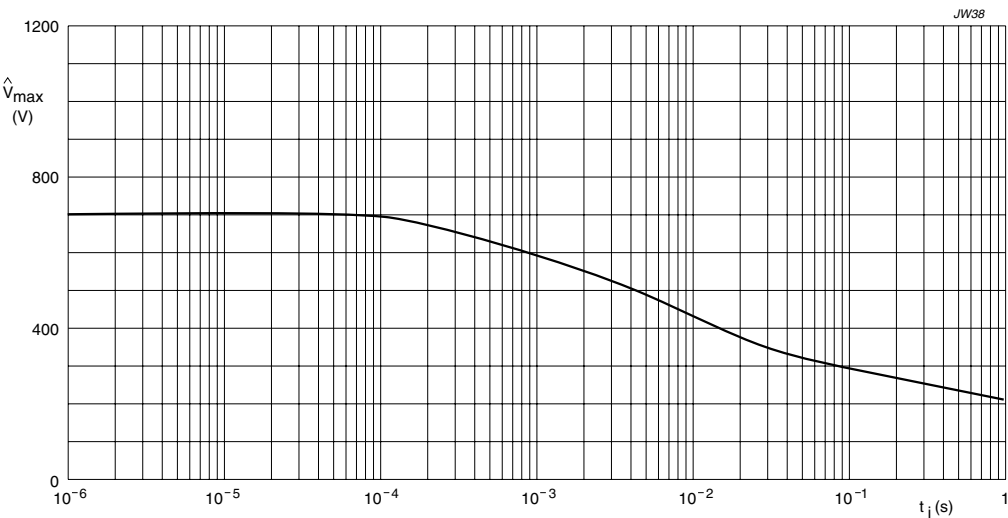


Fig.5 Pulse on a regular basis; maximum permissible peak pulse voltage ( $\hat{V}_{max}$ ) as a function of pulse duration ( $t_i$ ).

Metal film resistors

5063JD series (space miser)  
0.25 to 0.40 W; 1% and 5%

Definition of symbols (see Figs 4, 5, 6 and 7)

| SYMBOL           | DESCRIPTION                                       |
|------------------|---------------------------------------------------|
| $\bar{P}$        | applied peak pulse power                          |
| $\hat{P}_{\max}$ | maximum permissible peak pulse power; see Fig.4   |
| $V_i$            | applied peak pulse voltage; see Fig 6             |
| $\hat{V}_{\max}$ | maximum permissible peak pulse voltage; see Fig.5 |
| $V(t)$           | pulse voltage                                     |
| $R$              | nominal resistance value                          |
| $P_U$            | rated dissipation at ambient temperature          |
| $R_{\text{nom}}$ | nominal resistance value                          |
| $t_i$            | pulse duration (rectangular pulses)               |
| $t_p$            | pulse repetition time                             |

Pulses

The permissible pulse-load is determined by the resistance change as given for the endurance test after 8000 hours.

PULSE VOLTAGE LIMIT

The maximum permissible impulse voltage  $\hat{V}_{\max}$  is the voltage pulse short overload depending on the impulse time  $t_i$ . High ohmic values are protected by the interdependence of voltage limit and impulse time. this function is given by

the equation: 
$$\hat{V}_{\max} = \frac{2.5 \cdot V_{\max}}{1 + t_i \cdot K} + V_{\max}$$

$V_{\max}$  = maximum permissible continuous voltage;  
 $t_i$  = pulse time;  
 $K = 100 \text{ s}^{-1}$ .

MAXIMUM PULSE-LOAD

The average load  $\bar{P}$  must not exceed the rated dissipation. For resistance values above the critical resistance the rated dissipation is given by the resistance value and the limiting

element voltage  $V_{\max}$ : 
$$\bar{P} = \frac{1}{t_p} \int_{t_1}^{t_2} U^2(t) dt \leq P_U$$

CONTINUOUS AND SINGLE PULSE-LOAD

There is a difference between repetitive pulse-load ( $\bar{P} = \frac{t_i}{t_p} \cdot P$  with  $P$  = power at the pulse time  $t_i$ ) or single pulse load (e.g. switching events  $\bar{P} > 0$ ).

A higher pulse-load  $P_{\max}$  is accepted in the latter case.

PULSE SHAPES

Figure 6 shows the maximum pulse-load for a rectangular

pulse shape: 
$$\bar{P} = \frac{t_i \cdot \hat{V}^2}{t_p \cdot R}$$

Other pulses should be converted into rectangular pulse shapes (see Fig.7), having the same energy at a given peak voltage. The following equation shows the calculation for exponential pulses:

$$\bar{P} = \frac{\tau_e}{2 \cdot t_p} \cdot \frac{\hat{V}^2}{R} \text{ with } \tau_e = R \cdot C \text{ or } \tau_e = \frac{L}{R}$$

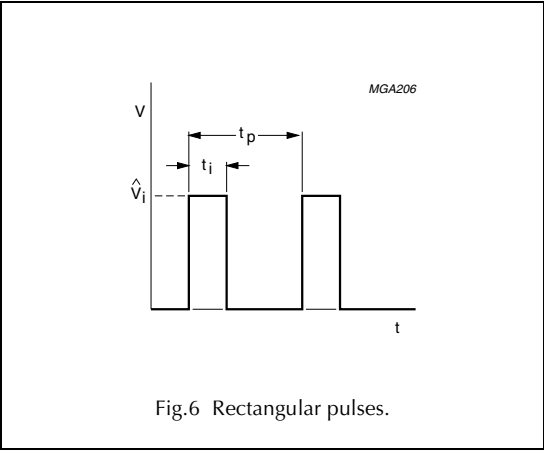


Fig.6 Rectangular pulses.

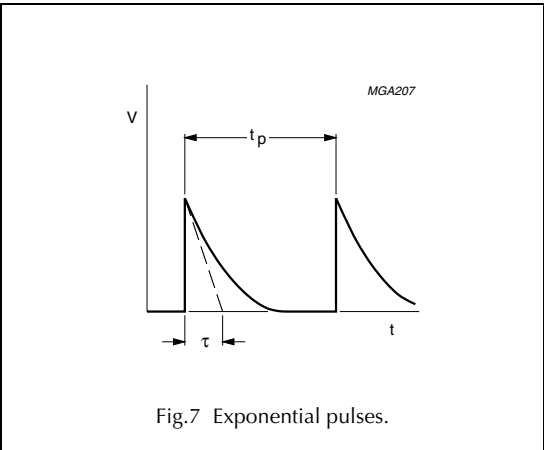


Fig.7 Exponential pulses.

Metal film resistors

5063JD series (space miser)  
0.25 to 0.40 W; 1% and 5%

MECHANICAL DATA

Mass per 100 units

13 g

Marking

The nominal resistance and tolerance are marked on the resistor using four or five coloured bands in accordance with IEC publication 60062 “Colour codes for fixed resistors”.

Mounting

The resistors are suitable for processing on automatic insertion equipment in addition to cutting and bending machines. The minimum bending is 5 mm (.200 inch).

Outlines

The length of the body ( $L_1$ ) is measured by inserting the leads into holes of two identical gauge plates and moving these plates parallel to each other until the resistor body is clamped without deformation (“IEC publication 60294”).

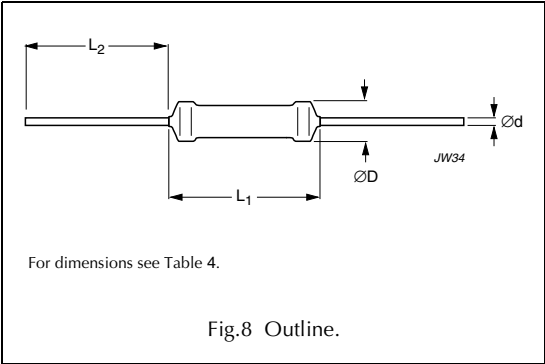


Table 4 Resistor type and physical dimensions; see Fig.8

| TYPE                      | $\varnothing D$<br>MAX.<br>(mm) | $L_1$<br>MAX.<br>(mm) | $L_2$<br>MAX.<br>(mm) | $\varnothing d$<br>(mm) |
|---------------------------|---------------------------------|-----------------------|-----------------------|-------------------------|
| Dimensions in inches      |                                 |                       |                       |                         |
| 5063JD                    | 0.063                           | .142                  | 1.14                  | .020                    |
| Dimensions in millimetres |                                 |                       |                       |                         |
| 5063JD                    | 1.6                             | 3.6                   | 29                    | 0.5                     |

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Vishay:

[5063JD 13 1%TR](#) [5063JD 178K 1%](#) [5063JD 20 1%TR](#) [5063JD 22 1%TR](#) [5063JD 249 1%TR](#) [5063JD 3.9K 1%TR](#)  
[5063JD 33 1%](#) [5063JD 432 1%TR](#) [5063JD 470K 1%TR](#) [5063JD 51 1%TR](#) [5063JD 60.4 1%TR](#) [5063JD 619 1%TR](#)  
[5063JD 69.8K 1%](#) [5063JD 976K 1%](#) [5063JD 143 1%](#) [5063JD 1.74M 1%](#) [5063JD 3.83K 1%](#) [5063JD 237 1%TR](#)  
[5063JD 820K 1%TR](#) [5063JD 390K 1%TR](#) [5063JD 7.15 1%](#) [5063JD 11 1%](#) [5063JD 22.6 1%TR](#) [5063JD 1.65K 1%](#)  
[5063JD 16 1%TR](#) [5063JD 560K 1%TR](#) [5063JD 806 1%TR](#) [5063JD 324K 1%TR](#) [5063JD 9.31 1%](#) [5063JD80.6K1%](#)  
[5063JD 2.8 1%](#) [5063JD 2.43M 1%](#) [5063JD 3.3 1%TR](#) [5063JD 33.2 1%](#) [5063JD 910K 1%](#) [5063JD 4.53 1%](#) [5063JD](#)  
[665K 1%](#) [5063JD 191 1%](#) [5063JD 2.4K 1%TR](#) [5063JD 51K 1%TR](#) [5063JD 1.3M 1%](#) [5063JD 215K 1%](#) [5063JD](#)  
[2.55K 1%](#) [5063JD 2.94 1%](#) [5063JD 8.87 1%](#) [5063JD22K1%TR](#) [5063JD 68 1%TR](#) [5063JD 3.24K 1%](#) [5063JD 162](#)  
[1%TR](#) [5063JD 232K 1%](#) [5063JD 54.9K 1%](#) [5063JD 243K 1%TR](#) [5063JD 196 1%](#) [5063JD 56.2 1%TR](#) [5063JD 2.15K](#)  
[1%](#) [5063JD 9.76 1%](#) [5063JD 39 1%](#) [5063JD 357K 1%TR](#) [5063JD 5.76K 1%](#) [5063JD 7.68K 1%](#) [5063JD 147 1%](#)  
[5063JD 130 1%TR](#) [5063JD 205K 1%](#) [5063JD 1.2M 1%](#) [5063JD 127 1%TR](#) [5063JD12K1%](#) [5063JD 866K 1%TR](#)  
[5063JD 178 1%TR](#) [5063JD121R0FT](#) [5063JD 1.27M 1%](#) [5063JD 232K 1%TR](#) [5063JD 390 1%](#) [5063JD 240 1%TR](#)  
[5063JD 1.13K 1%](#) [5063JD 523 1%TR](#) [5063JD 2.87K 1%](#) [5063JD 309 1%TR](#) [5063JD2M1%TR](#) [5063JD 249K 1%TR](#)  
[5063JD 430K 1%](#) [5063JD 9.53 1%](#) [5063JD 261 1%TR](#) [5063JD 976 1%TR](#) [5063JD 5.9K 1%](#) [5063JD 1.05K 1%](#)  
[5063JD 160K 1%TR](#) [5063JD 200 1%TR](#) [5063JD 6.65 1%](#) [5063JD 402K 1%TR](#) [5063JD 34.8 1%](#) [5063JD 66.5K 1%](#)  
[5063JD 2.49 1%](#) [5063JD 1.82 1%](#) [5063JD 210K 1%TR](#) [5063JD 143K 1%](#) [5063JD 76.8K 1%](#) [5063JD 2.05K 1%](#)  
[5063JD 6.98 1%](#) [5063JD 21K 1%TR](#) [5063JD 1.91M 1%](#)



## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9