

## **MICS-EK1 Datasheet**

### **Metal Oxide Semiconductor Gas Sensor Evaluation Kit**

#### **Getting started quickly with SGX Metal Oxide Semiconductor Gas Sensors**

Simply attach the universal power supply, connect to a PC USB port and plug in one or two gas sensors. The SGX data logging and control software allows the performance of different sensors to be assessed and makes it easy to capture performance data.

#### **INTRODUCTION**

The SGX MICS-EK1 Gas Sensor Evaluation Kit will drive the SGX range of Metal Oxide Semiconductor gas sensors and automatically measure the sensor resistance as it changes with applied gas.


Sensors can be driven manually or automatically by sending simple commands through the USB interface to an on-board microcontroller. A comprehensive set of commands is provided for use with a terminal program such as HyperTerminal. Alternatively an easy-to-use control and data logging PC application is provided on CD which gives full functionality in a few mouse-clicks.

Surface mount adapter boards are also available with the kit and can be ordered separately. One adapter PCB will plug in to both sockets and can be fitted with either a single or dual surface mount gas sensor.

The heaters can be set to two levels. These are nominally preset to 43 mW and 76 mW by plug-in resistors but may be changed by the user to other values. The microprocessor monitors the sensor output resistance with automatic resistance range switching.

An expansion connector provides access to four configurable alarms (open collector), two analog outputs and four digital inputs. LEDs on the board mimic the status of each alarm. A JTAG header allows advanced users to upload their own software to the microcontroller (MSP430F2616) and make full use of the available interfaces.

A universal mains adapter is also supplied or the user may connect a 9 V power supply to the terminal block connector.

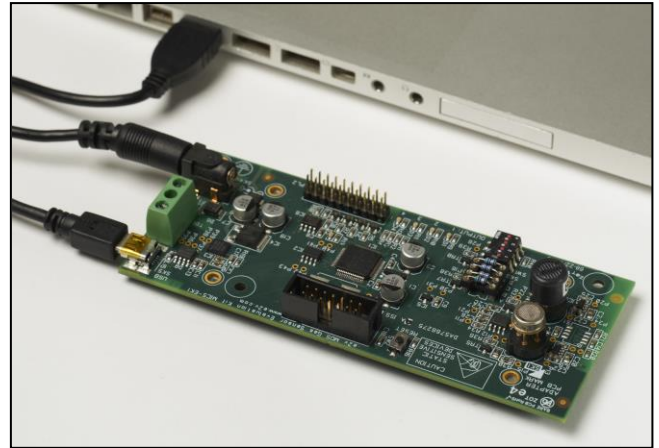

*Gas sensors to be ordered separately*

#### **FEATURES**

- For use with SGX Metal Oxide Semiconductor Gas Sensors
- Automatic measuring of sensor resistance changes
- Operates one 10-pin surface mount sensor (single or dual) with additional adapter PCB
- USB interface to a Personal Computer (PC)
- Free PC application software for easy control and data logging
- Settable heater drive levels
- Automatic load resistor switching
- Four configurable alarm outputs
- Two configurable analog outputs
- Four digital inputs
- Ambient temperature monitoring
- Provision for humidity sensor (customer fit)
- Expansion header for additional applications
- JTAG header for user software upload
- Supplied with universal mains adapter
- Supplied with user manual on CD

Whilst SGX has taken care to ensure the accuracy of the information contained herein it accepts no responsibility for the consequences of any use thereof and also reserves the right to change the specification of goods without notice. SGX accepts no liability beyond the set out in its standard conditions of sale in respect of infringement of third party patents arising from the use of SGX products in accordance with information contained herein. In case of modification of the product, SGX disclaims all liability.

## ELECTRICAL DATA

### Universal Mains Adapter

Input voltage	90 - 264 V ac
Input frequency	50 – 60 Hz
Adapters supplied	UK, Europe, USA, Australia
Output	9 V dc

### PCB Interfaces

#### DC Supply Input

SK4	2.1 x 5.5 mm socket, centre positive
TB1	terminal block
Input voltage	9 V ± 10%
Input protection	Over-voltage and current, reverse voltage

#### Gas Sensor Sockets

SK1	Channel 1: 4-pin TO5
SK2	Channel 2: 4-pin TO5

The adapter PCB is plugged into SK1 and SK2 to allow a single or dual surface mount sensor to be used.

#### Expansion Connector

PL2 2 x 10-pin 0.1" PCB header

3V3 regulated	1	2	9 V unregulated
0 V	3	4	0 V
Input 1 (3V3 logic)	5	6	Output 1 (Open collector)
Input 2 (3V3 logic)	7	8	Output 2 (Open collector)
Input 3 (3V3 logic)	9	10	Output 3 (Open collector)
Input 4 (3V3 logic)	11	12	Output 4 (Open collector)
0V	13	14	Analog out 1 (0 - 2.048 V)
0V	15	16	Analog out 2 (0 - 2.048 V)
Spare RXD (3V3)	17	18	Spare TXD (3V3)
0V	19	20	Spare

#### JTAG Connector

PL1 2 x 7-pin 0.1" box header

TDO	1	2	VCCO
TDI	3	4	VCCI
TMS	5	6	Unused
TCK	7	8	Unused
0 V	9	10	Unused
TRST	11	12	Unused
Unused	13	14	Unused

#### Microcontroller Reset

SW2 Push-button

#### Indicators

D1 – D4	Green LEDs (ON = alarm asserted)
D5	Green LED (flash = PCB functional)

#### Control Switch

SW1 1-4 Control of heater modes and humidity sensing (see manual)

#### Heater Control Resistors

RA, RB	High/low power – channel 1
RC, RD	High/low power – channel 2

#### USB

SK5 Mini-USB type B

## MECHANICAL DATA

### Dimensions

Mains adapter	72 x 45 x 29 mm
Evaluation kit PCB	130 x 55 mm
SMD adapter PCB	25 x 10 mm

## ENVIRONMENTAL DATA

### Operating Temperature Range

Mains adapter	Operating temperature: 0 to +40 °C Storage temperature: -25 to +85 °C Operating humidity: 10 to 90%
---------------	---

PCBs	Designed for operation and storage from -40 to +85 °C
------	---

Sensors	See individual sensor data sheets
---------	-----------------------------------

## PERFORMANCE DATA

ADC resolution	12-bit
DAC resolution	12-bit
Resistance measurement accuracy (25 °C)	≤2% (75R to 6.5M) ≤5% (30R to 20M)
Resistance measurement resolution (25 °C)	<1% (output given to 4 significant digits)
Temp measurement accuracy	±2 °C (at 25 °C) ±3 °C (-25 to +85 °C)

## RECOMMENDED PC SYSTEM

### For Control and Data Logging Software

Processor	Pentium 4/M or equivalent
Operating system	Windows XP or Vista
Screen resolution	1024 x 768 pixels
RAM	1 GB
Disk space	1.6 GB

## ORDERING INFORMATION

### MICS-EK1

MICS Gas Sensor Evaluation Kit Contents:

- Evaluation PCB
- Universal Mains Adapter
- USB lead
- CD Containing Data Logging Software and User Manual
- 5 x SMD Adaptor PCB's (also available separately)

### MICS-SMD-PCB5

MICS Surface Mount Adapter Kit Contents :

- 5 x SMD Adapter PCB's

**Note:** The above kits do not include sensors. These must be ordered separately.

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9