E6B2-C

CSM F6B2-C DS F 4 1

General-purpose Encoder with External Diameter of 40 mm

- Incremental model
- External diameter of 40 mm.
- Resolution of up to 2,000 ppr.





Be sure to read *Safety Precautions* on page 4.

Ordering Information

Encoders [Refer to Dimensions on page 4.]

Power supply voltage	Output configura- tion	Resolution (pulses/rotation)	Model	
5 to 24 VDC	NPN open-collector output	10, 20, 30, 40, 50, 60, 100, 200, 300, 360, 400, 500, 600	E6B2-CWZ6C (resolution) 0.5M Example: E6B2-CWZ6C 10P/R 0.5M	
		720, 800, 1,000, 1,024		
		1,200, 1,500, 1,800, 2,000		
12 to 24 VDC	PNP open-collector output	100, 200, 360, 500, 600	E6B2-CWZ5B (resolution) 0.5M Example: E6B2-CWZ5B 100P/R 0.5M	
		1,000		
		2,000	- Example: 2002 0 1001 /11 0.011	
5 to 12 VDC	Voltage output	10, 20, 30, 40, 50, 60, 100, 200, 300, 360, 400, 500, 600	FORD OWITOF (to a challent) O. FM	
		1,000	E6B2-CWZ3E (resolution) 0.5M Example: E6B2-CWZ3E 10P/R 0.5M	
		1,200, 1,500, 1,800, 2,000		
5 VDC	Line-driver output	10, 20, 30, 40, 50, 60, 100, 200, 300, 360, 400, 500, 600		
		1,000, 1,024	E6B2-CWZ1X (resolution) 0.5M Example: E6B2-CWZ1X 10P/R 0.5M	
		1,200, 1,500, 1,800, 2,000		

Accessories (Order Separately) [Refer to Dimensions on Rotary Encoder Accessories.]

Name	Model	Remarks	
	E69-C06B	Provided with the product.	
Couplings	E69-C68B	Different end diameter	
Couplings	E69-C610B	Different end diameter	
	E69-C06M	Metal construction	
Flanges	E69-FBA		
rianges	E69-FBA02	E69-2 Servo Mounting Bracket provided.	
Servo Mounting Bracket	E69-2		

Refer to Accessories for details.

OMRON 1

Ratings and Specifications

Item	Model	E6B2-CWZ6C	E6B2-CWZ5B	E6B2-CWZ3E	E6B2-CWZ1X		
Power supply voltage		5 VDC -5% to 24 VDC +15%, ripple (p-p): 5% max.	12 VDC -10% to 24 VDC +15%, ripple (p-p): 5% max.	5 VDC –5% to 12 VDC +10%, ripple (p-p): 5% max.	5 VDC ±5%, ripple (p-p): 5% max.		
Current consumption *1		80 mA max.	100 mA max.		160 mA max.		
Resolution (pulses/rotation)		10, 20, 30, 40, 50, 60, 100, 200, 300, 360, 400, 500, 600, 720, 800, 1,000, 1,024, 1,200, 1,500, 1,800, 2,000	100, 200, 360, 500, 600, 1,000, 2,000	10, 20, 30, 40, 50, 60, 100, 200, 300, 360, 400, 500, 600, 1,000, 1,200, 1,500, 1,800, 2,000	10, 20, 30, 40, 50, 60, 100, 200, 300, 360, 400, 500, 600, 1,000, 1,024, 1,200, 1,500, 1,800, 2,000		
Output phases		Phases A, B, and Z	Phases A, \overline{A} , B, \overline{B} , Z, and \overline{Z}				
	lifference n outputs	90°±45° between A and B (1/4	4 T ± 1/8 T)				
Output configuration		NPN open-collector output	PNP open-collector output	Voltage output (NPN output)	Line driver output *2		
Output capacity		Applied voltage: 30 VDC max. Sink current: 35 mA max. Residual voltage: 0.4 V max. (at sink current of 35 mA)	Applied voltage: 30 VDC max. Source current: 35 mA max. Residual voltage: 0.4 V max. (at source current of 35 mA)	Output resistance: $2 \text{ k}\Omega$ Sink current: 20 mA max. Residual voltage: 0.4 V max. (at sink current of 20 mA)	AM26LS31 equivalent Output current High level: Io = -20 mA Low level: Is = 20 mA Output voltage: Vo = 2.5 V min. Vs = 0.5 V max.		
Maximum response frequency *3		100 kHz	50 kHz	100 kHz			
Rise and fall times of output		1 μs max. (Control output voltage: 5 V, Load resistance: 1 $k\Omega$, Cable length: 2 m max.)	1 μs max. (Cable length: 2 m max., Sink current: 10 mA)		0.1 μs max. (Cable length: 2 m max., lo = -20 mA, ls = 20 mA)		
Starting torque		0.98 mN·m max.					
Moment	of inertia	a 1×10 ⁻⁶ kg·m² max.; 3 × 10 ⁻⁷ kg·m² max. at 600 P/R max.					
Shaft	Radial	30 N					
load- ing	Thrust	20 N	20 N				
Maximum permissible speed		6,000 r/min					
Protecti	on circuits	Power supply reverse polarity protection, Load short-circuit protection					
Ambient temperature range		Operating: -10 to 70°C (with no icing), Storage: -25 to 85°C (with no icing)					
Ambient humidity range		Operating/Storage: 35% to 85% (with no condensation)					
Insulation resistance		20 M Ω min. (at 500 VDC) between current-carrying parts and case					
Dielectri	ic strength	500 VAC, 50/60 Hz for 1 min between current-carrying parts and case					
Vibratio resistan		Destruction: 10 to 500 Hz, 150 m/s ² or 2-mm double amplitude for 11 min 3 times each in X, Y, and Z directions					
Shock re	esistance	Destruction: 1,000m/s ² 3 times each in X, Y, and Z directions					
Degree o		IEC 60529 IP50					
Connect method	tion	Pre-wired Models (Standard cable length: 500 mm)					
Material	s	Case: ABS, Main unit: Aluminum, Shaft: SUS420J2					
Weight (packed	state)	Approx. 100 g					
Accesso	ories	Coupling, Hexagonal wrench, Instruction manual					
. A !	An inrush current of approximately 9 A will flow for approximately 0.3 ms when the power is turned ON						


Maximum response frequency ×60 Maximum electrical response speed (rpm) = -Resolution

This means that the E6B2-C Rotary Encoder will not operate electrically if its speed exceeds the maximum electrical response speed.

^{*1.} An inrush current of approximately 9 A will flow for approximately 0.3 ms when the power is turned ON.
*2. The line driver output is a data transmission circuit compatible with RS-422A and long-distance transmission is possible with a twisted-pair cable. The quality is equivalent to AM26LS31.

^{*3.} The maximum electrical response speed is determined by the resolution and maximum response frequency as follows:

I/O Circuit Diagrams

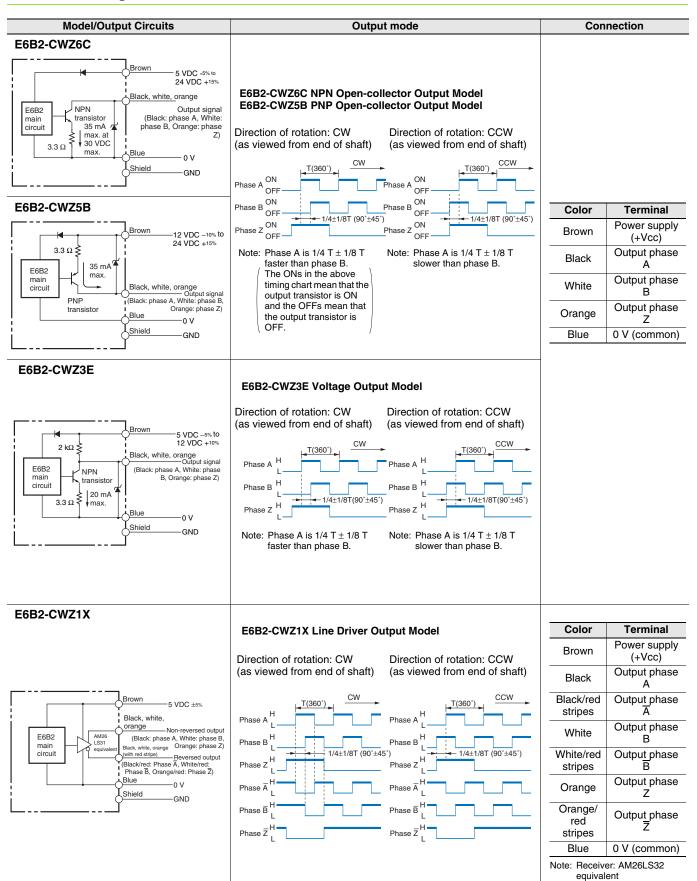

- Note: 1. The shielded cable outer core (shield) is not connected to the inner area or to the case.
 - 2. The phase A, phase B, and phase Z circuits are all identical.
 - 3. Normally, connect GND to 0 V or to an external ground.

Safety Precautions

Refer to Warranty and Limitations of Liability.

\wedge

WARNING

This product is not designed or rated for ensuring safety of persons either directly or indirectly. Do not use it for such purposes.



Precautions for Safe Use

Incorrect wiring may damage internal circuits.


Precautions for Correct Use

Do not use the Encoder under ambient conditions that exceed the ratings.

Mounting

Origin Indication

It is easy to adjust the position of phase Z with the origin indication function. The following illustration shows the relationship between phase Z and the origin. Set cut face D to the phase Z origin as shown in the illustration.



 Do not extend the length of the cable to more than 2 m. If the cable must be more than 2 m, use a Model with a Line-driver Output (max. length: 100 m).

Wiring

Spurious pulses may be generated when power is turned ON and OFF. Wait at least 0.1 s after turning ON the power to the Encoder before using the connected device, and stop using the connected device at least 0.1 s before turning OFF the power to the Encoder. Also, turn ON the power to the load only after turning ON the power to the Encoder.

(Unit: mm)


Dimensions


Tolerance class IT16 applies to dimensions in this datasheet unless otherwise specified.

Encoder

E6B2-C







Accessories (Order Separately)

Couplings Flanges

E69-C06B E69-FBA E69-FBA02

E69-C610B E69-C06M

Refer to Accessories for details.

Servo Mounting Bracket

E69-2

Read and Understand This Catalog

Please read and understand this catalog before purchasing the products. Please consult your OMRON representative if you have any questions or comments.

Warranty and Limitations of Liability

WARRANTY

OMRON's exclusive warranty is that the products are free from defects in materials and workmanship for a period of one year (or other period if specified) from date of sale by OMRON.

OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, REGARDING NON-INFRINGEMENT, MERCHANTABILITY, OR FITNESS FOR PARTICULAR PURPOSE OF THE PRODUCTS. ANY BUYER OR USER ACKNOWLEDGES THAT THE BUYER OR USER ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE. OMRON DISCLAIMS ALL OTHER WARRANTIES, EXPRESS OR IMPLIED.

LIMITATIONS OF LIABILITY

OMRON SHALL NOT BE RESPONSIBLE FOR SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED ON CONTRACT, WARRANTY, NEGLIGENCE, OR STRICT LIABILITY

In no event shall the responsibility of OMRON for any act exceed the individual price of the product on which liability is asserted.

IN NO EVENT SHALL OMRON BE RESPONSIBLE FOR WARRANTY, REPAIR, OR OTHER CLAIMS REGARDING THE PRODUCTS UNLESS OMRON'S ANALYSIS CONFIRMS THAT THE PRODUCTS WERE PROPERLY HANDLED, STORED, INSTALLED, AND MAINTAINED AND NOT SUBJECT TO CONTAMINATION, ABUSE, MISUSE, OR INAPPROPRIATE MODIFICATION OR REPAIR.

Application Considerations

SUITABILITY FOR USE

OMRON shall not be responsible for conformity with any standards, codes, or regulations that apply to the combination of products in the customer's application or use of the products.

At the customer's request, OMRON will provide applicable third party certification documents identifying ratings and limitations of use that apply to the products. This information by itself is not sufficient for a complete determination of the suitability of the products in combination with the end product, machine, system, or other application or use.

The following are some examples of applications for which particular attention must be given. This is not intended to be an exhaustive list of all possible uses of the products, nor is it intended to imply that the uses listed may be suitable for the products:

- · Outdoor use, uses involving potential chemical contamination or electrical interference, or conditions or uses not described in this catalog.
- Nuclear energy control systems, combustion systems, railroad systems, aviation systems, medical equipment, amusement machines, vehicles, safety equipment, and installations subject to separate industry or government regulations.
- Systems, machines, and equipment that could present a risk to life or property.

Please know and observe all prohibitions of use applicable to the products.

NEVER USE THE PRODUCTS FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCTS ARE PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

PROGRAMMABLE PRODUCTS

OMRON shall not be responsible for the user's programming of a programmable product, or any consequence thereof.

Disclaimers

CHANGE IN SPECIFICATIONS

Product specifications and accessories may be changed at any time based on improvements and other reasons.

It is our practice to change model numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the products may be changed without any notice. When in doubt, special model numbers may be assigned to fix or establish key specifications for your application on your request. Please consult with your OMRON representative at any time to confirm actual specifications of purchased products.

DIMENSIONS AND WEIGHTS

Dimensions and weights are nominal and are not to be used for manufacturing purposes, even when tolerances are shown.

PERFORMANCE DATA

Performance data given in this catalog is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of OMRON's test conditions, and the users must correlate it to actual application requirements. Actual performance is subject to the OMRON Warranty and Limitations of Liability.

ERRORS AND OMISSIONS

The information in this document has been carefully checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical, or proofreading errors, or omissions.

2010.8

In the interest of product improvement, specifications are subject to change without notice.



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Omron:

<u>E6B2CWZ1X600PR2</u> <u>E6B2CWZ3E100PR2M</u> <u>E6B2CWZ3E200PR2M</u> <u>E6B2CWZ3E500PR2M</u>

<u>E6B2CWZ6C200PR05M</u> <u>E6B2CWZ6C500PR05M</u> <u>E6B2CWZ1X1000PR05</u> <u>E6B2CWZ6C1000PR05</u> <u>E6B2-CWZ3E</u>

<u>500P/R 2M</u> <u>E6B2-CWZ3E 100P/R 2M</u> <u>E6B2-CWZ3E 200P/R 2M</u> <u>E6B2-CWZ1X-1000P/R 05</u> <u>E6B2-CWZ1X-600P/R 2</u>

<u>E6B2-CWZ6C-1000P/R 05</u>

ПОСТАВКА ЭЛЕКТРОННЫХ КОМПОНЕНТОВ

многоканальный

Общество с ограниченной ответственностью «МосЧип» ИНН 7719860671 / КПП 771901001 Адрес: 105318, г.Москва, ул.Щербаковская д.3, офис 1107

Данный компонент на территории Российской Федерации Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

http://moschip.ru/get-element

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г. Москва, ул. Щербаковская д. 3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru moschip.ru_6 moschip.ru 4 moschip.ru 9