

# ABC450 Series

## AC-DC Open Frame Power Supplies

The ABC450 Series of open-frame power supplies, with its wide universal 90-264 VAC input range and high power density, is available at 450 W of output power and a variety of single and multiple output voltages.

The high efficiency and high power density of the ABC family ensures minimal power loss in end-use equipment, thereby facilitating higher reliability, easier thermal management and meets regulatory approvals for environmentally-friendly end products.

These medical power supplies are ideal for monitoring, home health equipment as well as surgical devices.



### Key Features & Benefits

- 4 x 6.5 x 1.61 inches
- Universal AC Input
- 450 W (with airflow), 300 W (without airflow)
- Current Sharing Option
- Cover and Fan Options
- Peak Power Capability
- Low Standby Power
- Side Fan or Top Fan Mounting Option Product
- (-S or -T to be added to model number)
- Current Sharing Option Product (-I to be added to model number)
- ITE Safety Agency Approvals
- RoHS Compliant
- CE marked

### Applications

- Instrumentation
- Lighting
- Industrial Applications
- Test and Measurement
- Robotics
- Renewable Energy
- Data Communication
- Applied Computing



**bel** POWER  
SOLUTIONS &  
PROTECTION

a bel group

[belfuse.com/power-solutions](http://belfuse.com/power-solutions)

## 1. MODEL SELECTION

| MODEL        | OUTPUT VOLTAGE | MAX LOAD (CONVECTION) <sup>1,2,3</sup> | MAX LOAD (420 LFM) <sup>1,2,3</sup> | MINIMUM LOAD | RIPPLE & NOISE <sup>4</sup> |
|--------------|----------------|--|-------------------------------------|--------------|-----------------------------|
| ABC450-1T05G | 5 VDC          | 31.0 A                                 | 55.0 A                              | 0.0 A        | 2%                          |
| ABC450-1T12G | 12 VDC         | 20.83 A                                | 37.5 A                              | 0.0 A        | 2%                          |
| ABC450-1T15G | 15 VDC         | 16.66 A                                | 30.0 A                              | 0.0 A        | 2%                          |
| ABC450-1T24G | 24 VDC         | 12.30 A                                | 18.75 A                             | 0.0 A        | 2%                          |
| ABC450-1T30G | 30 VDC         | 10.0 A                                 | 15.0 A                              | 0.0 A        | 2%                          |
| ABC450-1T48G | 48 VDC         | 6.25 A                                 | 9.37 A                              | 0.0 A        | 2%                          |

## 2. INPUT SPECIFICATIONS

Specifications are for nominal input voltage, 25°C unless otherwise stated.

| PARAMETER           | DESCRIPTION / CONDITION                                 | SPECIFICATIONS                                   |
|---------------------|---|--|
| Input Voltage       | Universal   | 90-264 VAC / 120-390 VDC                         |
| Input Frequency     |   | 47 to 63 Hz                                      |
| Input Current       | 120 VAC:<br>230 VAC:                                    | 4.5 A max.<br>2.3 A max.                         |
| No Load Power       | 120 VAC:<br>230 VAC:                                    | 0.4 W<br>0.8 W                                   |
| Inrush Current      | 120 VAC:<br>230 VAC:                                    | 40 A max.<br>75 A max.                           |
| Leakage Current     | Earth Leakage Current<br>Touch Leakage Current          | 270 µA<br>45 µA @120 VAC / 63 Hz                 |
| Input Protection    | Dual fusing, in AC Line and AC Neutral                  | T8A / 250 V                                      |
| Power Factor        | 120 VAC<br>230 VAC                                      | 0.98<br>0.95                                     |
| Switching Frequency | PFC converter: Variable<br>Resonant converter: Variable | 45-160 kHz typical<br>35-250 kHz, 90 kHz typical |

<sup>1</sup> Combined output power of main output, fan supply and standby supply shall not exceed max. power rating

<sup>2</sup> Standby output voltage 5 V / 1.5 A (convection) / 2 A (420LFM) with tolerance including set point accuracy, line and load regulation is +/-10%. Ripple and noise is less than 5%.

<sup>3</sup> Fan supply output voltage 12 V / 500 mA with tolerance including set point accuracy, line and load regulation is +/-30% and needs min. 1% load on main output to be within regulation band. Ripple and noise is less than 10%.

<sup>4</sup> Ripple is peak to peak with 20 MHz bandwidth and 10 µF (Tantalum capacitor) in parallel with a 0.1 µF capacitor at rated line voltage and load ranges. Please contact factory/ sales representative for minimum load required for ripple to be within specification.

## 3. OUTPUT SPECIFICATIONS

| PARAMETER                   | DESCRIPTION / CONDITION   |                                       | SPECIFICATIONS            |
|-----------------------------|---|---------------------------------------|---------------------------|
| Output Power <sup>5</sup>   | 475 W for 24 V, 30 V & 500 W for 48 V model only for 5 seconds max. |                                       | 155 to 450 W              |
| Efficiency (Full Load)      | 120 VAC   | 24 V, 48 V, 30 V<br>12 V, 15 V<br>5 V | 88%<br>86%<br>83% typical |
|                             | 230 VAC   | 24 V, 48 V, 30 V                      | 90%                       |
|                             | Hold Up Time  | 120 / 230 VAC                         | 10 ms                     |
| Line Regulation             |   |                                       | +/-0.5%                   |
| Load Regulation             |   |                                       | +/-3%                     |
| Transient Response          | <10%, 50% to 100% load change, 50 Hz, 50% duty cycle, 0.1 A/μs      |                                       | Recovery time < 5 ms      |
| Rise Time                   |   |                                       | < 100 ms                  |
| Set Point Tolerance         |   |                                       | +/-1%                     |
| Voltage Adjustment          | V1  |                                       | ± 3 %                     |
| Over Voltage Protection     | Latch Type  |                                       | >114%                     |
| Over Current Protection     | Hic-Up type   |                                       | 120 to 150%               |
| Short Circuit Protection    | Short term, auto recovery   |                                       |                           |
| Over Temperature Protection | Automatic recovery  |                                       | 130°C primary heat sink   |
| Current Share               | Up to 2 supplies connected in parallel (optional)                   |                                       |                           |

## 4. SIGNALS

| PARAMETER         | DESCRIPTION / CONDITION   |
|-------------------|---|
| Power Good Signal | TTL signal goes high after main output is within regulation band, delay is 0.1 to 0.3 s |
| Remote Sense      | Compensates for 200 mV drop   |
| Remote on/off     | To turn on PSU short remote pin to ground   |

## 5. EMC SPECIFICATIONS

| PARAMETER                          | DESCRIPTION / CONDITION  | SPECIFICATION        |
|------------------------------------|--|----------------------|
| Conducted Emissions                | EN55032-B, CISPR22-B, FCC PART15-B   | Pass                 |
| Radiated Emissions                 | EN 55032 A;<br>with external core (King core K5B RC 25x12x15-M in input cable) | Pass<br>Level B      |
| Input Current Harmonics            | EN 61000-3-2   | Class D              |
| Voltage Fluctuation and Flicker    | EN 61000-3-3   | Pass                 |
| ESD Immunity                       | EN 61000-4-2   | Level 3, Criterion A |
| Radiated Field Immunity            | EN 61000-4-3   | Level 3, Criterion A |
| Electrical Fast Transient Immunity | EN 61000-4-4   | Level 3, Criterion A |
| Surge Immunity                     | EN 61000-4-5   | Level 3, Criterion A |
| Conducted Immunity                 | EN 61000-4-6   | Level 3, Criterion A |
| Magnetic Field Immunity            | EN 61000-4-8   | Level 3, Criterion A |
| Voltage Dips, Interruptions        | EN 61000-4-11  | Criterion A & B      |

<sup>5</sup> Derate output power linearly to 80% from 90 VAC to 80 VAC input.

## 6. ENVIRONMENTAL SPECIFICATIONS

| PARAMETER             | DESCRIPTION / CONDITION                     | SPECIFICATIONS                      |
|-----------------------|---|-------------------------------------|
| Operating Temperature | Refer to derating curve ( <i>Figure 1</i> ) | 0 to +70°C                          |
| Storage Temperature   |   | -40 to 85° C                        |
| Humidity              | Non Condensing                              | 95% HR                              |
| Altitude              | Operating:<br>Non-Operating:                | 10,000 ft.<br>40,000 ft.            |
| Cooling               | 5 V model                                   | Convection: 155 W<br>420 LFM: 275 W |
|                       | 12 V & 15 V models                          | Convection: 250 W<br>420 LFM: 450 W |
|                       | 24 V, 30 V & 48 V models                    | Convection: 300 W<br>420 LFM: 450 W |
| Reliability           | MTBF according to Telcordia -SR332-Issue 3  | 1.28 million hours                  |

## 7. SAFETY SPECIFICATIONS


| PARAMETER         | DESCRIPTION / CONDITION  | SPECIFICATION        |
|-------------------|--|----------------------|
| Isolation Voltage | Input to Output<br>Input to Earth  | 4242 VDC<br>2121 VDC |
| Safety Standards  | Approved to the latest edition of the following standards:<br>CSA/UL60950-1, EN60950-1 and IEC60950-1; Class1 SELV |                      |
| Agency Approvals  | Nemko, Nemko-CCL   |                      |
| CE mark           | Complies with LVD Directive  |                      |

## 8. CONNECTOR & PIN DESCRIPTION

| CONNECTOR            | PIN | DESCRIPTION / CONDITION   | MANUFACTURER / PN  |
|----------------------|-----|---|--|
| AC Input Connector   | J1  | Pin 1 AC line<br>Pin 3 AC neutral<br>Pin 5 Earth  | Tyco: 1-1123724-3<br>Mating: 1-1123722-5   |
| DC Output Connector  | J2  | Lug 1 +V1<br>Lug 2 RTN  | 6-32 inches Screw Pan HD<br>Mating: 16 AWG wire crimped to Ring Tongue Terminal AMP: 8-31886-1 |
| Signals <sup>6</sup> | J3  | Pin 1 NC<br>Pin 2 Power Fail<br>Pin 3 Power Good<br>Pin 4 DC Return<br>Pin 5 +5Vstby<br>Pin 6 +VE Remote Sense<br>Pin 7 -VE Remote Sense<br>Pin 8 CS<br>Pin 9 DC Return<br>Pin 10 Remote On/Off | Molex: 22-23-2081<br>Mating: 22-01-2087; Pins: 08-50-0113                                      |
| Fan                  | J4  | Pin 1 +VE<br>Pin 2 -VE  | Mating Connector: Molex 22-01-2025<br>Pins = 08-50-0113  |
| Earth <sup>7</sup>   | J5  |   | Molex: 19705-4301<br>Mating: 190030001   |

<sup>6</sup> PSU is supplied with J3, pin-9 and pin-10 shorted to enable main output without remote on/off feature

<sup>7</sup> The J5 (Earth) spade connector can be used for U-Channel option products only. When fan options are required the earth connection provided in the input AC connector should be used (Pin 5 – J1)

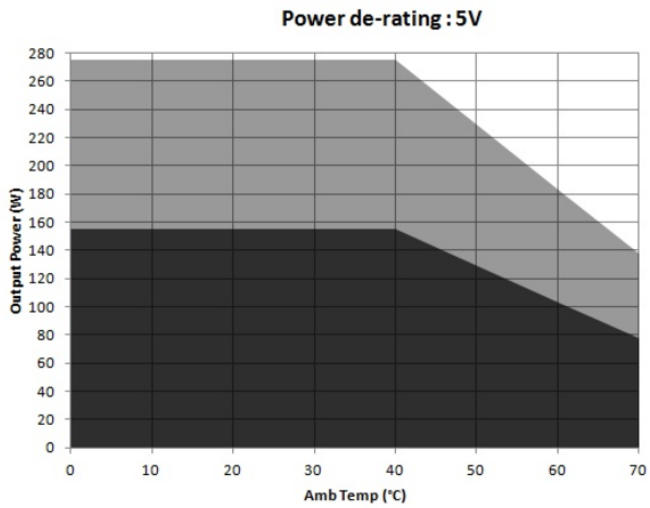


Convection load: 155 W up to 40 °C  
De-rate above 40 °C @ 1.67% per °C

Forced air cooled load: 275 W up to 40°C  
De-rate above 40 °C @ 1.67% per °C



Convection load: 250 W up to 40 °C  
De-rate above 40 °C @ 1.67% per °C

Forced air cooled load: 450 W up to 40°C  
De-rate above 40 °C @ 1.67% per °C

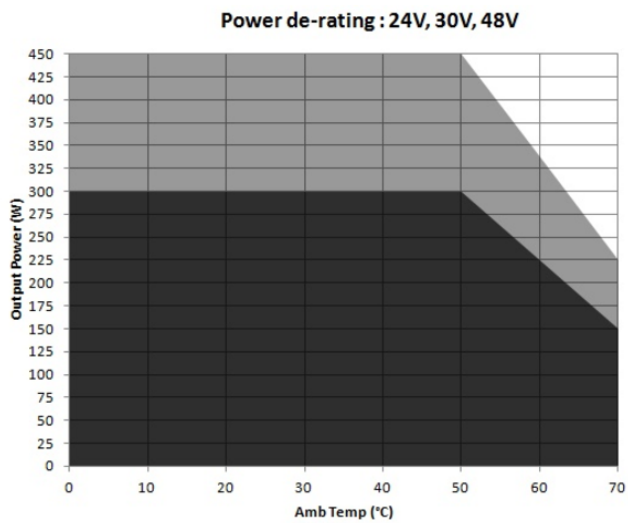

Convection load: 300 W up to 50 °C  
De-rate above 50 °C @ 2.5% per °C

Forced air cooled load: 450 W up to 50°C  
De-rate above 50 °C @ 2.5% per °C

Figure 1. Derating Curves



Asia-Pacific  
+86 755 298 85888

Europe, Middle East  
+353 61 225 977

North America  
+1 408 785 5200

9. MECHANICAL SPECIFICATIONS

| PARAMETER  | DESCRIPTION / CONDITION                        |
|------------|--|
| Weight     | 900 g (1.98 lbs)                               |
| Dimensions | 101.6 x 165.0 x 41.0 mm (4.0 x 6.5 x 1.6 inch) |

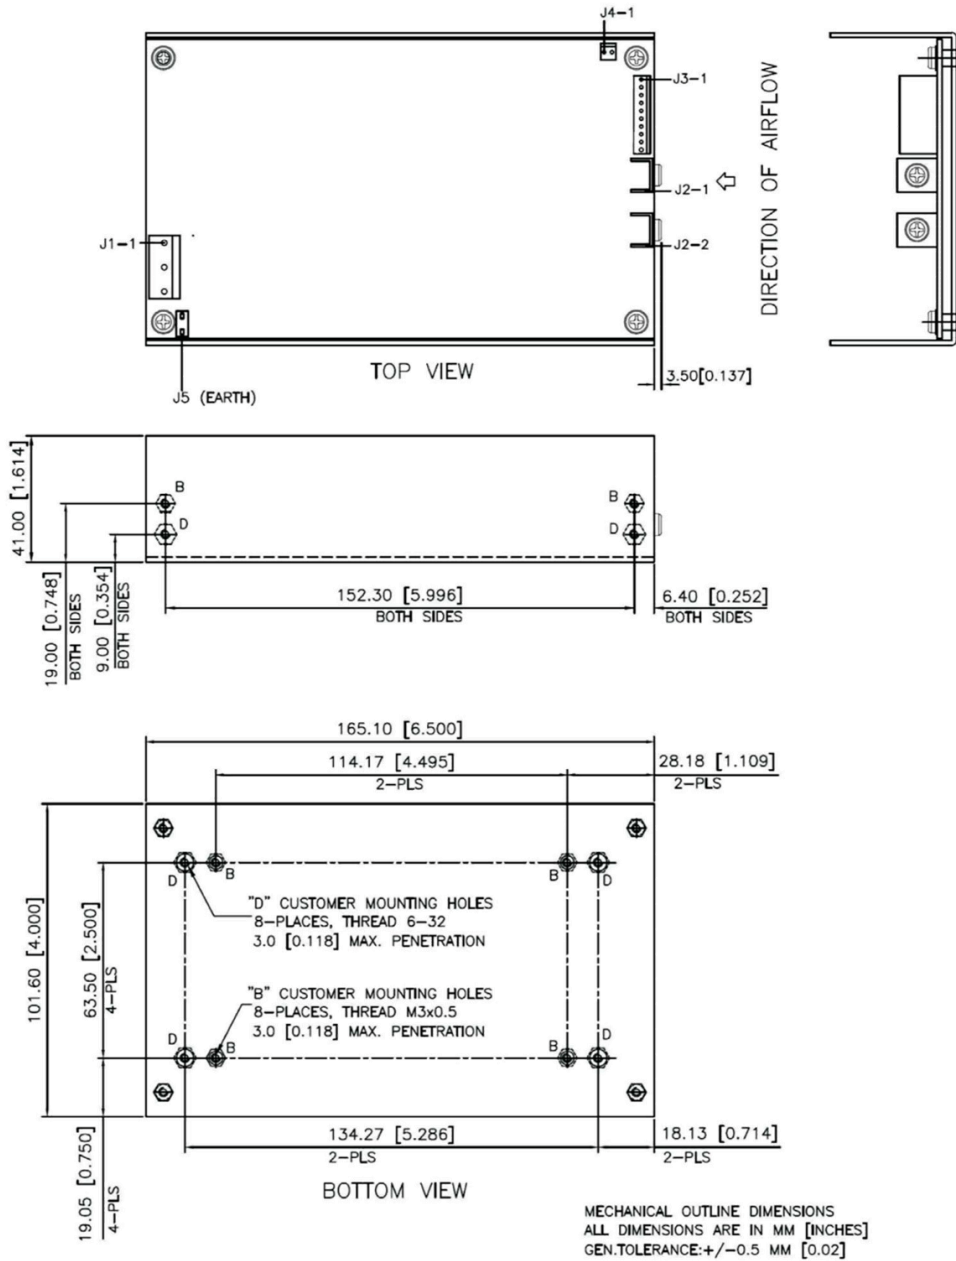


Figure 2. Mechanical Drawing (Without Fan Mounting)

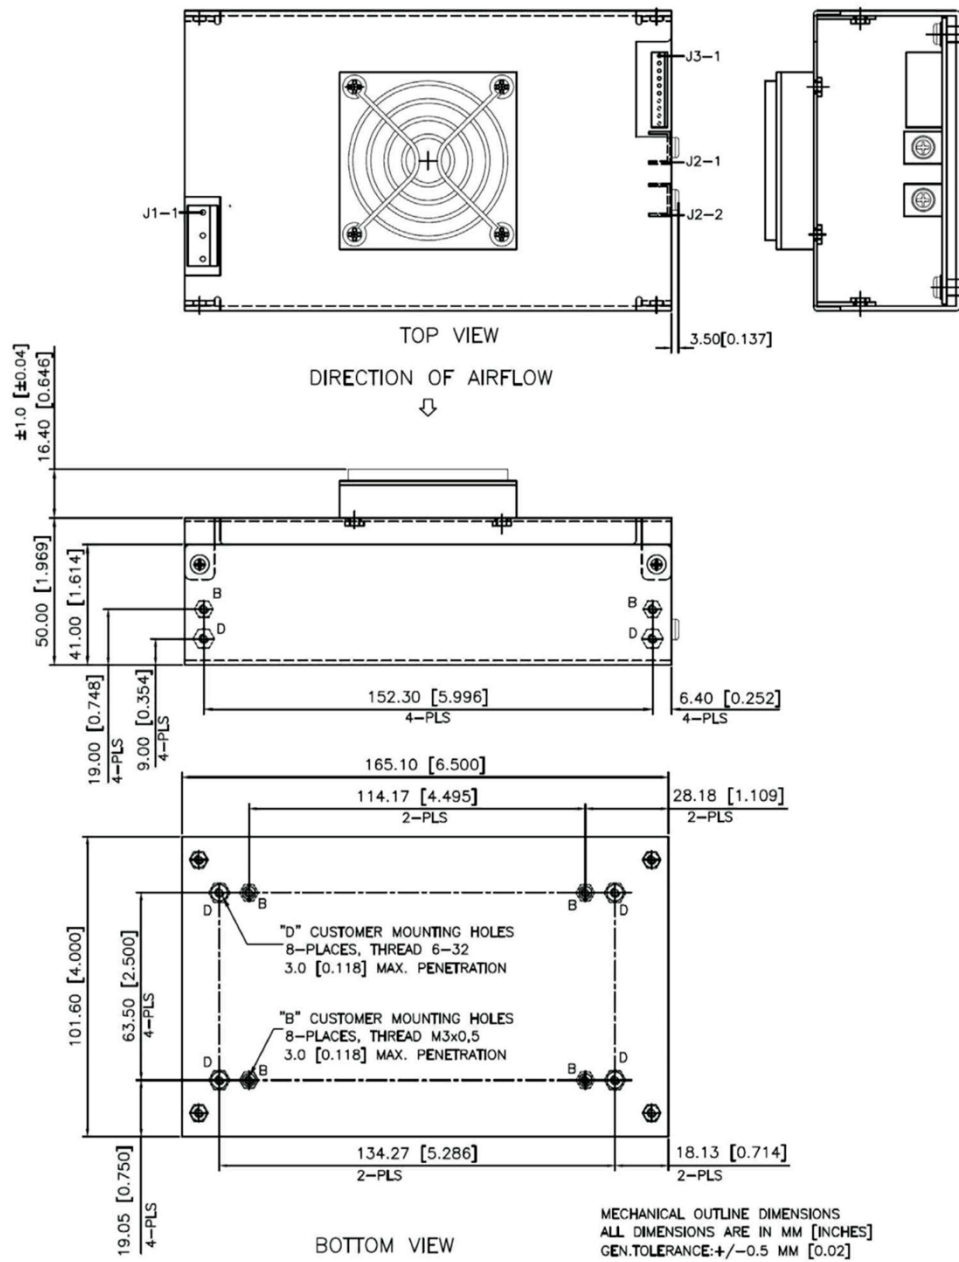


Figure 3 - Mechanical Drawing (With Top Fan Mounting)

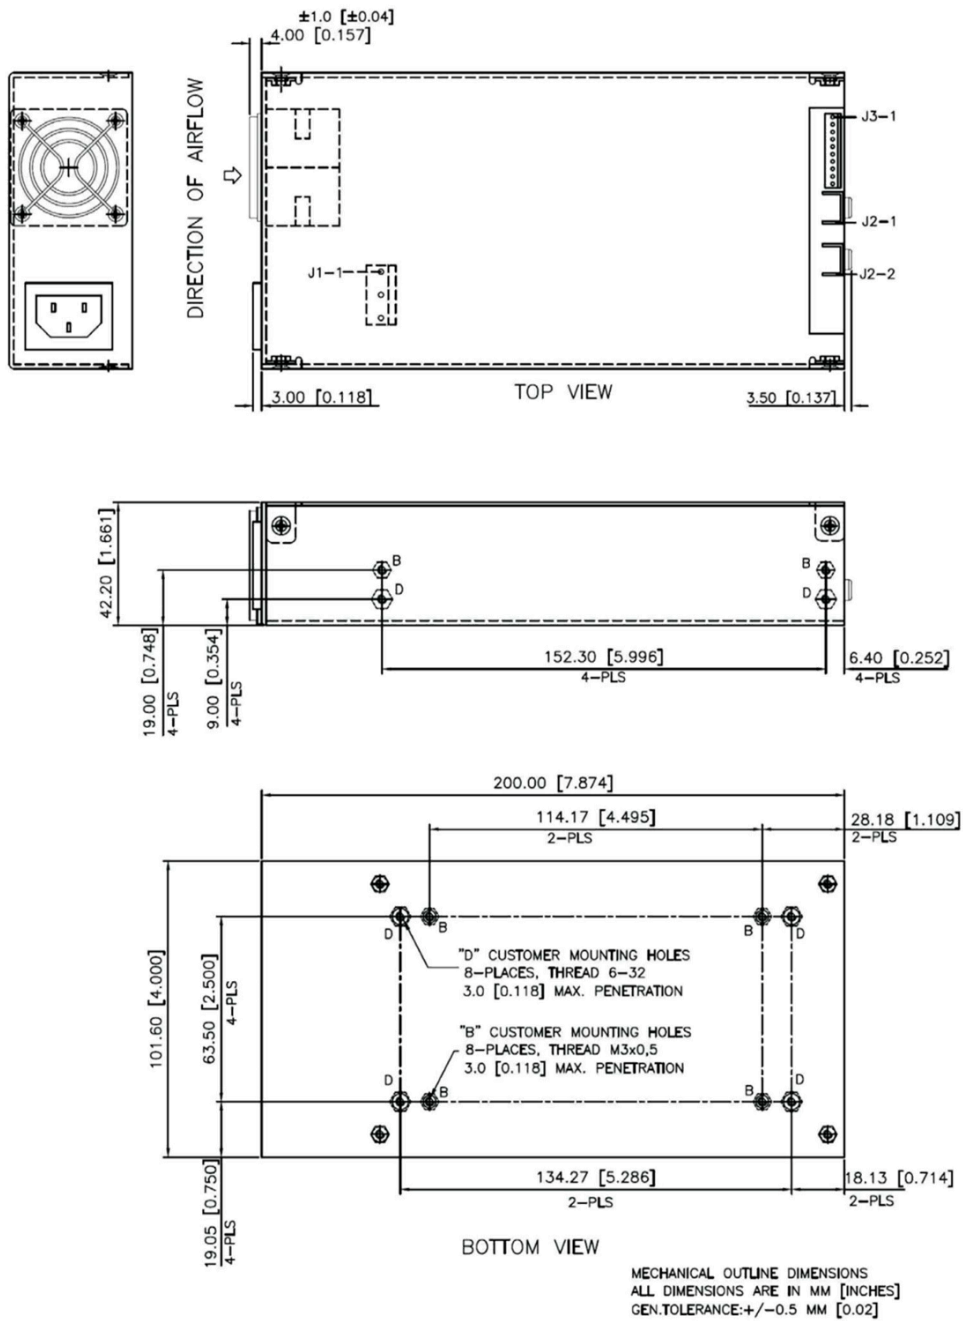


Figure 4 - Mechanical Drawing (With Side Fan Mounting)



## 10. INSTALLATION INSTRUCTION FOR CURRENT SHARING

During the installation and setup of parallel supplies in a system it is important that a single remote sense point be used for all the supplies.

The remote sense voltage between the supplies must be adjusted to within 2% to ensure the supplies are inside the 3% capture window.

If the supplies are not initially adjusted inside the capture window the supplies will not current share.


**NOTE:**

“CURRENT SHARING “ facility is inclusive with the unit only with ordering of the “ CURRENT SHARING “ option unit i.e. ABC450-1XXX-I or ABC450-1XXX-I.

**SET-UP PROCEDURE:**

- 1 Connect load cables to the outputs of each supply.
- 2 Connect the remote sense lines to the load in twisted style. (A common remote sense point must be used for all the supplies in parallel).
- 3 Connect all the “current share” pins on the J3 connector between the supplies.
- 4 Adjust remote sense voltage of each supply to within 1% of rated output voltage or readjust to required set point. (Adjustment to be done with all other parallel supplies off).
- 5 Current sharing between the supplies can be verified by monitoring the output current of each supply with a hall effect DC current probe. The supplies should share to within 10% of the total load current.
- 6 The current share circuit has a capture window voltage of +/- 3% of the rated output voltage. If the output remote sense voltage of one of the supplies is adjusted outside the 3% window the supplies will not current share.

**CURRENT SHARING BLOCK DIAGRAM**

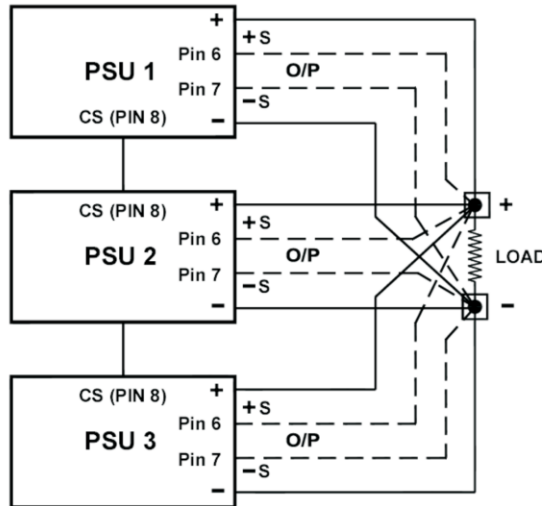

**For more information on these products consult: [tech.support@psbel.com](mailto:tech.support@psbel.com)**

**NUCLEAR AND MEDICAL APPLICATIONS** - Products are not designed or intended for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems.

**TECHNICAL REVISIONS** - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9