

#### Is Now Part of



## ON Semiconductor®

## To learn more about ON Semiconductor, please visit our website at www.onsemi.com

Please note: As part of the Fairchild Semiconductor integration, some of the Fairchild orderable part numbers will need to change in order to meet ON Semiconductor's system requirements. Since the ON Semiconductor product management systems do not have the ability to manage part nomenclature that utilizes an underscore (\_), the underscore (\_) in the Fairchild part numbers will be changed to a dash (-). This document may contain device numbers with an underscore (\_). Please check the ON Semiconductor website to verify the updated device numbers. The most current and up-to-date ordering information can be found at <a href="www.onsemi.com">www.onsemi.com</a>. Please email any questions regarding the system integration to Fairchild <a href="guestions@onsemi.com">guestions@onsemi.com</a>.

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any EDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officer

September 2016



FDMQ8205A

## **GreenBridge™ 2 Series of High-Efficiency Bridge Rectifiers**

#### **Features**

- Low Power Loss GreenBridge<sup>TM</sup> Replaces Diode Bridge
- Self Driving Circuitry for MOSFETs
- Low r<sub>DS(on)</sub> 100V Rated MOSFETs
- Maximizing Available Power and Voltage
- Eliminating Thermal Design Problems
- IEEE802.3at Compatible
  - Meet Detection and Classification Requirement
  - Work with 2 and 4-pair Architecture
  - Small Backfeed Voltage
- Compact MLP 4.5x5 Package

#### **Applications**

- Power over Ethernet (PoE) Power Device (PD)
  - IP Phones
  - Network Cameras
  - Wireless Access Points
  - Thin Clients
  - Microcell
  - Femtocell

#### **General Description**

FDMQ8205A is GreenBridge<sup>TM</sup>2 series of quad MOSFETs for a bridge application so that the input will be insensitive to the polarity of a power source coupled to the device. Many known bridge rectifier circuits can be configured using typical diodes. The conventional diode bridge has relatively high power loss that is undesirable in many applications. Especially, Power over Ethernet (PoE) Power Device (PD) application requires high-efficiency bridges because it should be operated with the limited power delivered from Power Source Equipment (PSE) which is classified by IEEE802.3at. FDMQ8205A is configured with low  $r_{\rm DS(on)}$  dual P-ch MOSFETs and N-ch MOSFETs so that it can reduce the power loss caused by the voltage drop, compared to the conventional diode bridge. FDMQ8205A enables the application to maximize the available power and voltage and to eliminate the thermal design problems in PoE PD applications.

FDMQ8205A GreenBridge<sup>TM</sup>2 is compatible with IEEE802.3at PoE standard by not compromising detection and classification requirement as well as small backfeed voltage.

#### **Package Marking and Ordering Information**

Dev	vice Marking	Device	Package	Reel Size	Tape Width	Quantity
FI	DMQ8205A	FDMQ8205A	MLP4.5x5	13 "	12 mm	3000 units

## **Typical Application**

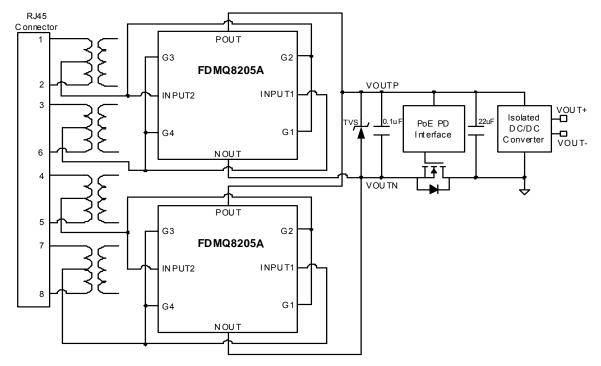


Figure 1. Typical Application of Power Device for Power over Ethernet

## **Block Diagram**


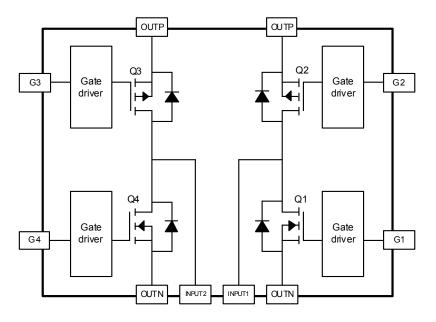


Figure 2. Block Diagram

## **Pin Configuration**

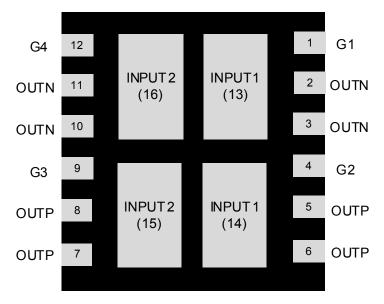

MLP 4.5x5

Figure 3. Pin Assignment (Bottom View)

## **Pin Descriptions**

Pin Number	Name	Description
1	G1	Gate of Q1 N-ch MOSFET
4	G2	Gate of Q2 P-ch MOSFET
9	G3	Gate of Q3 P-ch MOSFET
12	G4	Gate of Q4 N-ch MOSFET
13,14	INPUT1	Input1 of GreenBridge <sup>TM</sup>
15,16	INPUT2	Input2 of GreenBridge <sup>TM</sup>
2,3,11,10	OUTN	Negative Output of GreenBridge <sup>TM</sup>
5,6,7,8	OUTP	Positive Output of GreenBridge <sup>TM</sup>

#### Notes:

<sup>1.</sup> Show the feature that provides orientation or pin 1 location.


#### **Absolute Maximum Ratings**

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only.


			Min.	Max.	Units
INPUT1, INPUT2 to OUTN				100	V
OUTP to INPUT1, INPUT2				100	V
INPUT1 to INPUT2				100	V
INPUT2	to INPUT1			100	V
OUTP	OUTP to OUTN				V
G1, G2, G3			70	V	
OUTP to G1, G2, G3, G4				70	V
$V_{G\_TRANSIENT}$	Transient Gate Voltage, Pulse W Duty Cycle < 0.003	•		100	V
Continuous I <sub>INPLIT</sub> (GreenBridge <sup>TM</sup> Current,	T <sub>A</sub> = 25 °C	(Note 2a)		3.0	Α
Q1+Q3 or Q2+Q4)	T <sub>A</sub> = 25 °C	(Note 2b)		1.7	Α
Pulsed I <sub>INPUT</sub> (Q1+Q3 or Q2+Q4)	Pulse Width < 300 μs, Duty Cycle	e < 2% (Note 3)		58	Α
P. (Power Dissipation, O1+O2 or O2+O4)	T <sub>A</sub> = 25 °C	(Note 2a)		2.5	W
P <sub>D</sub> (Power Dissipation, Q1+Q3 or Q2+Q4)	T <sub>A</sub> = 25 °C	(Note 2b)		0.78	W
Max Junction Temperature				150	°C

#### Notes

2.  $R_{\theta JA}$  is determined with the device mounted on a 1 in<sup>2</sup> pad 2 oz copper pad on a 1.5 x 1.5 in. board of FR-4 material.  $R_{\theta JC}$  is guaranteed by design while  $R_{\theta CA}$  is determined by the user's board design.



 a. 50 °C/W when mounted on a 1 in<sup>2</sup> pad of 2 oz copper, the board designed Q1+Q3 or Q2+Q4.



b. 160 °C/W when mounted on a minimum pad of 2 oz copper, the board designed Q1+Q3 or Q2+Q4.

3. Pulse Id measured at td <= 300µs, refer to SOA graph for more details.

#### **Thermal Characteristics**

Symbol	Parameter	Min.	Тур.	Max.	Units
$R_{\theta JC}$	Thermal Resistance, Junction to Case		5.1		
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient (Note	2a)	50		°C/W
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient (Note	2b)	160		

## **Recommended Operating Conditions**

The Recommended Operating Conditions table defines the conditions for actual device operation. Recommended operating conditions are specified to ensure optimal performance. Fairchild does not recommend exceeding them or designing to Absolute Maximum Ratings.


Symbol	Parameter	Conditions	Min.	Max.	Units
V <sub>INPUT</sub>	Input Voltage of Bridge	INPUT1 to INPUT2 or INPUT2 to INPUT1		57	٧
V <sub>G</sub>	Gate Voltage of MOSFETs	G1, G4 to OUTN G2, G3 to OUTP		57	<b>&gt;</b>
I <sub>INPUT</sub>	Input Current of Bridge	Bridge Current through Q2 and Q4 or (Q3 and Q1)		1.7	Α
	Ambient Operation Temperature (T <sub>A</sub> )				°C
	Junction Operating Temperature (T <sub>J</sub> ) (Note 5)			125	°C

#### **Electrical Characteristics**

Unless otherwise noted:  $T_J = 25$  °C unless otherwise noted.


Symbol	Parameter	Conditions	Min.	Тур.	Max.	Units
V <sub>INPUT</sub>	Input Voltage of Bridge	At INPUT1 to INPUT2 or INPUT2 to INPUT1			57	V
V <sub>G</sub>	Gate Voltage of MOSFETs	At G1, G4 to OUTN and G2, G3 to OUTP			57	V
		Detection Mode 1.5 V <v<sub>INPUT=V<sub>G</sub>&lt;10.1V (Note 4)</v<sub>			5	μА
$I_{Q}$	Quiescent Current	Classification Mode 10.2 V <v<sub>INPUT=V<sub>G</sub>&lt;23.9 V (Note 4)</v<sub>			400	μА
		$ \begin{array}{llllllllllllllllllllllllllllllllllll$			3.2	mA
V <sub>TURN_ON</sub>	Turn-On Voltage of MOSFETs	Turn-On of MOSFETs while $V_G$ Increases (Note 4)	32		36	V
I <sub>LEAKAGE</sub>	Turn-Off Leakage Current	$V_{OUTP}$ =57 V, $V_{OUTN}$ =0 V $T_{J}$ = -40 °C to 85 °C (Note 4)			700	μА
$V_{BF}$	Backfeed Voltage	$V_{OUTP}$ =57 V, $V_{OUTN}$ =0 V, 100 kOhm between INPUT1 and INPUT2 $T_J$ = -40 °C to 85 °C (Note 4)			2.7	V
		V <sub>G</sub> =42 V, I <sub>INPUT</sub> =1.5 A, T <sub>A</sub> =25 °C		35	51	mΩ
	N-ch MOSFET	V <sub>G</sub> =48 V, I <sub>INPUT</sub> =1.5 A, T <sub>A</sub> =25 °C		29	44	mΩ
		V <sub>G</sub> =57 V, I <sub>INPUT</sub> =1.5 A, T <sub>A</sub> =25 °C		26	37	mΩ
r <sub>DS(on)</sub>		V <sub>G</sub> = -42 V, I <sub>INPUT</sub> = -1.5 A, T <sub>A</sub> =25 °C		95	147	mΩ
	P-ch MOSFET	V <sub>G</sub> = -48 V, I <sub>INPUT</sub> = -1.5 A, T <sub>A</sub> =25 °C		83	125	mΩ
Notes:		V <sub>G</sub> = -57 V, I <sub>INPUT</sub> = -1.5 A, T <sub>A</sub> =25 °C		76	107	mΩ

<sup>4.</sup> INPUT1 is connected to G3 and G4 and also INPUT2 is connected to G1 and G2 like below.

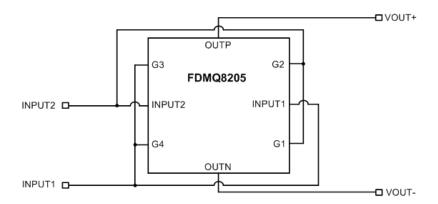

5. Backfeed Voltage can not be guaranteed for junction temperature in excess of 85 °C. See V<sub>BF</sub> in Electrical Characteristics Table.

## Typical Characteristics (Q1 or Q4 N-Channel) T<sub>J</sub> = 25°C unless otherwise noted.



10<sup>2</sup> V<sub>GS</sub> = 0 V T<sub>J</sub> = 25 °C T<sub>J</sub> = 25 °C T<sub>J</sub> = 55 °C

Figure 4. Normalized On Resistance vs. Junction Temperature

Figure 5. Source to Drain Diode Forward Voltage vs. Source Current





Figure 6. Gate Leakage Current vs. Gate to Source Voltage

## Typical Characteristics (Q2 or Q3 P-Channel) T<sub>J</sub> = 25 °C unless otherwise noted.



Is, REVERSE DRAIN CURRENT (A)  $V_{GS} = 0 V$ 10 1 T<sub>J</sub> = 150 °C 10<sup>-1</sup> 10<sup>-2</sup> 10<sup>-3</sup> T<sub>J</sub> = -55 °C 10<sup>-4</sup> 10<sup>-5</sup> 0.2 0.6 0.4 0.8 1.0 1.2 -V<sub>SD</sub>, BODY DIODE FORWARD VOLTAGE (V)

Figure 7. Normalized On Resistance vs. Junction Temperature

Figure 8. Source to Drain Diode Forward Voltage vs. Source Current





Figure 9. Gate Leakage Current vs. Gate to Source Voltage

#### Typical Characteristics (Q1 + Q3 or Q2 + Q4 In Serial) T<sub>.1</sub> = 25°C unless otherwise noted.






Figure 10. Forward Bias Safe Operating Area

Figure 11. Single Pulse Maximum Power Dissipation

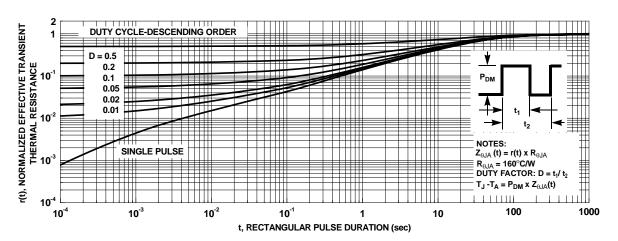


Figure 12. Junction-to-Ambient Transient Thermal Response Curve





Figure 13. Leakage vs. Output Voltage Curve

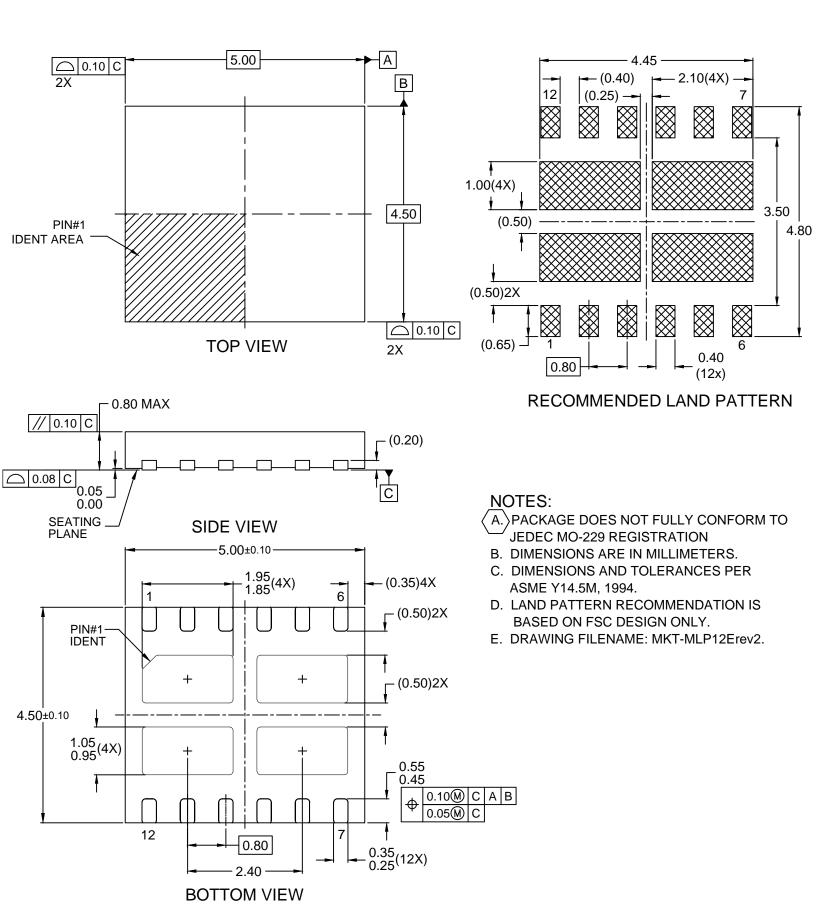

ON Semiconductor and in are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdt/Patent-Marking.pdf">www.onsemi.com/site/pdt/Patent-Marking.pdf</a>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and exp

#### **PUBLICATION ORDERING INFORMATION**

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800-282-9855 Toll Free USA/Canada
Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81-3-5817-1050

ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

ON Semiconductor: FDMQ8205A

### **ПОСТАВКА** ЭЛЕКТРОННЫХ КОМПОНЕНТОВ

Общество с ограниченной ответственностью «МосЧип» ИНН 7719860671 / КПП 771901001 Адрес: 105318, г.Москва, ул.Щербаковская д.3, офис 1107

# Данный компонент на территории Российской Федерации Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

#### http://moschip.ru/get-element

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

#### Офис по работе с юридическими лицами:

105318, г. Москва, ул. Щербаковская д. 3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru moschip.ru\_6 moschip.ru\_4 moschip.ru\_9