



## QUICKSWITCH® PRODUCTS 2.5V/3.3V 20-BIT HIGH BANDWIDTH BUS SWITCH

**IDTQS32XVH384**

### FEATURES:

- N channel FET switches with no parasitic diode to Vcc
  - Isolation under power-off conditions
  - No DC path to Vcc or GND
  - 5V tolerant in OFF and ON state
- 5V tolerant I/Os
- Low RON - 4Ω typical
- Flat RON characteristics over operating range
- Rail-to-rail switching 0 - 5V
- Bidirectional dataflow with near-zero delay: no added ground bounce
- Excellent RON matching between channels
- VCC operation: 2.3V to 3.6V
- High bandwidth - up to 500MHz
- LVTTTL-compatible control Inputs
- Undershoot Clamp Diodes on all switch and control Inputs
- Low I/O capacitance, 4pF typical
- Available in 48-pin QVSOP (S1) package

### APPLICATIONS:

- Hot-swapping
- 10/100 Base-T, Ethernet LAN switch
- Low distortion analog switch
- Replaces mechanical relay
- ATM 25/155 switching



### DESCRIPTION:

The QS32XVH384 HotSwitch is a high bandwidth, 20-bit bus switch. The QS32XVH384 has very low ON resistance, resulting in under 250ps propagation delay through the switch. Four banks of five switches are controlled by independent ( $\overline{xOE}$ ), LVTTTL compatible signals for bidirectional data flow with no added delay or ground bounce. In the ON state, the switches can pass signals up to 5V. In the OFF state, the switches offer very high impedance at the terminals.

The combination of near-zero propagation delay, high OFF impedance, and over-voltage tolerance makes the QS32XVH384 ideal for high performance communications applications.

The QS32XVH384 is characterized for operation from -40°C to +85°C.

### FUNCTIONAL BLOCK DIAGRAM

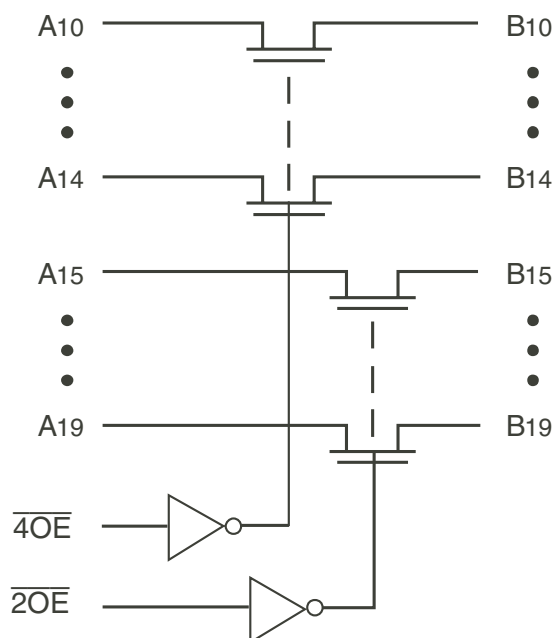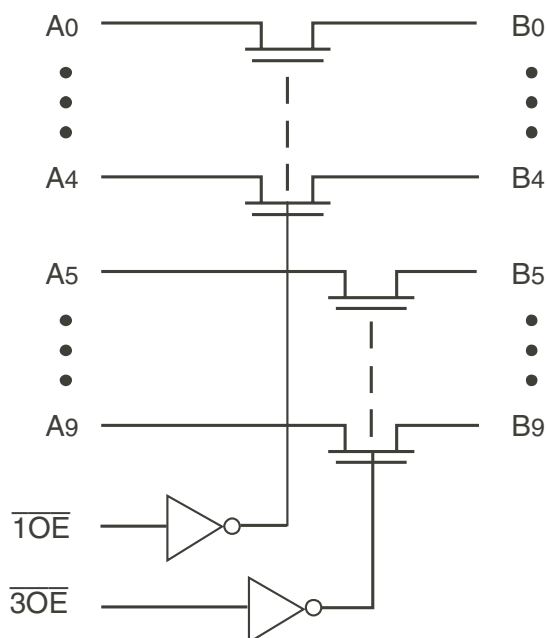


The IDT logo is a registered trademark of Integrated Device Technology, Inc.

**INDUSTRIAL TEMPERATURE RANGE**

**SEPTEMBER 2011**

## PIN CONFIGURATION

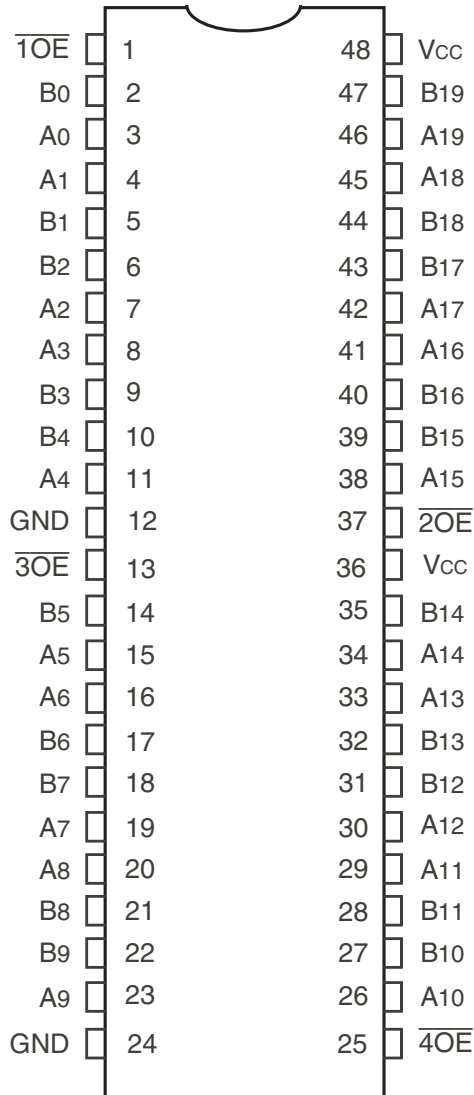

QVSOP  
TOP VIEW

## PIN DESCRIPTION

| Pin Names | I/O | Description            |
|-----------|-----|------------------------|
| A0 - A19  | I/O | Bus A                  |
| B0 - B19  | I/O | Bus B                  |
| 1OE       | I   | Output Enable, 0 - 4   |
| 2OE       | I   | Output Enable, 15 - 19 |
| 3OE       | I   | Output Enable, 5 - 9   |
| 4OE       | I   | Output Enable, 10 - 14 |

## ABSOLUTE MAXIMUM RATINGS<sup>(1)</sup>

| Symbol               | Description                               | Max          | Unit |
|----------------------|-------------------------------------------|--------------|------|
| VTERM <sup>(2)</sup> | Supply Voltage to Ground                  | -0.5 to +4.6 | V    |
| VTERM <sup>(3)</sup> | DC Switch Voltage Vs                      | -0.5 to +5.5 | V    |
| VTERM <sup>(3)</sup> | DC Input Voltage VIN                      | -0.5 to +5.5 | V    |
| VAC                  | AC Input Voltage (pulse width ≤20ns)      | -3           | V    |
| IOUT                 | DC Output Current (max. sink current/pin) | 120          | mA   |
| TSTG                 | Storage Temperature                       | -65 to +150  | °C   |

### NOTES:

- Stresses greater than those listed under ABSOLUTE MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.
- Vcc terminals.
- All terminals except Vcc.

## CAPACITANCE (TA = +25°C, F = 1MHz, VIN = 0V, VOUT = 0V)

| Symbol | Parameter <sup>(1)</sup>          | Typ. | Max. | Unit |
|--------|-----------------------------------|------|------|------|
| CIN    | Control Inputs                    | 3    | 5    | pF   |
| CI/O   | Quickswitch Channels (Switch OFF) | 4    | 6    | pF   |
| CI/O   | Quickswitch Channels (Switch ON)  | 8    | 12   | pF   |

### NOTE:

- This parameter is guaranteed but not production tested.

## FUNCTION TABLE<sup>(1)</sup>

| 1OE | 2OE | B0 - B4 | B15 - B19 | Function   |
|-----|-----|---------|-----------|------------|
| H   | H   | Z       | Z         | Disconnect |
| L   | H   | A0 - A4 | Z         | Connect    |
| H   | L   | Z       | A15 - A19 | Connect    |
| L   | L   | A0 - A4 | A15 - A19 | Connect    |
| 3OE | 4OE | B5 - B9 | B10 - B14 | Function   |
| H   | H   | Z       | Z         | Disconnect |
| L   | H   | A5 - A9 | Z         | Connect    |
| H   | L   | Z       | A10 - A14 | Connect    |
| L   | L   | A5 - A9 | A10 - A14 | Connect    |

### NOTE:

- H = HIGH Voltage Level  
L = LOW Voltage Level  
X = Don't care  
Z = High-Impedence

## DC ELECTRICAL CHARACTERISTICS OVER OPERATING RANGE

Following Conditions Apply Unless Otherwise Specified:


Industrial:  $T_A = -40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$ ,  $V_{CC} = 3.3\text{V} \pm 0.3\text{V}$

| Symbol           | Parameter                              | Test Conditions                                                    |                                |                        | Min. | Typ. <sup>(1)</sup> | Max. | Unit |
|------------------|----------------------------------------|--------------------------------------------------------------------|--------------------------------|------------------------|------|---------------------|------|------|
| V <sub>IH</sub>  | Input HIGH Voltage                     | Guaranteed Logic HIGH<br>for Control Inputs                        | V <sub>CC</sub> = 2.3V to 2.7V |                        | 1.7  | —                   | —    | V    |
|                  |                                        |                                                                    | V <sub>CC</sub> = 2.7V to 3.6V |                        | 2    | —                   | —    |      |
| V <sub>IL</sub>  | Input LOW Voltage                      | Guaranteed Logic LOW<br>for Control Inputs                         | V <sub>CC</sub> = 2.3V to 2.7V |                        | —    | —                   | 0.7  | V    |
|                  |                                        |                                                                    | V <sub>CC</sub> = 2.7V to 3.6V |                        | —    | —                   | 0.8  |      |
| I <sub>IN</sub>  | Input Leakage Current (Control Inputs) | 0V ≤ V <sub>IN</sub> ≤ V <sub>CC</sub>                             |                                |                        | —    | —                   | ±1   | μA   |
| I <sub>OZ</sub>  | Off-State Current (Hi-Z)               | 0V ≤ V <sub>OUT</sub> ≤ 5V, Switches OFF                           |                                |                        | —    | —                   | ±1   | μA   |
| I <sub>OFF</sub> | Data Input/Output Power Off Leakage    | V <sub>IN</sub> or V <sub>OUT</sub> 0V to 5V, V <sub>CC</sub> = 0V |                                |                        | —    | —                   | ±1   | μA   |
| R <sub>ON</sub>  | Switch ON Resistance                   | V <sub>CC</sub> = 2.3V<br>Typical at V <sub>CC</sub> = 2.5V        | V <sub>IN</sub> = 0V           | I <sub>ON</sub> = 30mA | —    | 6                   | 8    | Ω    |
|                  |                                        |                                                                    | V <sub>IN</sub> = 1.7V         | I <sub>ON</sub> = 15mA | —    | 7                   | 9    |      |
|                  |                                        | V <sub>CC</sub> = 3V                                               | V <sub>IN</sub> = 0V           | I <sub>ON</sub> = 30mA | —    | 4                   | 6    |      |
|                  |                                        |                                                                    | V <sub>IN</sub> = 2.4V         | I <sub>ON</sub> = 15mA | —    | 5                   | 8    |      |

### NOTE:

1. Typical values are at  $V_{CC} = 3.3\text{V}$  and  $T_A = 25^{\circ}\text{C}$ .

## TYPICAL ON RESISTANCE vs $V_{IN}$ AT $V_{CC} = 3.3\text{V}$

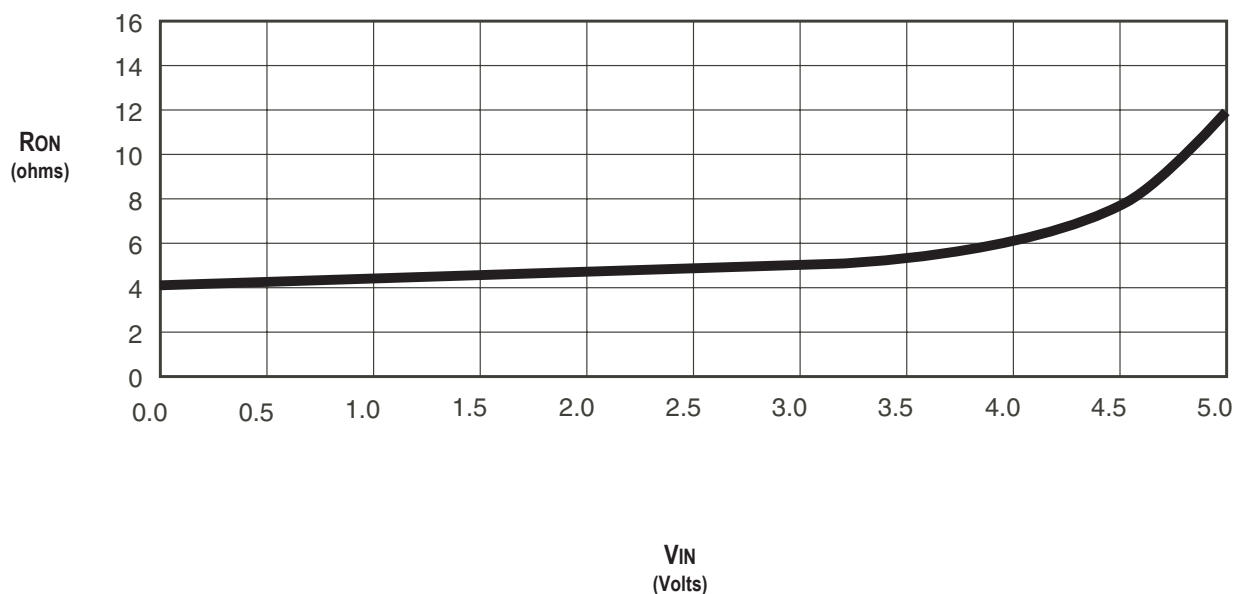


## POWER SUPPLY CHARACTERISTICS

| Symbol           | Parameter                                                                   | Test Conditions <sup>(1)</sup>                                                      | Min.                                                         | Typ. | Max. | Unit |
|------------------|-----------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------|------|------|------|
| I <sub>CCQ</sub> | Quiescent Power Supply Current                                              | V <sub>CC</sub> = Max., V <sub>IN</sub> = GND or V <sub>CC</sub> , f = 0            | —                                                            | 4    | 8    | mA   |
| ΔI <sub>CC</sub> | Power Supply Current <sup>(2,3)</sup> per Input HIGH                        | V <sub>CC</sub> = Max., V <sub>IN</sub> = 3V, f = 0 per Control Input               | —                                                            | —    | 30   | μA   |
| I <sub>CCD</sub> | Dynamic Power Supply Current per Output Enable Control Input <sup>(4)</sup> | V <sub>CC</sub> = 3.3V, A and B Pins Open, Control Inputs Toggling @ 50% Duty Cycle | See Typical I <sub>CCD</sub> vs Enable Frequency graph below |      |      |      |

### NOTES:

1. For conditions shown as Min. or Max., use the appropriate values specified under DC Electrical Characteristics.
2. Per input driven at the specified level. A and B pins do not contribute to ΔI<sub>CC</sub>.
3. This parameter is guaranteed but not tested.
4. This parameter represents the current required to switch internal capacitance at the specified frequency. The A and B inputs do not contribute to the Dynamic Power Supply Current. This parameter is guaranteed but not production tested.

## TYPICAL I<sub>CCD</sub> vs ENABLE FREQUENCY CURVE AT V<sub>CC</sub> = 3.3V

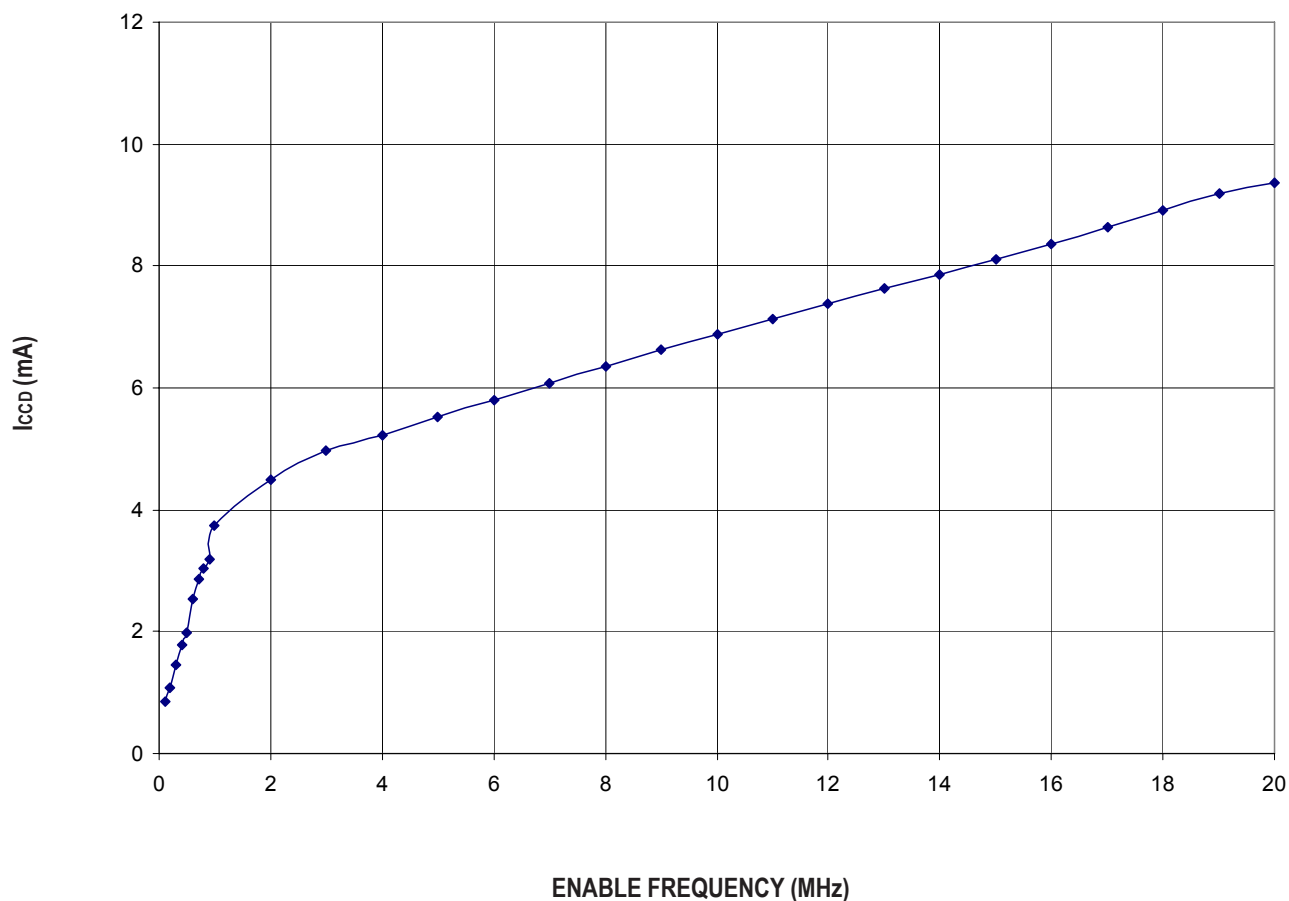

## SWITCHING CHARACTERISTICS OVER OPERATING RANGE


T<sub>A</sub> = -40°C to +85°C

| Symbol                               | Parameter                                                                          | V <sub>CC</sub> = 2.5 ± 0.2V <sup>(1)</sup> |      | V <sub>CC</sub> = 3.3 ± 0.3V <sup>(1)</sup> |      | Unit |
|--------------------------------------|------------------------------------------------------------------------------------|---------------------------------------------|------|---------------------------------------------|------|------|
|                                      |                                                                                    | Min. <sup>(4)</sup>                         | Max. | Min. <sup>(4)</sup>                         | Max. |      |
| t <sub>PLH</sub><br>t <sub>PHL</sub> | Data Propagation Delay <sup>(2,3)</sup><br>A <sub>x</sub> to/from B <sub>x</sub>   | —                                           | 0.2  | —                                           | 0.2  | ns   |
| t <sub>PZL</sub><br>t <sub>PZH</sub> | Switch Turn-On Delay<br>$\overline{\text{xOE}}$ to A <sub>x</sub> /B <sub>x</sub>  | 1.5                                         | 7.5  | 1.5                                         | 7.5  | ns   |
| t <sub>PLZ</sub><br>t <sub>PHZ</sub> | Switch Turn-Off Delay<br>$\overline{\text{xOE}}$ to A <sub>x</sub> /B <sub>x</sub> | 1.5                                         | 7    | 1.5                                         | 7    | ns   |
| f <sub>xOE</sub>                     | Operating Frequency -Enable <sup>(2,5)</sup>                                       | —                                           | 10   | —                                           | 20   | MHz  |


### NOTES:

1. See Test Conditions under TEST CIRCUITS AND WAVEFORMS.
2. This parameter is guaranteed but not production tested.
3. The bus switch contributes no propagation delay other than the RC delay of the ON resistance of the switch and the load capacitance. The time constant for the switch alone is of the order of 0.2ns at C<sub>L</sub> = 50pF. Since this time constant is much smaller than the rise and fall times of typical driving signals, it adds very little propagation delay to the system. Propagation delay of the bus switch, when used in a system, is determined by the driving circuit on the driving side of the switch and its interaction with the load on the driven side.
4. Minimums are guaranteed but not production tested.
5. Maximum toggle frequency for xOE control input (pass voltage > V<sub>CC</sub>, V<sub>IN</sub> = 5V, R<sub>LOAD</sub> ≥ 1MΩ, no C<sub>LOAD</sub>).


## SOME APPLICATIONS FOR HOTSWITCH PRODUCTS

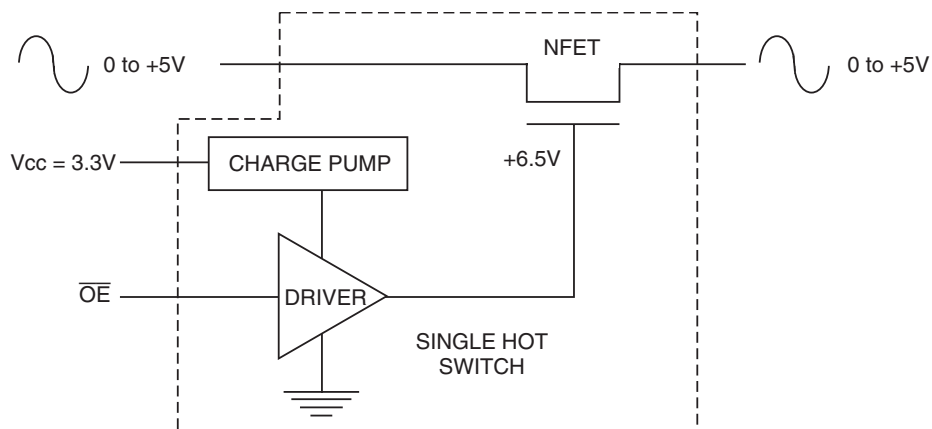

*Rail-to-Rail Switching*

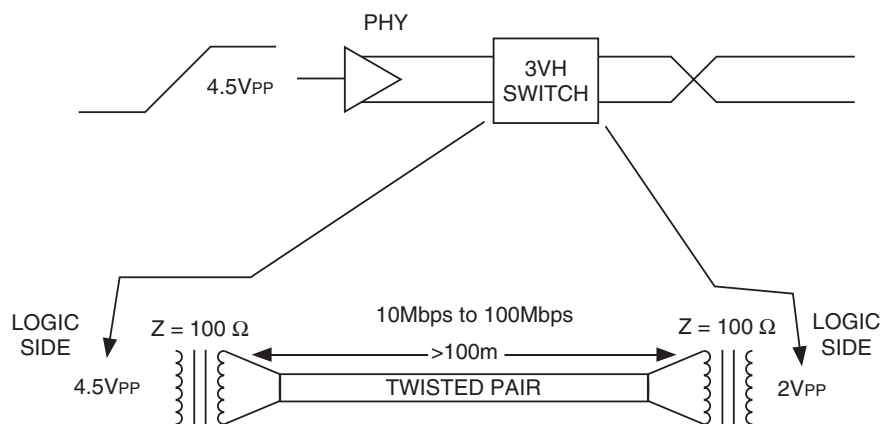

*Fast Ethernet Data Switching (LAN Switch)*

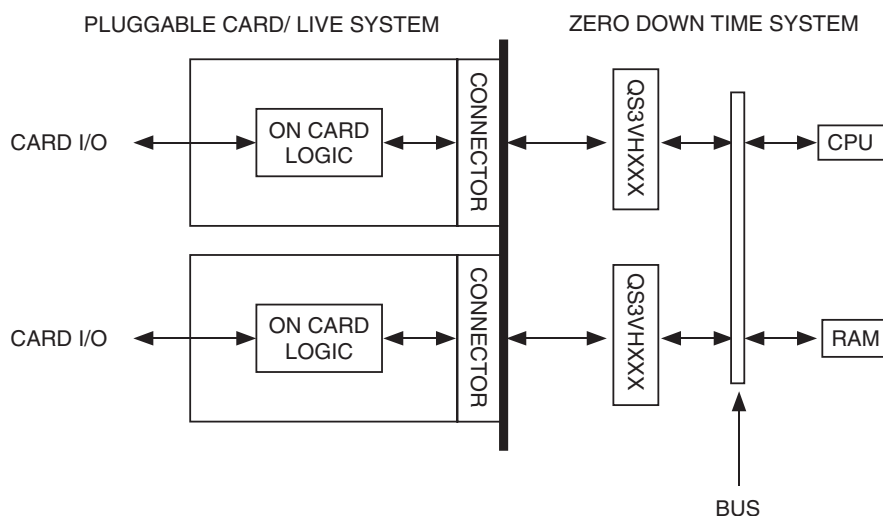


*Hot-Swapping*


## TEST CIRCUITS AND WAVEFORMS

### TEST CONDITIONS


| Symbol            | V <sub>CC</sub> <sup>(1)</sup> = 3.3V ± 0.3V | V <sub>CC</sub> <sup>(2)</sup> = 2.5V ± 0.2V | Unit |
|-------------------|----------------------------------------------|----------------------------------------------|------|
| V <sub>LOAD</sub> | 6                                            | 2 x V <sub>CC</sub>                          | V    |
| V <sub>IH</sub>   | 3                                            | V <sub>CC</sub>                              | V    |
| V <sub>T</sub>    | 1.5                                          | V <sub>CC</sub> /2                           | V    |
| V <sub>LZ</sub>   | 300                                          | 150                                          | mV   |
| V <sub>HZ</sub>   | 300                                          | 150                                          | mV   |
| C <sub>L</sub>    | 50                                           | 30                                           | pF   |

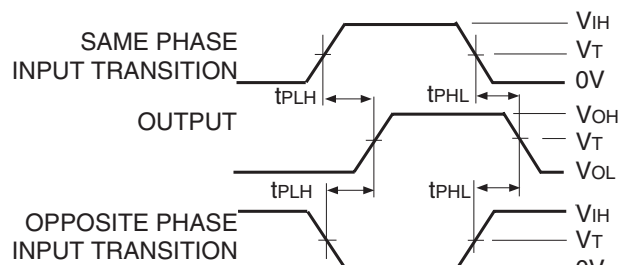

**Propagation Delay**

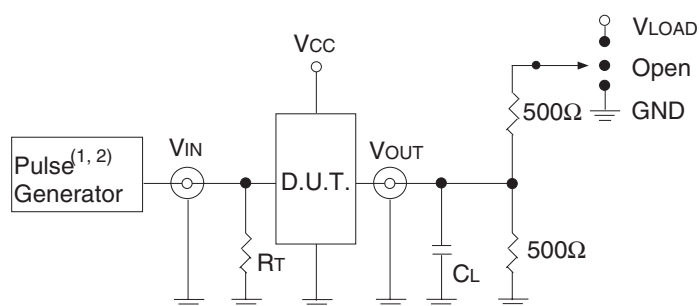

**Test Circuits for All Outputs**

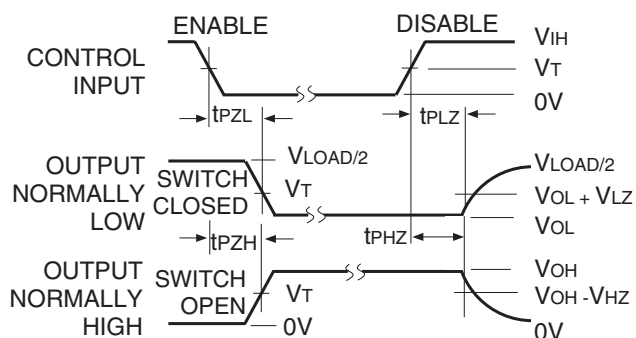

NOTE:

1. Diagram shown for input Control Enable-LOW and input Control Disable-HIGH.

**Enable and Disable Times**

### DEFINITIONS:

C<sub>L</sub> = Load capacitance: includes jig and probe capacitance.

R<sub>T</sub> = Termination resistance: should be equal to Z<sub>OUT</sub> of the Pulse Generator.

### NOTES:


1. Pulse Generator for All Pulses: Rate ≤ 10MHz; t<sub>r</sub> ≤ 2.5ns; t<sub>r</sub> ≤ 2.5ns.

2. Pulse Generator for All Pulses: Rate ≤ 10MHz; t<sub>r</sub> ≤ 2ns; t<sub>r</sub> ≤ 2ns.

## SWITCH POSITION

| Test                               | Switch            |
|------------------------------------|-------------------|
| t <sub>PLZ</sub> /t <sub>PZL</sub> | V <sub>LOAD</sub> |
| t <sub>PHZ</sub> /t <sub>PZH</sub> | GND               |
| t <sub>PD</sub>                    | Open              |

## ORDERING INFORMATION

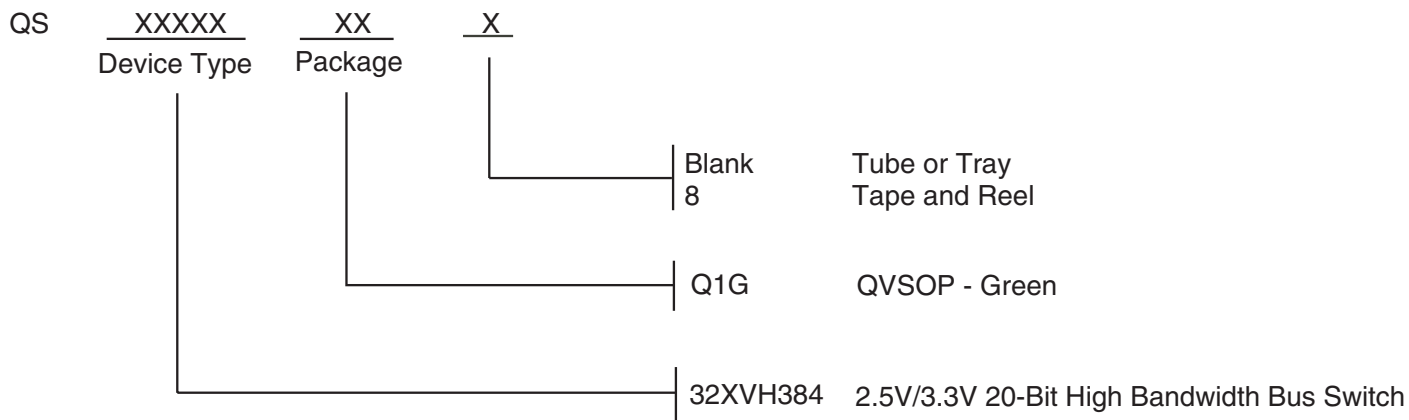

## Datasheet Document History

|          |          |                                                                                                                                                    |
|----------|----------|----------------------------------------------------------------------------------------------------------------------------------------------------|
| 09/01/08 | Pg. 4, 8 | Revise IccQ Typ. and Max. Add Green package, remove non green package version and updated the ordering information by removing the "IDT" notation. |
| 09/30/11 | Pg. 8    | Updated ordering information to include tube or tray and tape & reel.                                                                              |



**CORPORATE HEADQUARTERS**  
6024 Silver Creek Valley Road  
San Jose, CA 95138

**for SALES:**  
800-345-7015 or 408-284-8200  
fax: 408-284-2775  
www.idt.com

**for Tech Support:**  
logichelp@idt.com

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9