LED Driver
LDU05/07/14 Series

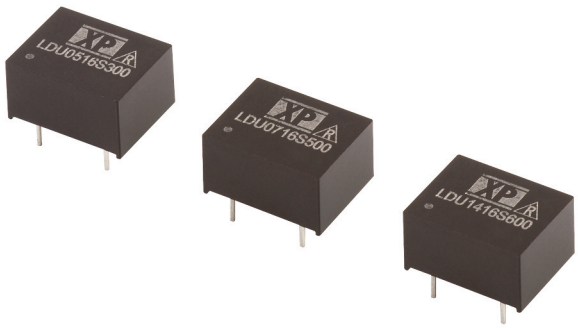

- Constant Current Output
- LED Drive Current up to 1000 mA
- LED Strings from 2 V to 14 V
- PWM & Analog Dimming Control
- High Efficiency – up to 93%
- Open or Short Circuit LED Protection
- 3 Year Warranty

Specification

Input

Input Voltage	• 7-16 VDC
Input Filter	• Capacitor
Input Surge	• 20 VDC for 0.5 s

Output

Output Voltage	• See tables (Vin must be at least 2 V greater than Vout)
Output Current	• See tables
Output Current Trim	• 25-100%
Output Current Accuracy	• See tables
Ripple & Noise	• See tables, measured with 20 MHz bandwidth
Short Circuit Protection	• Current is limited to the rated output
Temperature Coefficient	• ±0.03%/°C max
Remote On/Off	• On = 0.3-1.25 V or open circuit Off = ≤0.15 V (applied to control pin) Quiescent input current is 25 µA max,
Remote On/Off Signal Current	• 1 mA max

Dimming

PWM

Output Current Range	• 25% to 100%
Operating Frequency	• 1 kHz max
On Time	• 200 ns min
Off Time	• 200 ns min
Amplitude	• 1.25 V max

DC Voltage Control

Output Current Range	• 25% to 100%
Control Input	• 0.3 to 1.25 V max

Variable Resistor

Output Current Range	• 25% to 100%

General

Efficiency	• See tables
Switching Frequency	• LDU05: 60-300 kHz variable LDU07: 120-350 kHz variable LDU14: 90-400 kHz variable
MTBF	• >3.3 MHrs to MIL-HDBK-217F at 25 °C, GB

Environmental

Operating Temperature	• -40 °C to +85 °C except LDU14 1000 mA unit: -40 °C to +70 °C,
Storage Temperature	• -40 °C to +125 °C
Humidity	• Up to 95%, non-condensing
Thermal Impedance	• 35 °C/W model dependant

EMC

Emissions	• EN55022 class B conducted & radiated with external components - see application notes
ESD Immunity	• EN61000-4-2, level 2 Perf Criteria A
Radiated Immunity	• EN61000-4-3, level 2 Perf Criteria A
EFT/Burst	• EN61000-4-4, level 2 Perf Criteria A
Surge	• EN61000-4-5, level 2 Perf Criteria A
Conducted Immunity	• EN61000-4-6, level 2 Perf Criteria A

Models and Ratings

With Dimming Control

Output Power	Input Voltage Range	Output Voltage	Output Ripple & Noise	Output Current	Output Current Accuracy	Efficiency	Model Number
4.2 W	7-16 V	2-14 V	120 mV	300 mA	±5%	93%	LDU0516S300
4.9 W	7-16 V	2-14 V	150 mV	350 mA	±6%	93%	LDU0516S350
7.0 W	7-16 V	2-14 V	200 mV	500 mA	±7%	93%	LDU0716S500
8.4 W	7-16 V	2-14 V	200 mV	600 mA	±7%	93%	LDU1416S600
9.8 W	7-16 V	2-14 V	250 mV	700 mA	±7%	93%	LDU1416S700
14.0 W	7-16 V	2-14 V	250 mV	1000 mA	±8%	93%	LDU1416S1000

Mechanical Details

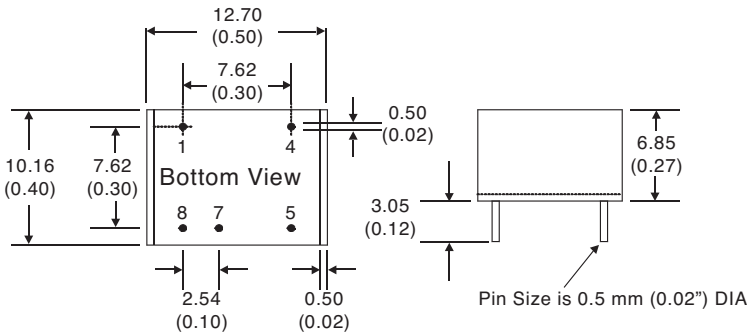

Pin Connections		
1	+V Input	+DC supply
4	+V Output	LED anode connection
5	-V Output	LED cathode connection
7	V Adj	Dimming Control
8	-V Input	-DC supply

Notes

1. All dimensions are in inches (mm)
2. Weight: 0.003 lbs (1.8 g) approx.
3. Pin diameter: 0.02±0.002 (0.5±0.05)
4. Pin pitch tolerance: ±0.014 (±0.35)
5. Case tolerance: ±0.02 (±0.5)

Application Notes

Output Current Adjustment by Variable Resistor

By connecting a variable resistor between Control and GND, simple dimming can be achieved. Capacitor C is optional for HF noise rejection, recommended value is 0.22 µF.

The output current can be determined using the equation: $Iout = \frac{\text{Rated Max I} \times R}{(R + 200\ k)}$

Where the value of R is between 0 and 2 MΩ, the maximum adjustment range of output current is 25% to 90% (For Vin-Vout <20 VDC)



Shorting out the Control pin to GND will turn the output off.

Output Current Adjustment by DC Voltage

Control Voltage Range: 0.3 V to 1.25 VDC

The output current is given by: $Iout\ nom = \text{Rated Max I} \times \frac{\text{Control Voltage}}{1.25}$

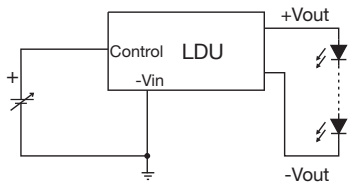

A Control Voltage lower than 0.15 V will turn the output off

Output Current Adjustment by PWM

A Pulse Width Modulated (PWM) signal with duty cycle DPWM can be applied to the control pin.

The output current can be determined using the equation : Iout = Rated Max I x Dpwm

Dpwm = PWM duty cycle

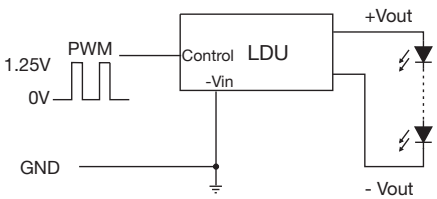

Input Filter to meet Class B Conducted Emissions

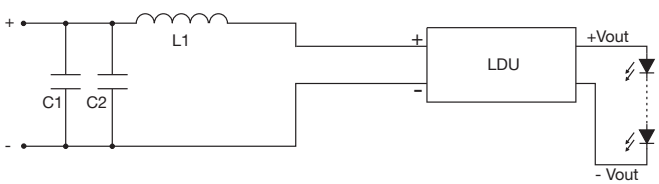

C1	10 µF
C2	4.7 µF
L1	68 µH

Общество с ограниченной ответственностью «МосЧип» ИНН 7719860671 / КПП 771901001
Адрес: 105318, г.Москва, ул.Щербаковская д.3, офис 1107

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

http://moschip.ru/get-element

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:
moschip.ru
moschip.ru_4
moschip.ru_6
moschip.ru_9