
Standard Product Specifications



Features

Package 1608 Flat lens type, water clear resin	
Product features • Outer dimension 1.6 x 0.8 x 0.8mm (L x W x H) • Lead-free soldering compatible • RoHS compliant	

Recommended Applications

*Amusement machine, Home appliances, OA/FA use, Various indicators, etc.


Page: 1 2017.9.29



Outline Dimensions

FY1101C-M-TR


 $\begin{array}{lll} \text{Unit} & : mm \\ \text{Weight} & : 1.8 \text{mg} \\ \text{Tolerance} & : \pm 0.1 \end{array}$

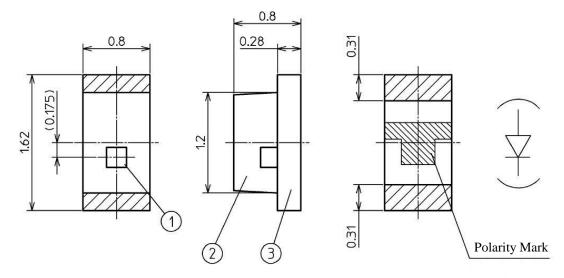

NO.	PART NAME	MATERIAL	QTY.
1	LED Die	AlGaInP	1
2	Lens	Epoxy Resin	1
3	Substrate	Glass Fabrics	1

Recommended Pad

Unit: mm



Specifications

FY1101C-M-TR

[Absolute Maximum Ratings]

(Ta=25°C)

ITEM	SYMBOL	MAXIMUM RATINGS	UNITS
Power Dissipation	Pd	81	mW
Forward Current	ĬF	30	mA
Repetitive Peak Forward Current "Pulse width ≤ 1ms, Duty ≤ 1/10"	Ifrm	100	mA
If Derate Linearly from "25°C"	$\Delta { m I}$ F	0.43	mA/°C
IFRM Derate Linearly from "25°C"	ΔI frm	1.00	mA/ ℃
Reverse Voltage	VR	5	V
Operating Temperature	Topr	-40 ~ +85	$^{\circ}\! \mathbb{C}$
Storage Temperature	Tstg	-40 ~ +100	$^{\circ}\! \mathbb{C}$
Soldering Temperature "Reflow Soldering"	Tsld	260	$^{\circ}\! \mathbb{C}$

Note

Note

Please refer to page 6, Soldering conditions.

【 Electro and Optical Characteristics 】

(Ta=25°C)

ITEM	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNITS
Forward Voltage	VF	$I_F = 20 \text{mA}$	-	1.9	2.4	V
Reverse Current	Ir	$V_R = 5V$	-	-	100	μΑ
Luminous Intensity	Iv	$I_F = 20 \text{mA}$	35	65	200	mcd
Peak Wavelength	$\lambda_{ m p}$	$I_F = 20 \text{mA}$	1	592	1	nm
Dominant Wavelength	λd	$I_F = 20 \text{mA}$	581.5	590	597.5	nm
Spectral Line Half Width	Δλ	$I_F = 20 \text{mA}$	-	15	-	nm



Specifications

【 Sorting For Luminous Intensity and Dominant Wavelength 】

LED's shall be sorted out into the following ranks of Luminous Intensity and Dominant Wavelength.

Luminous Intensity (Iv) Rank


Dominant Wavelength (λd) Rank

Rank	I _V (mcd)		Conditions
Kank	MIN.	MAX.	Conditions
В	35	70	
С	50	100	$I_F=20mA$
D	70	140	I_F =20mA Ta=25°C
Е	100	200	

Domlo	λd (nm)		Conditions
Rank	MIN.	MAX.	Conditions
A	581.5	585.0	
В	584.0	587.5	
С	586.5	590.0	$I_F=20mA$
D	589.0	592.5	Ta=25℃
Е	591.5	595.0	
F	594.0	597.5	


Notes: Sorting Tolerance: ±10% (Luminous Intensity)

FY1101C-M-TR

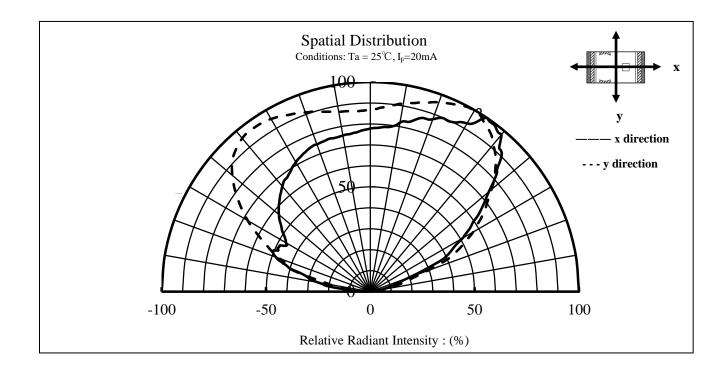

Soldering conditions

1. Reflow Soldering

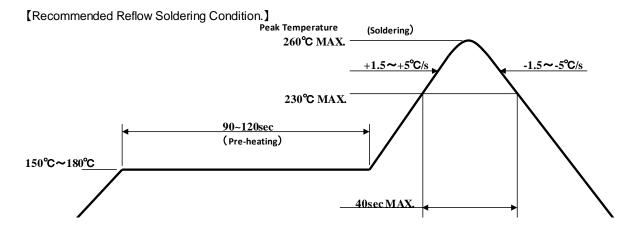

- 1. The above temp. profile shall be at the surface of LED resin.
- 2. The number of reflow process shall be 2 time MAX. If second reflow process would be performed, intervals between first and second process shall be as short as possible to prevent absorption of moisture to resin of LED. Cooling process to normal temp. shall be required between first and second reflow process.
- 3. Temp. fluctuation to LED at pre-heat process shall be minimized.

2. Manual Soldering (Soldering iron)

Temperature of Iron Tip	350°CMAX.
Soldering Duration, Time	3sec.MAX.,1 time

^{*} The number of manual soldering process shall be 1 time.

3. Other Caution

- 1. As manual soldering, please heat the solder pad, should not contact a tip of iron to a product (especially resin).
- 2. Heat or UV(or both) curing resin shall used for preliminary fixing. Curing condition temp.: 150 °C MAX., time: 120s MAX.
- 3. After soldering, any mechanical force or any excess vibration shall not be accepted to apply during cooling process to normal temp.

Handling Precaution

1. Cleaning

1. Special care shall be taken when applying the chemicals listed below for cleaning because certain chemicals may damage the surface of lens or care and cause discoloration.

Cleaning agents	Recommended / Not recommended
Isopropyl alcohol	√Recommended
Ethyl alcohol	√Recommended
Pure water	√Recommended
Trichloroethylene	x Not recommended
Chlorothene	x Not recommended
Acetone	x Not recommended
Thinner	x Not recommended

- * Dipping time is 3minutes MAX. (In normal temp.)
- * It can be cleaned on the next4 conditions, about pure water.
- Effect of ultrasonic cleaning on the LED resin body differs depending on such factors as the oscillator
 output, size of P.C.B. and LED mounting method. So the use of ultrasonic cleaning is strongly
 recommended after confirming that there is no problem.
- 3. When using Freon equivalent solvent, discoloration on the LED surface may be caused by one of the first confirming that there is no problem.
 - Freon substitute detergent
 - •Clean through 750H
 - •Pine alpha ST-100S
- 4. In the case of water-washing, ensure to use pure water (not city water) and, immediately after the washing is over, apply forced drying to remove all the moisture from the LED.

2. Warrant period

1. Within 6 month by following conditions. Un-opened, $+5 \sim +30^{\circ}\text{C}/70\%$ MAX.

3. Handling after opened

In case of no-using promptly or on the way to using, LEDs should be restored following conditions and the bag should be fastened the zip lock to prevent absorption of moisture to resin of LEDs.
 +5~+30°C/ 70% MAX.

Unpacked LEDs should be stored under the following conditions.
 LEDs must be soldered on board within 72h whether they are restored in the bag or not.

+5**~**+30°C/ 70% MAX.

3. In any case **over 72h has past after opening** the bag or the indicator color of the desiccant has changed(Blue→Pink), baking should be performed under the following conditions.

 $+60\pm5^{\circ}C$, $10\sim12$ hours




Handling Precaution

FY1101C-M-TR


[Other Precautions]

- 1. Stanley LED Lamps have semiconductor characteristics and are designed to ensure high reliability. However, the performance may vary depending on usage conditions
- 2. Absolute Maximum Ratings are set to prevent LED lamps from failing due to excess stress(temperature, current, voltage, etc.). Usage conditions must not exceed the ratings for a moment, nor do reach one item of absolute maximum ratings simultaneously.
- 3. In order to ensure high reliability from LED Lamps, variable factors that arise in actual usage conditions should be taken into account for designing. (Derating of TYP., MAX Forward Voltage, etc.)
- 4. Please insert protective resistors into the circuit in order to stabilize LED operation and to prevent the device from igniting due to excess current.
- 5. Please check the actual performance in the assembly because the Specification Sheets are described for LED device only.
- 6. Please refrain from looking directly at the light source of LED at high output, as it may harm your vision.
- 7. The products are designed to operate without failure in recommended usage conditions. However, please take the necessary precautions to prevent fire, injury, and other damages should any malfunction or failure arise.
- 8. The products are manufactured to be used for ordinary electronic equipment. Please contact our sales staff beforehand when exceptional quality and reliability are required, and the failure or malfunction of the products might directly jeopardize life or health (such as for airplanes, aerospace, transport equipment, medical applications, nuclear reactor control systems and so on).
- 9. When there is a process of supersonic wave welding etc. after mounting the product, there is a possibility of affecting on the reliability of junction part in package (junction part of die bonding and wire bonding). Please make sure there is no problem before using.
- 10. The formal specification sheets shall be valid only by exchange of documents signed by both parties.

Packaging Specifications

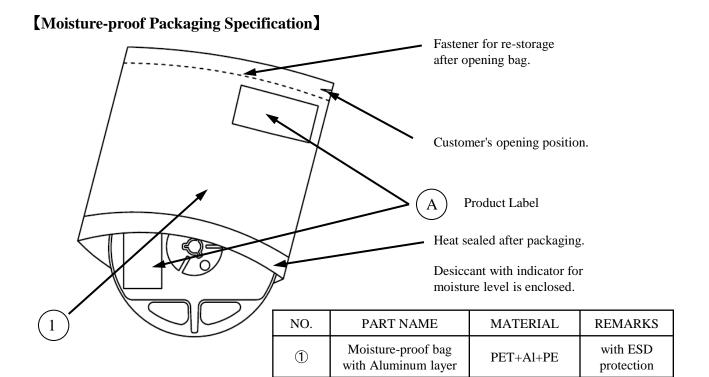

Flow Chart-package Opening to Mounting

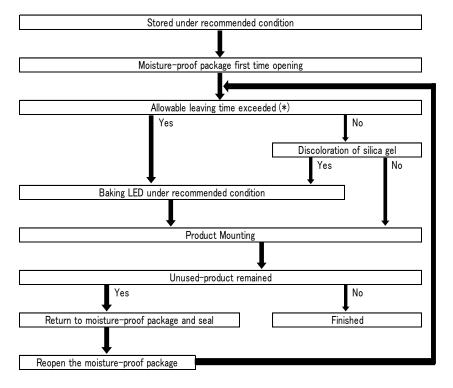

Allowable leaving time means the maximum allowable leaving time after opening package, which depends on each LED type.

The allowable leaving time should be calculated form the first opening of package to the time when soldering process is finished.

When judging if the allowable leaving time has exceeded or not, please subtract the soldering time. The allowable leaving time after reopening should be calculated form the first opening of package, or from the time when baking process is finished.

Packaging Specifications


[Packing box]

(RoHS•ELV Compliant)

Box TYPE	Outline dimension $L \times W \times H \text{ (mm)}$	Capacity of the box
Type A	280 × 265 × 45 (mm)	3 reels
Type B	310 × 235 × 265 (mm)	15 reels
Type C	440 × 310 × 265 (mm)	30 reels

The above measure is all the reference value.

The box is selected out of the above table, by the shipping quantity.

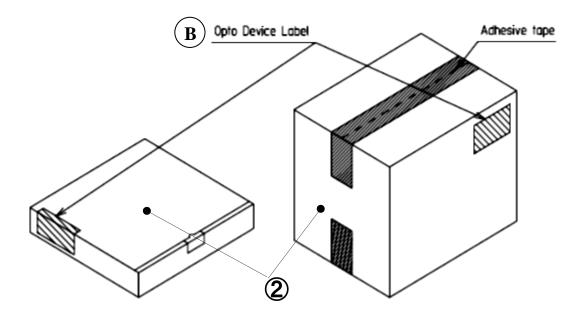

Type A Type B,C

Material / box : Cardboard C5BF Material / box : Cardboard K5AF

Partition: Cardboard K5BF

No.	PART NAME	MATERIAL	REMARKS
2	Packing Box	Corrugated Cardboard	without ESD protection


Packaging Specifications

FY1101C-M-TR

[Label Specification]


(acc.to; JIS-X0503(Code-39)

(A) Product label



- A. Parts number (Indicated the whole parts number)
- B. Bar-code for parts number
- C. Parts code (In-house identification code for each parts number)
- D. Packed parts quantity (Indicated Parts Qty in the packing)
- E. Bar-Code for packed parts quantity
- F. Lot number & Rank (indicated the following 16 digits)
- G. Bar-Code for Lot number & Rank

(B) Opto device label

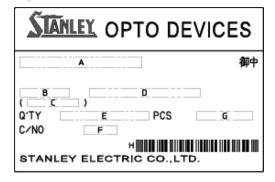


- A. Custmer Name
- B. Parts Type
- C. Parts Code
- D. Parts Number
- E. Packed Parts Quantity
- F. Carton Number
- G. Shipping Date
- H. Bar-Code for In-house identification Number

<Remark> Bar-code font : acc.to Code-39(JIX0503)



Lot Number Notational System

FY1101C-M-TR



① - Idigit: Production Location (Mark identify alphabet)

② - 1digit : Production Year (Last Digit of Production Year 2015→5,2016→6,2017→7,···)

③ - 2digits: Production Month (Jan. to Sep., Should be 01,02,03,....)

4 - 2digits: Production Date

⑤ - 3digits : Serial Number

6 - 2digits: Tape and Reel following Number

7 - 2digits: Luminous Intensity Rank. (If only 1 digit, second digit must be dash "-"and if not identified rank, its"- -")

8 - 2digits: Chromaticity Rank (If only 1 digit, second digit
must be dash "-"and if not identified rank, its"--")
 **Special rank identification such as Y',A' rank must be "YY" or "AA", not using prime" "


9 - 1digit: Option Rank (Normally its"-")





(acc.to; JIS-C0806-03)

1. Appearance

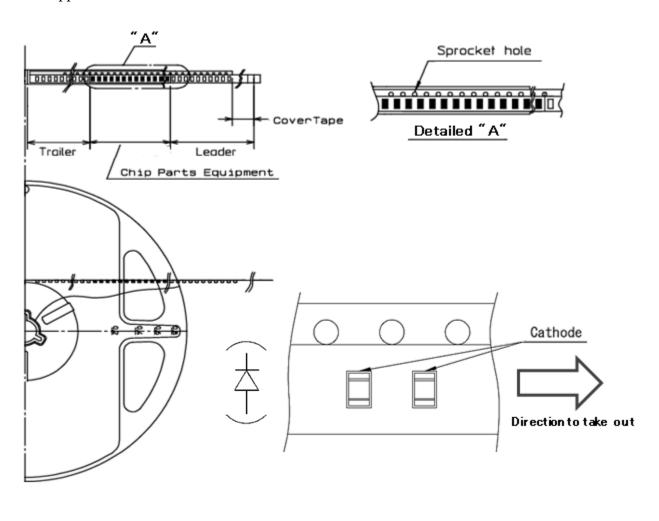

Ite	ms	Specifications	Remarks
Leader area	Cover-tape	Cover-tape shall be longer than 200mm without carrier-tape	The end of cover-tape shall be held with adhesive tape.
Carrier-tape		Empty pocket shall be more than 10 pieces.	Please refer to the above figure for Taping & reel orientation.
Trailer area		Empty pocket shall be more than 15 pieces.	The end of taping shall be inserted into a slit of the hub.



Taping and Reel Specifications

FY1101C-M-TR

2. Qty. per Reel

4,000 pcs./reel

3. Mechanical strength

Cover-tape adhesive strength shall be $0.1 \sim 1.0 N$ (An angle between carrier-tape and cover-tape shall be 170 deg.) Both tapes shall be so sealed that the contained parts will not come out from the tape when it is bent at a radius of 15mm.

4. Others

Reversed-orientation, Up-side down placing, side placing and out of spec. parts mix shall not be held. No more than 1 connecting empty pockets of taping. Empty Pocket per reel is assumed until 5piece.




Unit: mm

Taping and Reel Specifications


FY1101C-M-TR

(acc.to; JIS-C0806)

5. Taping Dimensions

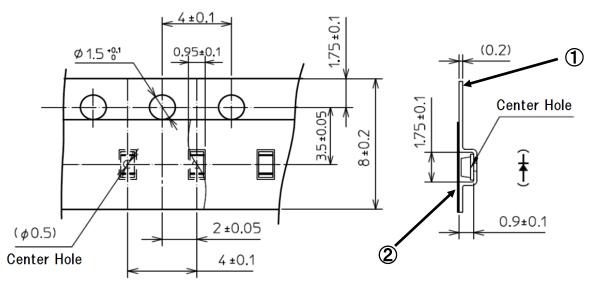

6. Reel Dimensions

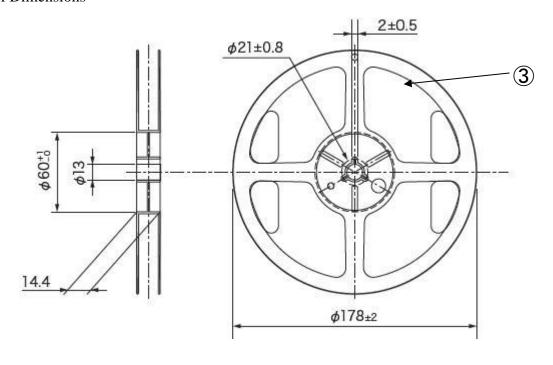

No.	Part name	Remarks
1	Carrier-tape	Anti-static grade
2	Cover-tape	Anti-static grade
3	Carrier-reel	Conductive grade



Correspondence to RoHS•ELV instruction

FY1101C-M-TR

This product is in compliance with RoHS•ELV.

Prohibition substance and it's criteria value of RoHS•ELV are as follows.

- •RoHS instruction Refer to following $(1)\sim(6)$.
- •ELV instruction Refer to following $(1)\sim(4)$.

	Substance group name	Criteria value	
(1)	Lead and its compounds	1,000ppm Max	
(2)	Cadmium and its compounds	100ppm Max	
(3)	Mercury and its compounds 1,000ppm Max		
(4)	Hexavalent chromium	1,000ppm Max	
(5)	PBB	1,000ppm Max	
(6)	PBDE	1,000ppm Max	



Reliability Testing Result

FY1101C-M-TR

Reliability Testing items	Applicable Standard	Testing Conditions	Duration	Failure
Room Temp. Operating Life	EIAJ ED- 4701/100(101)	$Ta = 25$ °C, $I_F = 30$ mA	1,000 h	0/20
Resistance to Soldering Heat	EIAJ ED- 4701/300(301)	Pre-heating: 150~180°C 90~120sec Operation Heating: 230°C 40s Max. Peak Temperature: 260°C	Twice	0/20
Temperature Cycling	EIAJ ED- 4701/100(105)	-40°C (30min) ~ Normal Temperature(15min) ~ +100°C (30min) ~ Normal Temperature(15min)	5 cycles	0/20
Wet High Temp. Storage Life	EIAJ ED- 4701/100(103)	$Ta = 60\pm2$ °C, $RH = 90\pm5$ %	1,000 h	0/20
High Temp. Storage Life	EIAJ ED- 4701/200(201)	$Ta = +100^{\circ}C$	1,000 h	0/20
Low Temp. Storage Life	EIAJ ED- 4701/200(202)	Ta = -40°C	1,000 h	0/20
Vibration, Variable Frequency	EIAJ ED- 4701/400(403)	98.1m/s ² (10G), 100 ~ 2KHz sweep for 20min., XYZ each direction	2 h	0/10

Failure Criteria

Items	Symbols	Conditions	Failure criteria
Luminous Intensity	I_{v}	5mA	Testing Min. Value < Spec. Min. Value x 0.5
Forward Voltage	V_{F}	5mA	Testing Max. Value ≥ Spec. Max. Value x 1.2
Reverse Current	I_R	5V	Testing Max. Value ≧ Spec. Max. Value x 2.5
External Appearance	-	-	Occurrence of notable discoloration, deformation and cracking



Special Notice to Customers Using the Products and Technical Information Shown in This Data Sheet

- The technical information shown in the data sheets are limited to the typical characteristics and circuit examples of the referenced products. It does not constitute the warranting of industrial property nor the granting of any license.
- 2) For the purpose of product improvement, the specifications, characteristics and technical data described in the data sheets are subject to change without prior notice. Therefore it is recommended that the most updated specifications be used in your design.
- 3) When using the products described in the data sheets, please adhere to the maximum ratings for operating voltage, heat dissipation characteristics, and other precautions for use. We are not responsible for any damage which may occur if these specifications are exceeded.
- 4) The products that have been described to this catalog are manufactured so that they will be used for the electrical instrument of the benchmark (OA equipment, telecommunications equipment, AV machine, home appliance and measuring instrument).
 - The application of aircrafts, space borne application, transportation equipment, medical equipment and nuclear power control equipment, etc. needs a high reliability and safety, and the breakdown and the wrong operation might influence the life or the human body. Please consult us beforehand if you plan to use our product for the usages of aircrafts, space borne application, transportation equipment, medical equipment and nuclear power control equipment, etc. except OA equipment, telecommunications equipment, AV machine, home appliance and measuring instrument.
- 5) In order to export the products or technologies described in this data sheet which are under the "Foreign Exchange and Foreign Trade Control Law," it is necessary to first obtain an export permit from the Japanese government.
- 6) No part of this data sheet may be reprinted or reproduced without prior written permission from Stanley Electric Co., Ltd.
- 7) The most updated edition of this data sheet can be obtained from the address below: http://www.stanley-components.com/en/

ПОСТАВКА ЭЛЕКТРОННЫХ КОМПОНЕНТОВ

многоканальный

Общество с ограниченной ответственностью «МосЧип» ИНН 7719860671 / КПП 771901001 Адрес: 105318, г.Москва, ул.Щербаковская д.3, офис 1107

Данный компонент на территории Российской Федерации Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

http://moschip.ru/get-element

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г. Москва, ул. Щербаковская д. 3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru moschip.ru_6 moschip.ru_4 moschip.ru_9