# CW48 Series

- Ratings from 10 A to 125 A @ 48-660 VAC
- SCR Output for heavy industrial loads
- LED Status Indicator
- UL/CSA/TUV Approved, CE Compliant to EN60950-1
- Improved SEMS screw and washer
- Redesigned housing with anti-rotation barriers
- AC or DC control and Universal AC/DC control
- EMC Compliant to Level 3
- Epoxy Free Design
- Removable IP20 touch-safe cover
- DBC substrate for superior thermal performance

For **Generation 3** datasheet click here

## PRODUCT SELECTION

| Control Voltage | 10 A | 25 A | 50 A | 90 A | 125 A |
|---|---|---|---|---|---|
| 4-32 VDC | CWD4810 | CWD4825 | CWD4850 | CWD4890 | CWD48125 |
| 90-280 VAC | CWA4810 | CWA4825 | CWA4850 | CWA4890 | CWA48125 |
| 18-36 VAC | CWA4810E | CWA4825E | CWA4850E | CWA4890E | CWA48125E |
| 20-48 VDC/20-280 VAC | CWU4810 | CWU4825 | CWU4850 | CWU4890 | CWU48125 |

## AVAILABLE OPTIONS




Required for valid part number
For options only and not required for valid part number
* Not all part number conbinations are available. Contact Crydom Technical Support for information on the availability of a specific part number.

## OUTPUT SPECIFICATIONS (2)

| Description | 10 A | 25 A | 50 A | 90 A | 125 A |
|---|---|---|---|---|---|
| Operating Voltage (47-440Hz) [Vrms] | 48-660 | 48-660 | 48-660 | 48-660 | 48-660 |
| Transient Overvoltage [Vpk] (1) | 1200 | 1200 | 1200 | 1200 | 1200 |
| Maximum Off-State Leakage Current @ Rated Voltage [mArms] | 1 | 1 | 1 | 1 | 1 |
| Minimum Off-State dv/dt @ Maximum Rated Voltage [V/µsec] | 500 | 500 | 500 | 500 | 500 |
| Maximum Load Current [Arms] (3) | 10 | 25 | 50 | 90 | 125 |
| Minimum Load Current [mArms] | 150 | 150 | 150 | 250 | 250 |
| Maximum 1 Cycle Surge Current (50/60Hz) [Apk] | 380/400 | 570/600 | 810/850 | 1290/1350 | 1900/2000 |
| Maximum On-State Voltage Drop @ Rated Current [Vpk] | 1.3 | 1.3 | 1.3 | 1.3 | 1.25 |
| Thermal Resistance Junction to Case (Rjc) [°C/W] | 0.35 | 0.3 | 0.2 | 0.16 | 0.11 |
| Maximum 1/2 Cycle $I^2t$ for Fusing (50/60Hz) [$A^2$ sec] | 720/660 | 1620/1500 | 3280/3000 | 8320/7560 | 18000/16600 |
| Minimum Power Factor (at Maximum load) (1) | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 |
| HP Rating UL 508/IEC60947 [-10 Option][HP (KW)]: 120 VAC | 0.5 (0.37) | 1 (0.74) | 2 (1.5) | 3 (2.24) | 5 (3.37) |
| HP Rating UL 508/IEC60947 [-10 Option][[HP (KW)]: 240 VAC | 1.5 (1.1) | 3 (2.2) | 5 (3.73) | 7.5 (5.6) | 10 (7.5) |
| HP Rating UL 508/IEC60947 [-10 Option][[HP (KW)]: 480 VAC | 3 (2.24) | 5 (3.7) | 7.5 (5.6) | 10 (7.4) | 15 (11.2) |
| HP Rating UL 508/IEC60947 [HP (KW)]: 120 VAC | 0.5 (0.37) | 0.75 (0.56) | 1 (0.74) | 2 (1.5) | 3 (2.2) |
| HP Rating UL 508/IEC60947 [HP (KW)]: 240 VAC | 1.5 (1.1) | 2 (1.5) | 3 (2.2) | 5 (3.73) | 7.5 (5.6) |
| HP Rating UL 508/IEC60947 [HP (KW)]: 480 VAC | 3 (2.24) | 5 (3.7) | 7.5 (5.6) | 10 (7.4) | 15 (11.2) |

## INPUT SPECIFICATIONS (1)
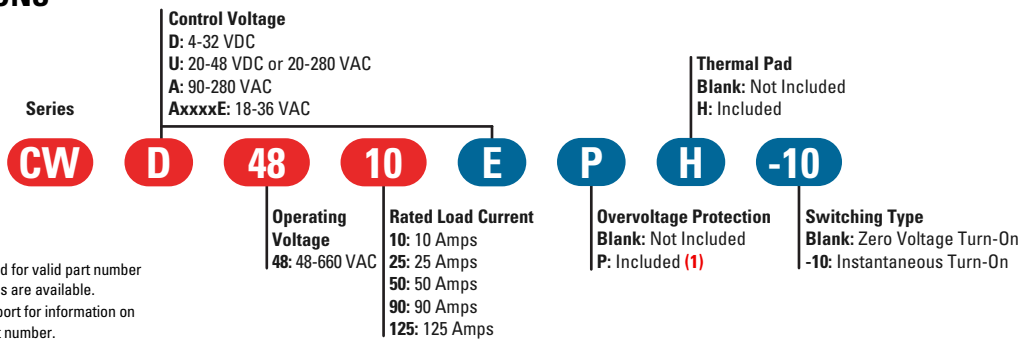
| Description | CWD | CWA | CWAxxxxE | CWU |
|---|---|---|---|---|
| Control Voltage Range | 4-32 VDC | 90-280 VAC (4) | 18-36 VAC | 20-48 VDC/ 20-280 VAC |
| Maximum Reverse Voltage | -32 VDC | - | - | - |
| Minimum Turn-On Voltage | 4 VDC (5) | 90 VAC | 18 VAC | 19 VDC/VAC |
| Minimum Turn-Off Voltage | 1 VDC | 10 VAC | 4 VAC | 5 VDC/VAC |
| Minimum Input Current (for on-state) | 10 mA | 6 mA | 13 mA | 7/13 mA |
| Maximum Input Current | 15 mA | 10 mA | 15 mA | 11/9 mA |
| Nominal Input Impedance | Current Regulated | Current Regulated | Current Regulated | Current Regulated |
| Maximum Turn-On Time [msec] | 1/2 Cycle (6) | 20 | 20 | 20 |
| Maximum Turn-Off Time [msec] | 1/2 Cycle | 30 | 30 | 30 |


Copyright © 2020 Crydom Inc. Specifications subject to change without notice.

Sensata Technologies

## GENERAL SPECIFICATIONS (1)

| Description | Parameters |
|---|---|
| Dielectric Strength, Input/Output/Base (50/60Hz) | 4000 Vrms |
| Minimum Insulation Resistance (@ 500 VDC) | $10^9$ Ohms |
| Maximum Capacitance, Input/Output | 8 pF |
| Ambient Operating Temperature Range (7) | -40 to 80 °C |
| Ambient Storage Temperature Range | -40 to 125 °C |
| Weight (typical) | 2.88 oz (81.53 g) |
| Housing Material | UL94 V-0 |
| Baseplate Material | Aluminum |
| Input Terminal Screw Torque Range (in-lbs/Nm) | 13-15 /1.5-1.7 |
| Load Terminal Screw Torque Range (in-lbs/Nm) | 18-20 / 2-2.2 |
| SSR Mounting Screw Torque Range (in-lbs/Nm) | 18-20 / 2-2.2 |
| Input/Output Terminal Screw Thread Size | #6-32 UNC / #8-32 UNC |
| Humidity per IEC60068-2-78 | 93% non-condensing |
| LED Input Status Indicator | Green |
| MTBF (Mean Time Between Failures) at 40°C ambient temperature (8) | 11,641,553 hours (1,328 years) |
| MTBF (Mean Time Between Failures) at 60°C ambient temperature (8) | 7,210,376 hours (823 years) |

## WIRING DIAGRAM




**Recommended Wire Sizes**

| Terminals | Wire Size (Solid / Stranded) | Wire Pull-Out Strength (lbs)[N] |
|---|---|---|
| Input | 24 AWG (0.2 mm²) / 0.2 [minimum] | 10 [44.5] |
| | 2 x 12 AWG (3.3 mm²) / 3.3 [maximum] | 90 [400] |
| Output | 20 AWG (0.5 mm²) / 0.518 [minimum] | 30 [133] |
| | 2 x 10 AWG (5.3 mm²) / 5.3 | 110 [490] |
| | 2 x 8 AWG (8.4 mm²) / 8.4 [maximum] | 90 [400] |

**Input Current vs Input Voltage**
**Standard Regulated DC Input**

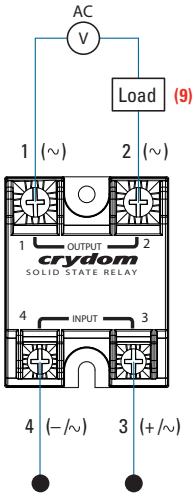


**Input Current vs Input Voltage**
**Standar Regulated AC Input**




**Input Current vs Input Voltage**
**Regulated AC Input Option "E"**

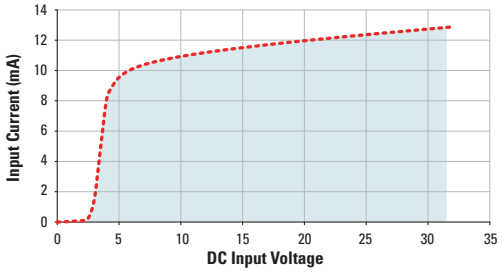


## EQUIVALENT CIRCUIT BLOCK DIAGRAMS

**CWD Series DC Control**

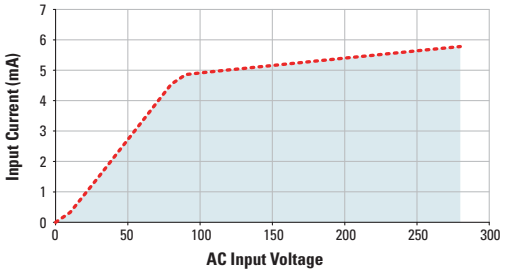


**CWA/CWU Series AC Control**

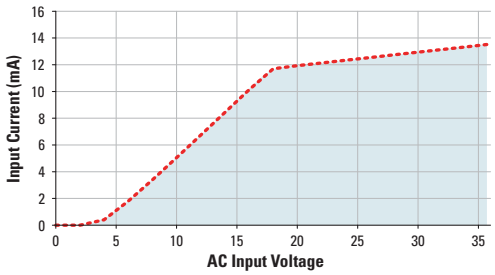



Copyright © 2020 Crydom Inc. Specifications subject to change without notice.
Sensata Technologies

## MECHANICAL SPECIFICATIONS (1)

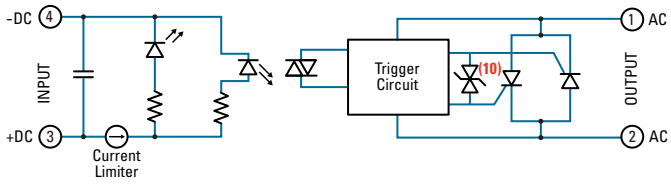Tolerances: ±0.02 in / 0.5 mm
All dimensions are in: inches [millimeters]

**Screw Termination**

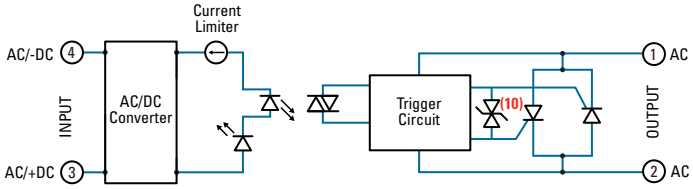


**Screw Termination, IP20**




## GENERAL NOTES

(1) "P" option output will self trigger between 900-1200 Vpk. Power factor 0.7 or higher, not suitable for capacitive loads.
(2) All parameters at 25°C unless otherwise specified.
(3) Heat sinking required, see derating curves
(4) For ambient temperature above 40°C the maximum control voltage must not exceed 250VAC.
(5) Increase minimum voltage by 1V for operations from -20 to -40°C.
(6) Turn-on time for Instantaneous turn-on versions is 0.1 msec and 7msec for CWU models.
(7) AC input models operating range is -20 to 80 °C.
(8) All parameters at 50% power rating and 100% duty cycle (contact Crydom tech support for detailed report).
(9) Load can be wired to either SSR output terminal 1 or 2.
(10) Select P option for overvoltage protection.
(11) For single surge pulse Tc=25°C; Tj=125°C. For AC Output SSRs, AC Rms value of surge current equals the peak value divided by $\sqrt{2}$ (1.414).

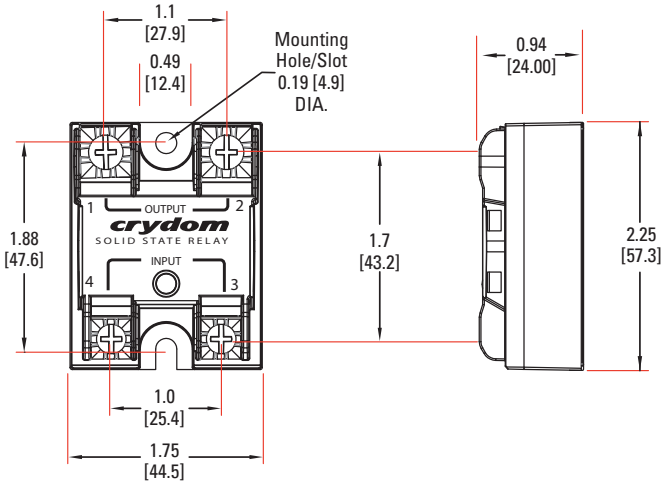For additional information or specific questions, contact Crydom Technical Support.


Copyright © 2020 Crydom Inc. Specifications subject to change without notice.
Sensata Technologies
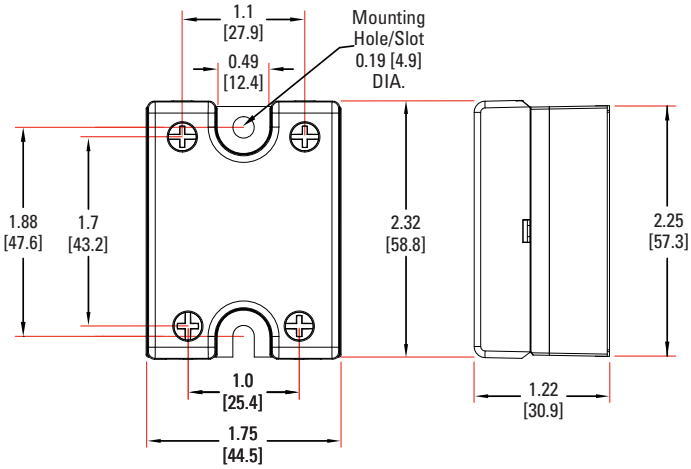
## SURGE CURRENT INFORMATION

Single Pulse (11)

### CWxxx10




### CWxxx25




### CWxxx50

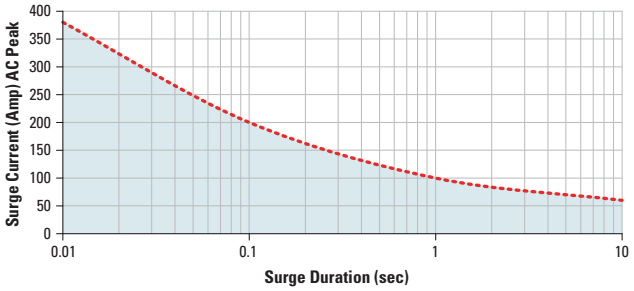


### CWxxx90

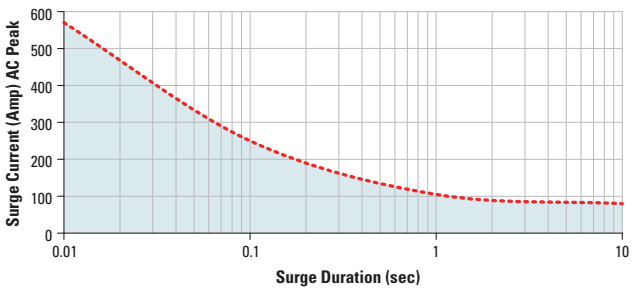


### CWxxx125

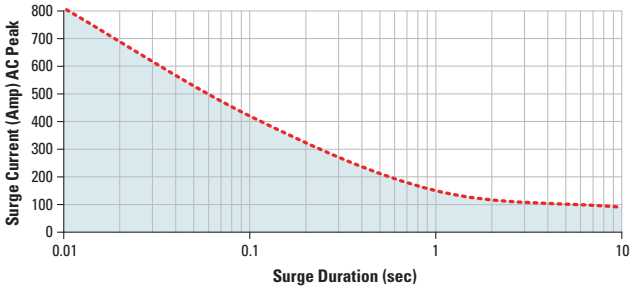



Copyright © 2020 Crydom Inc. Specifications subject to change without notice.
Sensata Technologies

## THERMAL DERATE INFORMATION

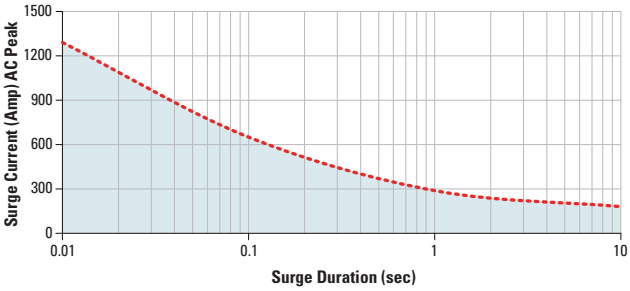(i) SSR metal base plate acting as heat sink, it must be exposed to free ambient air.

**CWxxx10**

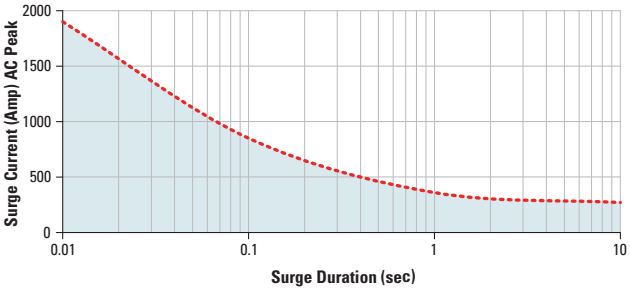


**CWxxx25**




**CWxxx50**

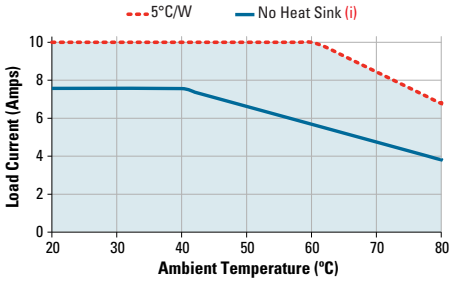


**CWxxx90**

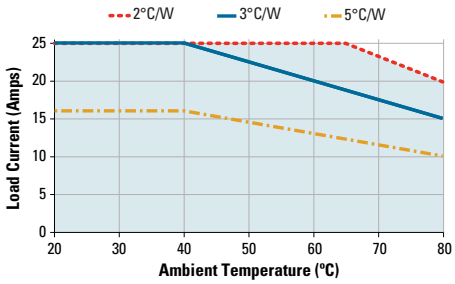


**CWxxx125**

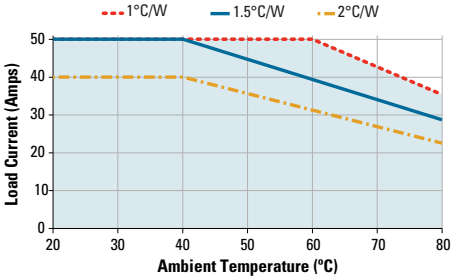



Copyright © 2020 Crydom Inc. Specifications subject to change without notice.
Sensata Technologies

## AGENCY APPROVALS

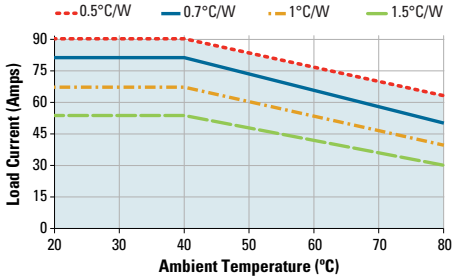EN60950-1: Meets the requirements of sections1.5: 1,7: 2.9: 2.10.5.3: 4.2: 4.5: 4.7:
Certified according to EN 62314:2006
IEC 61000-4-2 Electrostatic Discharge Level 3
IEC 61000-4-4 Electrically Fast Transients Level 3
IEC 61000-4-5 Electrical Surges Level 3
Vibration Resistance: IEC 60068-2-6 : Amplitude Range 10-55 Hz, Displacement 0.75mm
Shock Resistance: IEC 60068-2-27 : Peak Acceleration 15g, Duration11msec

c UL us E79183 LR 38595 RoHS
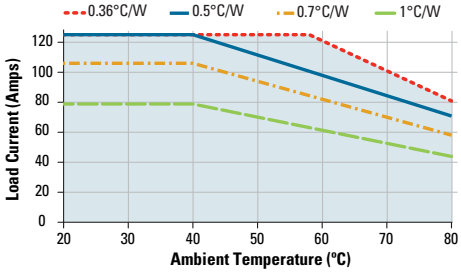
## ACCESORIES

***New Accessory!***
***Hardware Kits***

**Hardware Kit**
Part number: HK4



Bag with 2 square brass accessories and 2 screw 8-32 x 5/8 for output. Used to mount TMR1 lug terminals.

**Recommended Accessories**

| Cover | Hardware Kit | Heat Sink Part No. | Thermal Resistance [°C/W] | Lug Terminal | Thermal Pad |
|---|---|---|---|---|---|
| KS101 | HK1 | HS501DR | 5.0 | TRM1 | HSP-1 |
| | HK4 | HS301 / HS301DR | 3.0 | TRM6 | HSP-2 |
| | | HS251 | 2.5 | | |
| | | HS201 / HS201DR | 2.0 | | |
| | | HS202 / HS202DR | 2.0 | | |
| | | HS172 | 1.7 | | |
| | | HS151 / HS151DR | 1.5 | | |
| | | HS122 / HS122DR | 1.2 | | |
| | | HS103 / HS103DR | 1.0 | | |
| | | HS101 | 1.0 | | |
| | | HS073 | 0.7 | | |
| | | HS072 | 0.7 | | |
| | | HS053 | 0.5 | | |
| | | HS033 | 0.36 | | |
| | | HS023 | 0.25 | | |

Rev. 032720
ECN 20893


Copyright © 2020 Crydom Inc. Specifications subject to change without notice.

## ⚠ DANGER / PELIGRO / DANGER /GEFAHR / PERICOLO / 危险

**HAZARD OF ELECTRIC SHOCK, EXPLOSION, OR ARC FLASH.**

- Disconnect all power before installing or working with this equipment.
- Verify all connections and replace all covers before turning on power.

**Failure to follow these instructions will result in death or serious injury.**

**RIESGO DE DESCARGA ELECTRICA O EXPLOSION.**

- Desconectar todos los suministros de energia a este equipo antes de trabajar con este equipo.
- Verificar todas las conexiones y colocar todas las tapas antes de energizer el equipo.

**El incumplimiento de estas instrucciones puede provocar la muerte o lesiones serias.**

**RISQUE DE DESCHARGE ELECTRIQUE OU EXPLOSION**

- Eteindre toutes les sources d'énergie de cet appareil avant de travailler dessus de cet appareil
- Vérifier tous connections, et remettre tous couverts en olace avant de mettre sous

**De non-suivi de ces instructions provoquera la mort ou des lésions sérieuses sérieuses.**

**GEFAHR EINES ELEKTRISCHE N SCHLAGES ODER EINER EXPLOSION.**

- Stellen Sie jeglichen Strom ab, der dieses Gerät versorgt, bevor Sie an dem Gerät Arbeiten durchführen
- Vor dem Drehen auf Energie alle Anschlüsse überprüfen und alle Abdeckungen ersetzen.

**Unterlassung dieser Anweisungen können zum Tode oder zu schweren Verletzungen führen.**

**RISCHIO DI SCOSSA ELETTRICA O DELL'ESPLOSIONE.**

- Spenga tutta l'alimentazione che fornisce questa apparecchiatura prima di lavorare a questa apparecchiatura
- Verificare tutti i collegamenti e sostituire tutte le coperture prima dell'accensione

**L'omissione di queste istruzioni provocherà la morte o lesioni serie**

**存在电击、爆炸或电弧闪烁危险**

- 在操作此设备之前请先关闭电源。

**若不遵守这些说明，可能会导致严重的人身伤害甚至死亡。**

## ⚠ WARNING / AVERTISSEMENT / WARNUNG /ADVERTENCIA / AVVERTENZA / 警告

**RISK OF MATERIAL DAMAGE AND HOT ENCLOSURE**

- The product's side panels may be hot, allow the product to cool before touching.
- Follow proper mounting instructions including torque values.
- Do not allow liquids or foreign objects to enter this product.

**Failure to follow these instructions can result in serious injury, or equipment damage.**

**RISQUE DE DOMMAGE MATERIEL ET DE SURCHAUFFE DU BOITIER**

- Les panneaux latéraux du produit peuvent être chauds. Laisser le produit refroidir avant de le toucher.
- Respecter les consignes de montage, et notamment les couples de serrage.
- Ne pas laisser pénétrer de liquide ni de corps étrangers à l'intérieur du produit.

**Le non-respect de cette directive peut entraîner, des lésions corporelles graves ou des dommages matériels.**

**GEFAHR VON MATERIALSCHÄDEN UND GEHÄUSEERHITZUNG**

- Die Seitenwände können heiß sein. Lassen Sie das Produkt abkühlen, bevor Sie es berühren.
- Beachten Sie die Montageanweisungen,
- Führen Sie keine Flüssigkeiten oder Fremdkörper in das Produkt ein.

**Die Nichtbeachtung dieser Anweisung kann Körperverletzung oder Materialschäden zur Folge haben.**

**RIESGO DE DAÑOS MATERIALES Y DE SOBRECALENTAMIENTO DE LA UNIDAD**

- Los paneles laterales del producto pueden estar calientes. Esperar que el producto se enfríe antes de tocarlo.
- Respetar las instrucciones de montaje, y en particular los pares de apretado.
- No dejar que penetren líquidos o cuerpos extraños en el producto.

**Si no se respetan estas precauciones pueden producirse graves lesiones, daños materiales.**

**RISCHIO DI DANNI MATERIALI E D'INVOLUCRO CALDO**

- I pannelli laterali dell'apparecchio possono scottare; lasciar quindi raffreddare il prodotto prima di toccarlo.
- Seguire le istruzioni di montaggio corrette.
- Non far entrare liquidi o oggetti estranei in questo apparecchio.

**La mancata osservanza di questa precauzione può causare gravi rischi per l'incolumità personale o danni alle apparecchiature.**

**材料损坏和高温外壳的危险性**

- 产品的一侧面板可能很热，在其冷却前请不要触碰。
- 遵照正确的安装说明，包括扭矩值。
- 请勿让液体及其他异物进入本产品。

**如不能正确执行这些操作说明，极有可能造成严重人体伤害或者设备的损坏。**


Copyright © 2020 Crydom Inc. Specifications subject to change without notice.

## ANNEX - ENVIRONMENTAL INFORMATION

The environmental information disclosed in this annex including the EIP Pollution logo are in compliance with People's Republic of China Electronic Industry Standard SJ/T11364 – 2006, Marking for Control of Pollution Caused by Electronic Information Products.

| Part Name | Toxic or hazardous Substance and Elements | | | | | |
|---|---|---|---|---|---|---|
| | Lead (Pb) | Mercury (Hg) | Cadmium (Cd) | Hexavalent Chromium (Cr (VI)) | Polybrominated biphenyls (PBB) | Polybrominated diphenyl ethers (PBDE) |
| Semiconductor die | X | O | O | O | O | O |
| Solder | X | O | O | O | O | O |

## 附件 - 环保信息

此附件所标示的包括电子信息产品污染图标的环保信息符合中华人民共和国电子行业标准 SJ/T11364 - 2006, 电子信息产品污染控制标识要求。

| 部件名称 | 有毒有害物质或元素 | | | | | |
|---|---|---|---|---|---|---|
| | 铅 (Pb) | 汞 (Hg) | 镉 (Cd) | 六价铬 (Cr (VI)) | 多溴联苯 (PBB) | 多溴二苯醚 (PBDE) |
| 半导体芯片 | X | O | O | O | O | O |
| 焊接点 | X | O | O | O | O | O |

Copyright © 2020 Crydom Inc. Specifications subject to change without notice.

Общество с ограниченной ответственностью «МосЧип» ИНН 7719860671 / КПП 771901001
Адрес: 105318, г.Москва, ул.Щербаковская д.3, офис 1107

**Данный компонент на территории Российской Федерации**

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

http://moschip.ru/get-element

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

**Офис по работе с юридическими лицами:**

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:
moschip.ru
moschip.ru_4
moschip.ru_6
moschip.ru_9