

8

7

6

5

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

TERMINAL IDENTIFICATION FOR DR SERIES ONLY
(VIEWED FROM BOTTOM OF SWITCH)

0810
0C00
0240

0810
0C00
0240

ACTUATOR
LOCATION

10—POSITION, BCDSEE NOTE 2

POS	0	1	2	3	4	5	6	7	8	9
C	X	X	X	X	X	X	X	X	X	X
1		X		X		X		X		X
2			X	X			X	X		
4					X	X	X	X		
8									X	X

16—POSITION, HEXADECIMALSEE NOTE 3

POS	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
C	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
1		X		X		X		X		X		X		X		X
2			X	X			X	X			X	X			X	X
4					X	X	X	X				X	X	X	X	X
8									X	X	X	X	X	X	X	X

10 POSITION,
BCD COMPLEMENTSEE NOTE 4

POS	0	1	2	3	4	5	6	7	8	9
C	X	X	X	X	X	X	X	X	X	X
1	X		X		X		X		X	
2	X	X			X	X			X	X
4	X	X	X	X					X	X
8	X	X	X	X	X	X	X	X		

16—POSITION,
HEXADECIMAL COMPLEMENTSEE NOTE 5

POS	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
C	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
1	X		X		X		X		X		X		X		X	
2	X	X			X	X			X	X		X	X			
4	X	X	X	X					X	X	X	X				
8	X	X	X	X	X	X	X	X								

HOW TO ORDER

DRI

SERIES
ROTARY DIPS (BLACK CASE)

ACTUATOR STYLE
M= MINI PLASTIC SHAFT
W= WHEEL
S= METAL SHAFT

CIRCUIT TYPES
10= BC DECIMAL
10C= BCD COMPLEMENT
16= HEXADECIMAL
16C= HEXADECIMAL COMPLEMENT

SPECIFICATIONS:

MATERIAL:

FRAME & CASE: PPS UL94V–0, BLACK
ROTOR,PPS UL94V–0, COLOR SEE P/N TABLE
FIXED CONTACT TERMINAL: COPPER ALLOY,GOLD FLASH OVER NICKEL PLATE
MOVING CONTACT:COPPER ALLOY,GOLD FLASH OVER NICKEL PLATE
BALL SUPPORT PLATE: COPPER ALLOY
BALL: STAINLESS STEEL
DETENT SPRING: STAINLESS STEEL.
BUSHING (DRS): ZINC DIE CAST.
SHAFT (DRS): COPPER ALLOY–NICKEL PLATE

ELECTRICAL:

CONTACT RATING: 0.4 VA @ 20V DC OR PEAK AC
INITIAL CONTACT RESISTANCE: 50 MILLIOHMS MAX.
INSULATION RESISTANCE: 1,000 MEGOHMS @ 100V DC.
DIELECTRIC STRENGTH: 300V AC
LIFE EXPECTANCY: 10,000 ROTATIONS

MECHANICAL:

OPERATING FORCE: 13.88 OZF.IN. MAX

ENVIRONMENTAL:

OPERATING TEMPERATURE: –30 TO +85 DEGREES C
STORAGE TEMPERATURE: –45 TO +100 DEGREES C
RESISTANCE TO SOLDER HEAT–PER 109–202, COND B (THRU–HOLE)
SOLDERABILITY– PER JIS C 0050 & JIS C 0053

NOTES:

1. COMMON TERMINALS ARE CONNECTED INTERNALLY.

2. RED ROTOR WITH WHITE PRINTING ON TOP AND SIDE OF SWITCH. "S" STYLES HAVE NOT PRINTING ON TOP.

3. BLACK ROTOR WITH WHITE PRINTING ON TOP AND SIDE OF SWITCH. "S" STYLES HAVE NO PRINTING ON TOP.

4. ORANGE ROTOR WITH WHITE PRINTING ON TOP AND SIDE OF SWITCH EXCEPT FOR THE "W" STYLES, WHICH HAVE BLACK PRINTING ON TOP. "S" STYLES HAVE NO PRINTING ON TOP.

5. WHITE ROTOR WITH WHITE PRINTING ON TOP AND SIDE OF SWITCH EXCEPT FOR THE "W" STYLES, WHICH HAVE BLACK PRINTING ON TOP. "S" STYLE HAVE NO PRINTING ON TOP.

6. ALL MATERIALS AND FINISHES SHALL COMPLY WITH EU DIRECTIVE 2002/95/EC OF 27JAN2003 (ROHS)

7. LOCATE 'ALCO' TRADE NAME AND LOT NUMBER MARKING.
LOT NUMBER TO BE MARKED AS FOLLOW:

4F
1ST DIGIT2ND DIGIT
YEAR 1194MONTH 6

MARK WITH PERMANENT WHITE INK.

SEE SHEET 2 FOR DIMENSIONAL SPEC'S

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

TERMINAL IDENTIFICATION FOR DR SERIES ONLY
(VIEWED FROM BOTTOM OF SWITCH)

0810
0C00
0240

0810
0C00
0240

ACTUATOR
LOCATION

10—POSITION, BCDSEE NOTE 2

POS	0	1	2	3	4	5	6	7	8	9
C	X	X	X	X	X	X	X	X	X	X
1		X		X		X		X		X
2			X	X			X	X		
4					X	X	X	X		
8									X	X

16—POSITION, HEXADECIMALSEE NOTE 3

POS	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
C	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
1		X		X		X		X		X		X		X		X
2			X	X			X	X			X	X			X	X
4					X	X	X	X				X	X	X	X	X
8									X	X	X	X	X	X	X	X

10 POSITION,
BCD COMPLEMENTSEE NOTE 4

POS	0	1	2	3	4	5	6	7	8	9
C	X	X	X	X	X	X	X	X	X	X
1	X		X		X		X		X	
2	X	X			X	X			X	X
4	X	X	X	X					X	X
8	X	X	X	X	X	X	X	X		

16—POSITION,
HEXADECIMAL COMPLEMENTSEE NOTE 5

POS	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
C	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
1	X		X		X		X		X		X		X		X	
2	X	X			X	X			X	X		X	X			
4	X	X	X	X					X	X	X	X				
8	X	X	X	X	X	X	X	X								

HOW TO ORDER

DRI

SERIES
ROTARY DIPS (BLACK CASE)

ACTUATOR STYLE
M= MINI PLASTIC SHAFT
W= WHEEL
S= METAL SHAFT

CIRCUIT TYPES
10= BC DECIMAL
10C= BCD COMPLEMENT
16= HEXADECIMAL
16C= HEXADECIMAL COMPLEMENT

SPECIFICATIONS:

MATERIAL:

FRAME & CASE: PPS UL94V–0, BLACK
ROTOR,PPS UL94V–0, COLOR SEE P/N TABLE
FIXED CONTACT TERMINAL: COPPER ALLOY,GOLD FLASH OVER NICKEL PLATE
MOVING CONTACT:COPPER ALLOY,GOLD FLASH OVER NICKEL PLATE
BALL SUPPORT PLATE: COPPER ALLOY
BALL: STAINLESS STEEL
DETENT SPRING: STAINLESS STEEL.
BUSHING (DRS): ZINC DIE CAST.
SHAFT (DRS): COPPER ALLOY–NICKEL PLATE

ELECTRICAL:

CONTACT RATING: 0.4 VA @ 20V DC OR PEAK AC
INITIAL CONTACT RESISTANCE: 50 MILLIOHMS MAX.
INSULATION RESISTANCE: 1,000 MEGOHMS @ 100V DC.
DIELECTRIC STRENGTH: 300V AC
LIFE EXPECTANCY: 10,000 ROTATIONS

MECHANICAL:

OPERATING FORCE: 13.88 OZF.IN. MAX

ENVIRONMENTAL:

OPERATING TEMPERATURE: –30 TO +85 DEGREES C
STORAGE TEMPERATURE: –45 TO +100 DEGREES C
RESISTANCE TO SOLDER HEAT–PER 109–202, COND B (THRU–HOLE)
SOLDERABILITY– PER JIS C 0050 & JIS C 0053

NOTES:

1. COMMON TERMINALS ARE CONNECTED INTERNALLY.

2. RED ROTOR WITH WHITE PRINTING ON TOP AND SIDE OF SWITCH. "S" STYLES HAVE NOT PRINTING ON TOP.

3. BLACK ROTOR WITH WHITE PRINTING ON TOP AND SIDE OF SWITCH. "S" STYLES HAVE NO PRINTING ON TOP.

4. ORANGE ROTOR WITH WHITE PRINTING ON TOP AND SIDE OF SWITCH EXCEPT FOR THE "W" STYLES, WHICH HAVE BLACK PRINTING ON TOP. "S" STYLES HAVE NO PRINTING ON TOP.

5. WHITE ROTOR WITH WHITE PRINTING ON TOP AND SIDE OF SWITCH EXCEPT FOR THE "W" STYLES, WHICH HAVE BLACK PRINTING ON TOP. "S" STYLE HAVE NO PRINTING ON TOP.

6. ALL MATERIALS AND FINISHES SHALL COMPLY WITH EU DIRECTIVE 2002/95/EC OF 27JAN2003 (ROHS)

7. LOCATE 'ALCO' TRADE NAME AND LOT NUMBER MARKING.
LOT NUMBER TO BE MARKED AS FOLLOW:

4F
1ST DIGIT2ND DIGIT
YEAR 1194MONTH 6

MARK WITH PERMANENT WHITE INK.

SEE SHEET 2 FOR DIMENSIONAL SPEC'S

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

TERMINAL IDENTIFICATION FOR DR SERIES ONLY
(VIEWED FROM BOTTOM OF SWITCH)

0810
0C00
0240

0810
0C00
0240

ACTUATOR
LOCATION

10—POSITION, BCDSEE NOTE 2

POS	0	1	2	3	4	5	6	7	8	9
C	X	X	X	X	X	X	X	X	X	X
1		X		X		X		X		X
2			X	X			X	X		
4					X	X	X	X		
8									X	X

16—POSITION, HEXADECIMALSEE NOTE 3

POS	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
C	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
1		X		X		X		X		X		X		X		X
2			X	X			X	X			X	X			X	X
4					X	X	X	X				X	X	X	X	X
8									X	X	X	X	X	X	X	X

10 POSITION,
BCD COMPLEMENTSEE NOTE 4

POS	0	1	2	3	4	5	6	7	8	9
C	X	X	X	X	X	X	X	X	X	X
1	X		X		X		X		X	
2	X	X			X	X			X	X
4	X	X	X	X					X	X
8	X	X	X	X	X	X	X	X		

16—POSITION,
HEXADECIMAL COMPLEMENTSEE NOTE 5

POS	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
C	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
1	X		X		X		X		X		X		X		X	
2	X	X			X	X			X	X		X	X			
4	X	X	X	X					X	X	X	X				
8	X	X	X	X	X	X	X	X								

HOW TO ORDER

DRI

SERIES
ROTARY DIPS (BLACK CASE)

ACTUATOR STYLE
M= MINI PLASTIC SHAFT
W= WHEEL
S= METAL SHAFT

CIRCUIT TYPES
10= BC DECIMAL
10C= BCD COMPLEMENT
16= HEXADECIMAL
16C= HEXADECIMAL COMPLEMENT

SPECIFICATIONS:

MATERIAL:

FRAME & CASE: PPS UL94V–0, BLACK
ROTOR,PPS UL94V–0, COLOR SEE P/N TABLE
FIXED CONTACT TERMINAL: COPPER ALLOY,GOLD FLASH OVER NICKEL PLATE
MOVING CONTACT:COPPER ALLOY,GOLD FLASH OVER NICKEL PLATE
BALL SUPPORT PLATE: COPPER ALLOY
BALL: STAINLESS STEEL
DETENT SPRING: STAINLESS STEEL.
BUSHING (DRS): ZINC DIE CAST.
SHAFT (DRS): COPPER ALLOY–NICKEL PLATE

ELECTRICAL:

CONTACT RATING: 0.4 VA @ 20V DC OR PEAK AC
INITIAL CONTACT RESISTANCE: 50 MILLIOHMS MAX.
INSULATION RESISTANCE: 1,000 MEGOHMS @ 100V DC.
DIELECTRIC STRENGTH: 300V AC
LIFE EXPECTANCY: 10,000 ROTATIONS

MECHANICAL:

OPERATING FORCE: 13.88 OZF.IN. MAX

ENVIRONMENTAL:

OPERATING TEMPERATURE: –30 TO +85 DEGREES C
STORAGE TEMPERATURE: –45 TO +100 DEGREES C
RESISTANCE TO SOLDER HEAT–PER 109–202, COND B (THRU–HOLE)
SOLDERABILITY– PER JIS C 0050 & JIS C 0053

NOTES:

1. COMMON TERMINALS ARE CONNECTED INTERNALLY.

2. RED ROTOR WITH WHITE PRINTING ON TOP AND SIDE OF SWITCH. "S" STYLES HAVE NOT PRINTING ON TOP.

3. BLACK ROTOR WITH WHITE PRINTING ON TOP AND SIDE OF SWITCH. "S" STYLES HAVE NO PRINTING ON TOP.

4. ORANGE ROTOR WITH WHITE PRINTING ON TOP AND SIDE OF SWITCH EXCEPT FOR THE "W" STYLES, WHICH HAVE BLACK PRINTING ON TOP. "S" STYLES HAVE NO PRINTING ON TOP.

5. WHITE ROTOR WITH WHITE PRINTING ON TOP AND SIDE OF SWITCH EXCEPT FOR THE "W" STYLES, WHICH HAVE BLACK PRINTING ON TOP. "S" STYLE HAVE NO PRINTING ON TOP.

6. ALL MATERIALS AND FINISHES SHALL COMPLY WITH EU DIRECTIVE 2002/95/EC OF 27JAN2003 (ROHS)

7. LOCATE 'ALCO' TRADE NAME AND LOT NUMBER MARKING.
LOT NUMBER TO BE MARKED AS FOLLOW:

4F
1ST DIGIT2ND DIGIT
YEAR 1194MONTH 6

MARK WITH PERMANENT WHITE INK.

SEE SHEET 2 FOR DIMENSIONAL SPEC'S

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

TERMINAL IDENTIFICATION FOR DR SERIES ONLY
(VIEWED FROM BOTTOM OF SWITCH)

0810
0C00
0240

0810
0C00
0240

ACTUATOR
LOCATION

10—POSITION, BCDSEE NOTE 2

POS	0	1	2	3	4	5	6	7	8	9
C	X	X	X	X	X	X	X	X	X	X
1		X		X		X		X		X
2			X	X			X	X		
4					X	X	X	X		
8									X	X

16—POSITION, HEXADECIMALSEE NOTE 3

POS	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
C	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
1		X		X		X		X		X		X		X		X
2			X	X			X	X			X	X			X	X
4					X	X	X	X				X	X	X	X	X
8									X	X	X	X	X	X	X	X

10 POSITION,
BCD COMPLEMENTSEE NOTE 4

POS	0	1	2	3	4	5	6	7	8	9
C	X	X	X	X	X	X	X	X	X	X
1	X		X		X		X		X	
2	X	X			X	X			X	X
4	X	X	X	X					X	X
8	X	X	X	X	X	X	X	X		

16—POSITION,
HEXADECIMAL COMPLEMENTSEE NOTE 5

POS	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
C	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
1	X		X		X		X		X		X		X		X	
2	X	X			X	X			X	X		X	X			
4	X	X	X	X					X	X	X	X				
8	X	X	X	X	X	X	X	X								

HOW TO ORDER

DRI

SERIES
ROTARY DIPS (BLACK CASE)

ACTUATOR STYLE
M= MINI PLASTIC SHAFT
W= WHEEL
S= METAL SHAFT

CIRCUIT TYPES
10= BC DECIMAL
10C= BCD COMPLEMENT
16= HEXADECIMAL
16C= HEXADECIMAL COMPLEMENT

SPECIFICATIONS:

MATERIAL:

FRAME & CASE: PPS UL94V–0, BLACK
ROTOR,PPS UL94V–0, COLOR SEE P/N TABLE
FIXED CONTACT TERMINAL: COPPER ALLOY,GOLD FLASH OVER NICKEL PLATE
MOVING CONTACT:COPPER ALLOY,GOLD FLASH OVER NICKEL PLATE
BALL SUPPORT PLATE: COPPER ALLOY
BALL: STAINLESS STEEL
DETENT SPRING: STAINLESS STEEL.
BUSHING (DRS): ZINC DIE CAST.
SHAFT (DRS): COPPER ALLOY–NICKEL PLATE

ELECTRICAL:

CONTACT RATING: 0.4 VA @ 20V DC OR PEAK AC
INITIAL CONTACT RESISTANCE: 50 MILLIOHMS MAX.
INSULATION RESISTANCE: 1,000 MEGOHMS @ 100V DC.
DIELECTRIC STRENGTH: 300V AC
LIFE EXPECTANCY: 10,000 ROTATIONS

MECHANICAL:

OPERATING FORCE: 13.88 OZF.IN. MAX

ENVIRONMENTAL:

OPERATING TEMPERATURE: –30 TO +85 DEGREES C
STORAGE TEMPERATURE: –45 TO +100 DEGREES C
RESISTANCE TO SOLDER HEAT–PER 109–202, COND B (THRU–HOLE)
SOLDERABILITY– PER JIS C 0050 & JIS C 0053

NOTES:

1. COMMON TERMINALS ARE CONNECTED INTERNALLY.

2. RED ROTOR WITH WHITE PRINTING ON TOP AND SIDE OF SWITCH. "S" STYLES HAVE NOT PRINTING ON TOP.

3. BLACK ROTOR WITH WHITE PRINTING ON TOP AND SIDE OF SWITCH. "S" STYLES HAVE NO PRINTING ON TOP.

4. ORANGE ROTOR WITH WHITE PRINTING ON TOP AND SIDE OF SWITCH EXCEPT FOR THE "W" STYLES, WHICH HAVE BLACK PRINTING ON TOP. "S" STYLES HAVE NO PRINTING ON TOP.

5. WHITE ROTOR WITH WHITE PRINTING ON TOP AND SIDE OF SWITCH EXCEPT FOR THE "W" STYLES, WHICH HAVE BLACK PRINTING ON TOP. "S" STYLE HAVE NO PRINTING ON TOP.

6. ALL MATERIALS AND FINISHES SHALL COMPLY WITH EU DIRECTIVE 2002/95/EC OF 27JAN2003 (ROHS)

7. LOCATE 'ALCO' TRADE NAME AND LOT NUMBER MARKING.
LOT NUMBER TO BE MARKED AS FOLLOW:

4F
1ST DIGIT2ND DIGIT
YEAR 1194MONTH 6

MARK WITH PERMANENT WHITE INK.

SEE SHEET 2 FOR DIMENSIONAL SPEC'S

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

TERMINAL IDENTIFICATION FOR DR SERIES ONLY
(VIEWED FROM BOTTOM OF SWITCH)

0810
0C00
0240

0810
0C00
0240

ACTUATOR
LOCATION


10—POSITION, BCDSEE NOTE 2

POS	0	1	2	3	4	5	6	7	8	9
C	X	X	X	X	X	X	X	X	X	X
1		X		X		X		X		X
2			X	X			X	X		
4					X	X	X	X		
8									X	X



16—POSITION, HEXADECIMALSEE NOTE 3

POS	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
C	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
1		X		X		X		X		X		X		X		X
2			X	X			X	X			X	X			X	X
4					X	X	X</									


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-

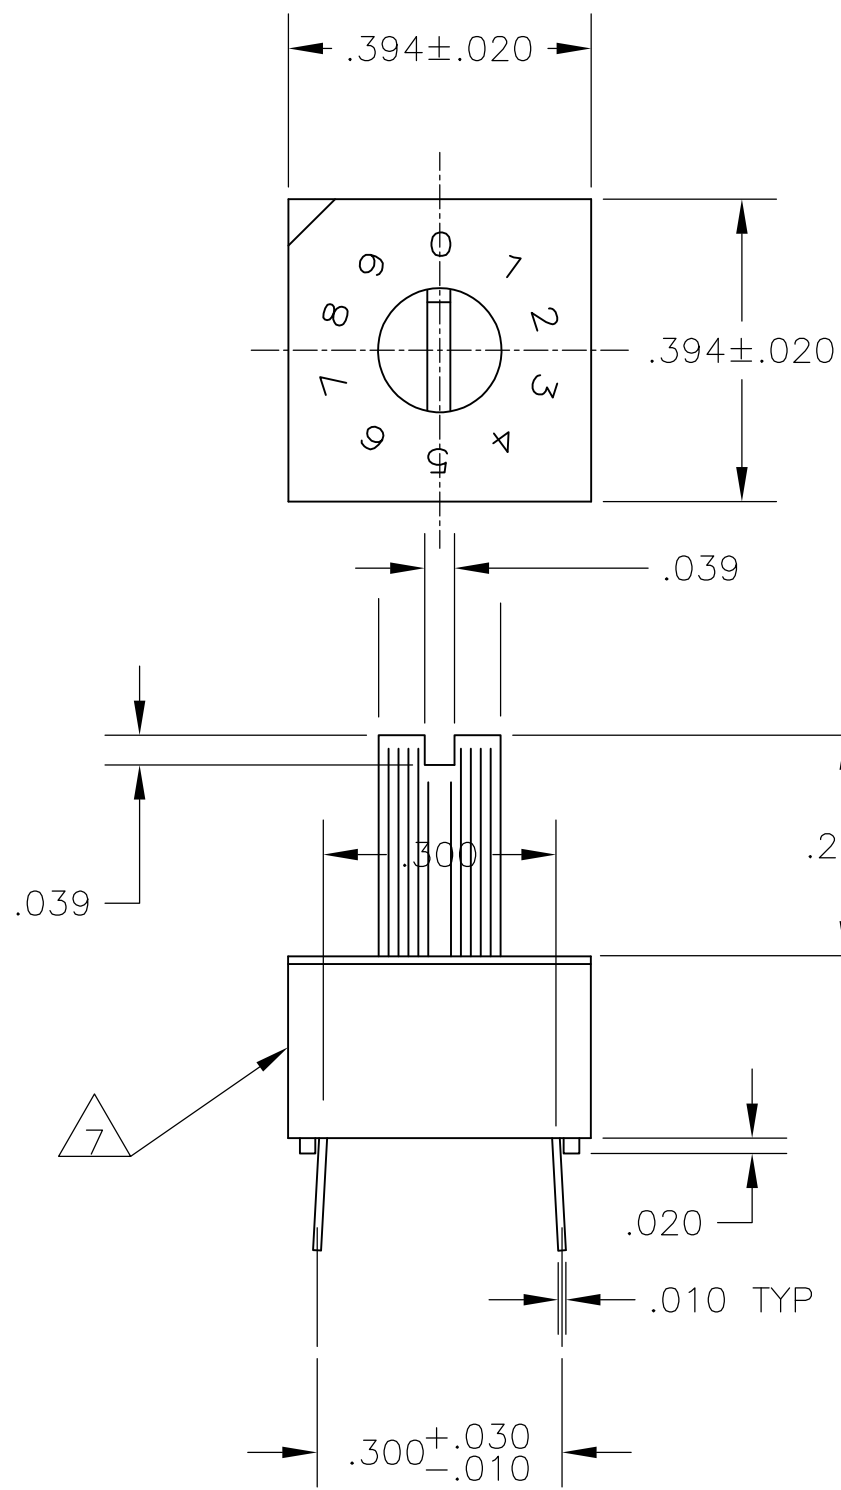


DRM
PC MOUNT

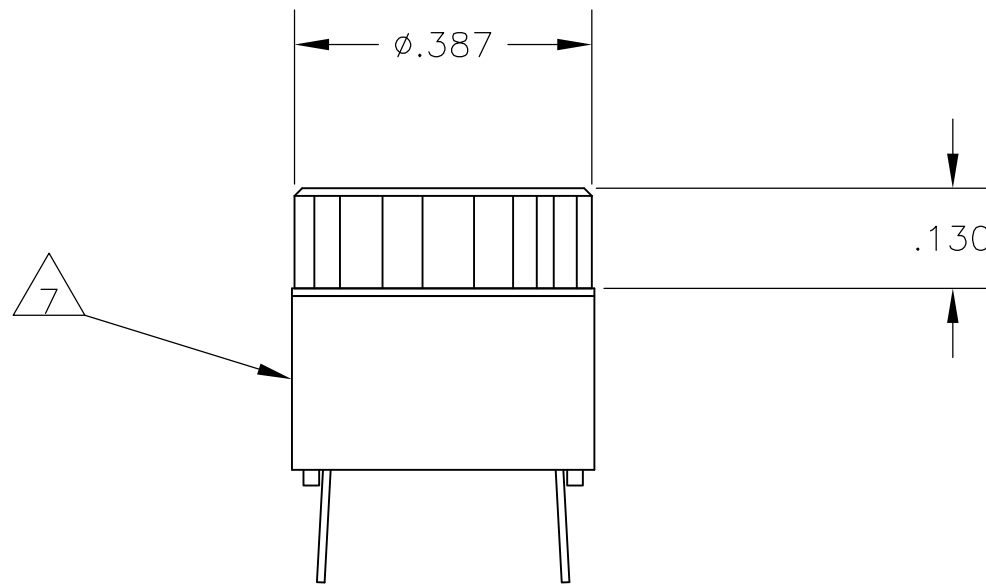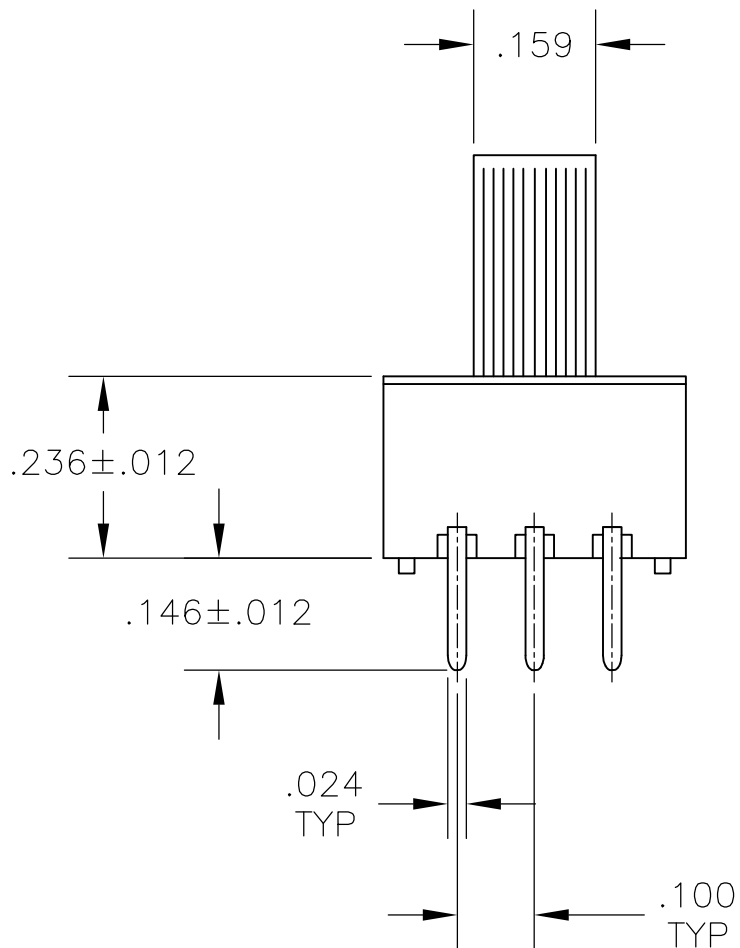


DRW
PC MOUNT

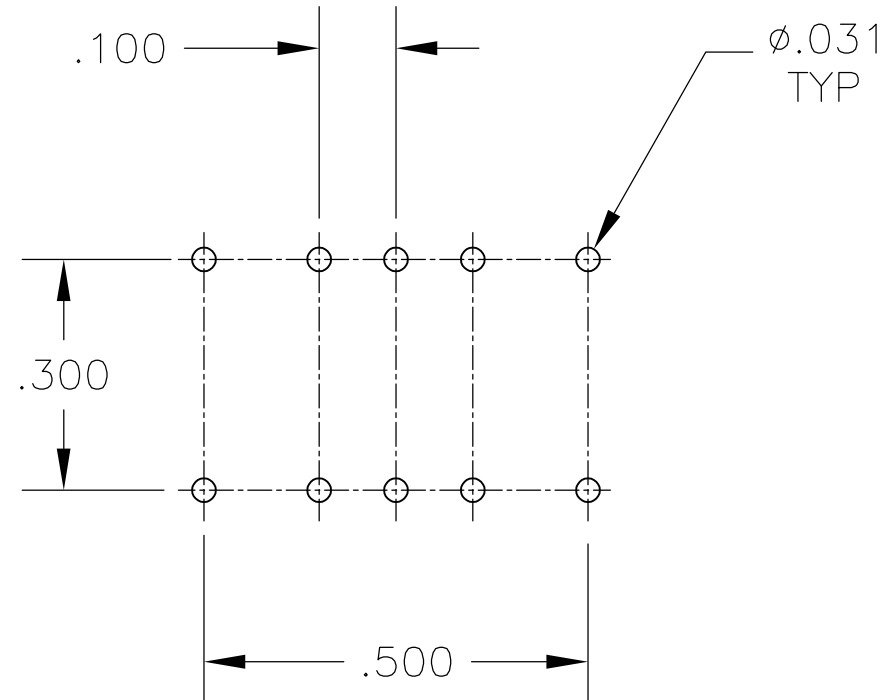


'S' STYLE VERTICAL

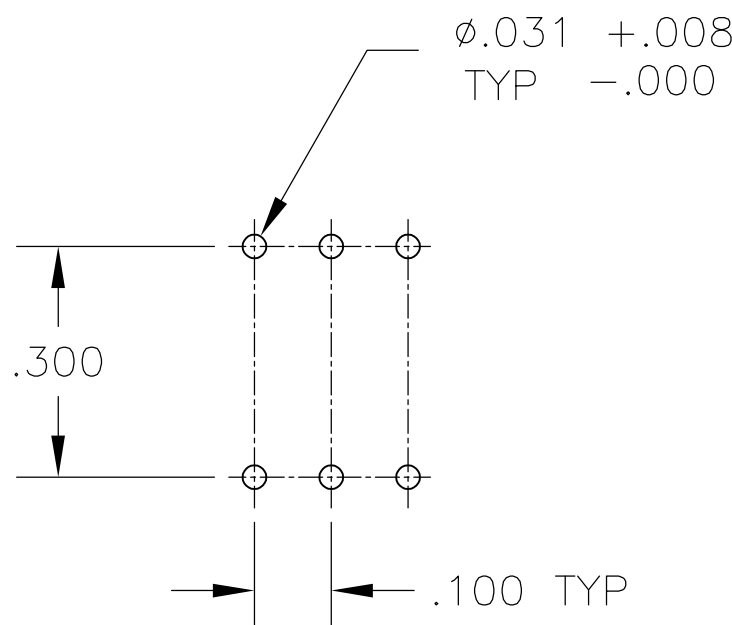


PC

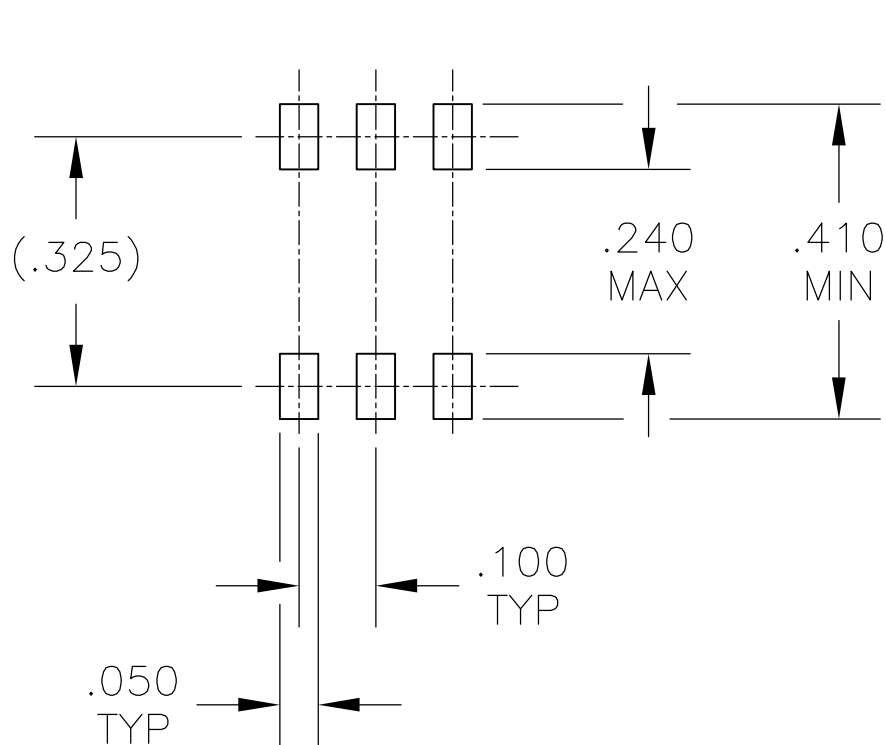




OUTSIDE "L"

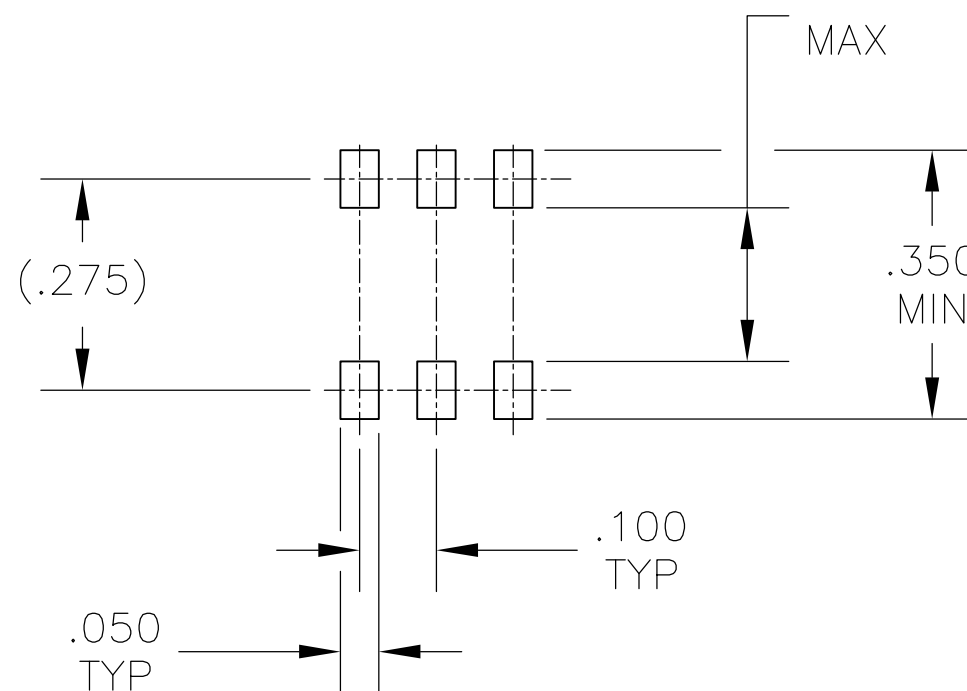


INSIDE "L"

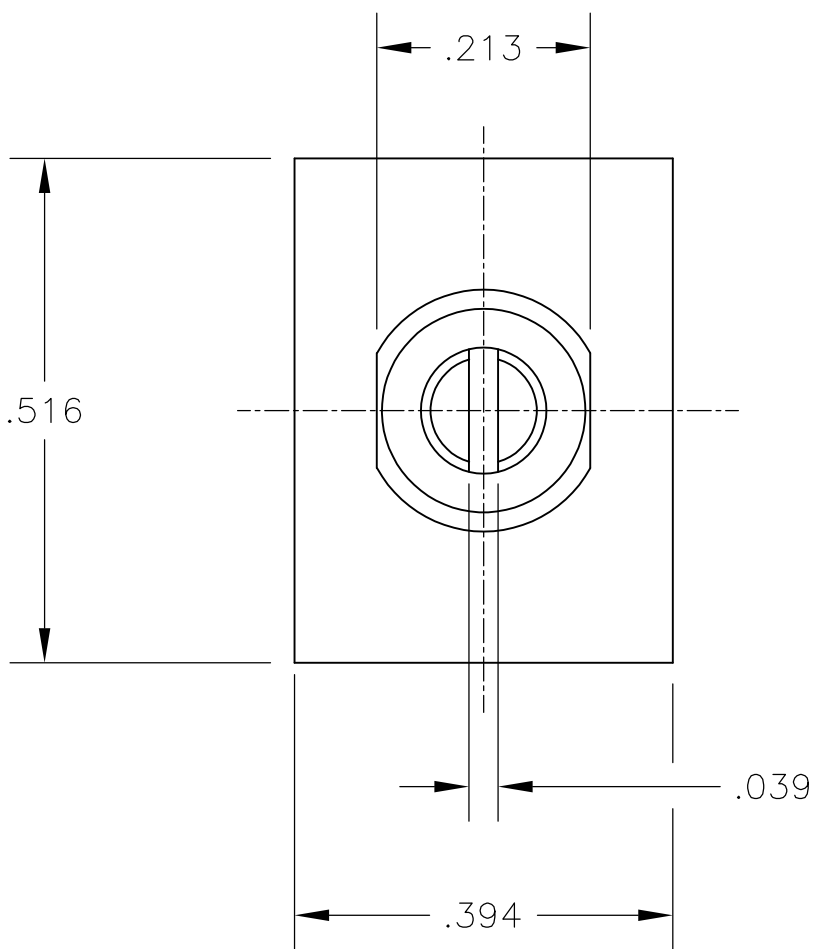


DRS
"S" STYLE VERTICAL

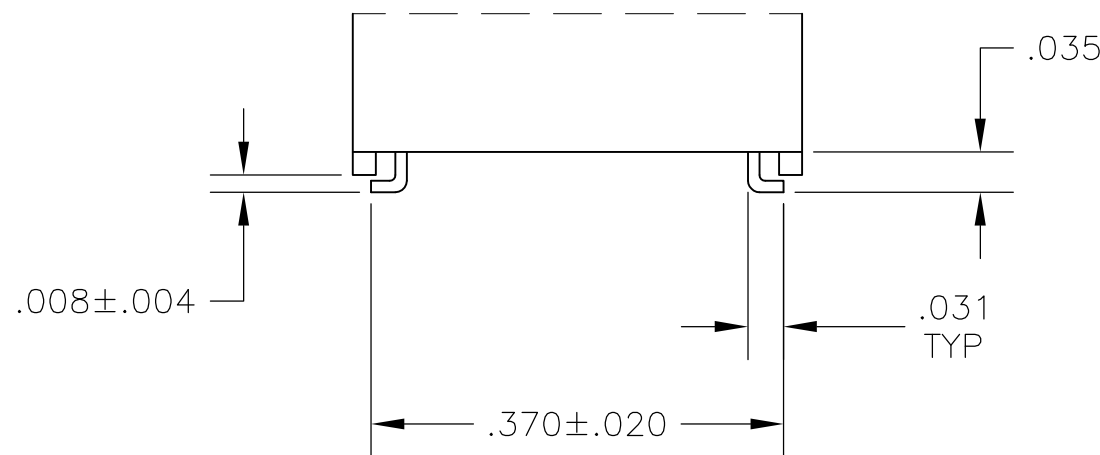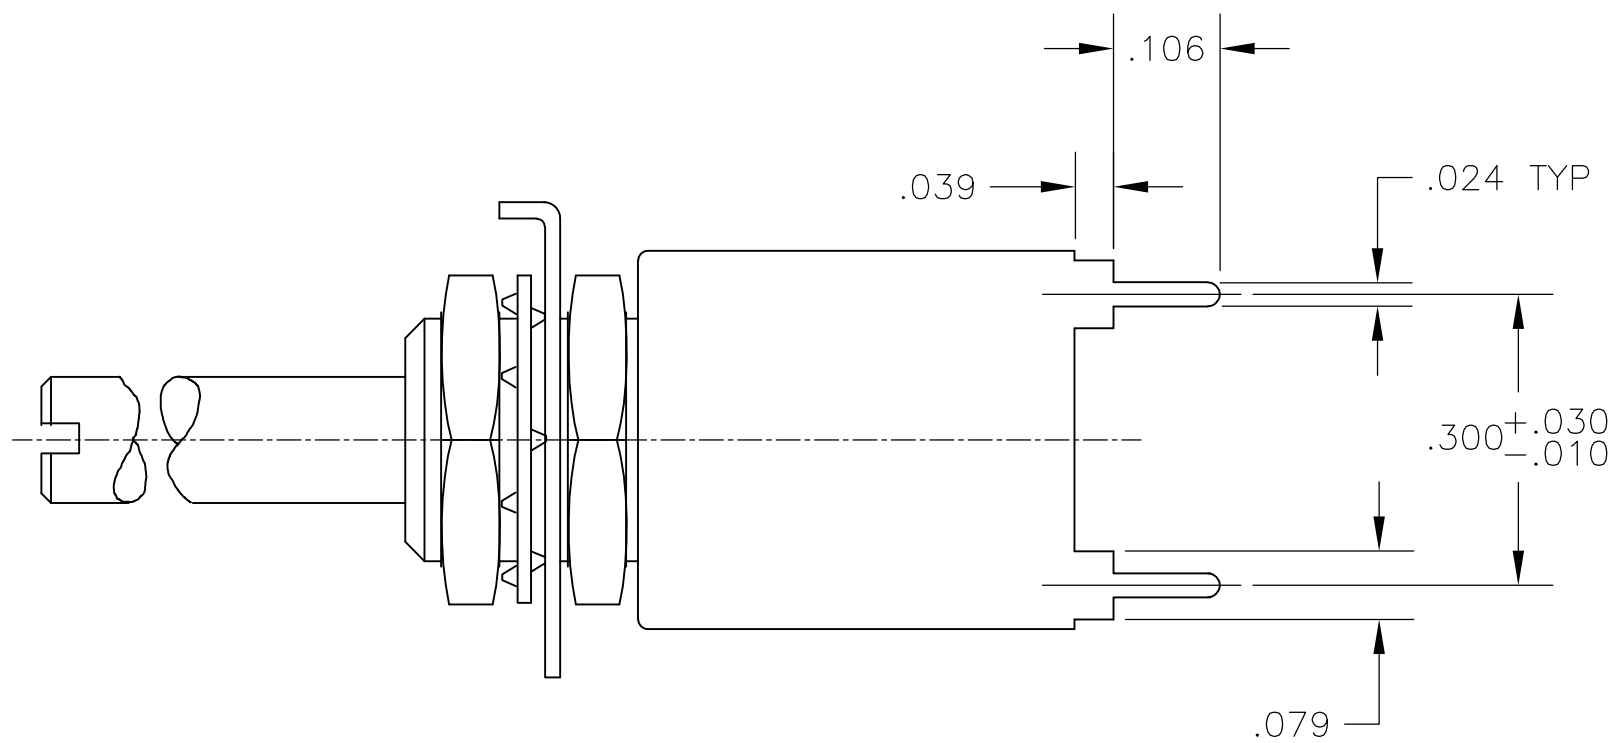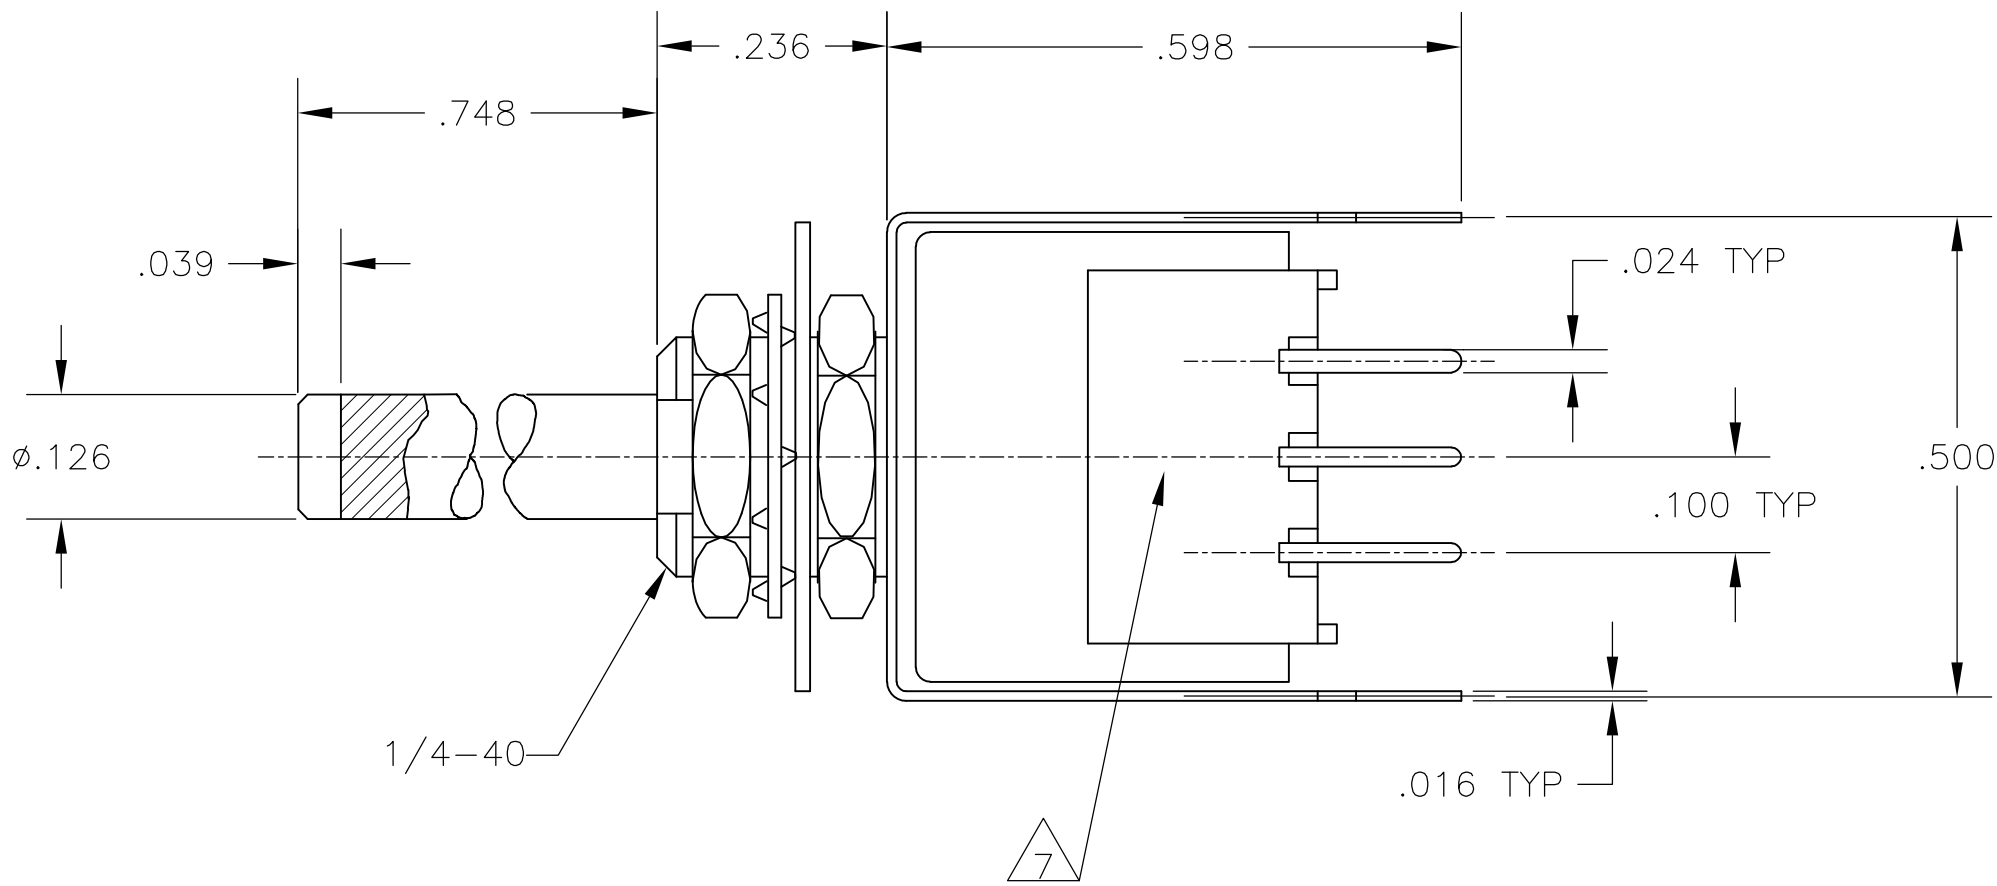

"S" OUTSIDE L TERMINAL
VERTICAL

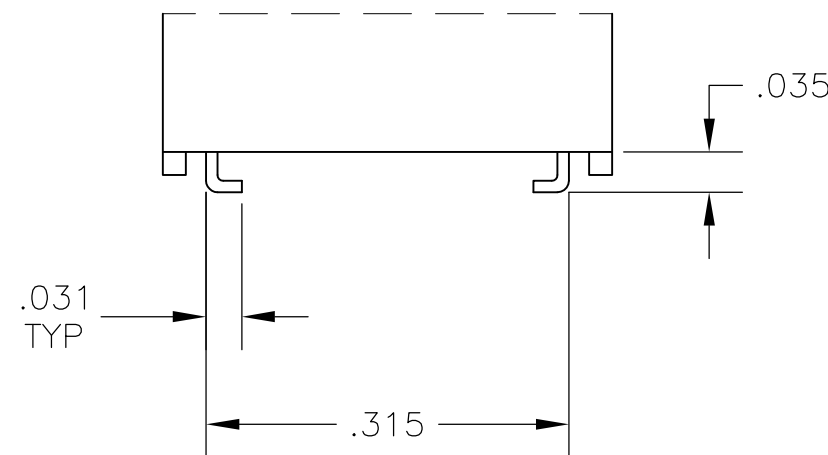

"SA" INSIDE L TERMINAL
VERTICAL

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN BSV	20JUN05	 TE Connectivity	
DIMENSIONS: INCHES		CHK MSS	-	NAME	
	TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC	ROTARY DIP SWITCH	
	0 PLC	± .	APPLICATION SPEC	-	
	1 PLC	± .	WEIGHT	0	SIZE
	2 PLC	± .	CUSTOMER DRAWING	A1 00779	C1825033
	3 PLC	± .010			
4 PLC	± .1"		SHEET	2 OF 2	
MATERIAL	FINISH			REV	A4
-	-				

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9