

Power PCB Relay Card E

- 1 pole 8A, 1 form C (CO) or 1 form A (NO) contact
- 4kV coil-contact
- Vertical and horizontal version
- Wash tight
- RoHS compliant (Directive 2011/65/EC)



Typical applications
I/O modules, heating control, timers



Approvals
VDE Cert. No. 5146 (not for AgSnO version), UL E214025
Technical data of approved types on request


| Contact Data | 8A | 5A | bifurcated |
|--|--------------------------------|-------------------|-----------------------|
| Contact arrangement | 1 form C (CO) or 1 form A (NO) | | |
| Rated voltage | 250VAC | | |
| Max. switching voltage | 400VAC | | |
| Rated current | 8A | 5A | 5A |
| Limiting making current, max 4 s, duty factor 10% | 15A | - | - |
| Breaking capacity max. | 2000VA | 1250VA | 1250VA |
| Contact material | AgSnO, AgNi20 | AgNi0.15 | AgNi0.15 |
| Contact style | single contact | single contact | bifurcated contact |
| Frequency of operation, with/without load | 360/72000h ⁻¹ | | |
| Operate/release time typ. | 7/3ms | | |
| Bounce time typ., form A/form B | 0.5/3ms | | |

| Contact ratings | Type | Contact | Load | Cycles |
|----------------------|--------------------------------|------------------------------------|------|--------------------|
| IEC61810 | | | | |
| AgCdO | C (CO) | 8A, 250VAC, resistive, 70°C | | 20x10 ³ |
| AgNi20 | C (CO) | 8A, 250VAC, resistive 70°C | | 20x10 ³ |
| AgNi20 | A (NO) | 8A, 250VAC, resistive, 70°C | | 30x10 ³ |
| AgNi0.15 | A (NO) | 5A, 250VAC, resistive, 70°C | | 20x10 ³ |
| UL508 | | | | |
| Series A101: | C (CO) | 8A, 250VAC, general purpose, 70°C | | 6x10 ³ |
| Series A201: | C (CO) | 8A, 250VAC, general purpose, 70°C | | 6x10 ³ |
| Series A901: | C (CO) | 10A, 250VAC, general purpose, 70°C | | 6x10 ³ |
| Mechanical endurance | >20x10 ⁶ operations | | | |

Coil Data
Coil voltage range 6 to 110VDC

| Coil code | Rated voltage VDC | Operate voltage VDC | Release voltage VDC | Coil resistance Ω±15% ¹⁾ | Rated coil power mW |
|-----------|-------------------|---------------------|---------------------|-------------------------------------|---------------------|
| 008 | 5 | 3.5 | 0.5 | 46 ¹⁾ | 543 |
| 001 | 6 | 4.2 | 0.6 | 80 ¹⁾ | 450 |
| 002 | 12 | 8.3 | 1.2 | 330 ¹⁾ | 436 |
| 006 | 24 | 16.8 | 2.4 | 1200 | 480 |
| 013 | 48 | 33.6 | 4.8 | 4700 | 490 |
| 023 | 60 | 42.0 | 6.0 | 7200 | 500 |
| 028 | 110 | 77.0 | 11.0 | 23400 | 517 |

1) Coil resistance ±10%.
All figures are given for coil without pre-energization, at ambient temperature +23°C.
Other coil voltages on request.

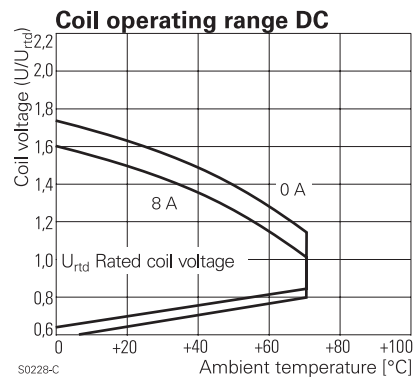

| Insulation Data | |
|------------------------------------|----------------------|
| Initial dielectric strength | |
| between open contacts | 1000V _{rms} |
| between contact and coil | 4000V _{rms} |
| Clearance/creepage | |
| between contact and coil | ≥4/4mm |
| Material group of insulation parts | IIIa |
| Tracking index of relay base | PTI225V |

Other Data

Power PCB Relay Card E (Continued)

Material compliance: EU RoHS/ELV, China RoHS, REACH, Halogen content refer to the Product Compliance Support Center at www.te.com/customersupport/rohssupportcenter

| | |
|--------------------------------------|----------------------------|
| Ambient temperature | -40 to +70°C |
| Category of environmental protection | RTIII - wash tight |
| IEC 61810 | PCB-THT |
| Terminal type | 5mm |
| Mounting distance | 14g |
| Weight | |
| Resistance to soldering heat THT | 260°C/5s |
| IEC 60068-2-20 | |
| Packaging/unit | tube/20 pcs., box/400 pcs. |


PCB layout / terminal assignment

Bottom view on solder pins

Vertical version



Horizontal version




Dimensions

Vertical version



S0280-AH

Horizontal version

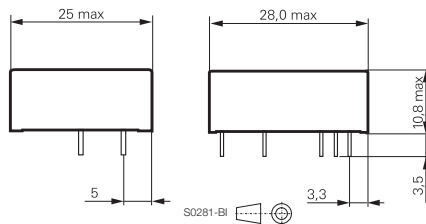

S0281-BI

Power PCB Relay Card E (Continued)

| | | | | | | | | |
|---|----------------------|---------------|-----------|----------|------------|-----------|----------|-----------|
| Product code structure | Typical product code | V23057 | -A | 0 | 006 | -A | 1 | 01 |
| Type | | | | | | | | |
| V23057 Power PCB Relay Card E | | | | | | | | |
| Version | | | | | | | | |
| A Horizontal | | | | | | | | |
| B Vertical | | | | | | | | |
| Version | | | | | | | | |
| 0 Standard (nature white) 3 nature white (formerly orange ³⁾) | | | | | | | | |
| Coil | | | | | | | | |
| Coil code: please refer to coil versions table | | | | | | | | |
| Contact set | | | | | | | | |
| A Single contact B Bifurcated contact | | | | | | | | |
| Contact material | | | | | | | | |
| 1 AgNi 0.15 | | | | | | | | |
| 2 AgNi 20 | | | | | | | | |
| 4 AgCdO ²⁾ | | | | | | | | |
| 9 AgSnO | | | | | | | | |
| Contact configuration | | | | | | | | |
| 01 1 form C contact (1 CO) | | | | | | | | |
| 02 1 form A contact (1 NO) | | | | | | | | |

2) AgCdO contacts are discontinued (see PCN E-17-015248)

3) Relay color changed from orange to nature white (see PCN P-13-009534)

| Product code | Version | Contact arrangement | Contact material | Coil | Approval | Part Number |
|-------------------|------------|--------------------------|------------------|--------|----------|-------------|
| V23057-A0002-B101 | Horizontal | form C (CO) bif. contact | AgNi 0.15 | 12VDC | VDE, UL | 1-1393215-1 |
| V23057-A0006-B101 | | form C (CO) bif. contact | AgNi 0.15 | 24VDC | VDE, UL | 3-1393215-0 |
| V23057-A0001-A101 | | 1 form C (CO) contact | AgNi 0.15 | 6VDC | VDE, UL | 1393215-1 |
| V23057-A0002-A101 | | 1 form C (CO) contact | AgNi 0.15 | 12VDC | VDE, UL | 1393215-4 |
| V23057-A0002-A102 | | 1 form A (NO) contact | AgNi 0.15 | 12VDC | VDE | 1393215-5 |
| V23057-A0006-A101 | | 1 form C (CO) contact | AgNi 0.15 | 24VDC | VDE, UL | 2-1393215-1 |
| V23057-A0006-A102 | | 1 form A (NO) contact | AgNi 0.15 | 24VDC | VDE | 1415546-6 |
| V23057-A0008-A101 | | 1 form C (CO) contact | AgNi 0.15 | 5VDC | VDE, UL | 3-1393215-4 |
| V23057-A0013-A101 | | 1 form C (CO) contact | AgNi 0.15 | 48VDC | VDE, UL | 3-1393215-8 |
| V23057-A0023-A101 | | 1 form C (CO) contact | AgNi 0.15 | 60VDC | VDE, UL | 5-1393215-5 |
| V23057-A0028-A101 | | 1 form C (CO) contact | AgNi 0.15 | 110VDC | VDE, UL | 5-1393215-9 |
| V23057-B0001-A101 | Vertical | 1 form C (CO) contact | AgNi 0.15 | 6VDC | VDE, UL | 6-1393215-6 |
| V23057-B0002-A101 | | 1 form C (CO) contact | AgNi 0.15 | 12VDC | VDE, UL | 6-1393215-7 |
| V23057-B0002-A102 | | 1 form A (NO) contact | AgNi 0.15 | 12VDC | VDE | 1415546-8 |
| V23057-B0006-A101 | | 1 form C (CO) contact | AgNi 0.15 | 24VDC | VDE, UL | 7-1393215-5 |
| V23057-B0006-A102 | | 1 form A (NO) contact | AgNi 0.15 | 24VDC | VDE | 7-1393215-9 |
| V23057-B0013-A101 | | 1 form C (CO) contact | AgNi 0.15 | 48VDC | VDE, UL | 9-1393215-4 |
| V23057-B0023-A101 | | 1 form C (CO) contact | AgNi 0.15 | 60VDC | VDE, UL | 1415546-5 |
| V23057-A0002-A201 | Horizontal | 1 form C (CO) contact | AgNi20 | 12VDC | VDE, UL | 1393215-6 |
| V23057-A0006-A201 | | 1 form C (CO) contact | AgNi20 | 24VDC | VDE, UL | 2-1393215-3 |
| V23057-B0002-A201 | Vertical | 1 form C (CO) contact | AgNi20 | 12VDC | VDE, UL | 6-1393215-9 |
| V23057-B0006-A201 | | 1 form C (CO) contact | AgNi20 | 24VDC | VDE, UL | 8-1393215-1 |
| V23057-B0006-A202 | | 1 form A (NO) contact | AgNi20 | 24VDC | VDE | 8-1393215-3 |
| V23057-B0023-A201 | | 1 form C (CO) contact | AgNi20 | 60VDC | VDE, UL | 2-1415543-8 |
| V23057-B0028-A201 | | 1 form C (CO) contact | AgNi20 | 110VDC | VDE, UL | 2-1415543-9 |
| V23057-A0001-A901 | Horizontal | 1 form C (CO) contact | AgSnO | 6VDC | UL | 2-1415372-1 |
| V23057-A0002-A901 | | 1 form C (CO) contact | AgSnO | 12VDC | UL | 1-1393215-0 |
| V23057-A0006-A901 | | 1 form C (CO) contact | AgSnO | 24VDC | UL | 2-1393215-8 |
| V23057-A0013-A901 | | 1 form C (CO) contact | AgSnO | 48VDC | UL | 4-1393215-2 |
| V23057-B0006-A901 | Vertical | 1 form C (CO) contact | AgSnO | 24VDC | UL | 8-1393215-8 |
| V23057-B0023-A901 | | 1 form C (CO) contact | AgSnO | 60VDC | UL | 1415538-4 |
| V23057-B0028-A901 | | 1 form C (CO) contact | AgSnO | 110VDC | UL | 1415538-6 |

This list represents the most common types and does not show all variants covered by this data sheet.

Other types on request

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9