
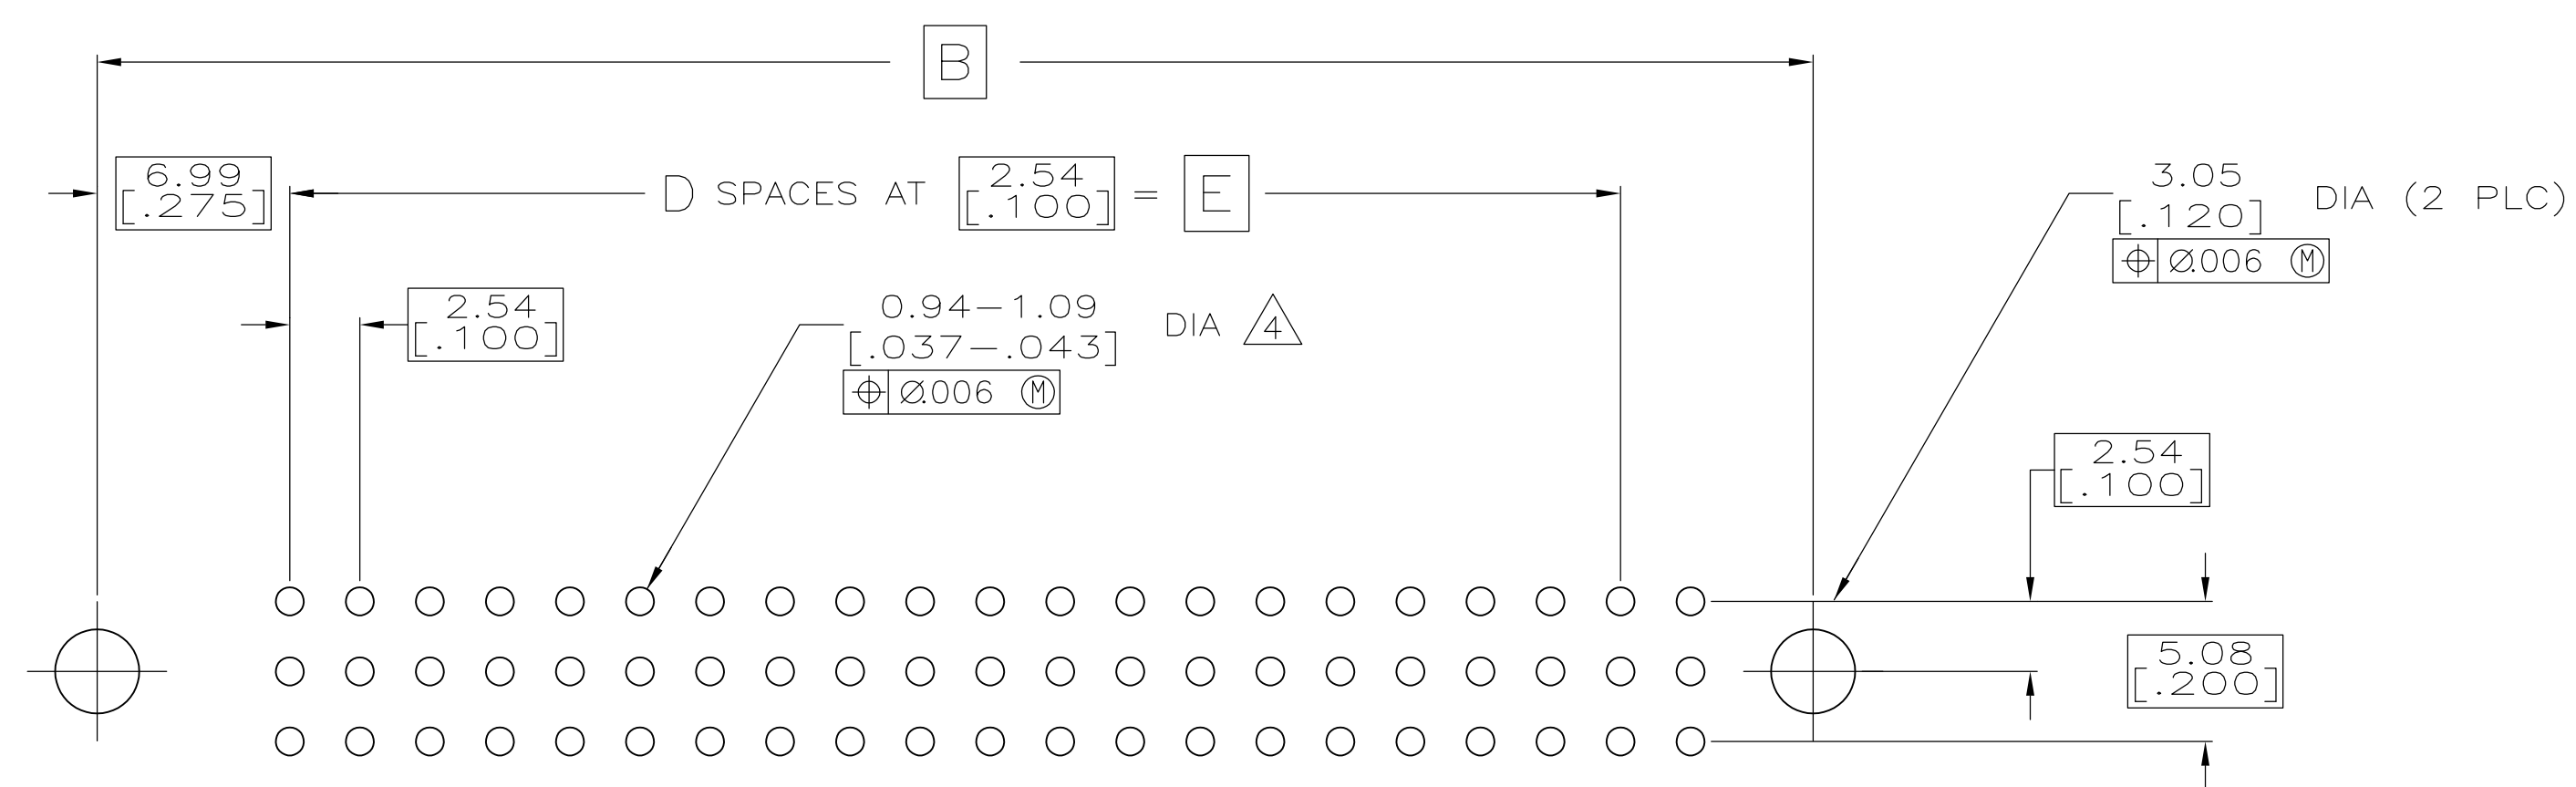





Technical drawing of a three-hole punch assembly. The drawing shows a cross-section of the punch mechanism. Dimensions are provided in inches and millimeters (in brackets). Key dimensions include:

- Overall width: 12.19 [480]
- Distance between punch tips: 0.64 [.025] SQ
- Distance from top of punch to top of punch body: 11.73 [.462]
- Distance from top of punch to bottom of punch body: 6.35±0.51 [.250±.020]
- Distance from top of punch to bottom of punch body (alternative): 5.33 [.210]
- Distance from top of punch to bottom of punch body (alternative): 5.00 [.197]
- Distance from top of punch to bottom of punch body (alternative): 2.54 [.100]
- Distance from top of punch to bottom of punch body (alternative): 5.08 [.200]

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R.K. SEIFRED 03/22/90 CHK R.K. SEIFRED 03/22/90		 TE Connectivity	
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± 0.13 [0.005] 4 PLC ± - ANGLES ± - FINISH		NAME HDI, 3 ROW, PIN ASSEMBLY, 6.35 [.250] LONG ACTION PINS	
		PRODUCT SPEC — APPLICATION SPEC —		SIZE A1	
MATERIAL 		WEIGHT 0		CAGE CODE 00779	
		CUSTOMER DRAWING		DRAWING NO C-532447	
				RESTRICTED TO —	
				SCALE 4:1	
				SHEET 1 OF 2	
				REV N	

THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION	- , - .
© COPYRIGHT - By - ALL RIGHTS RESERVED,		

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	—	SEE SHEET 1	—	—	—

1 HOUSING MATERIAL: THERMOPLASTIC, COLOR-BLACK.

CONTACT MATERIAL: PHOSPHOR BRONZE.

3 FINISH:
MATING AREA: MEETS THE PERFORMANCE REQUIREMENTS OF PRODUCT SPECIFICATION 108-9063; BASED ON TELCORDIA DR-1217-CORE APPLICATIONS IN UNCONTROLLED ENVIRONMENTS.
SOLDER TAILS AREA: TIN-LEAD PLATED.


4 ACTION PIN POSTS REQUIRE 2.36 [.093] MIN THICK P.C. BOARD.
RECOMMENDED P.C. BOARD HOLES ARE 1.151 [.0453] DIA PLATED
THRU WITH 0.025-0.076 [.001-.003] COPPER, WITH 0.0076
[.0003] MIN TIN-LEAD PLATING; FINISHED HOLE AFTER PLATING
0.94-1.09 [.037-.043] DIA; AFTER RELOW 0.91-1.09 [.036-.043].

5. DIMENSIONS IN BRACKETS ARE IN INCHES.

6 HOUSINGS WITH CENTER MOUNTING IS RECOMMENDED FOR ASSEMBLIES HAVING 75 CONTACTS PER ROW OR MORE.

 PART NUMBER IS OBSOLETE.

$\triangle$	$\frac{81.28}{[3.200]}$	$\overline{32}$	$\frac{85.09}{[3.350]}$	$\frac{95.25}{[3.750]}$	$\frac{102.87}{[4.050]}$	$\overline{99}$	2-532447-0
$\triangle$	$\frac{x}{x}$	$\overline{x}$	$\frac{x}{x}$	$\frac{x}{x}$	$\frac{x}{x}$	$\overline{x}$	1-532447-9
$\triangle$	$\frac{x}{x}$	$\overline{x}$	$\frac{x}{x}$	$\frac{x}{x}$	$\frac{x}{x}$	$\overline{x}$	1-532447-8
$\triangle \triangle$	$\frac{251.46}{[9.900]}$	$\overline{99}$	$\frac{255.27}{[10.050]}$	$\frac{265.43}{[10.450]}$	$\frac{273.05}{[10.750]}$	$\overline{300}$	1-532447-7
$\triangle \triangle$	$\frac{238.76}{[9.400]}$	$\overline{94}$	$\frac{242.57}{[9.550]}$	$\frac{252.73}{[9.950]}$	$\frac{260.35}{[10.250]}$	$\overline{285}$	1-532447-6
$\triangle \triangle$	$\frac{226.06}{[8.900]}$	$\overline{89}$	$\frac{229.87}{[9.050]}$	$\frac{240.03}{[9.450]}$	$\frac{247.65}{[9.750]}$	$\overline{270}$	1-532447-5
$\triangle \triangle$	$\frac{213.36}{[8.400]}$	$\overline{84}$	$\frac{217.17}{[8.550]}$	$\frac{227.33}{[8.950]}$	$\frac{234.95}{[9.250]}$	$\overline{255}$	1-532447-4
$\triangle \triangle$	$\frac{200.66}{[7.900]}$	$\overline{79}$	$\frac{204.47}{[8.050]}$	$\frac{214.63}{[8.450]}$	$\frac{222.25}{[8.750]}$	$\overline{240}$	1-532447-3
$\triangle$	$\frac{187.96}{[7.400]}$	74	$\frac{191.77}{[7.550]}$	$\frac{201.93}{[7.950]}$	$\frac{209.55}{[8.250]}$	225	1-532447-2
	$\frac{175.26}{[6.900]}$	69	$\frac{179.07}{[7.050]}$	$\frac{189.23}{[7.450]}$	$\frac{196.85}{[7.750]}$	210	1-532447-1
	$\frac{162.56}{[6.400]}$	64	$\frac{166.37}{[6.550]}$	$\frac{176.53}{[6.950]}$	$\frac{184.15}{[7.250]}$	195	1-532447-0
	$\frac{149.86}{[5.900]}$	59	$\frac{153.67}{[6.050]}$	$\frac{163.83}{[6.450]}$	$\frac{171.45}{[6.750]}$	180	532447-9
	$\frac{137.16}{[5.400]}$	54	$\frac{140.97}{[5.550]}$	$\frac{151.13}{[5.950]}$	$\frac{158.75}{[6.250]}$	165	532447-8
	$\frac{124.46}{[4.900]}$	49	$\frac{128.27}{[5.050]}$	$\frac{138.43}{[5.450]}$	$\frac{146.05}{[5.750]}$	150	532447-7
	$\frac{111.76}{[4.400]}$	$\overline{44}$	$\frac{115.57}{[4.550]}$	$\frac{125.73}{[4.950]}$	$\frac{133.35}{[5.250]}$	$\overline{135}$	532447-6
	$\frac{99.06}{[3.900]}$	39	$\frac{102.87}{[4.050]}$	$\frac{113.03}{[4.450]}$	$\frac{120.65}{[4.750]}$	120	532447-5
	$\frac{86.36}{[3.400]}$	34	$\frac{90.17}{[3.550]}$	$\frac{100.33}{[3.950]}$	$\frac{107.95}{[4.250]}$	105	532447-4
	$\frac{78.74}{[3.100]}$	31	$\frac{82.55}{[3.250]}$	$\frac{92.71}{[3.650]}$	$\frac{100.33}{[3.950]}$	96	532447-3
$\triangle \triangle$	$\frac{73.66}{[2.900]}$	$\overline{29}$	$\frac{77.47}{[3.050]}$	$\frac{87.63}{[3.450]}$	$\frac{95.25}{[3.750]}$	$\overline{90}$	532447-2
	$\frac{60.96}{[2.400]}$	24	$\frac{64.77}{[2.550]}$	$\frac{74.93}{[2.950]}$	$\frac{82.55}{[3.250]}$	75	532447-1
	E	D	C	B	A	POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG. R.K. SEIFRED 03/22/90 CHK. R.K. SEIFRED 03/22/90 APP'D _____	 TE Connectivity	
DIMENSIONS: mm [INCHES]	TOLERANCES, UNLESS OTHERWISE SPECIFIED:	NAME HDI, 3 ROW, PIN ASSEMBLY, 6.35 [250] LONG ACTION PINS		
	0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± 0.13 [0.05] ANGLES ± FINISH ±	PRODUCT SPEC APPLICATION SPEC	SIZE A1	CASE CODE 00779
MATERIAL 		DRAWING NO 532447	RESTRICTED TO -	
WEIGHT 0		CUSTOMER DRAWING	SCALE 4:1	SHEET 2 OF 2
			REV N	

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9