




TW

Hybrid D'Sub series

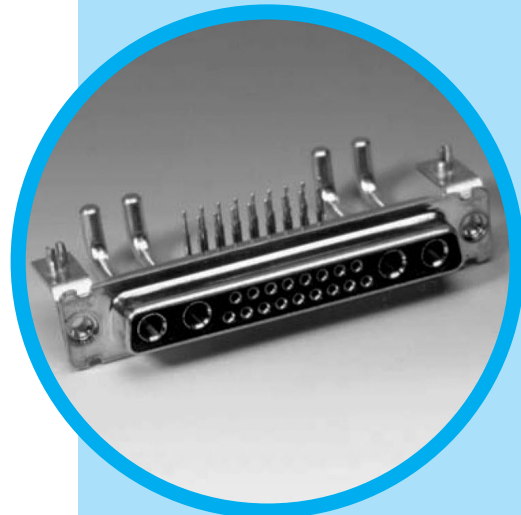

CONTENT

Specifications

- Connectors according to: MIL C24308 - NFC93425 - HE507

Materials and platings		Electrical Data	
Shells	Steel-Tin plating	Current rating	
Insulators	High temperature black thermoplastic	Signal contacts	7.5 A. with 10 A. peaks
Signal contacts	Female: machined bronze	Power contacts	
Material	Male: machined brass	PCB terminations	10 to 40 A.
Plating finish	16μ "Au over 79μ" Ni min.	Solder cup terminations	10 to 40 A.
Or	30μ "Au over 79μ" Ni min.	Crimp terminations	10 to 40 A.
Shielded contacts	Female: machined bronze	Shielded contacts	0.5 A.
Material	Male: machined brass	Voltage rating	
Plating		Signal and power contacts	300 V.R.M.S. at 50 Hz
Inner conductor	16μ "Au or 30μm Au over 79μ" Ni	Shielded contacts	150 V.R.M.S. at 50 Hz
Outer ring	10μ "Au over 79μ" Ni	Shielded contacts	
Terminations	Tinned	Frequency range	0-1 GHz
Except solder cup and crimp terminations	gold flash	Attenuation	0.2dB
Power contacts	Female: machined bronze	V. S. W. R.	1.4(+0.04/GHz)
Material	Male: machined brass	Characteristic impedance	50 Ohms
Plating		Dielectric withstanding voltage	≥ 1000 V.R.M.S. at 50Hz
Contacts	16μ "Au or 30μ" Au over 79μ" Ni	Insulation resistance	≥ 5000 M Ohms at 500 VDC
Terminations	Tinned	Contact resistance	≤ 5m Ohms
Except solder cup and crimp terminations	gold flash	Shell resistance (electrical grounding)	≤ 1m Ohm
Brackets	Steel-Tin plating		
Front jackscrews	Brass-Tin plating		
Rear clinch nuts	Brass-Tin plating		
Boardlocks	Bronze-Tin plating		
Stand-off	Brass-Tin plating		

Climatic Data		Mechanical data	
Operating temperature	-55°C + 155°C (with peaks up to 180°C)	Shells	With or without dimples
Damp heat	56 days (40°C - 95% HR)	Contact retention force in dielectric material	> 40N
Salt spray	48 hours	Maximum mating and unmating force	
		With dimples	E size = 70 N A size = 80 N B size = 100 N C size = 150 N D size = 180 N E size = 30 N A size = 50 N B size = 80 N C size = 120 N D size = 160 N
		Without dimples	
		Compatible with process	
		IR - Air convectioned	260° for 20 s.
		Resistance to solder iron heat	260°C for 30 s.
		Mating cycles	≥ 200 (classe II) or 500 (classe I)
		Blind mating system	Available upon request
		Polarization	Available with locking accessories Consult factory



DESCRIPTION

Amphenol D'Sub TW Hybrid Series permits a mix of contacts including signal, power, shielded, high voltage and fiber optics in the same housing with 18 different contacts arrangements.

This economic series was first developed from our military series, and has improved features:

- new contacts
- new high temperature black thermoplastic insert
- PCB configurations come preloaded with fixed contacts and brackets.

These connectors are supplied with screw machined contacts which are fixed in the insulator.

A complete range of housings are also available for cable application.

A full range of arrangements compatible with reflow process

APPLICATIONS

- Commercial
- Medical
- Industrial
- Telecom
- Any application requiring optimization of space

TW / E1



Amphenol

Shell and contacts plating

CLASS II

0.4µm (16µ") Au contacts gold plating
200 mating cycles

Types	Shells and plating
77 TW	Tin plated shell <i>*Male and female</i>
717 TW	Tin plated shell with dimples <i>Male only</i>













CLASS I

0.76µm (30µ") Au contacts gold plating
500 mating cycles


Types	Shells and plating
177 TW	Tin plated shell <i>*Male and female</i>
777 TW	Tin plated shell with dimples <i>Male only</i>

Housing arrangements

Male front view

Arrangement Shell size	 5W1 E	 7W2 A	 11W1 A
Arrangement Shell size	 3W3 A	 5W5 B	 9W4 B
Arrangement Shell size	 13W3 B	 17W2 B	 21W1 B
Arrangement Shell size	 27W2 C	 13W6 C	 17W5 C
Arrangement Shell size	 21W4 C	 8W8 C	 25W3 C
Arrangement Shell size	 24W7 D	 36W4 D	 43W2 D


Shell size dimensions

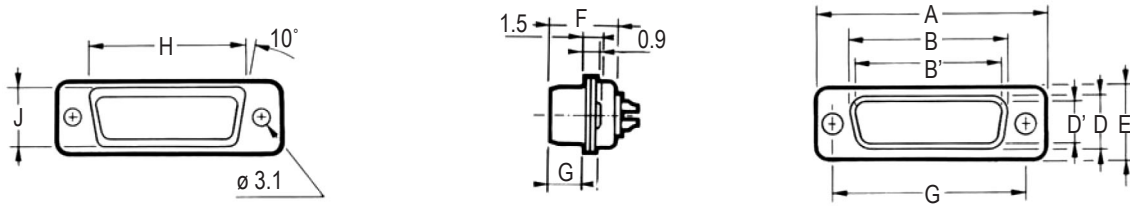


Shell size	Contact P: Pin S: Socket	A ±0.25 (±.010)	B 0/-0.20 (0/- .008)	B' +0.20/0 (+.008/0)	C ±0.10 (±.004)	D 0/-0.25 (0/- .010)	D' +0.25/0 (+.010/0)	E ±0.20 (±.008)	F +0.05/-0.20 (+.002/- .008)	F' +0.10/-0.20 (+.004/- .008)	G +0.10/-0.20 (+.004/- .008)	G' ±0.10 (±.004)	H +0.10/-0.40 (+.004/- .016)	J 0/-0.50 (0/- .020)
E	P	30.7 (1.209")		16.8 (.661")	25.0 (.984")		8.2 (.323")	12.4 (.488")		10.9 (.429")		5.9 (.232")	19.4 (.764")	11.0 (.433")
	S		16.4 (.646")			8.0 (.315")			11.1 (.437)		6.2 (.244")			
A	P	39.0 (1.535")		25.1 (.988")	33.3 (1.311")		8.2 (.323")	12.4 (.488")		10.9 (.429")		5.9 (.232")	27.7 (1.091")	11.0 (.433")
	S		24.8 (.976")			8.0 (.315")			11.1 (.437)		6.2 (.244")			
B	P	52.9 (2.083")		38.8 (1.528")	47.0 (1.850")		8.2 (.323")	12.4 (.488")		11.0 (.433")		5.8 (.228")	41.4 (1.630")	11.0 (.433")
	S		38.5 (1.513")			8.0 (.315")			11.1 (.437)		6.2 (.244")			
C	P	69.2 (2.724")		55.3 (2.177")	63.5 (2.500")		8.2 (.323")	12.4 (.488")		11.0 (.433")		5.8 (.228")	57.9 (2.280")	11.0 (.433")
	S		54.9 (2.161")			8.0 (.315")			11.1 (.437)		6.2 (.244")			
D	P	66.8 (2.630")		52.7 (2.075")	61.1 (2.406")		11.0 (.433")	15.2 (.598")		11.0 (.433")		5.8 (.228")	55.5 (2.185")	13.8 (.543")
	S		52.5 (2.067")			10.9 (.429")			11.1 (.437)		6.2 (.244")			

Panel cutouts

Optimal cutout for rear mounting

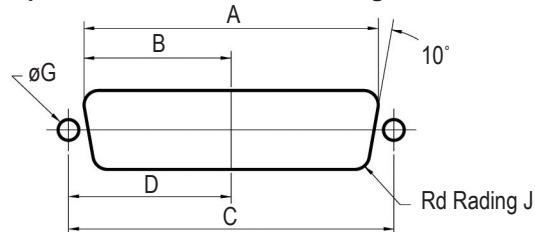


Standard cutout

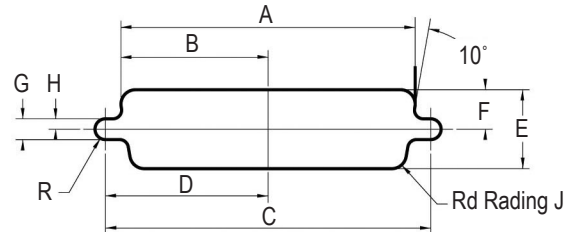

Shell size	Mounting method	A ±0.20 (±.008)	B ±0.20 (±.008)	C ±0.20 (±.008)	D ±0.20 (±.008)	E ±0.20 (±.008)	F ±0.20 (±.008)	G ±0.20 (±.008)	H ±0.20 (±.008)	J ±0.20 (±.008)
E	Front	22.2 (.874")	11.1 (.437")	25.0 (.984")	12.5 (.492")	13.0 (.512")	6.5 (.256")	3.0 (.118")	1.5 (.059")	2.1 (.083")
	Rear	20.5 (.807")	10.2 (.402")			11.4 (.449")	5.7 (.224")			3.4 (.134")
A	Front	30.5 (1.201")	15.3 (.602")	33.3 (1.311")	16.7 (.657")	13.0 (.512")	6.5 (.256")	3.0 (.118")	1.5 (.059")	2.1 (.083")
	Rear	28.8 (1.134")	14.4 (.567")			11.4 (.449")	5.7 (.224")			3.4 (.134")
B	Front	44.3 (1.744")	22.1 (.870")	47.0 (1.850")	23.5 (.925")	13.0 (.512")	6.5 (.256")	3.0 (.118")	1.5 (.059")	2.1 (.083")
	Rear	42.5 (1.673")	21.3 (.839")			11.4 (.449")	5.7 (.224")			3.4 (.134")
C	Front	60.7 (2.390")	30.4 (1.197")	63.5 (2.500")	31.7 (1.248")	13.0 (.512")	6.5 (.256")	3.0 (.118")	1.5 (.059")	2.1 (.083")
	Rear	59.1 (2.327")	29.5 (1.161")			11.4 (.449")	5.7 (.224")			3.4 (.134")
D	Front	58.3 (2.295")	29.2 (1.150")	61.1 (2.406")	30.6 (1.205")	15.8 (.622")	7.9 (.311")	3.0 (.118")	1.5 (.059")	2.1 (.083")
	Rear	56.3 (2.217")	28.2 (1.110")			14.1 (.555")	7.1 (.280")			3.4 (.134")

Straight connector footprint

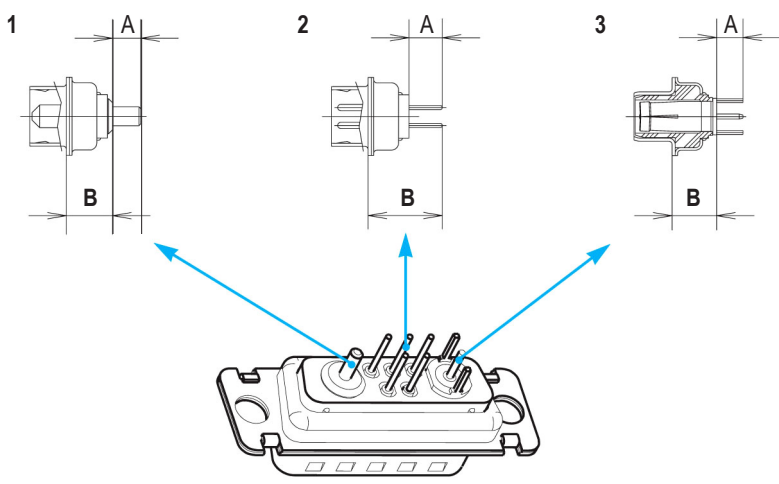


Signal tail 0.6 mm Dia. (.0236")
1.6 mm (.063")PCB
For other PCB thickness: consult factory.

Description		Dimensions	
		a	b
Power (.126" tail dia.)	1	4.80 mm (.198")	7.2 mm (.283")
Power (.0787" tail dia.)	1	4.80 mm (.198")	7.2 mm (.283")
Shielded	3	4.00 mm (.157")	7.2 mm (.283")
Signal	2	5.00 mm (.196")	11.50 mm (.453")

Straight contact combinations

Arrangement with signal contacts		Arrangement without signal contacts 3W3 - 5W5 - 8W8	
See above dimensions	Size 8 and 20 Contacts	See above dimensions	Size 8 Contacts
↓		↓	
P 3SY	Power 3.2 mm DIA. (.126") (20 to 40 A) and signal	P 3Y	Power only 3.2 mm DIA. (.126") (20 to 40 A)
P 2SY	Power 2 mm DIA. (.0787") (10 to 20 A) and signal	P 2Y	Power only 2 mm DIA. (.0787") (10 to 20 A)
CSY	Shielded and signal	CY	Shielded only
SY	Signal only		
No reference	Signal (Size 20) with solder cup terminations Housing preloaded with contacts		

Right angle connector footprint

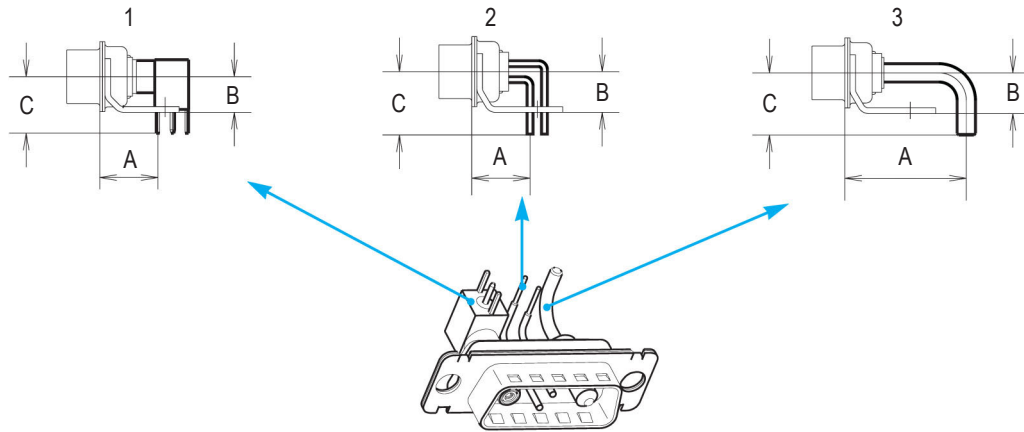

Signal tail 0.6 mm Dia. (.0236")
1.6 mm (.063") PCB
For other PCB thickness: consult factory.

Description		Europe			Mix			MIL		
		a	b	c	a	b	c	a	b	c
Shielded	1	-	-	-	10.30mm (.406")	6.30mm (.248")	10.00mm (.394")	10.30mm (.406")	6.30mm (.248")	10.00mm (.394")
Signal	2	10.30mm (.406")	7.20mm (.283")	11.20mm (.441")	10.30mm (.406")	6.30mm (.248")	9.50mm (.374")	8.10mm (.319")	6.30mm (.248")	9.50mm (.374")
Power (.0787" tail dia.)	3	11.57mm (.456")	7.20mm (.283")	10.50mm (.413")	11.57mm (.456")	6.30mm (.248")	9.50mm (.374")	9.52mm (.375")	6.30mm (.248")	9.50mm (.374")
Power (.126" tail dia.)	3	21.46mm (.845")	7.20mm (.283")	10.50mm (.413")	21.46mm (.845")	6.30mm (.248")	9.50mm (.374")	21.46mm (.845")	6.30mm (.248")	9.50mm (.374")

Note: above dimensions correspond to sizes E to C. Consult factory for D sizes.
Connector comes equipped with contacts and brackets.

Right angle contacts combinations

Arrangement with signal contacts

European footprint	Mixed footprint	MIL (U.S.) footprint	Size 8 and 20 Contacts
EP3SV	HP3SV	MP3SV	Power 3.2 mm DIA. (.126") (20 to 40 A) and signal
EP2SV	HP2SV	MP2SV	Power 2 mm DIA. (.0787") (10 to 20 A) and signal
-	HCSV	MCSV	Shielded and signal
ESV	HSV	MSV	Signal only

Arrangement without signal contacts 3W3 - 5W5 - 8W8


European footprint	Mixed footprint	MIL (U.S.) footprint	Size 8 contacts only
EP3V	HP3V	MP3V	Power only 3.2 mm DIA. (.126") (20 to 40 A)
EP2V	HP2V	MP2V	Power only 2.0 mm DIA. (.0787") (10 to 20 A)
-	HCV	MCV	Shielded only

Mounting options


Right angle version

Connectors come equipped with metal brackets

BLANK: 3.10mm (.122") dia mounting hole

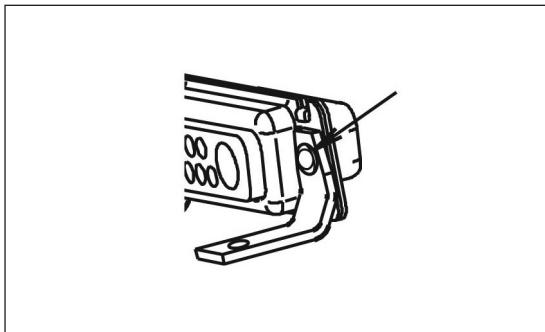


RM6: metal brackets + boardlock

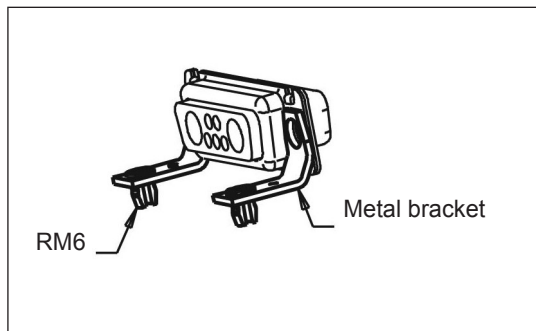


Straight version

BLANK: 3.10mm (.122") dia mounting hole

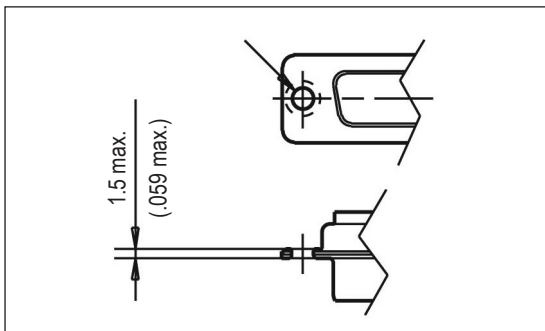

RM54: RM5 4.40 threaded


RM53: RM5 M3 threaded

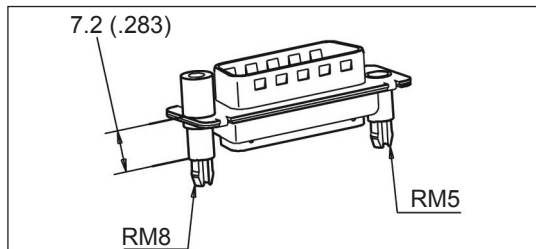


RM84: RM8 4.40 threaded

RM83: RM8 M3 threaded

A514: blind mating system

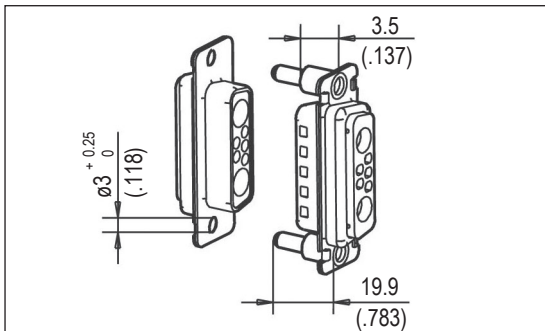


FM: float mounting system

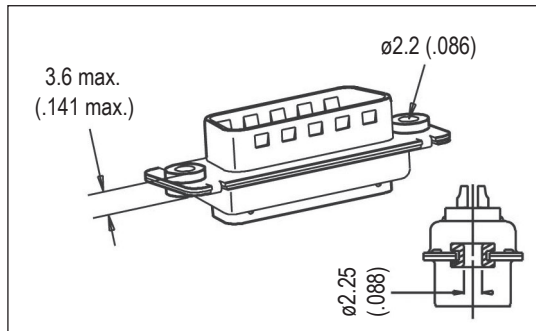

Straight and right angle version


4R: 4.40 rear nut

3R: M3 rear nut

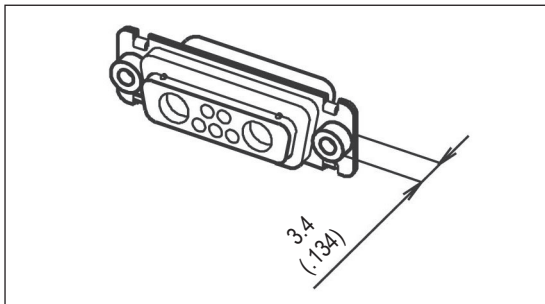


4F: 4.40 front female screwlock



3F: M3 front female screwlock

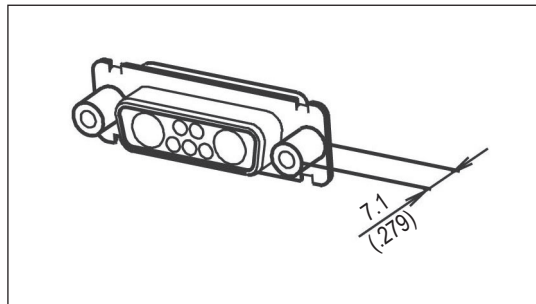

High power contacts

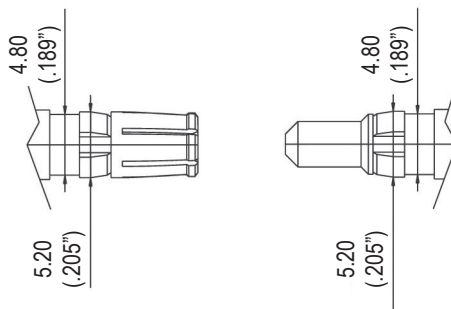



Solder cup version

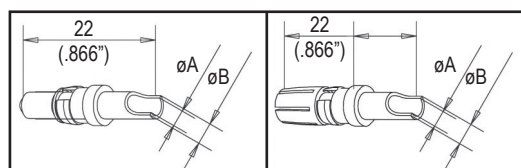

P/N		Current	Dimensions	
Plug	Socket		A mm (inch)	B mm (inch)
L 17DM 53745-8	L 17DM 53744-7	10 to 20 Amp.	1.80 (.071")	2.55 (.100")
L 17DM 53745-7	L 17DM 53744-6	20 to 30 Amp.	2.80 (.110")	3.70 (.145")
L 17DM 53745-1	L 17DM 53744-1	30 to 40 Amp.	4.80 (.189")	5.60 (.220")

Trim dimensions: 7.5 mm (.295")

Crimp version

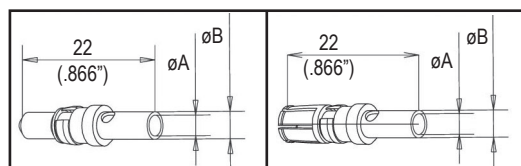

P/N		Current	Dimensions	
Plug	Socket		A mm (inch)	B mm (inch)
L 17DM 53745-208	L 17DM 53744-207	10 to 20 Amp.	1.80 (.071")	2.55 (.100")
L 17DM 53745-207	L 17DM 53744-206	20 to 30 Amp.	2.80 (.110")	3.70 (.145")
L 17DM 53745-201	L 17DM 53744-201	30 to 40 Amp.	4.80 (.189")	5.60 (.220")

Trim dimensions: 7.5 mm (.295")

**Crimping tool for all sizes
L17D479SP**




Extraction tool for sizes 8 cts




Straight shielded contacts

Crimp ferrule and inner solder

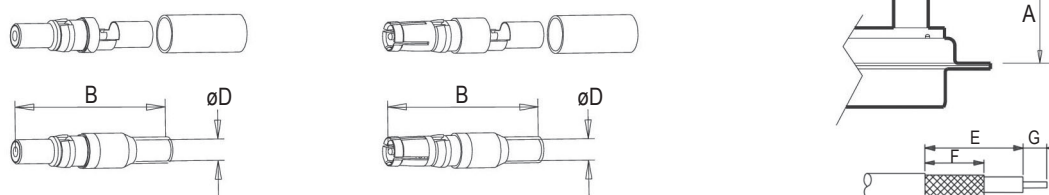

Type	P/N	Dimensions (inch)			Cable - RG	Trim dimensions (inch)		
		A Max	B	D		E	F	G
plug	L17DM 53740	18.8 (740")	23.6 (.929")	1.0 (.039")	178 B/U	7.9 (.311")	6.3 (.248")	2 (.078")
plug	L17DM 53740-1	18.8 (740")	23.6 (.929")	1.7 (.066")	179 B/U 316 B/U	7.9 (.311")	6.3 (.248")	2 (.078")
plug	L17DM 53740-3	21.5 (846")	23.6 (.929")	2.8 (.110")	180 B/U	9.5 (.374")	7.9 (.311")	2 (.078")
plug	L17DM 53740-5	21.5 (846")	23.6 (.929")	3.2 (.126")	58 C/U	9.5 (.374")	7.9 (.311")	2 (.078")
socket	L17DM 53742	18.8 (740")	23.6 (.929")	1.0 (.039")	178 B/U	7.9 (.311")	6.3 (.248")	2 (.078")
socket	L17DM 53742-1	18.8 (740")	23.6 (.929")	1.7 (.066")	179 B/U 316 B/U	7.9 (.311")	6.3 (.248")	2 (.078")
socket	L17DM 53742-3	21.5 (846")	23.6 (.929")	2.8 (.110")	180 B/U	9.5 (.374")	7.9 (.311")	2 (.078")
socket	L17DM 53742-5	21.5 (846")	23.6 (.929")	3.2 (.126")	58 C/U	9.5 (.374")	7.9 (.311")	2 (.078")




Ferrule and inner solder

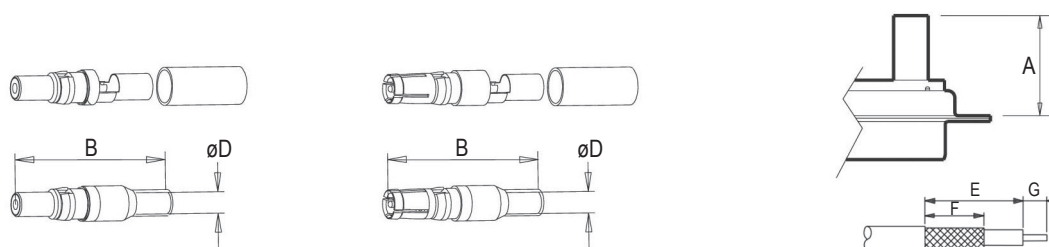

Type	P/N	Dimensions (inch)			Cable - RG	Trim dimensions (inch)		
		A Max	B	D		E	F	G
short plug	L17DM 53740-5000	17.0 (669")	21.8 (.858")	1.0 (.039")	178 B/U	7.9 (.311")	6.3 (.248")	2 (.078")
plug	L17DM 53740-5001	18.8 (740")	23.6 (.929")	1.7 (.066")	179 B/U 316 B/U	7.9 (.311")	6.3 (.248")	2 (.078")
plug	L17DM 53740-5002	21.5 (846")	26.3 (1.035")	2.8 (.110")	180 B/U	9.5 (.374")	7.9 (.311")	2 (.078")
plug	L17DM 53740-5005	21.5 (846")	26.3 (1.035")	3.2 (.126")	58 C/U	9.5 (.374")	7.9 (.311")	2 (.078")
plug	L17DM 53740-5008	18.8 (740")	23.6 (.929")	1.0 (.039")	178 B/U	7.9 (.311")	6.3 (.248")	2 (.078")
short socket	L17DM 53742-5000	17.0 (669")	21.8 (.858")	1.0 (.039")	178 B/U	7.9 (.311")	6.3 (.248")	2 (.078")
socket	L17DM 53742-5001	18.8 (740")	23.6 (.929")	1.7 (.066")	179 B/U 316 B/U	7.9 (.311")	6.3 (.248")	2 (.078")
socket	L17DM 53742-5002	21.5 (846")	26.3 (1.035")	2.8 (.110")	180 B/U	9.5 (.374")	7.9 (.311")	2 (.078")
socket	L17DM 53742-5004	21.5 (846")	26.3 (1.035")	3.2 (.126")	58 C/U	9.5 (.374")	7.9 (.311")	2 (.078")
socket	L17DM 53742-50060	18.8 (740")	23.6 (.929")	1.0 (.039")	178 B/U	7.9 (.311")	6.3 (.248")	2 (.078")




Right angled shielded contact

Crimp ferrule and inner solder



Type	P/N	Dimensions (inch)			Cable - RG	Trim dimensions (inch)		
		A Max	B	D		E	F	G
plug	L17DM 53741	13.5 (.531")	18.6 (.732")	1.0 (.039")	178 B/U	9.5 (.374")	5.9 (.232")	1.6 (.062")
plug	L17DM 53741-1	13.5 (.531")	18.6 (.732")	1.7 (.066")	179 B/U 316 B/U	9.5 (.374")	5.9 (.232")	1.6 (.062")
plug	L17DM 53741-3	13.5 (.531")	18.6 (.732")	2.8 (.110")	180 B/U	10.7 (.421")	7.9 (.311")	2.4 (.094")
plug	L17DM 53741-4	13.5 (.531")	18.6 (.732")	3.2 (.126")	58 C/U	10.7 (.421")	7.9 (.311")	2.4 (.094")
socket	L17DM 53743-2	13.5 (.531")	18.6 (.732")	1.0 (.039")	178 B/U	9.5 (.374")	5.9 (.232")	1.6 (.062")
socket	L17DM 53743-3	13.5 (.531")	18.6 (.732")	1.7 (.066")	179 B/U 316 B/U	9.5 (.374")	5.9 (.232")	1.6 (.062")
socket	L17DM 53743-5	13.5 (.531")	18.6 (.732")	2.8 (.110")	180 B/U	10.7 (.421")	7.9 (.311")	2.4 (.094")
socket	L17DM 53743-6	13.5 (.531")	18.6 (.732")	3.2 (.126")	58 C/U	10.7 (.421")	7.9 (.311")	2.4 (.094")

Ferrule and inner solder



Type	P/N	Dimensions (inch)			Cable - RG	Trim dimensions (inch)		
		A Max	B	D		E	F	G
plug	L17DM 53741-5000	13.5 (.531")	18.6 (.732")	1.0 (.039")	178 B/U	9.5 (.374")	5.9 (.232")	1.6 (.062")
plug	L17DM 53741-5001	13.5 (.531")	18.6 (.732")	1.7 (.066")	179 B/U 316 B/U	9.5 (.374")	5.9 (.232")	1.6 (.062")
plug	L17DM 53741-5003	13.5 (.531")	18.6 (.732")	2.8 (.110")	180 B/U	10.7 (.421")	7.9 (.311")	2.4 (.094")
plug	L17DM 53741-5004	13.5 (.531")	18.6 (.732")	3.2 (.126")	58 C/U	10.7 (.421")	7.9 (.311")	2.4 (.094")
socket	L17DM 53743-5000	13.5 (.531")	18.6 (.732")	1.0 (.039")	178 B/U	9.5 (.374")	5.9 (.232")	1.6 (.062")
socket	L17DM 53743-5001	13.5 (.531")	18.6 (.732")	1.7 (.066")	179 B/U 316 B/U	9.5 (.374")	5.9 (.232")	1.6 (.062")
socket	L17DM 53743-5003	13.5 (.531")	18.6 (.732")	2.8 (.110")	180 B/U	10.7 (.421")	7.9 (.311")	2.4 (.094")
socket	L17DM 53743-5004	13.5 (.531")	18.6 (.732")	3.2 (.126")	58 C/U	10.7 (.421")	7.9 (.311")	2.4 (.094")

Crimping tool

Hand crimp tool

227-0944 (without dies) (M 22 520/5-01)

RG cables	MIL reference	Amphenol P/N	dim. between 2 flat surface	
			cavity A	cavity B
RG 58 C/U	M 22 520/5-05	227 1221-05	5.41	-
RG 178 B/U	M 22 520/5-03	227 1221-03	-	2.67
RG 179 B/U	M 22 520/5-03	227 1221-03	3.25	-
RG 180 B/U	M 22 520/5-05	227 1221-05	-	4.52

Extraction tool

Extraction tool for sizes 8 cts



L17D429SP



Cabling instructions for shielded contacts



Straight crimp shielded contacts:

inner solder contact
outer crimp contact

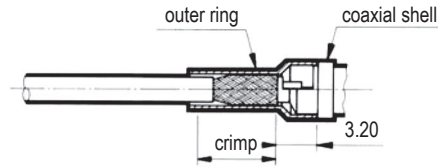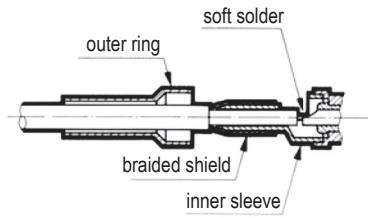

Right angle crimp shielded contacts:



inner solder contact
outer crimp contact

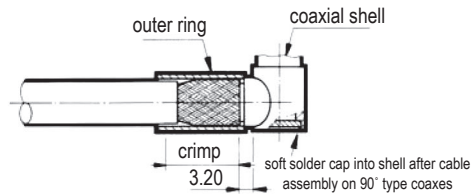



Assembly method

- Slide the outer ring over the cable jacket. Trim the cable according to the recommended dimensions.
- Insert the cable dielectric and the center conductor inside the inner sleeve.
- Solder the central conductor to the shielded center contacts.
- Slide the outer ring towards the inner sleeve and recover the braid.
- Using crimp hand tool equipped with the appropriate dies, crimp in the area defined.

Solder straight shielded contacts:

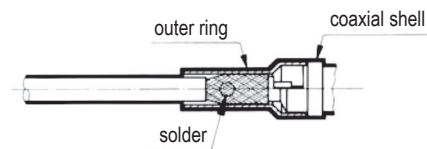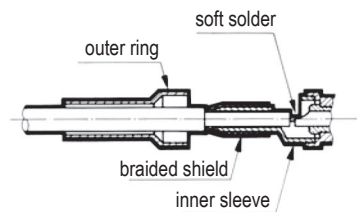

Solder right angle shielded contacts:

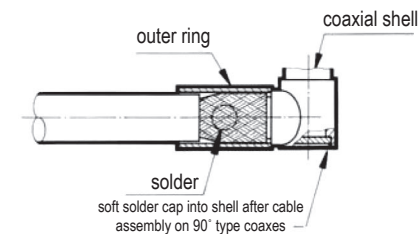

Assembly method

- Slide the outer ring over the cable jacket. Trim the cable according to the recommended dimensions.
- Insert the cable dielectric and the center conductor inside the inner sleeve.
- Solder the central conductor to the shielded center contacts.
- Slide the outer ring towards the inner sleeve and recover the braid.
- Solder by introducing metal through the outer ring hole.

How to build your part number

L

RoHS Compliant

... TW ...

Contacts and Shell

Contact Plating	Shell	
	Tinned	Tinned & Indents; Plug only
0.4µm(16µ") Au	77	717
0.76µm(30µ") Au	177	777

Shell size and Configuration:

E5W1, A3W3, A7W2, A11W1, B5W5, B9W4, B13W3, B17W2, B21W1, C8W8, C13W6, C17W5, C21WA4, C25W3, C27W2, D24W7, D36W4, D43W2

Gender:

P: Pin
S: Socket

Contacts:

For straight

BLANK:

Solder-cup signal contacts only

P3SY:

20-40 Amp power & signal mix

P2SY:

10-20 Amp power & signal mix

CSY:

Coax & signal mix

SY:

Signal only

P3Y:

20-40 Amp power only (3W3, 5W5, 8W8)

P2Y:

10-20 Amp power only (3W3, 5W5, 8W8)

CY:

Coax only (3W3, 5W5, 8W8)

For right angle

MP3SV:

US Footprint, 20-40 Amp power & signal mix

MP2SV:

US Footprint, 10-20 Amp power & signal mix

MCSV:

US Footprint, Coax & signal mix

MSV:

US Footprint, Signal only

MP3V:

US Footprint, 20-40 Amp power only (3W3, 5W5, 8W8)

MP2V:

US Footprint, 10-20 Amp power only (3W3, 5W5, 8W8)

MCV:

US Footprint, Coax only (3W3, 5W5, 8W8)

EP3SV:

European Footprint, 20-40 Amp power & signal mix

EP2SV:

European Footprint, 10-20 Amp power & signal mix

ESV:

European Footprint, Signal only

EP3V:

European Footprint, 20-40 Amp power only (3W3, 5W5, 8W8)

EP2V:

European Footprint, 10-20 Amp power only (3W3, 5W5, 8W8)

HP3SV:

Mixed Footprint, 20-40 Amp power & signal mix

HP2SV:

Mixed Footprint, 10-20 Amp power & signal mix

HCSV:

Mixed Footprint, Coax & signal mix

HSV:

Mixed Footprint, Signal only

HP3V:

Mixed Footprint, 20-40 Amp power only (3W3, 5W5, 8W8)

HP2V:

Mixed Footprint, 10-20 Amp power only (3W3, 5W5, 8W8)

HCV:

Mixed Footprint, Coax only (3W3, 5W5, 8W8)

Special Deviations

Please consult factory

Board Mounting Options

For Straight

Blank:

.120"(3.05mm) Clear Hole

RM53:

M3 Threaded (panel side)

standoff with boarlock

RM54:

4-40UNC Threaded (panel side)

standoff with boardlock

RM84:

Non-Removable M3 screwlock,

with standoff and boardlock

For Right Angle

RM6:

Metal bracket with boardlocks

Panel Mounting Options

For right angle & cable mount

Blank:

.120"(3.05mm) Clear Hole

3F:

M3 Front Screwlock

3R:

M3 Rear Threaded Insert

4F:

#4-40 Front Screwlock

4R:

#4-40 Threaded Rear Insert

FM:

Float mount system

A514:

Blind Mate Guide Pin

HOW TO ORDER

TW / E1

Amphenol 11

The following are some of the most common types of fraud:

- Identity Theft
- Credit Card Fraud
- Insurance Fraud
- Mortgage Fraud
- Tax Evasion
- Money Laundering
- Securities Fraud
- Bankruptcy Fraud
- False Claims
- Healthcare Fraud
- Intellectual Property Infringement
- Computer Fraud
- Embezzlement
- Forgery
- Stolen Goods
- Counterfeiting
- Piracy
- Prostitution
- Gambling
- Vandalism
- Arson
- Kidnapping
- Human Trafficking
- Organ Trafficking
- Drug Trafficking
- Alcohol Trafficking
- Tobacco Trafficking
- Firearms Trafficking
- Explosives Trafficking
- Chemical Trafficking
- Biological Trafficking
- Nuclear Trafficking
- Space Trafficking
- Air Traffic
- Sea Traffic
- Land Traffic
- Air Cargo
- Sea Cargo
- Land Cargo
- Air Freight
- Sea Freight
- Land Freight
- Air Mail
- Sea Mail
- Land Mail
- Air Parcel
- Sea Parcel
- Land Parcel
- Air Express
- Sea Express
- Land Express
- Air Courier
- Sea Courier
- Land Courier
- Air Shipper
- Sea Shipper
- Land Shipper
- Air Receiver
- Sea Receiver
- Land Receiver
- Air Consignor
- Sea Consignor
- Land Consignor
- Air Consignee
- Sea Consignee
- Land Consignee
- Air Agent
- Sea Agent
- Land Agent
- Air Broker
- Sea Broker
- Land Broker
- Air Operator
- Sea Operator
- Land Operator
- Air Pilot
- Sea Pilot
- Land Pilot
- Air Captain
- Sea Captain
- Land Captain
- Air First Officer
- Sea First Officer
- Land First Officer
- Air Second Officer
- Sea Second Officer
- Land Second Officer
- Air Third Officer
- Sea Third Officer
- Land Third Officer
- Air Fourth Officer
- Sea Fourth Officer
- Land Fourth Officer
- Air Fifth Officer
- Sea Fifth Officer
- Land Fifth Officer
- Air Sixth Officer
- Sea Sixth Officer
- Land Sixth Officer
- Air Seventh Officer
- Sea Seventh Officer
- Land Seventh Officer
- Air Eighth Officer
- Sea Eighth Officer
- Land Eighth Officer
- Air Ninth Officer
- Sea Ninth Officer
- Land Ninth Officer
- Air Tenth Officer
- Sea Tenth Officer
- Land Tenth Officer
- Air Eleventh Officer
- Sea Eleventh Officer
- Land Eleventh Officer
- Air Twelfth Officer
- Sea Twelfth Officer
- Land Twelfth Officer
- Air Thirteenth Officer
- Sea Thirteenth Officer
- Land Thirteenth Officer
- Air Fourteenth Officer
- Sea Fourteenth Officer
- Land Fourteenth Officer
- Air Fifteenth Officer
- Sea Fifteenth Officer
- Land Fifteenth Officer
- Air Sixteenth Officer
- Sea Sixteenth Officer
- Land Sixteenth Officer
- Air Seventeenth Officer
- Sea Seventeenth Officer
- Land Seventeenth Officer
- Air Eighteenth Officer
- Sea Eighteenth Officer
- Land Eighteenth Officer
- Air Nineteenth Officer
- Sea Nineteenth Officer
- Land Nineteenth Officer
- Air Twentieth Officer
- Sea Twentieth Officer
- Land Twentieth Officer
- Air Twenty-first Officer
- Sea Twenty-first Officer
- Land Twenty-first Officer
- Air Twenty-second Officer
- Sea Twenty-second Officer
- Land Twenty-second Officer
- Air Twenty-third Officer
- Sea Twenty-third Officer
- Land Twenty-third Officer
- Air Twenty-fourth Officer
- Sea Twenty-fourth Officer
- Land Twenty-fourth Officer
- Air Twenty-fifth Officer
- Sea Twenty-fifth Officer
- Land Twenty-fifth Officer
- Air Twenty-sixth Officer
- Sea Twenty-sixth Officer
- Land Twenty-sixth Officer
- Air Twenty-seventh Officer
- Sea Twenty-seventh Officer
- Land Twenty-seventh Officer
- Air Twenty-eighth Officer
- Sea Twenty-eighth Officer
- Land Twenty-eighth Officer
- Air Twenty-ninth Officer
- Sea Twenty-ninth Officer
- Land Twenty-ninth Officer
- Air Thirtieth Officer
- Sea Thirtieth Officer
- Land Thirtieth Officer
- Air Thirty-first Officer
- Sea Thirty-first Officer
- Land Thirty-first Officer
- Air Thirty-second Officer
- Sea Thirty-second Officer
- Land Thirty-second Officer
- Air Thirty-third Officer
- Sea Thirty-third Officer
- Land Thirty-third Officer
- Air Thirty-fourth Officer
- Sea Thirty-fourth Officer
- Land Thirty-fourth Officer
- Air Thirty-fifth Officer
- Sea Thirty-fifth Officer
- Land Thirty-fifth Officer
- Air Thirty-sixth Officer
- Sea Thirty-sixth Officer
- Land Thirty-sixth Officer
- Air Thirty-seventh Officer
- Sea Thirty-seventh Officer
- Land Thirty-seventh Officer
- Air Thirty-eighth Officer
- Sea Thirty-eighth Officer
- Land Thirty-eighth Officer
- Air Thirty-ninth Officer
- Sea Thirty-ninth Officer
- Land Thirty-ninth Officer
- Air Fortieth Officer
- Sea Fortieth Officer
- Land Fortieth Officer
- Air Forty-first Officer
- Sea Forty-first Officer
- Land Forty-first Officer
- Air Forty-second Officer
- Sea Forty-second Officer
- Land Forty-second Officer
- Air Forty-third Officer
- Sea Forty-third Officer
- Land Forty-third Officer
- Air Forty-fourth Officer
- Sea Forty-fourth Officer
- Land Forty-fourth Officer
- Air Forty-fifth Officer
- Sea Forty-fifth Officer
- Land Forty-fifth Officer
- Air Forty-sixth Officer
- Sea Forty-sixth Officer
- Land Forty-sixth Officer
- Air Forty-seventh Officer
- Sea Forty-seventh Officer
- Land Forty-seventh Officer
- Air Forty-eighth Officer
- Sea Forty-eighth Officer
- Land Forty-eighth Officer
- Air Forty-ninth Officer
- Sea Forty-ninth Officer
- Land Forty-ninth Officer
- Air Fiftieth Officer
- Sea Fiftieth Officer
- Land Fiftieth Officer
- Air Fifty-first Officer
- Sea Fifty-first Officer
- Land Fifty-first Officer
- Air Fifty-second Officer
- Sea Fifty-second Officer
- Land Fifty-second Officer
- Air Fifty-third Officer
- Sea Fifty-third Officer
- Land Fifty-third Officer
- Air Fifty-fourth Officer
- Sea Fifty-fourth Officer
- Land Fifty-fourth Officer
- Air Fifty-fifth Officer
- Sea Fifty-fifth Officer
- Land Fifty-fifth Officer
- Air Fifty-sixth Officer
- Sea Fifty-sixth Officer
- Land Fifty-sixth Officer
- Air Fifty-seventh Officer
- Sea Fifty-seventh Officer
- Land Fifty-seventh Officer
- Air Fifty-eighth Officer
- Sea Fifty-eighth Officer
- Land Fifty-eighth Officer
- Air Fifty-ninth Officer
- Sea Fifty-ninth Officer
- Land Fifty-ninth Officer
- Air Sixtieth Officer
- Sea Sixtieth Officer
- Land Sixtieth Officer
- Air Sixty-first Officer
- Sea Sixty-first Officer
- Land Sixty-first Officer
- Air Sixty-second Officer
- Sea Sixty-second Officer
- Land Sixty-second Officer
- Air Sixty-third Officer
- Sea Sixty-third Officer
- Land Sixty-third Officer
- Air Sixty-fourth Officer
- Sea Sixty-fourth Officer
- Land Sixty-fourth Officer
- Air Sixty-fifth Officer
- Sea Sixty-fifth Officer
- Land Sixty-fifth Officer
- Air Sixty-sixth Officer
- Sea Sixty-sixth Officer
- Land Sixty-sixth Officer
- Air Sixty-seventh Officer
- Sea Sixty-seventh Officer
- Land Sixty-seventh Officer
- Air Sixty-eighth Officer
- Sea Sixty-eighth Officer
- Land Sixty-eighth Officer
- Air Sixty-ninth Officer
- Sea Sixty-ninth Officer
- Land Sixty-ninth Officer
- Air Seventieth Officer
- Sea Seventieth Officer
- Land Seventieth Officer
- Air Seventy-first Officer
- Sea Seventy-first Officer
- Land Seventy-first Officer
- Air Seventy-second Officer
- Sea Seventy-second Officer
- Land Seventy-second Officer
- Air Seventy-third Officer
- Sea Seventy-third Officer
- Land Seventy-third Officer
- Air Seventy-fourth Officer
- Sea Seventy-fourth Officer
- Land Seventy-fourth Officer
- Air Seventy-fifth Officer
- Sea Seventy-fifth Officer
- Land Seventy-fifth Officer
- Air Seventy-sixth Officer
- Sea Seventy-sixth Officer
- Land Seventy-sixth Officer
- Air Seventy-seventh Officer
- Sea Seventy-seventh Officer
- Land Seventy-seventh Officer
- Air Seventy-eighth Officer
- Sea Seventy-eighth Officer
- Land Seventy-eighth Officer
- Air Seventy-ninth Officer
- Sea Seventy-ninth Officer
- Land Seventy-ninth Officer
- Air Eightieth Officer
- Sea Eightieth Officer
- Land Eightieth Officer
- Air Eighty-first Officer
- Sea Eighty-first Officer
- Land Eighty-first Officer
- Air Eighty-second Officer
- Sea Eighty-second Officer
- Land Eighty-second Officer
- Air Eighty-third Officer
- Sea Eighty-third Officer
- Land Eighty-third Officer
- Air Eighty-fourth Officer
- Sea Eighty-fourth Officer
- Land Eighty-fourth Officer
- Air Eighty-fifth Officer
- Sea Eighty-fifth Officer
- Land Eighty-fifth Officer
- Air Eighty-sixth Officer
- Sea Eighty-sixth Officer
- Land Eighty-sixth Officer
- Air Eighty-seventh Officer
- Sea Eighty-seventh Officer
- Land Eighty-seventh Officer
- Air Eighty-eighth Officer
- Sea Eighty-eighth Officer
- Land Eighty-eighth Officer
- Air Eighty-ninth Officer
- Sea Eighty-ninth Officer
- Land Eighty-ninth Officer
- Air Ninetieth Officer
- Sea Ninetieth Officer
- Land Ninetieth Officer
- Air Ninety-first Officer
- Sea Ninety-first Officer
- Land Ninety-first Officer
- Air Ninety-second Officer
- Sea Ninety-second Officer
- Land Ninety-second Officer
- Air Ninety-third Officer
- Sea Ninety-third Officer
- Land Ninety-third Officer
- Air Ninety-fourth Officer
- Sea Ninety-fourth Officer
- Land Ninety-fourth Officer
- Air Ninety-fifth Officer
- Sea Ninety-fifth Officer
- Land Ninety-fifth Officer
- Air Ninety-sixth Officer
- Sea Ninety-sixth Officer
- Land Ninety-sixth Officer
- Air Ninety-seventh Officer
- Sea Ninety-seventh Officer
- Land Ninety-seventh Officer
- Air Ninety-eighth Officer
- Sea Ninety-eighth Officer
- Land Ninety-eighth Officer
- Air Ninety-ninth Officer
- Sea Ninety-ninth Officer
- Land Ninety-ninth Officer
- Air One Hundred Officer
- Sea One Hundred Officer
- Land One Hundred Officer
- Air One Hundred and One Officer
- Sea One Hundred and One Officer
- Land One Hundred and One Officer
- Air One Hundred and Two Officer
- Sea One Hundred and Two Officer
- Land One Hundred and Two Officer
- Air One Hundred and Three Officer
- Sea One Hundred and Three Officer
- Land One Hundred and Three

Tel: +86(0)755 2717 7945
Info-dsub@amphenol.com.cn
<http://www.dsubconnector.com>

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9