

High and Low Side Driver

Features

- Floating channel designed for bootstrap operation
- Fully operational to +600V
- Tolerant to negative transient voltage
- dV/dt immune
- Gate drive supply range from 10 to 20V
- Undervoltage lockout for both channels
- 3.3V logic compatible
- Separate logic supply range from 3.3V to 20V
- Logic and power ground $\pm 5V$ offset
- CMOS Schmitt-triggered inputs with pull-down
- Cycle by cycle edge-triggered shutdown logic
- Matched propagation delay for both channels
- Outputs in phase with inputs

Product Summary

V_{OFFSET}	600V max.
$I_{\text{O+/-}}$	2A / 2A
V_{OUT}	10 – 20V
Ton/off (typ.)	120 & 94 ns
Delay Matching (typ.)	20 ns

Description

The IR25607 is a high voltage, high speed power MOSFET and IGBT driver with independent high and low side referenced output channels. Proprietary HVIC and latch immune CMOS technologies enable ruggedized monolithic construction. Logic inputs are compatible with standard CMOS or LSTTL output, down to 3.3V logic. The output drivers feature a high pulse current buffer stage designed for minimum driver cross-conduction. Propagation delays are matched to simplify use in high frequency applications. The floating channel can be used to drive an N-channel power MOSFET or IGBT in the high side configuration which operates up to 600 V.

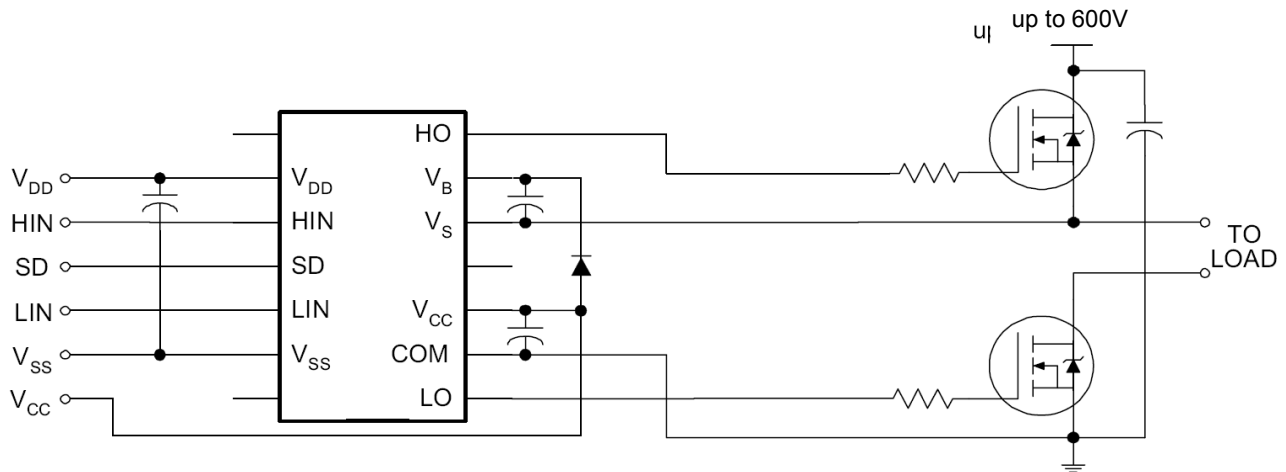
Package Options



Ordering Information

Base Part Number	Package Type	Standard Pack		Orderable Part Number
		Form	Quantity	
IR25607SPBF	SO16W	Tube	45	IR25607SPBF
IR25607SPBF	SO16W	Tape and Reel	1000	IR25607STRPBF

Typical Connection Diagram



(Refer to Lead Assignments for correct pin configuration). This/These diagram(s) show electrical connections only. Please refer to our Application Notes and DesignTips for proper circuit board layout.

Absolute Maximum Ratings

Absolute maximum ratings indicate sustained limits beyond which damage to the device may occur. All voltage parameters are absolute voltages referenced to COM. The thermal resistance and power dissipation ratings are measured under board mounted and still air conditions.

Symbol	Definition	Min.	Max.	Units
V_B	High side floating supply voltage	-0.3	625	V
V_S	High side floating supply offset voltage	$V_B - 25$	$V_B + 0.3$	
V_{HO}	High side floating output voltage	$V_S - 0.3$	$V_B + 0.3$	
V_{CC}	Low side and logic fixed supply voltage	-0.3	25	
V_{LO}	Low side output voltage	-0.3	$V_{CC} + 0.3$	
V_{DD}	Logic supply voltage	-0.3	$V_{SS} + 25$	
V_{SS}	Logic supply offset voltage	$V_{CC} - 25$	$V_{CC} + 0.3$	
V_{IN}	Logic input voltage (HIN, LIN & SD)	$V_{SS} - 0.3$	$V_{DD} + 0.3$	
dVs/dt	Allowable offset supply voltage transient	—	50	V/ns
P_D	Package power dissipation @ $T_A \leq +25^\circ\text{C}$	—	1.25	W
R_{thJA}	Thermal resistance, junction to ambient	—	100	$^\circ\text{C/W}$
T_J	Junction temperature	—	150	$^\circ\text{C}$
T_S	Storage temperature	-55	150	
T_L	Lead temperature (soldering, 10 seconds)	—	300	

Recommended Operating Conditions

For proper operation the device should be used within the recommended conditions. The V_S and V_{SS} offset ratings are tested with all supplies biased at 15V differential.

Symbol	Definition	Min.	Max.	Units
V_B	High side floating supply absolute voltage	$V_S + 10$	$V_S + 20$	V
V_S	High side floating supply offset voltage	†	600	
V_{HO}	High side floating output voltage	V_S	V_B	
V_{CC}	Low side fixed supply voltage	10	20	
V_{LO}	Low side output voltage	0	V_{CC}	
V_{DD}	Logic supply voltage	$V_{SS} + 3$	$V_{SS} + 20$	
V_{SS}	Logic supply offset voltage	-5 ††	5	
V_{IN}	Logic input voltage (HIN, LIN & SD)	V_{SS}	V_{DD}	
T_A	Ambient temperature	-40	125	$^\circ\text{C}$

† Logic operational for V_S of -5 to +600V. Logic state held for V_S of -5V to -VBS. (Please refer to Design Tip DT97-3 for more details).

†† When $V_{DD} < 5V$, the minimum V_{SS} offset is limited to $-V_{DD}$.

Dynamic Electrical Characteristics

V_{BIAS} (V_{CC} , V_{BS} , V_{DD}) = 15V, C_L = 1000 pF, V_{SS} = COM and T_A = 25°C unless otherwise specified.

Symbol	Definition	Min.	Typ.	Max.	Units	Test Conditions
t_{on}	Turn-on propagation delay	—	120	150	ns	$V_S = 0V$
t_{off}	Turn-off propagation delay	—	94	125		$V_S = 600V$
t_{sd}	Shutdown propagation delay	—	110	140		$V_S = 600V$
t_r	Turn-on rise time	—	25	35		
t_f	Turn-off fall time	—	17	25		
MT	Delay matching, HS & LS turn-on/off	—	—	20		

Static Electrical Characteristics

V_{BIAS} (V_{CC} , V_{BS} , V_{DD}) = 15V, V_{SS} = COM and T_A = 25°C unless otherwise specified. The V_{IN} , V_{TH} and I_{IN} parameters are referenced to V_{SS} and are applicable to all three logic input leads: HIN, LIN and SD. The V_O and I_O parameters are referenced to COM and are applicable to the respective output leads: HO and LO.


Symbol	Definition	Min.	Typ.	Max.	Units	Test Conditions
V_{IH}	Logic "1" input voltage	9.5	—	—	V	
V_{IL}	Logic "0" input voltage	—	—	6.0		
V_{OH}	High level output voltage, $V_{BIAS} - V_O$	—	—	1.2		$I_O = 0A$
V_{OL}	Low level output voltage, V_O	—	—	0.1		$I_O = 0A$
I_{LK}	Offset supply leakage current	—	—	50	μA	$V_B = V_S = 600V$
I_{QBS}	Quiescent V_{BS} supply current	—	125	230		$V_{IN} = 0V$ or V_{DD}
I_{QCC}	Quiescent V_{CC} supply current	—	180	340		$V_{IN} = 0V$ or V_{DD}
I_{QDD}	Quiescent V_{CC} supply current	—	15	30		$V_{IN} = 0V$ or V_{DD}
I_{IN+}	Logic "1" input bias current	—	20	40		$V_{IN} = V_{DD}$
I_{IN-}	Logic "0" input bias current	—	—	1		$V_{IN} = 0V$
V_{BSUV+}	V_{BS} supply undervoltage positive going threshold	7.5	8.6	9.7	V	
V_{BSUV-}	V_{BS} supply undervoltage negative going threshold	7.0	8.2	9.4		
V_{CCUV+}	V_{CC} supply undervoltage positive going threshold	7.4	8.5	9.6		
V_{CCUV-}	V_{CC} supply undervoltage negative going threshold	7.0	8.2	9.4		
I_{O+}	Output high short circuit pulsed current	2	2.5	—	A	$V_O = 0V$, $V_{IN} = V_{DD}$ $PW \leq 10 \mu s$
I_{O-}	Output low short circuit pulsed current	2	2.5	—		$V_O = 15V$, $V_{IN} = V_{DD}$ $PW \leq 10 \mu s$

The schematic diagram illustrates a 3T1C1D CMOS image sensor pixel circuit. The input signals are V_{DD} , V_{SS} , HIN , SD , LIN , V_B , V_S , V_{CC} , LO , and COM . The circuit includes several functional blocks: V_{DD}/V_{CC} LEVEL SHIFT, PULSE GEN, UV DETECT, PULSE FILTER, and DELAY. The output signals are HO , LO , and COM . The circuit is designed to process input signals and generate output signals based on the sensor's internal logic and timing.

Lead Definitions

Symbol	Description
V _{DD}	Logic supply
HIN	Logic input for high side gate driver output (HO), in phase
SD	Logic input for shutdown
LIN	Logic input for low side gate driver output (LO), in phase
V _{SS}	Logic ground
V _B	High side floating supply
HO	High side gate drive output
V _S	High side floating supply return
V _{CC}	Low side and logic fixed supply
LO	Low side gate drive output
COM	Low side return

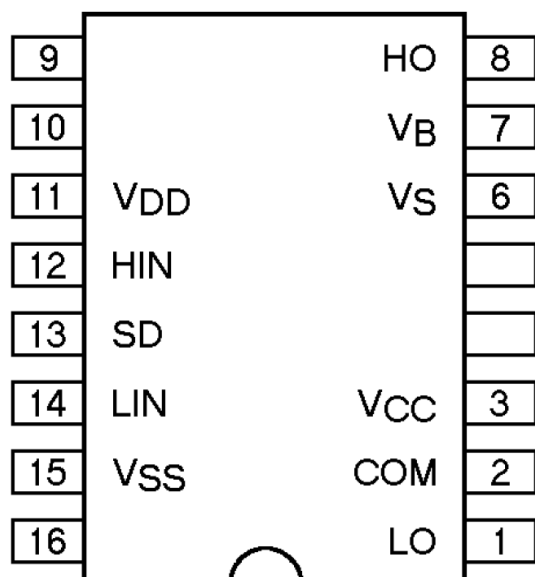Lead Assignments



Application Information and Additional Details

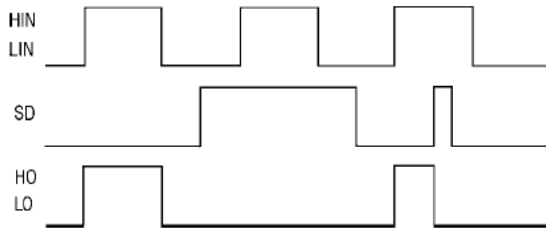


Figure 1. Input/Output Timing Diagram

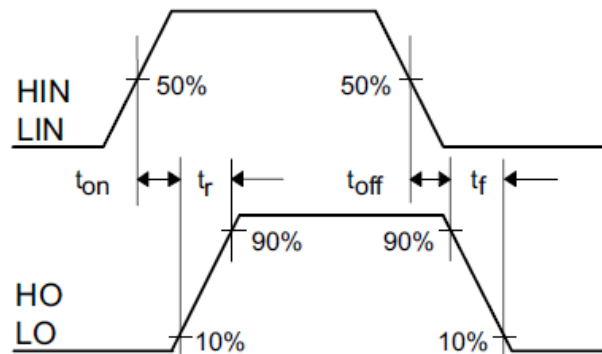


Figure 2. Switching Time Waveform Definitions

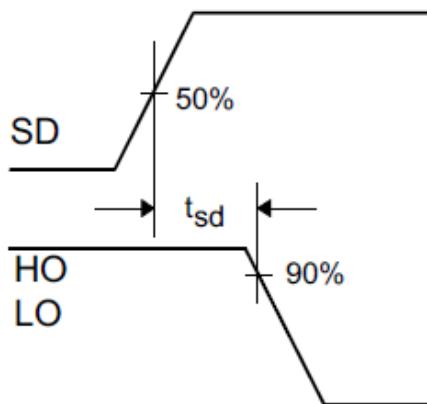


Figure 3. Shutdown Waveform Definitions

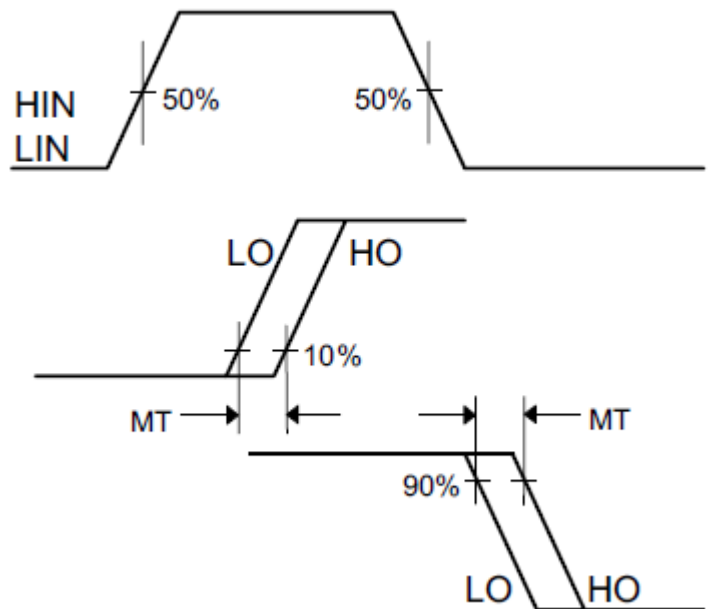
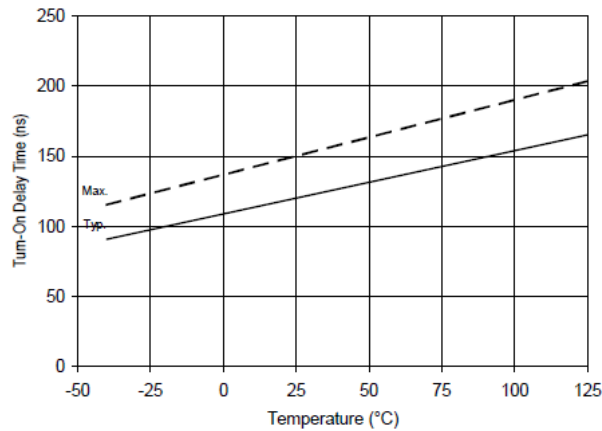
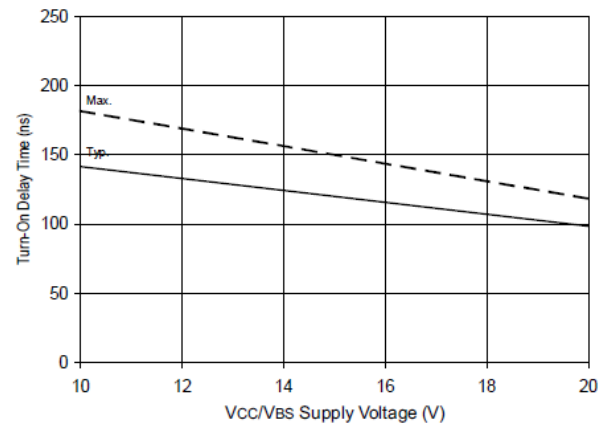
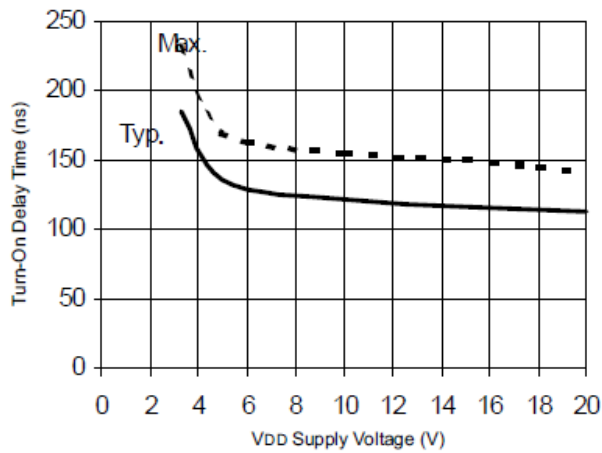
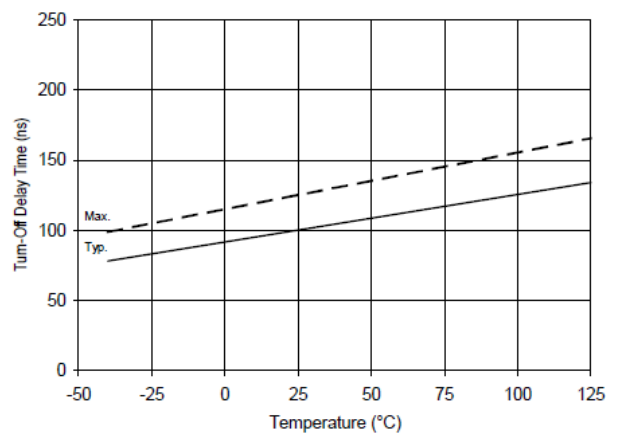
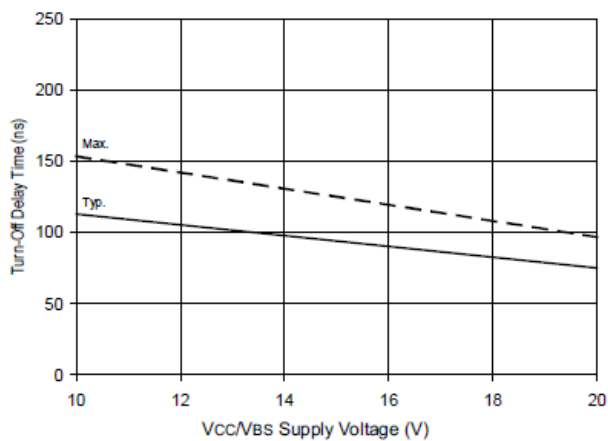
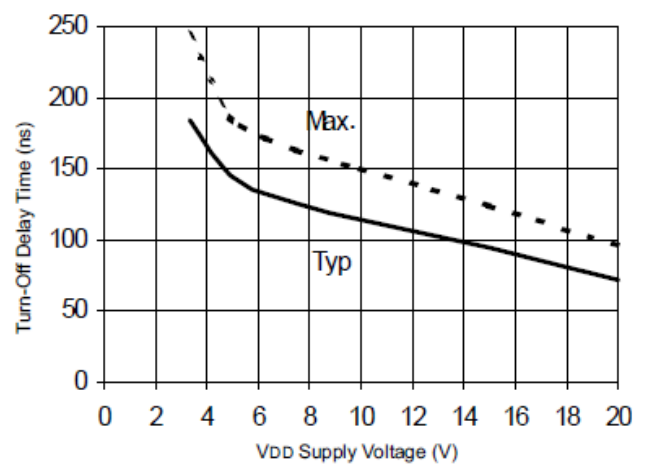
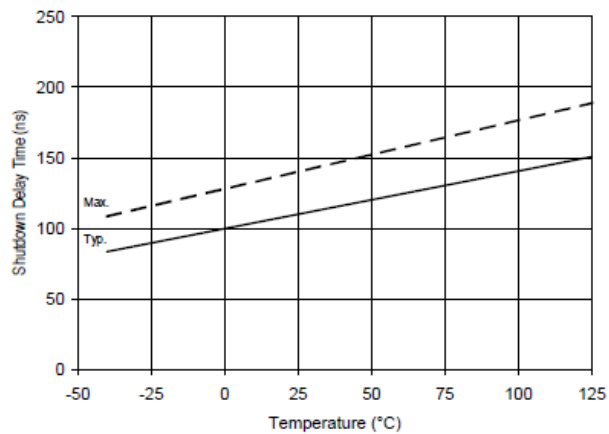
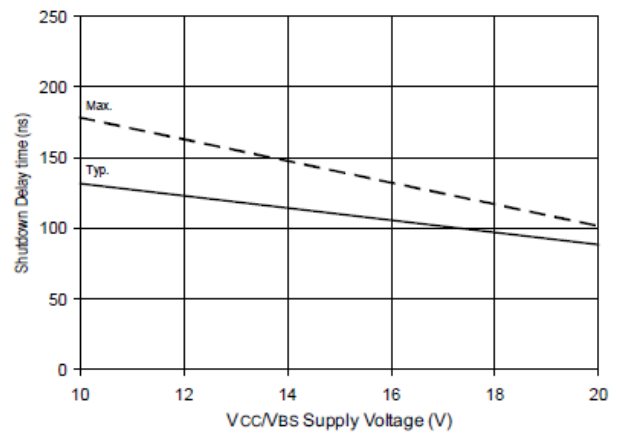
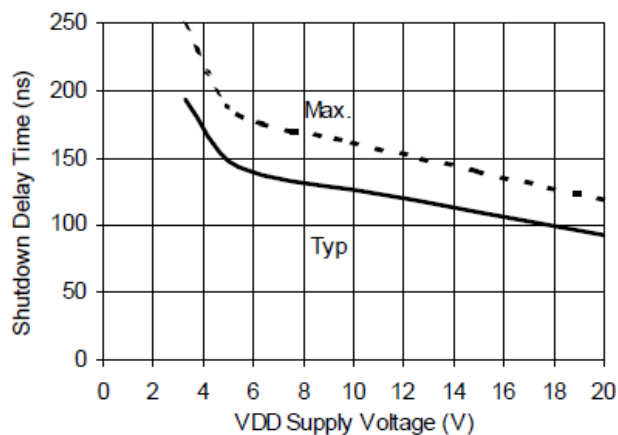
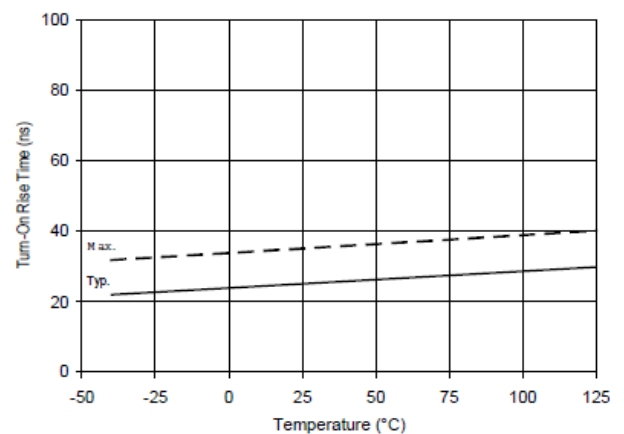
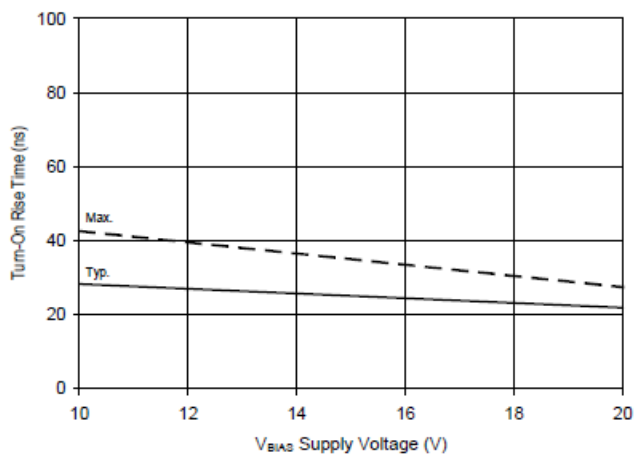
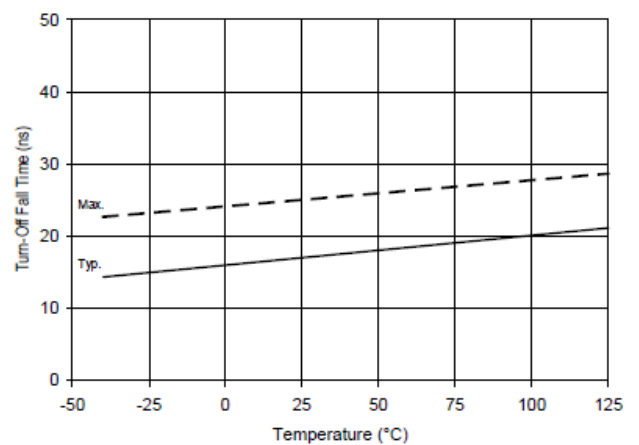
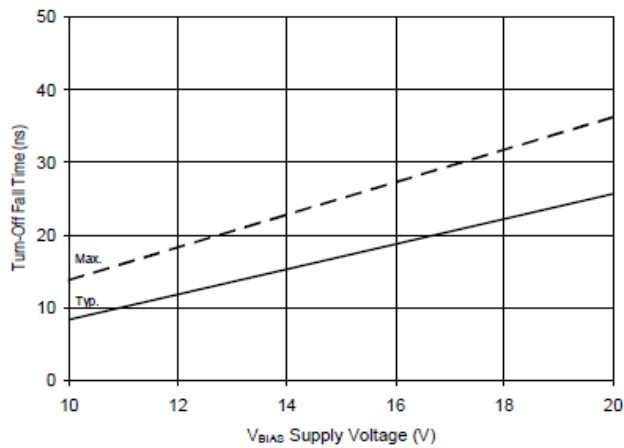
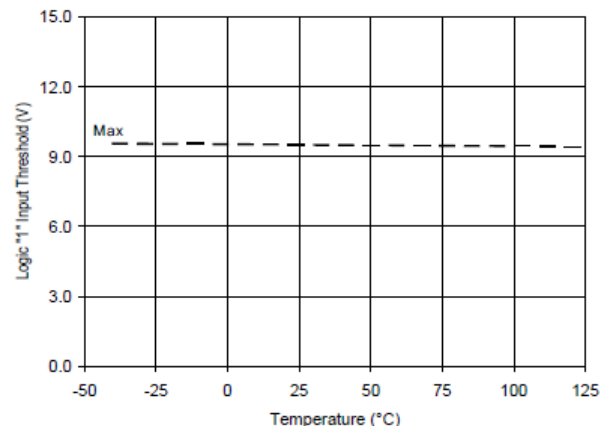
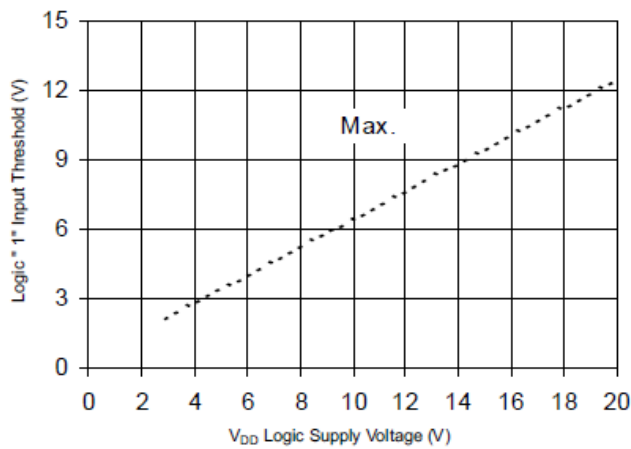
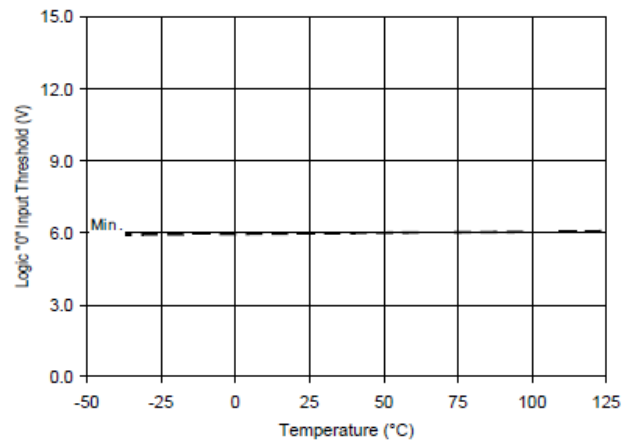
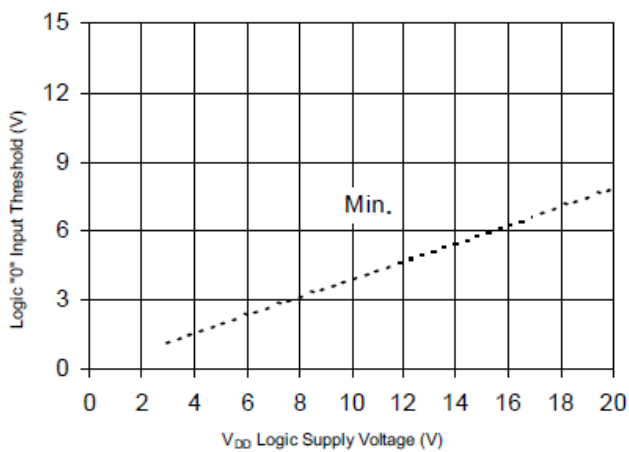
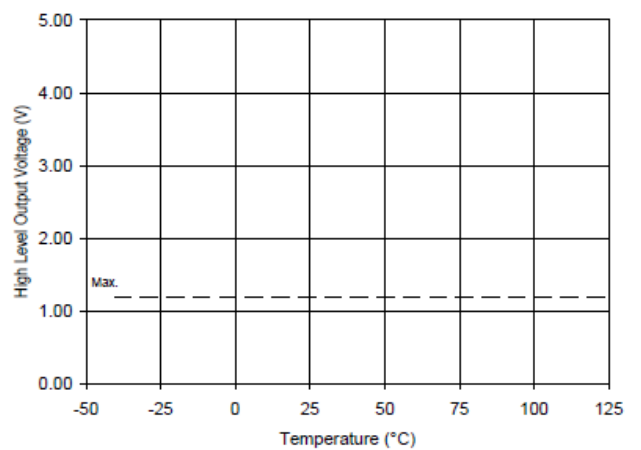
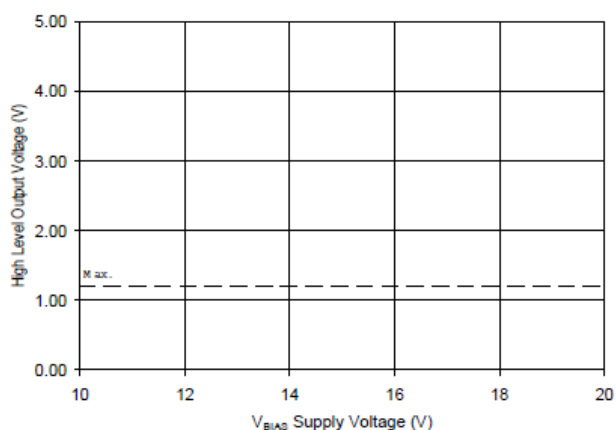
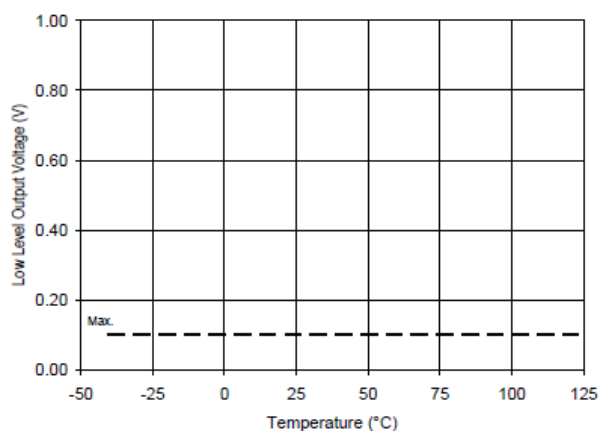
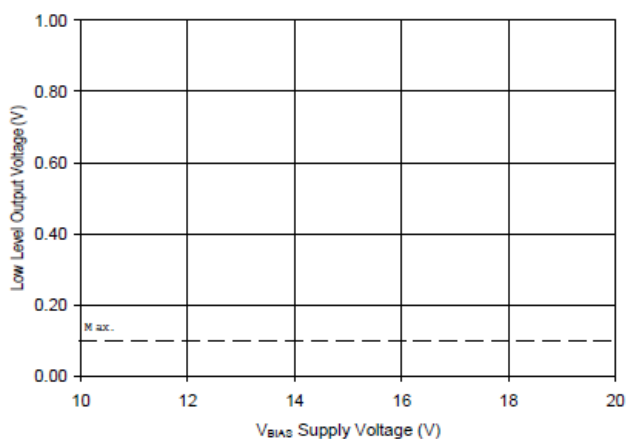
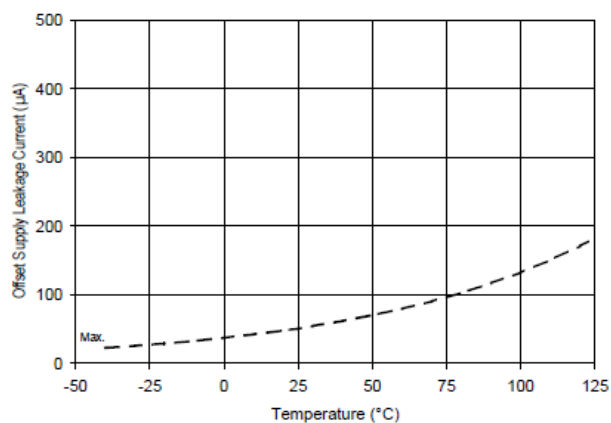
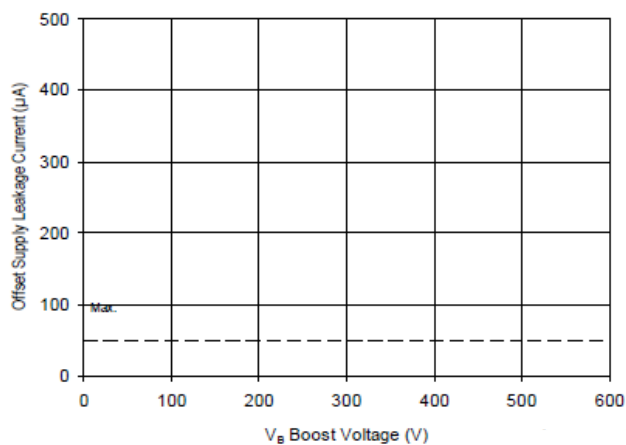
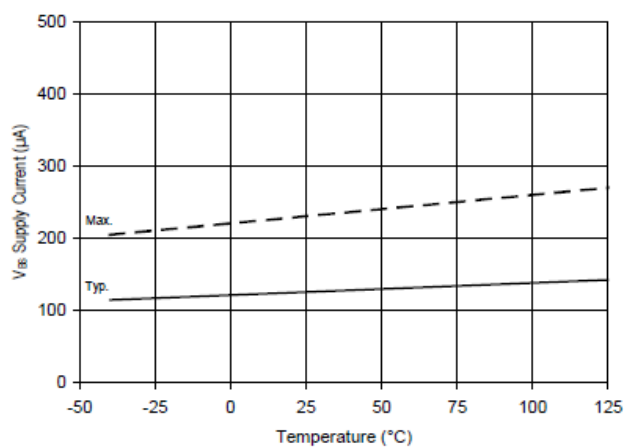


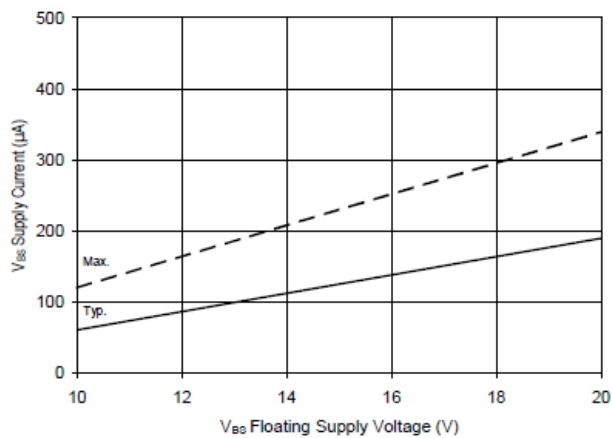
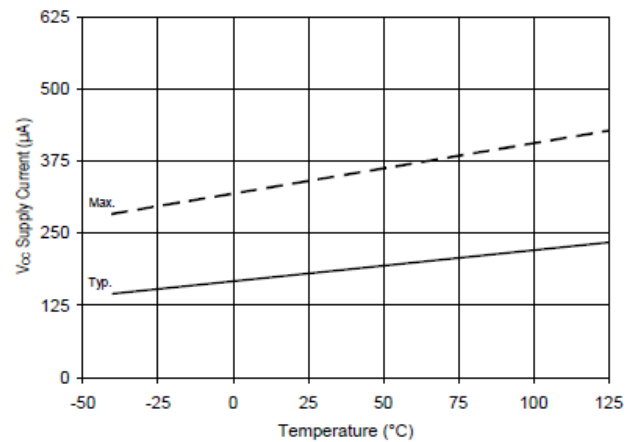
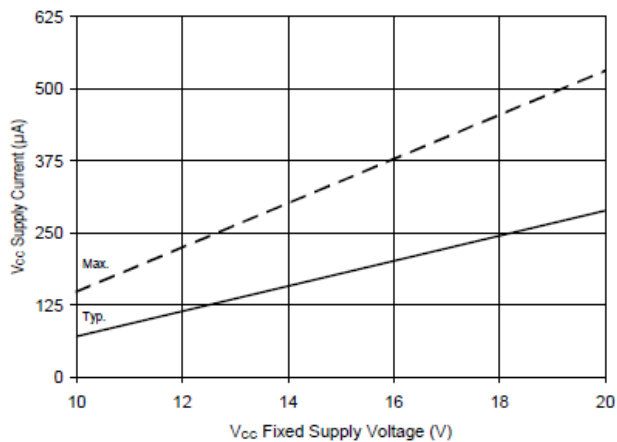
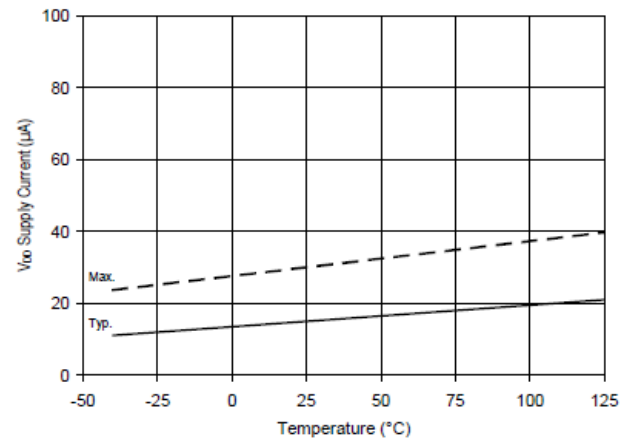
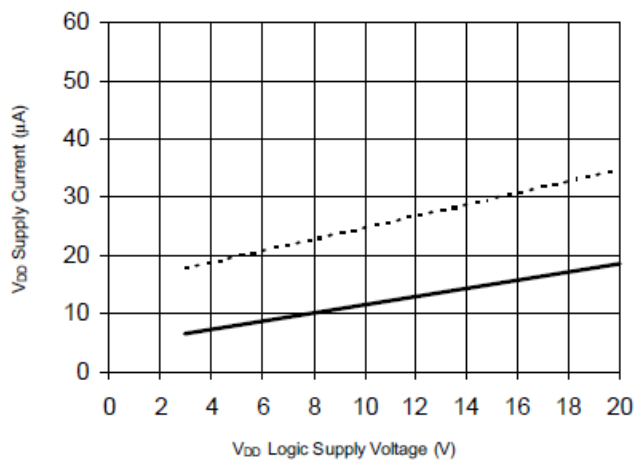
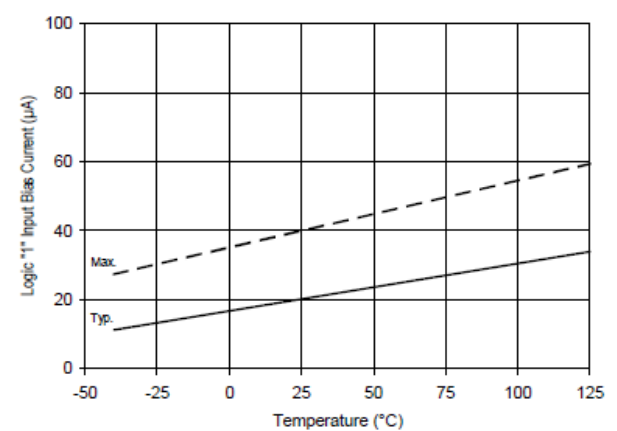
Figure 4. Delay matching Waveform Definitions

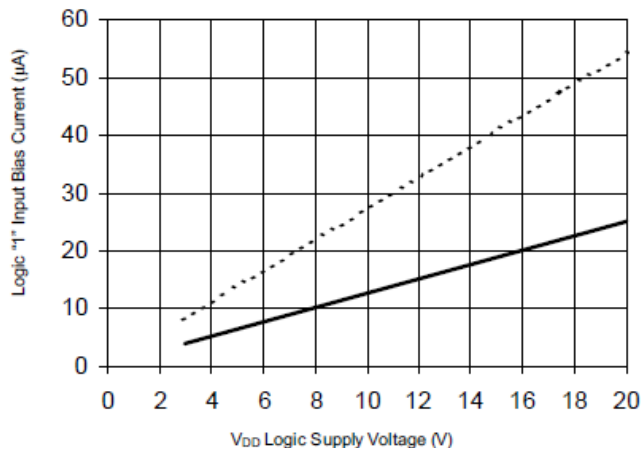
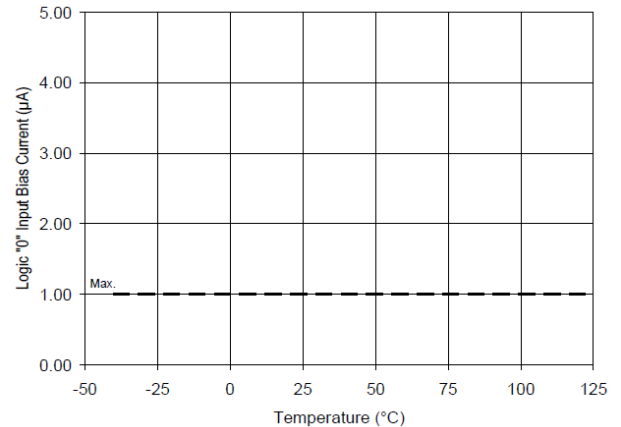
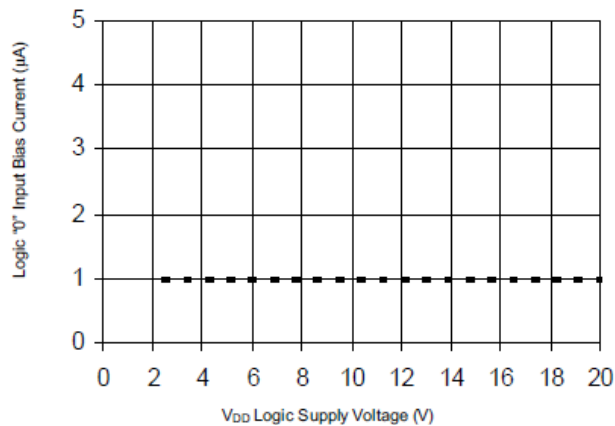
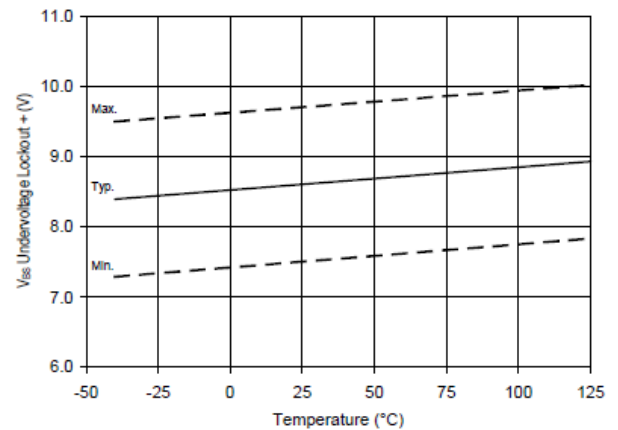
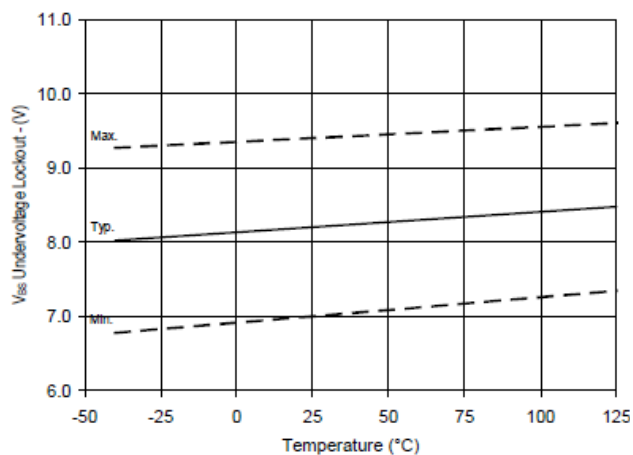
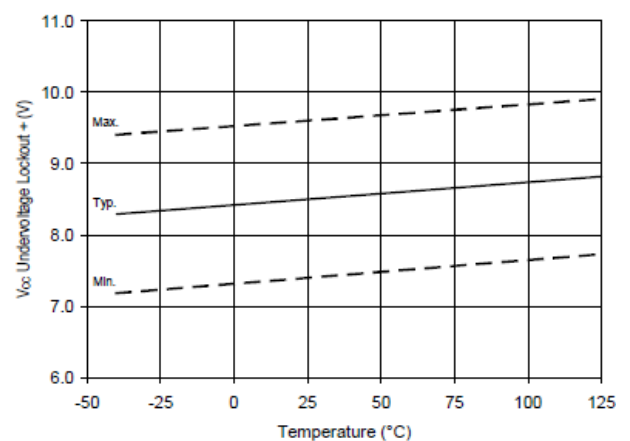

Figure 5A. Turn On Time vs. Temperature

Figure 5B. Turn On Time vs. V_{CC}/V_{BS} Supply Voltage

Figure 5C. Turn On Time vs. V_{DD} Supply Voltage

Figure 6A. Turn Off Time vs. Temperature

Figure 6B. Turn Off Time vs. V_{CC}/V_{BS} Supply Voltage

Figure 6C. Turn Off Time vs. V_{DD} Supply Voltage

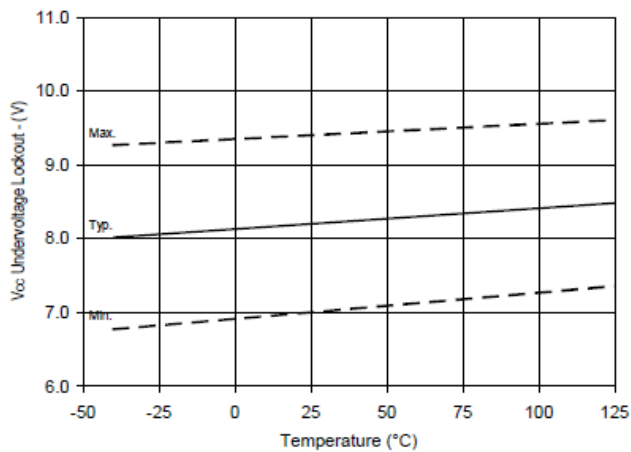
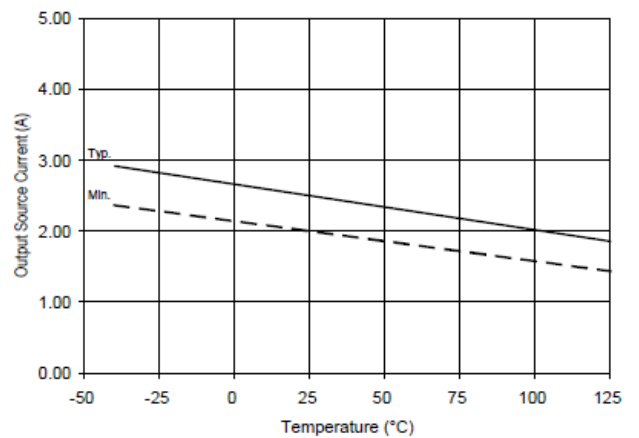
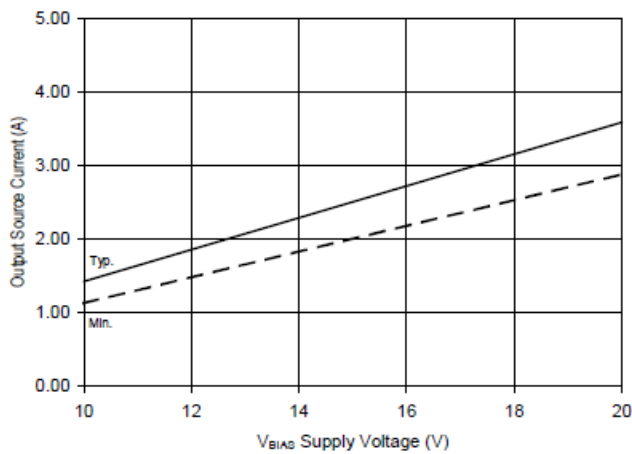
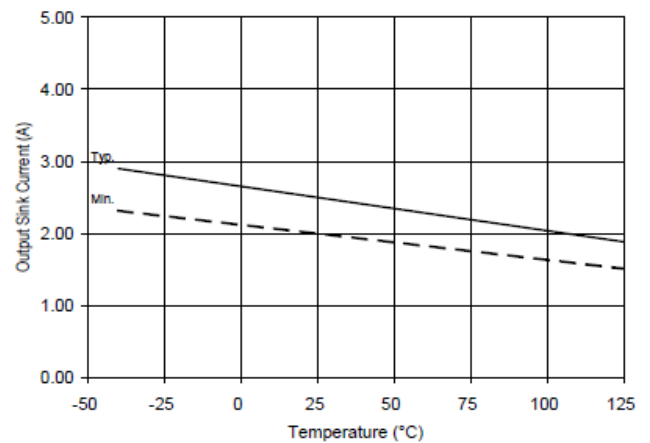
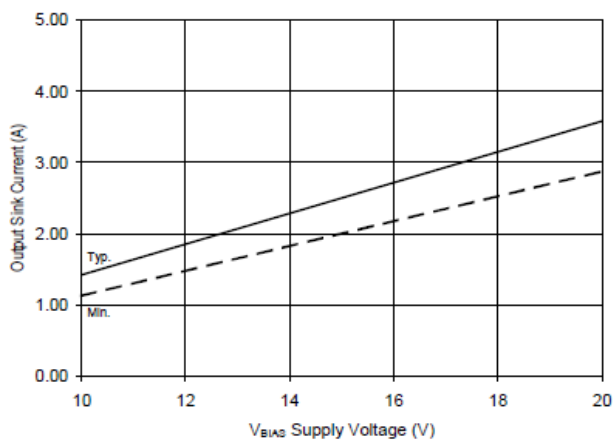
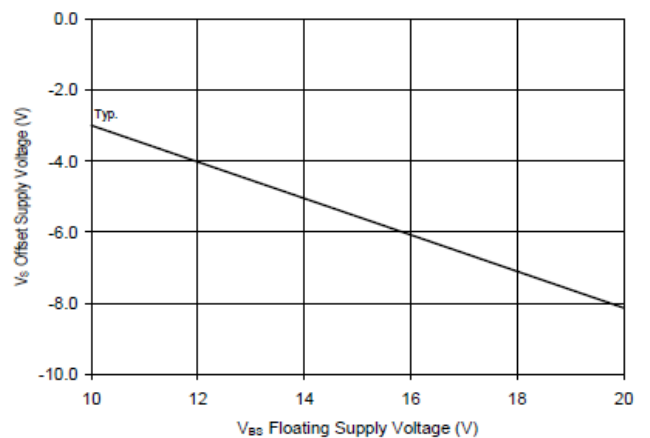

Figure 7A. Shutdown Time vs. Temperature

Figure 7B. Shutdown Time vs. V_{CC}/V_{BS} Supply Voltage

Figure 7C. Shutdown Time vs. V_{DD} Supply Voltage

Figure 8A. Turn On Rise Time vs. Temperature

Figure 8B. Turn On Rise Time vs. Voltage

Figure 9A. Turn Off Fall Time vs. Temperature


Figure 9B. Turn Off Fall Time vs. Voltage

Figure 10A. Logic '1' Input Threshold vs. Temperature

Figure 10B. Logic '1' Input Threshold vs. Voltage

Figure 11A. Logic '0' Input Threshold vs. Temperature

Figure 11B. Logic '0' Input Threshold vs. Voltage

Figure 12A. High Level Output vs. Temperature


Figure 12B. High Level Output vs. Voltage

Figure 13A. Low Level Output vs. Temperature

Figure 13B. Low Level Output vs. Voltage

Figure 14A. Offset Supply Current vs. Temperature

Figure 14B. Offset Supply Current vs. Voltage

Figure 15A. V_{BS} Supply Current vs. Temperature


Figure 15B. V_{BS} Supply Current vs. Voltage

Figure 16A. V_{CC} Supply Current vs. Temperature

Figure 16B. V_{CC} Supply Current vs. Voltage

Figure 17A. V_{DD} Supply Current vs. Temperature

Figure 17B. V_{DD} Supply Current vs. V_{DD} Voltage

Figure 18A. Logic '1' Input Current vs. Temperature


Figure 18B. Logic '1' Input Current vs. V_{DD} Voltage

Figure 19A. Logic '0' Input Current vs. Temperature

Figure 19B. Logic '0' Input Current vs. V_{DD} Voltage

Figure 20. V_{BS} Undervoltage (+) vs. Temperature

Figure 21 V_{BS} Undervoltage (-) vs. Temperature

Figure 22. V_{CC} Undervoltage (+) vs. Temperature


Figure 23. V_{CC} Undervoltage (-) vs. Temperature

Figure 24A. Output Source Current vs. Temperature

Figure 24B. Output Source Current vs. Voltage

Figure 25A. Output Sink Current vs. Temperature

Figure 25B. Output Sink Current vs. Voltage

Figure 26. Maximum V_S Negative Offset vs. V_{BS} Supply Voltage

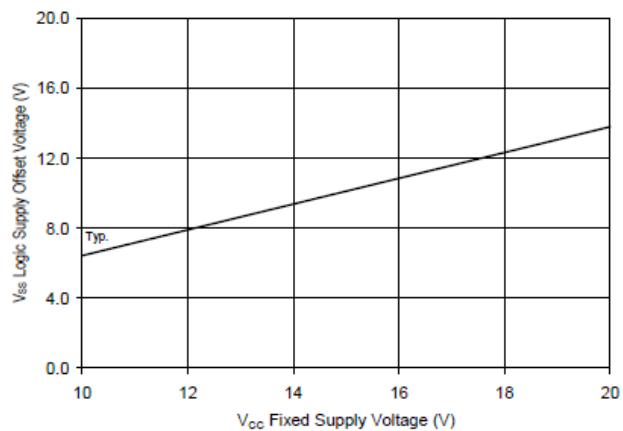


Figure 27. Maximum V_{SS} Positive Offset vs. V_{CC} Supply Voltage

Technical drawing of a 16 Lead SOIC (wide body) showing top, side, and end views with dimensions in millimeters and inches.

Top View Dimensions:

- Overall width: 10.50 [.4133] / 10.10 [.3977]
- Lead width: 0.25 [.010] (M, C, B, M)
- Lead pitch: 0.25 [.010] (M, C, B, M)
- Lead length: 10.65 [.419] / 10.00 [.394]
- Lead thickness: 0.635 [.025]
- Lead angle: 0° - 8°
- Lead height: 0.30 [.0118] / 0.10 [.0040]
- Lead width: 0.49 [.0192] / 0.35 [.0138]
- Lead pitch: 16X
- Lead width: 1.27 [.050] (14X)
- Lead width: 0.25 [.010] (M, C, B, S, A, S)

Side View Dimensions:

- Overall height: 2.65 [.1043] / 2.35 [.0926]
- Lead height: 0.32 [.0125] / 0.23 [.0091]
- Lead pitch: 16X
- Lead width: 1.27 [.050] / 0.40 [.016]
- Lead width: 0.25 [.010] (M, C, B, S, A, S)

End View Dimensions:

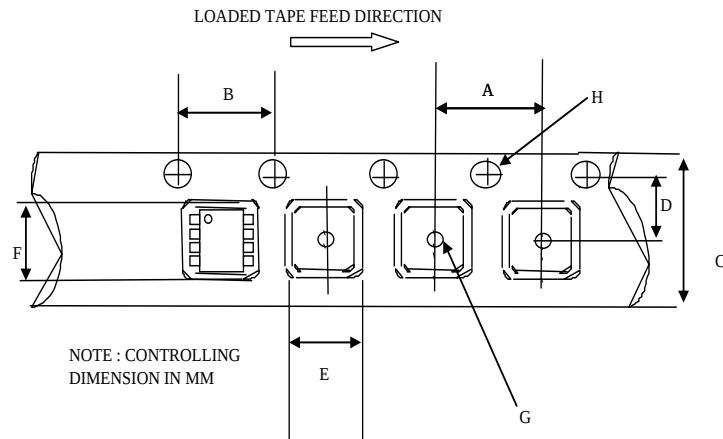
- Overall length: 10.50 [.4133] / 10.10 [.3977]
- Lead length: 10.65 [.419] / 10.00 [.394]
- Lead width: 0.25 [.010] (M, C, B, M)
- Lead pitch: 0.25 [.010] (M, C, B, M)
- Lead height: 0.635 [.025]
- Lead angle: 0° - 8°
- Lead height: 0.30 [.0118] / 0.10 [.0040]
- Lead width: 0.49 [.0192] / 0.35 [.0138]
- Lead pitch: 16X
- Lead width: 1.27 [.050] (14X)
- Lead width: 0.25 [.010] (M, C, B, S, A, S)

Notes:

- DIMENSIONING & TOLERANCING PER ANSI Y14.5M-1982.
- CONTROLLING DIMENSION: MILLIMETER.
- DIMENSIONS ARE SHOWN IN MILLIMETERS [INCHES].
- OUTLINE CONFORMS TO JEDEC OUTLINE MS-013AA.
- DIMENSION IS THE LENGTH OF LEAD FOR SOLDERING TO A SUBSTRATE.
- DIMENSION DOES NOT INCLUDE MOLD PROTUSIONS. MOLD PROTUSIONS SHALL NOT EXCEED 0.15 [.006].


16 Lead SOIC (wide body)

Tape and Reel Details



CARRIER TAPE DIMENSION FOR 16SOICN


Code	Metric		Imperial	
	Min	Max	Min	Max
A	7.90	8.10	0.311	0.318
B	3.90	4.10	0.153	0.161
C	15.70	16.30	0.618	0.641
D	7.40	7.60	0.291	0.299
E	6.40	6.60	0.252	0.260
F	10.20	10.40	0.402	0.409
G	1.50	n/a	0.059	n/a
H	1.50	1.60	0.059	0.062

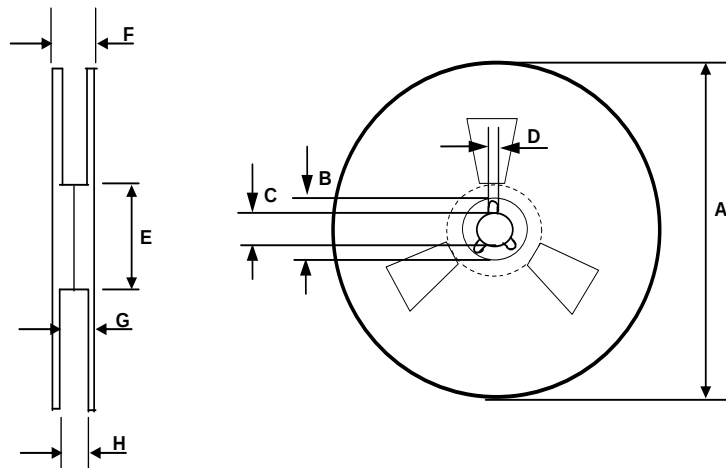

REEL DIMENSIONS FOR 16SOICN

Code	Metric		Imperial	
	Min	Max	Min	Max
A	329.60	330.25	12.976	13.001
B	20.95	21.45	0.824	0.844
C	12.80	13.20	0.503	0.519
D	1.95	2.45	0.767	0.096
E	98.00	102.00	3.858	4.015
F	n/a	22.40	n/a	0.881
G	18.50	21.10	0.728	0.830
H	16.40	18.40	0.645	0.724

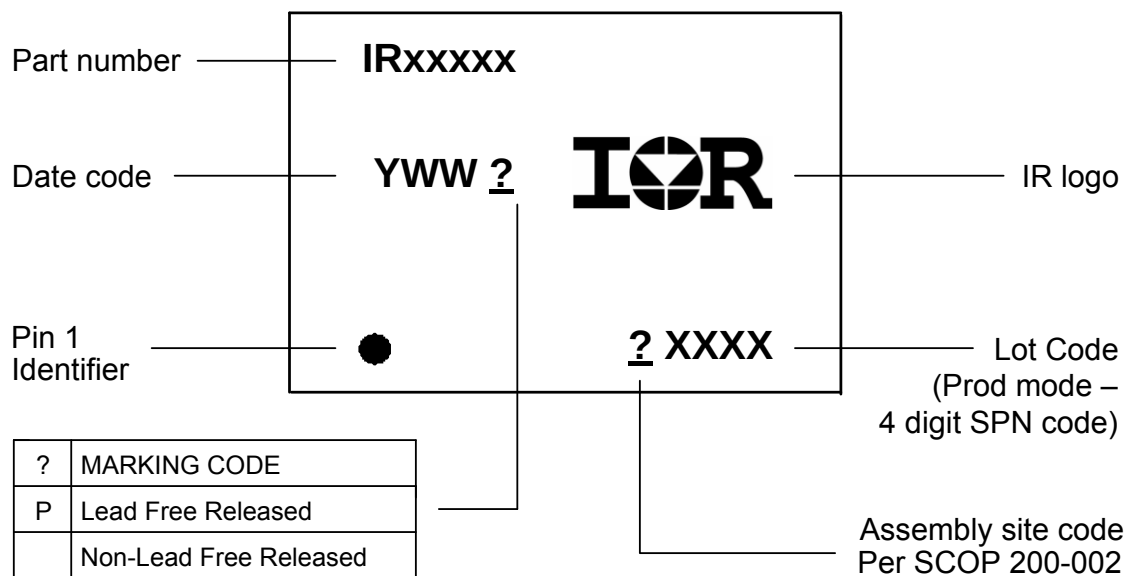Part Marking Information



Qualification Information[†]

Qualification Level	Industrial ^{††} (per JEDEC JESD 47)
	Comments: This family of ICs has passed JEDEC's Industrial qualification. IR's Consumer qualification level is granted by extension of the higher Industrial level.
Moisture Sensitivity Level	MSL3 ^{†††} (per IPC/JEDEC J-STD-020)
RoHS Compliant	Yes

† Qualification standards can be found at International Rectifier's web site <http://www.irf.com/>

†† Higher qualification ratings may be available should the user have such requirements. Please contact your International Rectifier sales representative for further information.

††† Higher MSL ratings may be available for the specific package types listed here. Please contact your International Rectifier sales representative for further information.

The information provided in this document is believed to be accurate and reliable. However, International Rectifier assumes no responsibility for the consequences of the use of this information. International Rectifier assumes no responsibility for any infringement of patents or of other rights of third parties which may result from the use of this information. No license is granted by implication or otherwise under any patent or patent rights of International Rectifier. The specifications mentioned in this document are subject to change without notice. This document supersedes and replaces all information previously supplied.

For technical support, please contact IR's Technical Assistance Center
<http://www.irf.com/technical-info/>

WORLD HEADQUARTERS:
 233 Kansas St., El Segundo, California 90245
 Tel: (310) 252-7105

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9