

### FEATURES

- Series reference (2.5 V, 3 V, 4.096 V, 5 V)
- Low quiescent current: 70  $\mu$ A maximum
- Current output capability:  $\pm$ 5 mA
- Wide supply range:  $V_{IN} = V_{OUT} + 200$  mV to 12 V
- Wideband noise (10 Hz to 10 kHz): 50  $\mu$ V rms
- Specified temperature range:  $-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$
- Compact, surface-mount SOT-23 package

### APPLICATIONS

- Portable, battery-powered equipment; for example, notebook computers, cellular phones, pagers, PDAs, GPSs, and DMMs
- Computer workstations; suitable for use with a wide range of video RAMDACs
- Smart industrial transmitters
- PCMCIA cards
- Automotive
- Hard disk drives
- 3 V/5 V, 8-bit/12-bit data converters

### GENERAL DESCRIPTION

The AD1582/AD1583/AD1584/AD1585 are low cost, low power, low dropout, precision band gap references. These designs are available as 3-terminal (series) devices and are packaged in the compact SOT-23, 3-lead surface-mount package. The versatility of these references makes them ideal for use in battery-powered 3 V or 5 V systems where there can be wide variations in supply voltage and a need to minimize power dissipation.

The superior accuracy and temperature stability of the AD1582/AD1583/AD1584/AD1585 result from the precise matching and thermal tracking of on-chip components. Patented temperature drift curvature correction design techniques minimize the nonlinearities in the voltage output temperature characteristic.

### PIN CONFIGURATION




Figure 1. 3-Lead SOT-23-3 (RT Suffix)

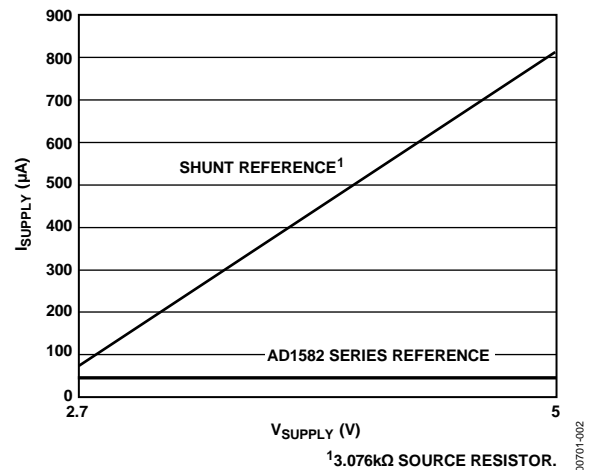


Figure 2. Supply Current ( $\mu$ A) vs. Supply Voltage (V)

The AD1582/AD1583/AD1584/AD1585 series mode devices source or sink up to 5 mA of load current and operate efficiently with only 200 mV of required headroom supply. These parts draw a maximum 70  $\mu$ A of quiescent current with only a 1.0  $\mu$ A/V variation with supply voltage. The advantage of these designs over conventional shunt devices is extraordinary. Valuable supply current is no longer wasted through an input series resistor, and maximum power efficiency is achieved at all input voltage levels.

The AD1582/AD1583/AD1584/AD1585 are available in two grades, A and B, and are provided in a tiny footprint, the SOT-23. All grades are specified over the industrial temperature range of  $-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ .

Table 1. AD158x Products, Three Electrical Grades

| Electrical Grade | Initial Accuracy |               |        | Temperature Coefficient (ppm/ $^{\circ}\text{C}$ ) |
|------------------|------------------|---------------|--------|--|
|                  | AD1582           | AD1583/AD1585 | AD1584 |  |
| B                | 0.08%            | 0.10%         | 0.10%  | 50   |
| A                | 0.80%            | 1.00%         | 0.98%  | 100  |

## TABLE OF CONTENTS

|   |   |   |    |
|---|---|---|----|
| Features .....                            | 1 | Theory of Operation .....                         | 10 |
| Applications.....                         | 1 | Applications Information .....                    | 11 |
| Pin Configuration.....                    | 1 | Temperature Performance.....                      | 11 |
| General Description .....                 | 1 | Voltage Output Nonlinearity vs. Temperature ..... | 11 |
| Revision History .....                    | 2 | Output Voltage Hysteresis.....                    | 12 |
| Specifications.....                       | 3 | Supply Current vs. Temperature.....               | 12 |
| AD1582 Specifications.....                | 3 | Supply Voltage .....                              | 12 |
| AD1583 Specifications.....                | 4 | AC Performance .....                              | 12 |
| AD1584 Specifications.....                | 5 | Noise Performance and Reduction .....             | 13 |
| AD1585 Specifications.....                | 6 | Turn-On Time .....                                | 13 |
| Absolute Maximum Ratings.....             | 7 | Dynamic Performance.....                          | 14 |
| ESD Caution.....                          | 7 | Outline Dimensions .....                          | 15 |
| Terminology .....                         | 8 | Ordering Guide .....                              | 16 |
| Typical Performance Characteristics ..... | 9 | Package Branding Information .....                | 16 |

## REVISION HISTORY

### 2/13—Rev. I to Rev. J

|                                 |    |
|---------------------------------|----|
| Change to Table 6 .....         | 7  |
| Changes to Ordering Guide ..... | 16 |

### 5/10—Rev. H to Rev. I

|                                  |    |
|----------------------------------|----|
| Changes to Figure 10.....        | 11 |
| Updated Outline Dimensions ..... | 16 |
| Changes to Ordering Guide .....  | 16 |

### 11/07—Rev. G to Rev. H

|                                  |           |
|----------------------------------|-----------|
| Deleted C Grade .....            | Universal |
| Changes to VOERR Parameter ..... | 3         |
| Changes to Ordering Guide .....  | 16        |

### 6/06—Rev. F to Rev. G

|                                      |   |
|--------------------------------------|---|
| Changes to Features.....             | 1 |
| Changes to General Description ..... | 1 |

### 2/06—Rev. E to Rev. F

|                                 |           |
|---------------------------------|-----------|
| Updated Format.....             | Universal |
| Changes to Features.....        | 1         |
| Changes to Table 6.....         | 7         |
| Changes to Ordering Guide ..... | 16        |

### 6/05—Rev. D to Rev. E

|                                      |   |
|--------------------------------------|---|
| Changes to Ordering Guide .....      | 7 |
| Moved Package Branding Section ..... | 7 |

### 6/04—Rev. C to Rev. D

|                                  |    |
|----------------------------------|----|
| Changes to Ordering Guide .....  | 6  |
| Updated Outline Dimensions ..... | 13 |

### 12/02—Rev. B to Rev. C

|  |    |
|--|----|
| Changes to Features .....                          | 1  |
| Changes to General Description .....               | 1  |
| Changes to Specifications.....                     | 2  |
| Changes to Absolute Maximum Ratings.....           | 6  |
| Replaced TPC 3 .....                               | 8  |
| Changes to Temperature Performance Section .....   | 9  |
| Replaced Figure 4 .....                            | 9  |
| Changes to Output Voltage Hysteresis Section ..... | 10 |
| Updated SOT-23 Package.....                        | 13 |

### 3/97—Revision 0: Initial Version

## SPECIFICATIONS

## AD1582 SPECIFICATIONS

$T_A = T_{MIN}$  to  $T_{MAX}$ ,  $V_{IN} = 5$  V, unless otherwise noted.

Table 2.

| Parameter  | AD1582A      |          |  | AD1582B     |          |  | Unit   |
|--|--------------|----------|--|-------------|----------|--|--|
|  | Min          | Typ      | Max                                      | Min         | Typ      | Max                                      |  |
| OUTPUT VOLTAGE (@ 25°C)<br>$V_O$   | 2.480        | 2.500    | 2.520                                    | 2.498       | 2.500    | 2.502                                    | V  |
| INITIAL ACCURACY ERROR (@ 25°C)<br>$V_{OERR}$  | -20<br>-0.80 |          | +20<br>+0.80                             | -2<br>-0.08 |          | +2<br>+0.08                              | mV<br>%  |
| OUTPUT VOLTAGE TEMPERATURE DRIFT   |              |          | 100                                      |             |          | 50                                       | ppm/°C   |
| TEMPERATURE COEFFICIENT (TCV <sub>O</sub> )<br>-40°C < $T_A$ < +125°C<br>0°C < $T_A$ < 70°C  |              | 40<br>35 | 100                                      |             | 18<br>15 | 50                                       | ppm/°C<br>ppm/°C                                   |
| MINIMUM SUPPLY HEADROOM ( $V_{IN} - V_{OUT}$ )   | 200          |          |  | 200         |          |  | mV   |
| LOAD REGULATION<br>0 mA < $I_{OUT}$ < 5 mA (-40°C to +85°C)<br>0 mA < $I_{OUT}$ < 5 mA (-40°C to +125°C)<br>-5 mA < $I_{OUT}$ < 0 mA (-40°C to +85°C)<br>-5 mA < $I_{OUT}$ < 0 mA (-40°C to +125°C)<br>-0.1 mA < $I_{OUT}$ < +0.1 mA (-40°C to +85°C)<br>-0.1 mA < $I_{OUT}$ < +0.1 mA (-40°C to +125°C) |              |          | 0.2<br>0.4<br>0.25<br>0.45<br>2.7<br>3.5 |             |          | 0.2<br>0.4<br>0.25<br>0.45<br>2.7<br>3.5 | mV/mA<br>mV/mA<br>mV/mA<br>mV/mA<br>mV/mA<br>mV/mA |
| LINE REGULATION<br>$V_{OUT} + 200$ mV < $V_{IN}$ < 12 V<br>$I_{OUT} = 0$ mA  |              |          | 25                                       |             |          | 25                                       | μV/V   |
| RIPPLE REJECTION ( $\Delta V_{OUT}/\Delta V_{IN}$ )<br>$V_{IN} = 5$ V ± 100 mV (f = 120 Hz)  | 80           |          |  | 80          |          |  | dB   |
| QUIESCENT CURRENT  |              |          | 70                                       |             |          | 70                                       | μA   |
| SHORT-CIRCUIT CURRENT TO GROUND  |              |          | 15                                       |             |          | 15                                       | mA   |
| NOISE VOLTAGE (@ 25°C)<br>0.1 Hz to 10 Hz<br>10 Hz to 10 kHz   |              | 70<br>50 |  |             | 70<br>50 |  | μV p-p<br>μV rms                                   |
| TURN-ON SETTLING TIME TO 0.1%<br>$C_L = 0.2$ μF  |              |          | 100                                      |             |          | 100                                      | μs   |
| LONG-TERM STABILITY<br>1000 Hours @ 25°C   |              | 100      |  |             | 100      |  | ppm/1000 hr  |
| OUTPUT VOLTAGE HYSTERESIS  |              | 115      |  |             | 115      |  | ppm  |
| TEMPERATURE RANGE<br>Specified Performance (A, B, C)<br>Operating Performance (A, B, C)  | -40<br>-55   |          | +125<br>+125                             | -40<br>-55  |          | +125<br>+125                             | °C<br>°C   |

**AD1583 SPECIFICATIONS**

$T_A = T_{MIN}$  to  $T_{MAX}$ ,  $V_{IN} = 5$  V, unless otherwise noted.

Table 3.

| Parameter  | AD1583A     |          |   | AD1583B    |          |   | Unit   |
|--|-------------|----------|---|------------|----------|---|--|
|  | Min         | Typ      | Max                                       | Min        | Typ      | Max                                       |  |
| OUTPUT VOLTAGE (@ 25°C)<br>$V_O$   | 2.970       | 3.000    | 3.030                                     | 2.997      | 3.000    | 3.003                                     | V  |
| INITIAL ACCURACY ERROR (@ 25°C)<br>$V_{OERR}$  | -30<br>-1.0 |          | +30<br>+1.0                               | -3<br>-0.1 |          | +3<br>+0.1                                | mV<br>%  |
| OUTPUT VOLTAGE TEMPERATURE DRIFT   |             |          | 100                                       |            |          | 50  | ppm/°C   |
| TEMPERATURE COEFFICIENT (TCV <sub>O</sub> )<br>-40°C < T <sub>A</sub> < +125°C<br>0°C < T <sub>A</sub> < 70°C  |             | 40<br>35 | 100                                       |            | 18<br>15 | 50  | ppm/°C<br>ppm/°C                                   |
| MINIMUM SUPPLY HEADROOM ( $V_{IN} - V_{OUT}$ )   | 200         |          |   | 200        |          |   | mV   |
| LOAD REGULATION<br>0 mA < I <sub>OUT</sub> < 5 mA (-40°C to +85°C)<br>0 mA < I <sub>OUT</sub> < 5 mA (-40°C to +125°C)<br>-5 mA < I <sub>OUT</sub> < 0 mA (-40°C to +85°C)<br>-5 mA < I <sub>OUT</sub> < 0 mA (-40°C to +125°C)<br>-0.1 mA < I <sub>OUT</sub> < +0.1 mA (-40°C to +85°C)<br>-0.1 mA < I <sub>OUT</sub> < +0.1 mA (-40°C to +125°C) |             |          | 0.25<br>0.45<br>0.40<br>0.6<br>2.9<br>3.7 |            |          | 0.25<br>0.45<br>0.40<br>0.6<br>2.9<br>3.7 | mV/mA<br>mV/mA<br>mV/mA<br>mV/mA<br>mV/mA<br>mV/mA |
| LINE REGULATION<br>$V_{OUT} + 200$ mV < $V_{IN}$ < 12 V<br>I <sub>OUT</sub> = 0 mA   |             |          | 25  |            |          | 25  | μV/V   |
| RIPPLE REJECTION ( $\Delta V_{OUT}/\Delta V_{IN}$ )<br>$V_{IN} = 5$ V ± 100 mV (f = 120 Hz)  | 80          |          |   | 80         |          |   | dB   |
| QUIESCENT CURRENT  |             |          | 70  |            |          | 70  | μA   |
| SHORT-CIRCUIT CURRENT TO GROUND  |             |          | 15  |            |          | 15  | mA   |
| NOISE VOLTAGE (@ 25°C)<br>0.1 Hz to 10 Hz<br>10 Hz to 10 kHz   |             | 85<br>60 |   |            | 85<br>60 |   | μV p-p<br>μV rms                                   |
| TURN-ON SETTLING TIME TO 0.1%<br>$C_L = 0.2$ μF  |             |          | 120                                       |            |          | 120                                       | μs   |
| LONG-TERM STABILITY<br>1000 Hours @ 25°C   |             | 100      |   |            | 100      |   | ppm/1000 hr  |
| OUTPUT VOLTAGE HYSTERESIS  |             | 115      |   |            | 115      |   | ppm  |
| TEMPERATURE RANGE<br>Specified Performance (A, B, C)<br>Operating Performance (A, B, C)  | -40<br>-55  |          | +125<br>+125                              | -40<br>-55 |          | +125<br>+125                              | °C<br>°C   |

**AD1584 SPECIFICATIONS**

$T_A = T_{MIN}$  to  $T_{MAX}$ ,  $V_{IN} = 5$  V, unless otherwise noted.

**Table 4.**

| Parameter  | AD1584A      |           |   | AD1584B    |           |   | Unit   |
|--|--------------|-----------|---|------------|-----------|---|--|
|  | Min          | Typ       | Max                                       | Min        | Typ       | Max                                       |  |
| OUTPUT VOLTAGE (@ 25°C)<br>$V_O$   | 4.056        | 4.096     | 4.136                                     | 4.092      | 4.096     | 4.100                                     | V  |
| INITIAL ACCURACY ERROR (@ 25°C)<br>$V_{OERR}$  | -40<br>-0.98 |           | +40<br>+0.98                              | -4<br>-0.1 |           | +4<br>+0.1                                | mV<br>%  |
| OUTPUT VOLTAGE TEMPERATURE DRIFT   |              |           | 100                                       |            |           | 50  | ppm/°C   |
| TEMPERATURE COEFFICIENT (TCV <sub>O</sub> )<br>-40°C < $T_A$ < +125°C<br>0°C < $T_A$ < 70°C  |              | 40<br>35  | 100                                       |            | 18<br>15  | 50  | ppm/°C<br>ppm/°C                                   |
| MINIMUM SUPPLY HEADROOM ( $V_{IN} - V_{OUT}$ )   | 200          |           |   | 200        |           |   | mV   |
| LOAD REGULATION<br>0 mA < $I_{OUT}$ < 5 mA (-40°C to +85°C)<br>0 mA < $I_{OUT}$ < 5 mA (-40°C to +125°C)<br>-5 mA < $I_{OUT}$ < 0 mA (-40°C to +85°C)<br>-5 mA < $I_{OUT}$ < 0 mA (-40°C to +125°C)<br>-0.1 mA < $I_{OUT}$ < +0.1 mA (-40°C to +85°C)<br>-0.1 mA < $I_{OUT}$ < +0.1 mA (-40°C to +125°C) |              |           | 0.32<br>0.52<br>0.40<br>0.6<br>3.2<br>4.1 |            |           | 0.32<br>0.52<br>0.40<br>0.6<br>3.2<br>4.1 | mV/mA<br>mV/mA<br>mV/mA<br>mV/mA<br>mV/mA<br>mV/mA |
| LINE REGULATION<br>$V_{OUT} + 200$ mV < $V_{IN}$ 12 V<br>$I_{OUT} = 0$ mA  |              |           | 25  |            |           | 25  | μV/V   |
| RIPPLE REJECTION ( $\Delta V_{OUT}/\Delta V_{IN}$ )<br>$V_{IN} = 5$ V ± 100 mV (f = 120 Hz)  | 80           |           |   | 80         |           |   | dB   |
| QUIESCENT CURRENT  |              |           | 70  |            |           | 70  | μA   |
| SHORT-CIRCUIT CURRENT TO GROUND  |              |           | 15  |            |           | 15  | mA   |
| NOISE VOLTAGE (@ 25°C)<br>0.1 Hz to 10 Hz<br>10 Hz to 10 kHz   |              | 110<br>90 |   |            | 110<br>90 |   | μV p-p<br>μV rms                                   |
| TURN-ON SETTLING TIME TO 0.1%<br>$C_L = 0.2$ μF  |              |           | 140                                       |            |           | 140                                       | μs   |
| LONG-TERM STABILITY<br>1000 Hours @ 25°C   |              | 100       |   |            | 100       |   | ppm/1000 hr  |
| OUTPUT VOLTAGE HYSTERESIS  |              | 115       |   |            | 115       |   | ppm  |
| TEMPERATURE RANGE<br>Specified Performance (A, B, C)<br>Operating Performance (A, B, C)  | -40<br>-55   |           | +125<br>-125                              | -40<br>-55 |           | +125<br>+125                              | °C<br>°C   |

**AD1585 SPECIFICATIONS**

@  $T_A = T_{MIN}$  to  $T_{MAX}$ ,  $V_{IN} = 6$  V, unless otherwise noted.

Table 5.

| Parameter  | AD1585A     |            |  | AD1585B     |            |  | Unit   |
|--|-------------|------------|--|-------------|------------|--|--|
|  | Min         | Typ        | Max                                    | Min         | Typ        | Max                                    |  |
| OUTPUT VOLTAGE (@ 25°C)<br>$V_O$   | 4.950       | 5.000      | 5.050                                  | 4.995       | 5.000      | 5.005                                  | V  |
| INITIAL ACCURACY ERROR (@ 25°C)<br>$V_{OERR}$  | -50<br>-1.0 |            | +50<br>+1.0                            | -5<br>-0.10 |            | +5<br>+0.10                            | mV<br>%  |
| OUTPUT VOLTAGE TEMPERATURE DRIFT   |             |            | 100                                    |             |            | 50                                     | ppm/°C   |
| TEMPERATURE COEFFICIENT (TCV <sub>O</sub> )<br>-40°C < $T_A$ < 125°C<br>0°C < $T_A$ < 70°C   |             | 40<br>35   | 100                                    |             | 18<br>15   | 50                                     | ppm/°C<br>ppm/°C                                   |
| MINIMUM SUPPLY HEADROOM ( $V_{IN} - V_{OUT}$ )   | 200         |            |  | 200         |            |  | mV   |
| LOAD REGULATION<br>0 mA < $I_{OUT}$ < 5 mA (-40°C to +85°C)<br>0 mA < $I_{OUT}$ < 5 mA (-40°C to +125°C)<br>-5 mA < $I_{OUT}$ < 0 mA (-40°C to +85°C)<br>-5 mA < $I_{OUT}$ < 0 mA (-40°C to +125°C)<br>-0.1 mA < $I_{OUT}$ < +0.1 mA (-40°C to +85°C)<br>-0.1 mA < $I_{OUT}$ < +0.1 mA (-40°C to +125°C) |             |            | 0.40<br>0.6<br>0.40<br>0.6<br>4<br>4.8 |             |            | 0.40<br>0.6<br>0.40<br>0.6<br>4<br>4.8 | mV/mA<br>mV/mA<br>mV/mA<br>mV/mA<br>mV/mA<br>mV/mA |
| LINE REGULATION<br>$V_{OUT} + 200$ mV < $V_{IN}$ < 12 V<br>$I_{OUT} = 0$ mA  |             |            | 25                                     |             |            | 25                                     | μV/V   |
| RIPPLE REJECTION ( $\Delta V_{OUT}/\Delta V_{IN}$ )<br>$V_{IN} = 6$ V ± 100 mV (f = 120 Hz)  | 80          |            |  | 80          |            |  | dB   |
| QUIESCENT CURRENT  |             |            | 70                                     |             |            | 70                                     | μA   |
| SHORT-CIRCUIT CURRENT TO GROUND  |             |            | 15                                     |             |            | 15                                     | mA   |
| NOISE VOLTAGE (@ 25°C)<br>0.1 Hz to 10 Hz<br>10 Hz to 10 kHz   |             | 140<br>100 |  |             | 140<br>100 |  | μV p-p<br>μV rms                                   |
| TURN-ON SETTLING TIME TO 0.1%<br>$C_L = 0.2$ μF  |             |            | 175                                    |             |            | 175                                    | μs   |
| LONG-TERM STABILITY<br>1000 Hours @ 25°C   |             | 100        |  |             | 100        |  | ppm/1000 hr  |
| OUTPUT VOLTAGE HYSTERESIS  |             | 115        |  |             | 115        |  | ppm  |
| TEMPERATURE RANGE<br>Specified Performance (A, B, C)<br>Operating Performance (A, B, C)  | -40<br>-55  |            | +125<br>+125                           | -40<br>-55  |            | +125<br>+125                           | °C<br>°C   |

## ABSOLUTE MAXIMUM RATINGS

Table 6.

| Parameter  | Rating          |
|--|-----------------|
| V <sub>IN</sub> to Ground  | 12 V            |
| Internal Power Dissipation <sup>1</sup><br>SOT-23-3 (RT-3)             | 400 mW          |
| Storage Temperature Range  | −65°C to 150°C  |
| Specified Temperature Range<br>AD1582RT/AD1583RT/<br>AD1584RT/AD1585RT | −40°C to +125°C |
| Lead Temperature, Soldering<br>Vapor Phase (60 sec)                    | 215°C           |
| Infrared (15 sec)  | 220°C           |

<sup>1</sup> Specification is for device in free air at 25°C; SOT-23 package,  $\theta_{JA} = 300^{\circ}\text{C}$ .

Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only; functional operation of the device at these or any other conditions above those indicated in the operational section of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

### ESD CAUTION



**ESD (electrostatic discharge) sensitive device.** Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

## TERMINOLOGY

### Temperature Coefficient (TCV<sub>O</sub>)

The change of output voltage over the operating temperature change and normalized by the output voltage at 25°C, expressed in ppm/°C. The equation follows

$$TCV_O [\text{ppm}/^\circ\text{C}] = \frac{V_O(T_2) - V_O(T_1)}{V_O(25^\circ\text{C}) \times (T_2 - T_1)} \times 10^6$$

where:

$$V_O(25^\circ\text{C}) = V_O @ 25^\circ\text{C}.$$

$$V_O(T_1) = V_O @ \text{Temperature 1}.$$

$$V_O(T_2) = V_O @ \text{Temperature 2}.$$

### Line Regulation ( $\Delta V_O/\Delta V_{IN}$ ) Definition

The change in output voltage due to a specified change in input voltage. It includes the effects of self-heating. Line regulation is expressed in either percent per volt, parts per million per volt, or microvolts per volt change in input voltage.

### Load Regulation ( $\Delta V_O/\Delta I_{LOAD}$ )

The change in output voltage due to a specified change in load current. It includes the effects of self-heating. Load regulation is expressed in either microvolts per milliampere, parts per million per milliampere, or ohms of dc output resistance.

### Long-Term Stability ( $\Delta V_O$ )

Typical shift of output voltage at 25°C on a sample of parts subjected to an operation life test of 1000 hours at 125°C.

$$\Delta V_O = V_O(t_0) - V_O(t_1)$$

$$\Delta V_O [\text{ppm}] = \frac{V_O(t_0) - V_O(t_1)}{V_O(t_0)} \times 10^6$$

where:

$$V_O(t_0) = V_O @ 25^\circ\text{C} \text{ at Time 0}.$$

$$V_O(t_1) = V_O @ 25^\circ\text{C} \text{ after 1000 hours of operation at } 125^\circ\text{C}.$$

### Thermal Hysteresis ( $V_{O\_HYS}$ )

The change of output voltage after the device is cycled through temperatures from +25°C to -40°C to +85°C and back to +25°C. This is a typical value from a sample of parts put through such a cycle

$$V_{O\_HYS} = V_O(25^\circ\text{C}) - V_{O\_TC}$$

$$V_{O\_HYS} [\text{ppm}] = \frac{V_O(25^\circ\text{C}) - V_{O\_TC}}{V_O(25^\circ\text{C})} \times 10^6$$

where:

$$V_O(25^\circ\text{C}) = V_O \text{ at } 25^\circ\text{C}.$$

$$V_{O\_TC} = V_O \text{ at } 25^\circ\text{C} \text{ after temperature cycle at } +25^\circ\text{C} \text{ to } -40^\circ\text{C} \text{ to } +85^\circ\text{C} \text{ and back to } +25^\circ\text{C}.$$

### Operating Temperature

The temperature extremes at which the device can still function. Parts can deviate from their specified performance outside the specified temperature range.



### TYPICAL PERFORMANCE CHARACTERISTICS



Figure 3. Typical Output Voltage Temperature Drift Distribution



Figure 6. Load Regulation vs.  $V_{IN}$

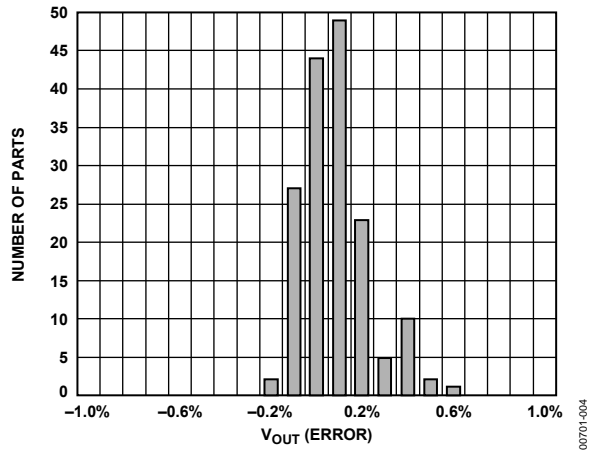


Figure 4. Typical Output Voltage Error Distribution

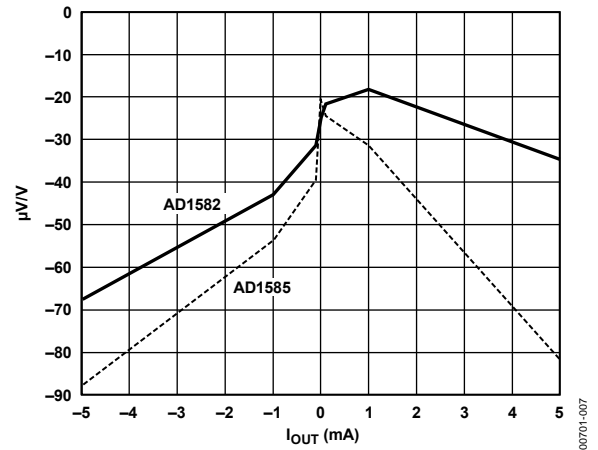


Figure 7. Line Regulation vs.  $I_{LOAD}$

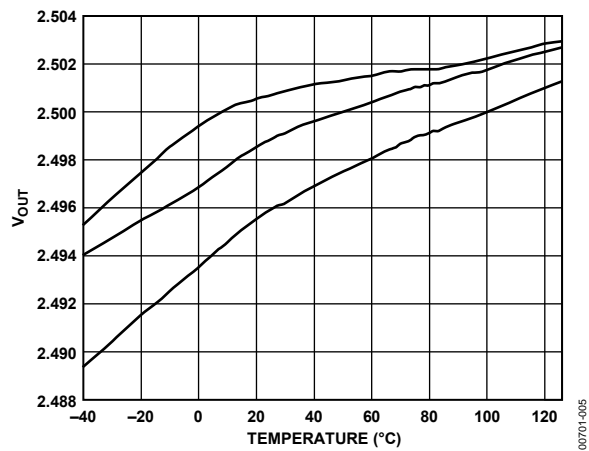


Figure 5. Typical Temperature Drift Characteristic Curves

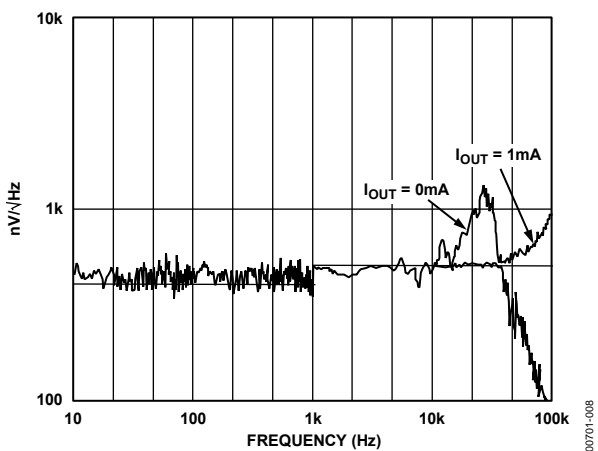


Figure 8. Noise Spectral Density

## THEORY OF OPERATION

The AD1582/AD1583/AD1584/AD1585 use the band gap concept to produce stable, low temperature coefficient voltage references suitable for high accuracy data acquisition components and systems. These parts of precision references use the underlying temperature characteristics of a silicon transistor's base emitter voltage in the forward-biased operating region. Under this condition, all such transistors have a  $-2 \text{ mV}/^\circ\text{C}$  temperature coefficient (TC) and a  $V_{BE}$  that, when extrapolated to absolute zero, 0 K (with collector current proportional to absolute temperature), approximates the silicon band gap voltage. By summing a voltage that has an equal and opposite temperature coefficient of  $2 \text{ mV}/^\circ\text{C}$  with the  $V_{BE}$  of a forward-biased transistor, an almost 0 TC reference can be developed. In the AD1582/AD1583/AD1584/AD1585 simplified circuit diagram shown in Figure 9, such a compensating voltage,  $V_1$ , is derived by driving two transistors at different current densities and amplifying the resultant  $V_{BE}$  difference ( $\Delta V_{BE}$ , which has a positive TC). The sum of  $V_{BE}$  and  $V_1$  ( $V_{BG}$ ) is then buffered and amplified to produce stable reference voltage outputs of 2.5 V, 3 V, 4.096 V, and 5 V.

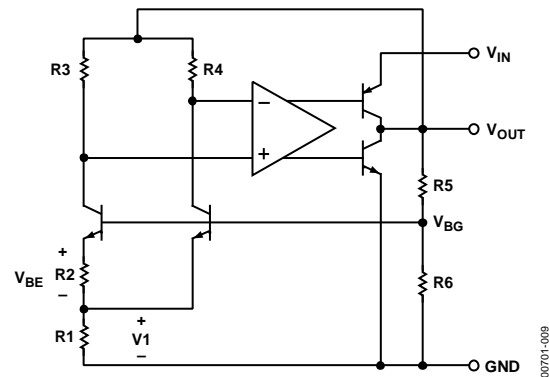


Figure 9. Simplified Schematic

## APPLICATIONS INFORMATION

The [AD1582/AD1583/AD1584/AD1585](#) are series references that can be used for many applications. To achieve optimum performance with these references, only two external components are required. Figure 10 shows the [AD1582/AD1583/AD1584/AD1585](#) configured for operation under all loading conditions. With a simple 4.7  $\mu\text{F}$  capacitor attached to the input and a 1  $\mu\text{F}$  capacitor applied to the output, the devices can achieve specified performance for all input voltage and output current requirements. For best transient response, add a 0.1  $\mu\text{F}$  capacitor in parallel with the 4.7  $\mu\text{F}$  capacitor. While a 1  $\mu\text{F}$  output capacitor can provide stable performance for all loading conditions, the [AD1582/AD1583/AD1584/AD1585](#) can operate under low ( $-100 \mu\text{A} < I_{\text{OUT}} < +100 \mu\text{A}$ ) current conditions with just a 0.2  $\mu\text{F}$  output capacitor. The 4.7  $\mu\text{F}$  capacitor on the input can be reduced to 1  $\mu\text{F}$  in this condition.

Unlike conventional shunt reference designs, the [AD1582/AD1583/AD1584/AD1585](#) provide stable output voltages at constant operating current levels. When properly decoupled, as shown in Figure 10, these devices can be applied to any circuit and provide superior low power solutions.



Figure 10. Typical Connection Diagram

## TEMPERATURE PERFORMANCE

The [AD1582/AD1583/AD1584/AD1585](#) are designed for applications where temperature performance is important. Extensive temperature testing and characterization ensure that device performance is maintained over the specified temperature range.

The error band guaranteed with the [AD1582/AD1583/AD1584/AD1585](#) is the maximum deviation from the initial value at 25°C. Therefore, for a given grade of the [AD1582/AD1583/AD1584/AD1585](#), the designer can easily determine the maximum total error by summing initial accuracy and temperature variation. For example, for the [AD1582BRT](#), the initial tolerance is  $\pm 2 \text{ mV}$ , and the temperature error band is  $\pm 8 \text{ mV}$ ; therefore, the reference is guaranteed to be  $2.5 \text{ V} \pm 10 \text{ mV}$  from  $-40^\circ\text{C}$  to  $+125^\circ\text{C}$ .

Figure 11 shows the typical output voltage drift for the [AD1582/AD1583/AD1584/AD1585](#) and illustrates the methodology. The box in Figure 11 is bounded on the x-axis by operating temperature extremes. It is bounded on the y-axis by the maximum and minimum output voltages observed over the operating temperature range. The slope of the diagonal drawn from the initial output value at 25°C to the output values at  $+125^\circ\text{C}$  and  $-40^\circ\text{C}$  determines the performance grade of the device.

Duplication of these results requires a test system that is highly accurate with stable temperature control. Evaluation of the [AD1582/AD1583/AD1584/AD1585](#) produces curves similar to those in Figure 5 and Figure 11, but output readings can vary depending on the test methods and test equipment used.



Figure 11. Output Voltage vs. Temperature

## VOLTAGE OUTPUT NONLINEARITY VS. TEMPERATURE

When using a voltage reference with data converters, it is important to understand the impact that temperature drift can have on converter performance. The nonlinearity of the reference output drift represents additional error that cannot be easily calibrated out of the overall system. To better understand the impact such a drift can have on a data converter, refer to Figure 12, where the measured drift characteristic is normalized to the endpoint average drift. The residual drift error for the [AD1582/AD1583/AD1584/AD1585](#) of approximately 200 ppm demonstrates that these parts are compatible with systems that require 12-bit accurate temperature performance.

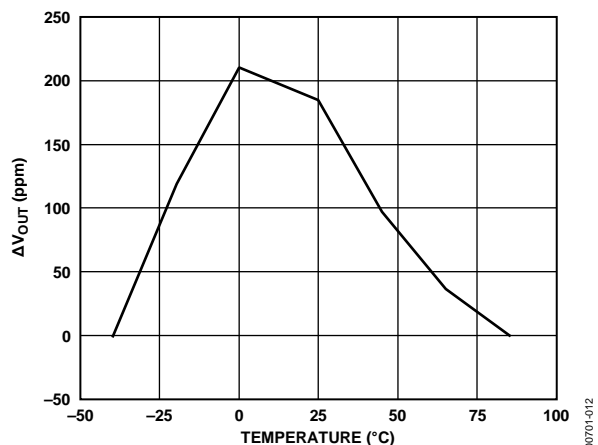


Figure 12. Residual Drift Error

**OUTPUT VOLTAGE HYSTERESIS**

High performance industrial equipment manufacturers can require the AD1582/AD1583/AD1584/AD1585 to maintain a consistent output voltage error at 25°C after the references are operated over the full temperature range. All references exhibit a characteristic known as output voltage hysteresis; however, the AD1582/AD1583/AD1584/AD1585 are designed to minimize this characteristic. This phenomenon can be quantified by measuring the change in the +25°C output voltage after temperature excursions from +125°C to +25°C and from -40°C to +25°C. Figure 13 displays the distribution of the AD1582/AD1583/AD1584/AD1585 output voltage hysteresis.

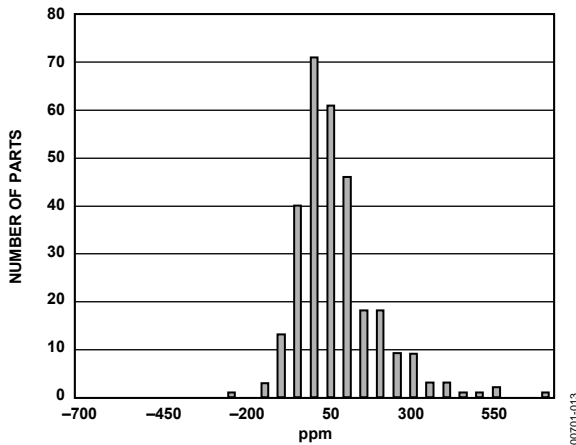


Figure 13. Output Voltage Hysteresis Distribution

**SUPPLY CURRENT VS. TEMPERATURE**

The quiescent current for the AD1582/AD1583/AD1584/AD1585 varies slightly over temperature and input supply range. Figure 14 illustrates the typical performance for the AD1582/AD1583/AD1584/AD1585 reference when varying both temperature and supply voltage. As is evident from Figure 14, the AD1582/AD1583/AD1584/AD1585 supply current increases only 1.0  $\mu\text{A}/\text{V}$ , making this device extremely attractive for use in applications where there can be wide variations in supply voltage and a need to minimize power dissipation.



Figure 14. Typical Supply Current over Temperature

**SUPPLY VOLTAGE**

One of the ideal features of the AD1582/AD1583/AD1584/AD1585 is low supply voltage headroom. The parts can operate at supply voltages as low as 200 mV above  $V_{\text{OUT}}$  and up to 12 V. However, if negative voltage is inadvertently applied to  $V_{\text{IN}}$  with respect to ground, or any negative transient  $>5\text{ V}$  is coupled to  $V_{\text{IN}}$ , the device can be damaged.

**AC PERFORMANCE**

To apply the AD1582/AD1583/AD1584/AD1585, it is important to understand the effects of dynamic output impedance and power supply rejection. In Figure 15, a voltage divider is formed by the AD1582/AD1583/AD1584/AD1585 output impedance and by the external source impedance. Figure 16 shows the effect of varying the load capacitor on the reference output. Power supply rejection ratio (PSRR) should be determined when characterizing the ac performance of a series voltage reference. Figure 17 shows a test circuit used to measure PSRR, and Figure 18 demonstrates the ability of the AD1582/AD1583/AD1584/AD1585 to attenuate line voltage ripple.



Figure 15. Output Impedance Test Circuit

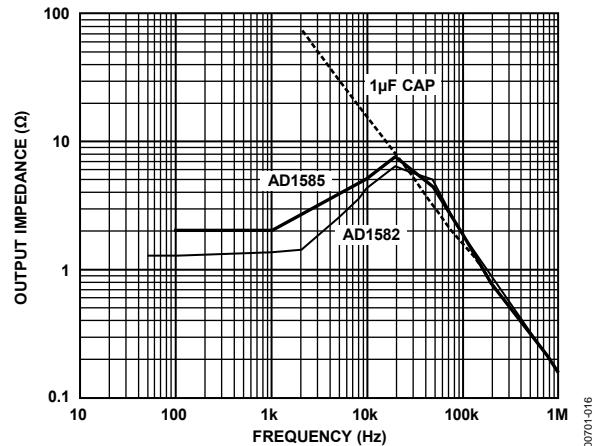


Figure 16. Output Impedance vs. Frequency



Figure 17. Ripple Rejection Test Circuit



Figure 18. Ripple Rejection vs. Frequency

**NOISE PERFORMANCE AND REDUCTION**

The noise generated by the [AD1582/AD1583/AD1584/AD1585](#) is typically less than 70  $\mu\text{V}$  p-p over the 0.1 Hz to 10 Hz frequency band. Figure 19 shows the 0.1 Hz to 10 Hz noise of a typical [AD1582/AD1583/AD1584/AD1585](#). The noise measurement is made with a high gain band-pass filter. Noise in a 10 Hz to 10 kHz region is approximately 50  $\mu\text{V}$  rms. Figure 20 shows the broadband noise of a typical [AD1582/AD1583/AD1584/AD1585](#). If further noise reduction is desired, add a 1-pole, low-pass filter between the output pin and ground. A time constant of 0.2 ms has a  $-3$  dB point at roughly 800 Hz and reduces the high frequency noise to about 16  $\mu\text{V}$  rms. It should be noted, however, that while additional filtering on the output can improve the noise performance of the [AD1582/AD1583/AD1584/AD1585](#), the added output impedance can degrade the ac performance of the references.



Figure 19. 10 Hz to 10 kHz Wideband Noise

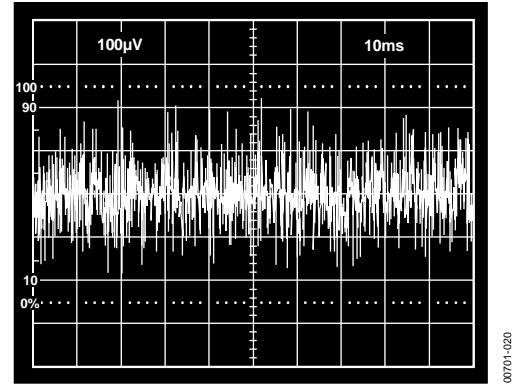


Figure 20. 1 Hz to 10 Hz Voltage Noise

**TURN-ON TIME**

Many low power instrument manufacturers are concerned with the turn-on characteristics of the components used in their systems. Fast turn-on components often enable the end user to save power by keeping power off when not needed. Turn-on settling time is defined as the time required, after the application of power (cold start), for the output voltage to reach its final value within a specified error. The two major factors affecting this are the active circuit settling time and the time required for the thermal gradients on the chip to stabilize. Figure 21 shows the turn-on settling and transient response test circuit. Figure 22 shows the turn-on characteristics of the [AD1582/AD1583/AD1584/AD1585](#). These characteristics are generated from cold-start operation and represent the true turn-on waveform after power-up. Figure 23 shows the fine settling characteristics of the [AD1582/AD1583/AD1584/AD1585](#). Typically, the reference settles to within 0.1% of its final value in about 100  $\mu\text{s}$ .

The device can momentarily draw excessive supply current when  $V_{\text{SUPPLY}}$  is slightly below the minimum specified level. Power supply resistance must be low enough to ensure reliable turn-on. Fast power supply edges minimize this effect.

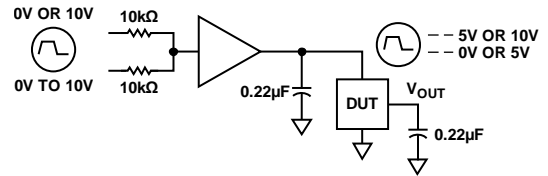


Figure 21. Turn-On/Transient Response Test Circuit

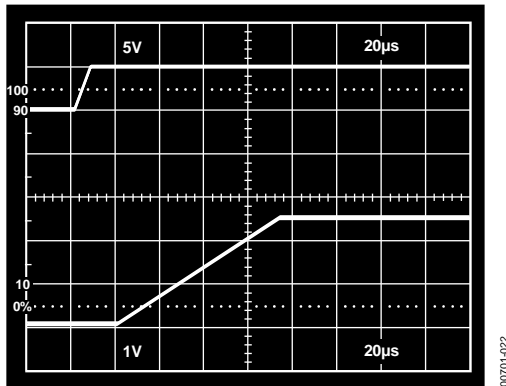


Figure 22. Turn-On Characteristics

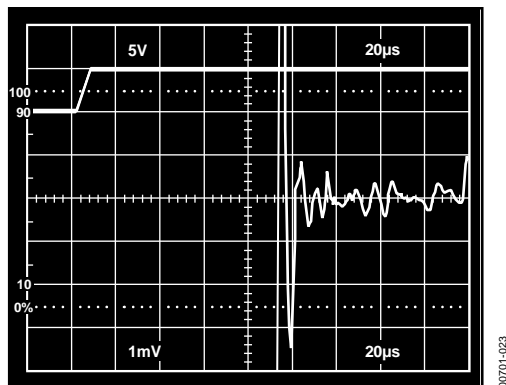


Figure 23. Turn-On Settling

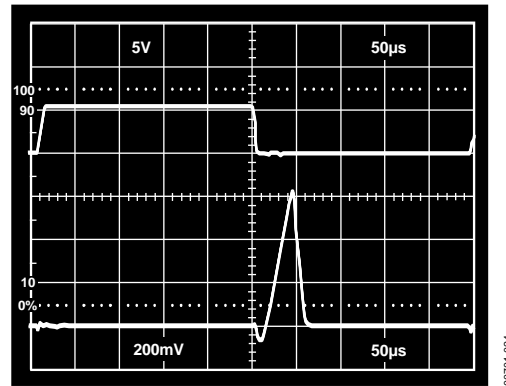


Figure 24. Line Transient Response

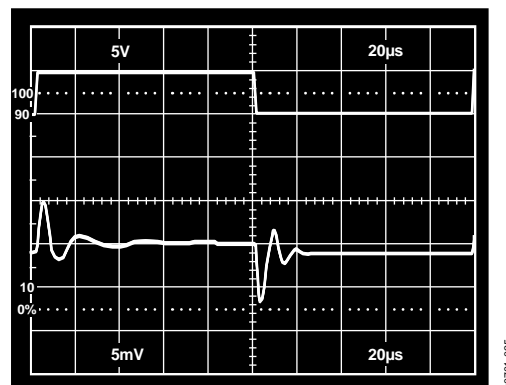


Figure 25. Load Transient Response (0 mA to 5 mA Load)

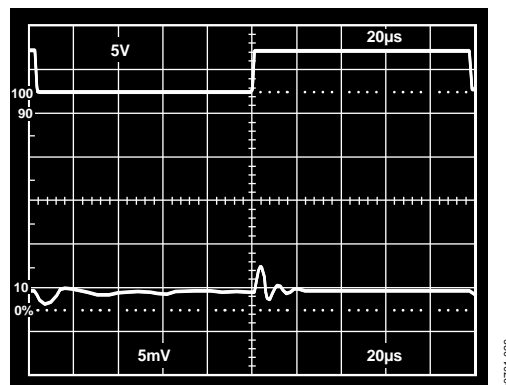


Figure 26. Load Transient Response (0 mA to -1 mA Load)

## DYNAMIC PERFORMANCE

Many ADCs and DACs present transient current loads to the reference and poor reference response can degrade converter performance. The [AD1582/AD1583/AD1584/AD1585](#) provide superior static and dynamic line and load regulation. Because these series references are capable of both sourcing and sinking large current loads, they exhibit excellent settling characteristics.

Figure 24 displays the line transient response for the [AD1582/AD1583/AD1584/AD1585](#). The circuit used to perform such a measurement is shown in Figure 21, where the input supply voltage is toggled from 5 V to 10 V, and the input and output capacitors are each 0.22  $\mu\text{F}$ .

Figure 25 and Figure 26 show the load transient settling characteristics for the [AD1582/AD1583/AD1584/AD1585](#) when load current steps of 0 mA to +5 mA and 0 mA to -1 mA are applied. The input supply voltage remains constant at 5 V; the input decoupling and output load capacitors are 4.7  $\mu\text{F}$  and 1  $\mu\text{F}$ , respectively; and the output current is toggled. For both positive and negative current loads, the reference responses settle very quickly and exhibit initial voltage spikes of less than 10 mV.

OUTLINE DIMENSIONS



COMPLIANT TO JEDEC STANDARDS TO-236-AB

Figure 27. 3-Lead Small Outline Transistor Package [SOT-23-3] (RT-3)

Dimensions shown in millimeters

011909-C

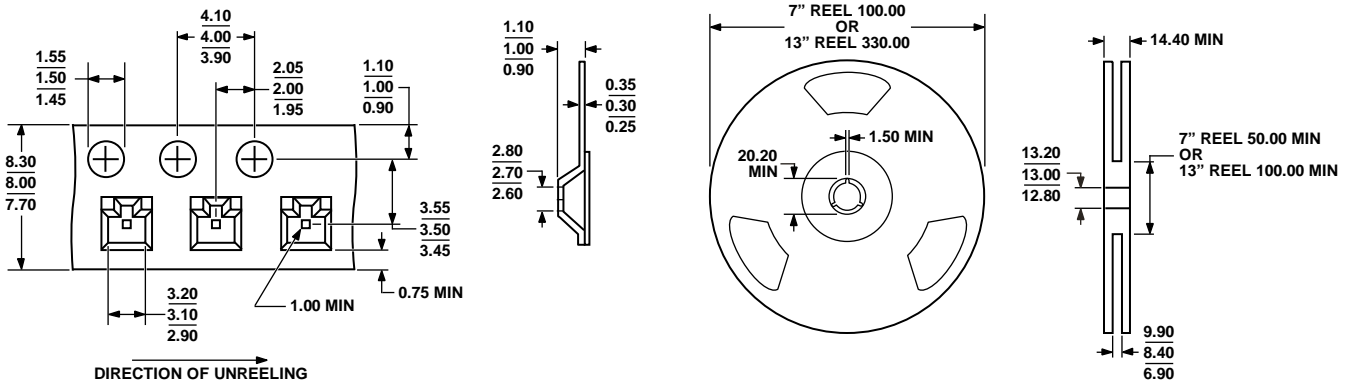


Figure 28. SOT-23 Tape and Reel Outline Dimension (RT-3)

Dimensions shown in millimeters

053006-0

## ORDERING GUIDE

| Model <sup>1</sup> | Output Voltage (V) | Accuracy (mV) | Initial Accuracy (%) | Initial Temp. Coefficient (ppm/°C) | Package Description | Package Option | Branding <sup>2</sup> | No. of Parts Banding per Reel |
|--------------------|--------------------|---------------|----------------------|------------------------------------|---------------------|----------------|-----------------------|-------------------------------|
| AD1582ART-REEL7    | 2.50               | 20            | 0.80                 | 100                                | SOT-23-3            | RT-3           | 2A                    | 3,000                         |
| AD1582ARTZ-R2      | 2.50               | 20            | 0.80                 | 100                                | SOT-23-3            | RT-3           | R1Z                   | 250                           |
| AD1582ARTZ-REEL7   | 2.50               | 20            | 0.80                 | 100                                | SOT-23-3            | RT-3           | R1Z                   | 3,000                         |
| AD1582BRTZ-REEL7   | 2.50               | 2             | 0.08                 | 50                                 | SOT-23-3            | RT-3           | R20                   | 3,000                         |
| AD1583ARTZ-R2      | 3.00               | 30            | 1.00                 | 100                                | SOT-23-3            | RT-3           | R22                   | 250                           |
| AD1583ARTZ-REEL7   | 3.00               | 30            | 1.00                 | 100                                | SOT-23-3            | RT-3           | R22                   | 3,000                         |
| AD1583BRTZ-REEL7   | 3.00               | 3             | 0.10                 | 50                                 | SOT-23-3            | RT-3           | R23                   | 3,000                         |
| AD1584ARTZ-R2      | 4.096              | 40            | 0.98                 | 100                                | SOT-23-3            | RT-3           | R25                   | 250                           |
| AD1584ARTZ-REEL7   | 4.096              | 40            | 0.98                 | 100                                | SOT-23-3            | RT-3           | R25                   | 3,000                         |
| AD1584BRTZ-REEL7   | 4.096              | 4             | 0.10                 | 50                                 | SOT-23-3            | RT-3           | R26                   | 3,000                         |
| AD1585ARTZ-R2      | 5.00               | 50            | 1.00                 | 100                                | SOT-23-3            | RT-3           | R28                   | 250                           |
| AD1585ARTZ-REEL7   | 5.00               | 50            | 1.00                 | 100                                | SOT-23-3            | RT-3           | R28                   | 3,000                         |
| AD1585BRTZ-REEL7   | 5.00               | 5             | 0.10                 | 50                                 | SOT-23-3            | RT-3           | R29                   | 3,000                         |

<sup>1</sup> Z = RoHS Compliant Part.

<sup>2</sup> See Package Branding Information section.

## PACKAGE BRANDING INFORMATION

This branding information is only for nonPb-free versions. Four fields identify the device:

First field, product identifier; for example, a 2/3/4/5 identifies the generic as [AD1582/AD1583/AD1584/AD1585](#)

Second field, device grade, which can be A, B, or C

Third field, calendar year of processing: 7 for 1997..., A for 2001...

Fourth field, two-week window within the calendar year; for example, letters A to Z to represent a two-week window starting with "A" for the first two weeks of January.



## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9